TECHNICAL PROVISIONS

PROJECT TABLE OF CONTENTS

SECTION	TITLE
DIVISION 1 - GENERAL REQUIREMENTS	
00102N	LIST OF DRAWINGS
01100	GENERAL REQUIREMENTS
01270A	MEASUREMENT AND PAYMENT
01312A	QUALITY CONTROL SYSTEM (QCS)
01320A	PROJECT SCHEDULE
01330	SUBMITTAL PROCEDURES
01355A	ENVIRONMENTAL PROTECTION
01356A	STORM WATER POLLUTION PREVENTION MEASURES
01420	SOURCES FOR REFERENCE PUBLICATIONS
01451A	CONTRACTOR QUALITY CONTROL
01500A	TEMPORARY CONSTRUCTION FACILITIES
01525	SAFETY AND OCCUPATIONAL HEALTH REQUIRMENTS
01781	OPERATION AND MAINTENANCE DATA
DIVISION 2 - SITE WORK	
02220	DEMOLITION
02300	EARTHWORK
02370A	SOIL SURFACE EROSION CONTROL
02510A	WATER DISTRIBUTION SYSTEM
02531	SANITARY SEWERS
02630	STORM DRAINAGE
02722N	GRADED CRUSHED AGGREGATE BASE COURSE FOR FLEXIBLE PAVEMENT
02741A	HOT-MIX ASPHALT (HMA) FOR ROADS
02743N	BITUMINOUS PRIME COAT
02744N	BITUMINOUS TACK COAT
02763A	PAVEMENT MARKINGS
02770A	CONCRETE SIDEWALKS AND CURBS AND GUTTERS
02821N	CHAIN LINK FENCES AND GATES
02921A	SEEDING
DIVISION 3 CONCRETE	
03307	CONCRETE FOR MINOR STRUCTURES
DIVISION 4 MASONRY	
04200	MASONRY

DIVISION 5 METALS
05120 STRUCTURAL STEEL
05400 COLD-FORMED STEEL FRAMING
05500A MISCELLANEOUS METAL

DIVISION 7 THERMAL AND MOISTURE PROTECTION
07110A BITUMINOUS DAMPPROOFING
07220 ROOF AND DECK INSULATION
07416A STANDING SEAM METAL ROOF (SSSMR) SYSTEM
07600 FLASHING AND SHEET METAL
07920 JOINT SEALING

DIVISION 8 DOORS AND WINDOWS
08120 ALUMINUM DOORS AND FRAMES
08520A ALUMINUM WINDOWS
08710 DOOR HARDWARE

DIVISION 9 FINISHES
09250 GYPSUM BOARD
09310 CERAMIC TILE, QUARRY TILE, AND PAVER TILE
09510 ACOUSTICAL CEILING
09650 RESILIENT FLOORING
09900 PAINTS AND COATINGS

DIVISION 10 SPECIALTIES
10201N METAL WALLS AND DOOR LOUVERS
10505N STEEL CLOTHING LOCKERS
10605N WIRE MESH PARTITIONS
10800 TOILET ACCESSORIES

DIVISION 12 - FURNISHINGS

12320A CABINETS AND COUNTERTOPS

DIVISION 15 MECHANICAL
15070A SEISMIC PROTECTION FOR MECHANICAL EQUIPMENT
15080 THERMAL INSULATION FOR MECHANICAL SYSTEMS
15182 REFRIGERANT PIPING
15400A PLUMBING, GENERAL PURPOSE
15700A UNITARY HEATING AND COOLING EQUIPMENT
15895 AIR SUPPLY, DISTRIBUTION, VENTILATION AND EXHAUST SYSTEMS
15990A TESTING, ADJUSTING, AND BALANCING OF HVAC SYSTEMS

DIVISION 16 ELECTRICAL

16370A ELECTRICAL DISTRIBUTION SYSTEM, AERIAL
16415A ELECTRICAL WORK, INTERIOR

ATTACHMENTS

DOCUMENT TABLE OF CONTENTS

DOCUMENTS 00 - INTRODUCTORY, BIDDING, AND CONTRACT REQUIREMENTS

DOCUMENT 00102

LIST OF DRAWINGS

08/04

PART 1 GENERAL

1.1 SUMMARY
1.2 CONTRACT DRAWINGS

-- End of Document Table of Contents -

DOCUMENT 00102

LIST OF DRAWINGS
08/04

PART 1 GENERAL

1.1 SUMMARY

This document lists the drawings for the project pursuant to contract clause "DFARS 252.236-7001, Contract Drawings, Maps and Specifications."

1.2 CONTRACT DRAWINGS

Contract drawings are as follows:

DRAWING NO.	TITLE
X-1	Location Plan and Drawing Index
C-1	Existing Topography
C-2	Layout and Control Plan
C-3	Grading Plan
C-4	Utilities Plan
C-5	Soil Erosion and Sediment Control Plan
C-6	Sitework Details- Sheet 1
C-7	Sitework Details- Sheet 2
C-8	Sitework Details- Sheet 3
A-1	Administration Building and Kennel Floor Plans
A-2	Administration Building and Kennel Elevations
A-3	Administration Building and Kennel Building Sections
A-4	Administration Building and Kennel Roof Plan
A-5	Administration Building and Kennel Reflected Ceiling Plan
A-6	Administration Building and Kennel Wall Sections
A-7	Administration Building and Kennel Wall Sections
A-8	Administration Building and Kennel Schedules
A-9	Administration Building and Kennel Large Scale Plans
A-10	Administration Building and Kennel Miscellaneous Details
A-11	Administration Building and Kennel Miscellaneous fence Details
A-12	Administration Building and Kennel Roof Details
S-1	Administration Building and Kennel Foundation Plans
S-2	Administration Building and Kennel Roof Framing Plans
S-3	Administration Building and Kennel Masonry Details

P-1	Administration Building and Kennel Domestic Hot and Cold Water Plan
P-2	Administration Building and Kennel Drain, Waste, and Vent Plan
M-1	Administration Building and Kennel HVAC Plan
M-2	Administration Building and Kennel HVAC Sections, Schedules, and Details
E-1	Administration Building and Kennel Lighting Plan
E-2	Administration Building and Kennel Lighting Details
E-3	Administration Building and Kennel Power Plan
E-4	Administration Building and Kennel Panel Schedules and Details
E-5	Administration Building and Kennel Electrical Site Details
E-6	Administration Building and Kennel Electrical Site Materials

SECTION TABLE OF CONTENTS

GENERAL REQUIREMENTS

SECTION 01100

PART 1 GENERAL

1.1 PRECONSTRUCTION CONFERENCE
1.1.1 Conference
1.1.2 Submittals
1.1.3 Quality Control System (QCS) Data File
1.1.4 Letter of Record

1.2 CONTRACTOR-PREPARED CONSTRUCTION PROGRESS CHART

1.3 CERTIFICATES OF COMPLIANCE

1.4 ENVIRONMENTAL PROTECTION REQUIREMENTS
1.4.1 Environmental Protection
1.4.2 Environmental Litigation
1.4.3 Work in Quarantined Areas (1968 May OCE)

1.5 DAMAGE TO WORK

1.6 PHYSICAL CONDITIONS AND DATA
1.6.1 General
1.6.2 Physical Conditions
1.6.3 Weather Conditions
1.6.4 Transportation facilities
1.6.4.1 Railroads
1.6.4.2 Highways
1.6.4 Vehicle Weight Restrictions.
1.6.5 Records
1.6.6 Subsurface conditions and data
1.6.7 Radiological Concerns

1.7 TIME EXTENSIONS FOR UNUSUALLY SEVERE WEATHER

1.8 UTILITY SERVICES PROVIDED BY THE GOVERNMENT

1.9. CONTRACTOR'S USE OF PROJECT SITE FACILITIES

1.10. TESTING

SECTION TABLE OF CONTENTS

GENERAL REQUIREMENTS

SECTION 01100

1.11. CONSTRUCTION SCHEDULE CONSTRAINTS
1.11.1 Occupancy
1.11.2 COORDINATION WITH OTHER CONTRACTORS
1.11.3 Protection
1.11.3.1 Covering, Shields and Barricades
11.3.2 Construction and Placement
1.11.4 Phasing and Sequence
1.11.4.1 General
1.11.4.2 Special Work Constraints
1.11.5 Outages
1.11.5.1 Traffic Management Plans
1.11.6 Continuity

1.12 "AS-BUILT" DRAWINGS
1.12.1 "As-Built" Drawings
1.12.2 "As-Built" Contract Drawings

1.13. HAUL ROUTES

1.14. PAYMENT FOR MATERIALS STORED ON-SITE AND OFF-SITE

1.15. SAVANNAH RIVER SITE SECURITY REQUIREMENTS

1.16. SITE PERMITS

1.17. EMERGENCY PREPAREDNESS

1.18. DISPOSAL OF MATERIALS

1.19. HEALTH PROTECTION SURVEYS

1.20. VENDOR ACCESS TO Savannah River Site

1.21. SAVANNAH RIVER SITE POINT OF ENTRY (POE) PROCESS

1.22. REMOVAL OF MATERIALS FROM SRS

1.23. SITE EQUIPMENT TRANSFERS

1.24. EXISTING UNDERGROUND UTILITIES

1.25. SITE ACCESS.

1.26. LIST OF DRAWINGS

SECTION TABLE OF CONTENTS

GENERAL REQUIREMENTS

SECTION 01100

1.27. PROJECT SIGN

PART 2 PRODUCTS (Not Applicable)

PART 3 EXECUTION (Not Applicable)

3.1 FINAL AND CONDITIONAL ACCEPTANCE OF GRASSING

-- End of Section Table of Contents –

GENERAL REQUIREMENTS

SECTION 01100

PART 1 GENERAL

1.1 PRECONSTRUCTION CONFERENCE

1.1.1 Conference

A Preconstruction Conference will be arranged by the Contracting Officer's Representative after award of contract and before commencement of work. The Contracting Officer's Representative will notify the Contractor of the time and date set for the meeting. At this conference, the Contractor shall be oriented with respect to Government procedures and line of authority, contractual, administrative, and construction matters. Additionally, a schedule of required submittals will be discussed.

1.1.2 Submittals

The Contractor shall bring to this conference the following items in completed form:

(a) Minimum Basic Outline for Accident Prevention Program

(b) Emergency Response Procedures including employee certificates for current First Aid and CPR training

(c) Letter signed by an officer of the company designating the full-time job superintendent and his qualifications

(d) Quality Control Plan

(e) List of Subcontractors - Including written statement that no first tier subs are presently debarred or suspended from Government work.

(f) Environmental Protection Plan

(g) Hazard Analysis Plan

(h) Submit at least two (2) completed Safety Checklists for Mobile Construction Equipment (SAD FORM 1666-R). See ATTACHMENTS. These safety inspection checklists should include identified safety deficiencies with corrective actions taken while performing work in other Corps of Engineers Districts.

1.1.3 Quality Control System (QCS) Data File

The Contractor shall bring the “Export to RMS” file for import to the Corps of Engineers RMS (Resident Management System). This file shall be in

accordance with the Section 01312A, QUALITY CONTROL SYSTEM (QCS) and shall include current information on the following:

(a) Prime Contractor Data
(b) Subcontractor Data
(c) Insurance Data
(d) Equipment Data
(e) Submittal Register
(f) Correspondence
(g) Features of Work
(h) Activity Schedule
(i) Pay Activity Data

1.1.4 Letter of Record

A Letter of Record will be written documenting all items discussed at the conference and a copy will be furnished by the Contracting Officer's Representative to all in attendance.

1.2. CONTRACTOR-PREPARED CONSTRUCTION PROGRESS CHART.

The contractor shall provide and maintain a network analysis as specified in SECTION 01320A PROJECT SCHEDULE.

1.3 CERTIFICATES OF COMPLIANCE

Any certificates required for demonstrating proof of compliance of materials with specification requirements shall be executed in one (1) copy unless otherwise specified. Each certificate shall be signed by an official authorized to certify in behalf of the manufacturing company and shall contain the name and address of the Contractor, the project name and location, and the quantity and date or dates of shipment or delivery to which the certificates apply. Copies of laboratory test reports submitted with certificates shall contain the name and address of the testing laboratory and the date or dates of the tests to which the report applies. Certification shall not be construed as relieving the Contractor from furnishing satisfactory material, if, after tests are performed on selected samples, the material is found not to meet the specific requirements.

1.4 ENVIRONMENTAL PROTECTION REQUIREMENTS

1.4.1 Environmental Protection

It is the responsibility of the Contractor to investigate and comply with all Federal, State, county, and municipal laws concerning pollution of air and water, and for the protection of public and employee health, and for damages to shellfish, fish, and wildlife. The Contractor will provide sufficient safeguards to prevent pollution to the waterways by spillage or waste of paints, fuels, oils, bitumens, calcium chloride, insecticides, herbicides or other similar materials harmful to the health and well being of employees, the public, fish, shellfish, or wildlife. Additionally, all oil and oil cans, buckets, etc. shall be

removed from the site and disposed of properly. No oil shall be dumped at the site. Any soil contaminated by oil will be required to be removed from the site at the Contractor's expense. All other trash and discarded materials (such as old mats, cable, etc.) shall be completely removed from the site and disposed of properly.

1.4.2 Environmental Litigation

If the performance of all or any part of the work is suspended, delayed, or interrupted due to an order of a court of competent jurisdiction as a result of environmental litigation, as defined below, the Contracting Officer, at the request of the Contractor, shall determine whether the order is due in any part to the acts or omissions of the Contractor or a Subcontractor at any tier not required by the terms of this contract. If it is determined that the order is not due in any part to acts or omissions of the Contractor or a Subcontractor at any tier other than as required by the terms of this contract, such suspension, delay, or interruption shall be considered as if ordered by the Contracting Officer in the administration of this contract under the terms of the Contract Clause SUSPENSION OF WORK found in Section 0700. The period of such suspension, delay or interruption shall be considered unreasonable, and an adjustment shall be made for any increase in the cost of performance of this contract (excluding profit) as provided in that clause, subject to all the provision thereof.

The term "environmental litigation", as used herein, means a lawsuit alleging that the work will have an adverse effect on the environment or that the Government has not duly considered, either substantively or procedurally, the effect of the work on the environment.

1.4.3 Work in Quarantined Areas (1968 May OCE)

The work called for by this contract involves activities in counties quarantined by the Department of Agriculture to prevent the spread of certain plant pests which may be present in the soil. The Contractor agrees that all construction equipment and tools to be moved from such counties shall be thoroughly cleaned of all soil residues at the construction site with water under pressure and that hand tools shall be thoroughly cleaned by brushing or other means to remove all soil. In addition, if this contract involves the identification, shipping, storage, testing, or disposal of soils from such a quarantined area, the Contractor agrees to comply with the provisions of ER 1110-1-5 and attachments, a copy of which will be made available by the Contracting Officer upon request. The Contractor agrees to assure compliance with this obligation by all subcontractors.

1.5 DAMAGE TO WORK

The responsibility for damage to any part of the permanent work shall be as set forth in Section 0700, Contract Clauses, clause entitled PERMITS AND RESPONSIBILITIES. However, if, in the judgment of the Contracting Officer, any part of the permanent work performed by the Contractor is damaged by flood, earthquake, hurricane, or tornado, which damage is not due to the failure of the Contractor to take reasonable precautions or to exercise sound engineering and construction practices in the conduct

of the work, the Contractor will make the repairs as ordered by the Contracting Officer and full compensation for such repairs will be made at the applicable contract unit or lump sum prices as fixed and established in the contract. If, in the opinion of the Contracting Officer, there are no contract unit or lump sum prices applicable to any part of such work, an equitable adjustment pursuant to the Contract Clause, CHANGES will be made as full compensation to the repairs of that part of the permanent work for which there are no applicable contract unit or lump sum prices. Except as herein provided, damage to all work (including temporary construction), utilities, materials, equipment and plant shall be repaired to the satisfaction of the Contracting Officer at the Contractor's expense, regardless of the cause of such damage.

1.6 PHYSICAL CONDITIONS AND DATA

1.6.1 General

Data and information furnished or referred to below is for the Contractor's information. The Government shall not be responsible for any interpretation of or conclusion drawn from the data or information by the Contractor.

1.6.2 Physical Conditions

The physical conditions indicated on the drawings and in the specifications are the result of site investigations by the U.S. Army Corps of Engineers, Charleston District, Technical Services Division, Design Branch. It is highly recommended that bidders conduct their own investigations and decide for themselves the wetness of the site and character of the materials and the difficulties of performing the work.

1.6.3 Weather Conditions

The U.S. Department of Commerce, National Oceanic and Atmospheric Administration (NOAA) compiled the following data based on readings taken at the Bush Field Airport, Augusta, GA, recording station:

Average annual precipitation	44.5 inches
Average monthly high precipitation	4.9 inches
Average annual temperature	64.3 degrees F
Average monthly high temperature	76.9 degrees F
Average monthly low temperature	51.5 degrees F

Additional information can be obtained from the NOAA Environmental Data Service Office in Asheville, North Carolina.

1.6.4 Transportation facilities:

1.6.4.1 Railroads

Augusta, Georgia, the nearest major city to the site of the work is served by the CSX Railroad. The Contractor shall investigate the availability of sidings and shall make all arrangements for use of any sidings for the delivery of any materials and equipment to be used in the work. Railroads within Savannah River Site area are not available to the Contractor.

1.6.4.2 Highways

State and Federal Highways serving the site of the work are shown on the Location and Vicinity Map of the contract drawings. The Contractor shall make his own investigations of available roads for transportation, load limits for bridges and roads, and other road conditions affecting the transportation of materials and equipment to the site of the work. All site roads are controlled and will require badges for access to work area (See ATTACHMENTS, Security Badge Request Form).

1.6.4 Vehicle Weight Restrictions.

To ensure that the aging bridges, culverts, and box culverts can safely support the various vehicle load combinations applied to the structures and that the loads are within the AASHTO Operating and Inventory Rating for each structure, the following vehicles are not permitted to cross any bridge structures at Savannah River Site without prior written approval from CSWE-Engineering:

Central Services Works Engineering Dept.

*Railroads, Roads, and Grounds = Field Services Bldg. 706-N, Savannah River Site, (803) 557-7617

*Engineering Services Bldg. 722-A Savannah River Site, (803) 725-2346

Vehicles (trailers, tractors), loaded or unloaded, exceeding the total vehicle weight or individual axle weights as follows:

1. AASHTO Standard Truck Loading H 20-44 - Axle Spacing 14' Front, Axle Weight 8000 lbs., Rear Axle Weight 32,000 lbs., Total Weight of Truck and Load, 40,000 lbs.

2. AASHTO Standard Truck Loading HS 20-44 - First Axle spacing 14'(Tractor Axle), Second Axle Spacing 14 to 30', First Axle Weight 8,000 lbs., Second Axle Weight 32,000 labs. Combined, Third Axle Weight 32,000 lbs., Total Weight of Truck and Load 72,000 lbs.

Operators of vehicles exceeding the above load limits shall notify CSWE Engineering, in writing, seventy-two (72) hours prior to crossing any bridge structure at Savannah River Site. Additional information may be required to develop an Operating and Inventory Rating for each bridge structure the load will cross.

1.6.5 Records

Design data used to formulate the plans and specifications for this work are available for review at the Corps of Engineers, Charleston District Office, upon written request of any bidder to Contracting Division, 69A Hagood Avenue, Charleston, South Carolina.

1.6.6 Subsurface conditions and data:

The locations of borings are shown on the drawings. The boring logs are contained in ATTACHMENTS. Soils have been classified in accordance with the Unified Soils Classification System.

1.6.7 Radiological Concerns:

Savannah River Site is managed by the Department of Energy and, as such, includes nuclear storage areas and operating facilities; however, no radiological contamination above publicly recognized and accepted levels is anticipated the barricade site.

No special training requirements beyond GET and CAT are anticipated for the Contractor personnel. Contractor equipment shall be monitored by Health Protection personnel when brought on to Savannah River Site and prior to leaving Savannah River Site.

1.7 TIME EXTENSIONS FOR UNUSUALLY SEVERE WEATHER (OCT 1989)
(LOCAL 52.236-4100 ER 415-1-15)

(a) This clause specifies the procedure for determination of time extensions for unusually severe weather in accordance with the clause entitled DEFAULT (FIXED-PRICE CONSTRUCTION). In order for the Contracting Officer to award a time extension under this clause, the following conditions must be satisfied:

(1) The weather experienced at the project site during the contract period must be found to be unusually severe, that is, more severe than the adverse weather anticipated for the project location during any given month.

(2) The unusually severe weather must actually cause a delay to the completion of the project. The delay must be beyond the control and without the fault or negligence of the Contractor.

(b) The following schedules of monthly anticipated adverse weather delays are based on National Oceanic and Atmospheric Administration or similar data for the project location and will constitute the base line for monthly weather time evaluations.
The Contractor's progress schedule must reflect these anticipated adverse weather delays in all weather dependent activities.

MONTHLY ANTICIPATED ADVERSE WEATHER CALENDAR

JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
7	6	7	5	7	6	7	6	6	4	4	6

(c) Upon acknowledgement of the notice to proceed and continuing throughout the contract, the Contractor will record on the daily CQC report, the occurrence of adverse weather and resultant impact to normally scheduled work. Actual adverse weather delay days must prevent work on critical activities for 50 percent or more of the contractor's scheduled workday. The number of actual adverse weather delay days shall include days impacted by actual adverse weather (even if adverse weather occurred in previous month), be calculated chronologically from the first to the last day of each month, and be recorded as full days. If the number of actual adverse weather delay days exceeds the number of days anticipated in paragraph (b) above, the Contracting Officer will convert any qualifying delays to calendar days, giving full consideration for equivalent fair weather work days, and issue a modification in accordance with the contract clause entitled DEFAULT (FIXED-PRICE CONSTRUCTION).

1.8 UTILITY SERVICES PROVIDED BY THE GOVERNMENT

No utility service will be furnished by the Government for construction activities. The contractor shall provide all necessary equipment for power, water and any other utilities required for the construction activities.

1.9 CONTRACTOR'S USE OF PROJECT SITE FACILITIES

Except as required for Security Guards in the performance of their assigned duties, no Contractor's personnel on any project site shall be allowed to use as living quarters any facilities in areas set aside for the Contractor's use as administrative area, storage facilities or use by security personnel.

1.10 TESTING

ALL TESTS REQUIRED UNDER THE technical provisions sections will be performed by and at the expense of the Contractor.
All instruments and personnel required for these tests shall be furnished by the Contractor.

1.11 CONSTRUCTION SCHEDULE CONSTRAINTS (1984 APR-CESAC).

1.11.1 Occupancy

The work to be performed is to be accomplished in an area adjacent to facilities that will be occupied and in normal usage during the course of construction. It is the intent of these provisions to provide for maximum coordination between construction activities pursuant to this contract and concurrent on-going routine activities of site personnel. Interference with and inconvenience to the occupants or routine of the facility shall be held to an absolute minimum.

1.11.2 COORDINATION WITH OTHER CONTRACTORS (1984 NOV-CESAC).

The attention of the Contractor is invited to the fact other contractors may be working at the project site concurrently with the work under this contract. The order of work under this contract shall be coordinated with other work at the site. The contractor shall not interfere with materials, appliances, or workmen of any Contractor who may be concurrently performing work under other contracts at the site as hereinbefore specified. As far as practicable, all Contractors shall have equal rights to use all roads and grounds. In case of disagreement regarding such use, the decision of the Contracting Officer will be final.

1.11.3 Protection

1.11.3.1 Covering, Shields and Barricades

Contractor is responsible to provide such covering, shields and barricades as are required to protect the general public, equipment, stores, supplies, etc., from dust, debris, weather intrusion, water, moisture or other cause of damage resulting from construction.

1.11.3.2 Construction and Placement

Construction and placement of covering, shields and barricades, and choice of methods and materials will be at Contractor's option unless otherwise shown on the drawings.

1.11.4 Phasing and Sequence

The Contractor shall submit for approval a summary work schedule setting forth schedule dates for initiation and completion of construction in each work area. No work shall be performed prior to approval of this schedule and all work shall be performed in strict adherence thereto. If departures from this schedule appear to be required or desired, the Contracting Officer shall be promptly notified and his approval will be required prior to implementation of said departure(s).

1.11.5 Outages:

Contractor's work requiring any scheduled facility shutdown will require 21 calendar days advance notice and will be subject to the approval of the Contracting Officer. Traffic Management Plan shall be as specified in SECTION 01500A TEMPORARY CONSTRUCTION FACILITIES.

1.11.6 Continuity.

All tools, labor and materials required to complete any item of work within a given work area or requiring an outage of any building utility or system, shall be available at the site prior to commencement thereof. Once work has commenced on an item of work, said work shall be continuously and diligently performed to completion and acceptance.

1.12 "As-Built" Drawings:

Upon completion of items of work, the Contractor shall revise the shop drawings to show "as-built" conditions. The notation "Revised to show "as-built" conditions" shall be placed in red in the lower right corner of each drawing along with initials of a responsible company representative. Each as-built shop drawing or catalog cut shall be identified by the Contract Number (W912HP-05-C-0002) associated with the contract and corresponding transmittal number from ENG Form 4025 (See ATTACHMENTS.). "As-built" shop drawings of each Contractor-prepared construction drawing shall be prepared 10 days after the construction detailed on a given drawing has been completed. After the "as-built" shop drawings have been prepared as described above and within 15 days after the item has been incorporated into the project, the Contractor shall submit one complete set of as-built shop drawings, including catalog cuts, to the Contracting Officer. The Government reserves the right to withhold two percent of the total price of the item for which as-built shop drawings have not been submitted.

1.12.2 "As-Built" Contract Drawings

The Contractor-shall maintain a separate set of full-size contract drawings, marked up in red, to indicate as-built conditions. Each as-built contract drawing shall include the Contract Number (W912HP-05-C-0002) associated with the contract. These drawings shall be maintained in a current condition at all times until completion of the work and shall be available for review by Government personnel at all times. All variations from the contract drawings, for whatever reason, including those occasioned by modification, optional materials, and the required coordination between trades shall be indicated. These variations shall be shown in the same general detail utilized in the contract drawings. The Government reserves the right to withhold two percent of the total price of the items for which as-built contract drawings have not been submitted. These notated prints shall be certified as to their correctness by signature of the Contractor and turned over to the Contracting Officer not later than 10 days after final acceptance of the work by the Government. Marked up prints shall be reviewed for approval by the Contracting officer and returned for corrections as necessary. Upon final approval, the government will furnish the original contract drawings to the Contractor. These drawings shall be CADD (Microstation, Intergraph) electronic files of original contract drawings. The Contractor shall be responsible for transferring all changes noted on approved set of "As-Built" Record Drawing prints to the original contract drawings. As-built changes to the original contract drawings shall be made in CADD format to insure uniformity throughout. Drafting shall conform to “The A/E/C CADD Standard” that has been developed by The CADD/GIS Technology Center and is located at http://tsc.wes.army.mil/products/standards/aec/intro.asp.
The Contractor shall furnish the revised set of original drawings and three complete sets of prints of the revised originals to the Contracting officer within 90 days after receipt of the original drawings. The Contractor shall be responsible for any loss or damage to the original contract drawings until received by the Contracting Officer.

1.12.2.1 Actual location (Savannah River Site coordinate system) of all utility lines, type of materials actually installed, major sizes of line, etc.

shall be shown. In order that the location of these lines and appurtenances may be determined in the event the surface opening or indicators become covered or obscured, the record drawings shall show, by offset dimensions to two permanently fixed surface features, both ends of each run and each change in direction. Valves, splice boxes, and similar appurtenances shall be located by dimensions along the utility run from a reference point. The average depth below the surface of each run shall also be recorded.

1.12.2.2 Any shop drawings which constitute part of the design shall be included with the record drawings.

1.12.2.3 The manufacturer and model number of all major items of equipment §hall be, shown on the record drawings.

1.13 HAUL ROUTES (1984 APR CESAC).

Haul routes shall be as specified in SECTION 01500A TEMPORARY CONSTRUCTION FACILITIES.

1.14 PAYMENT FOR MATERIALS STORED ON-SITE AND OFF-SITE

The estimates for progress payments on this project submitted by the Contractor for approval by the Contracting Officer (in accordance with sub-paragraph (b) of Contract Clause PAYMENTS UNDER FIXED PRICE CONSTRUCTION CONTRACTS are authorized to take into consideration material delivered to the Contractor and stored on the site, or at locations other than the site, if the Contractor furnishes satisfactory evidence that (1) he has acquired title to such material; (2) that it will be utilized on the work covered by and meets the requirements of this contract; and (3) that the material is stored in a bonded warehouse within a 50-mile radius of the project site.

1.15 SAVANNAH RIVER SITE SECURITY REQUIREMENTS

1.15.1 The Contractor must comply with the Savannah River Site security requirements and shall provide the name of employees (prime and subcontractor) for clearance into the project work area. All employees will be processed through Westinghouse's badging procedures and will be subject to investigation by Government authorities. The badging procedures include a one-day General Employee Training (GET) Course. Passing a written exam is required in order to obtain a badge. This course is offered on certain days of the week. Additional Consolidated Annual Training is required approximately one (1) year from date of completing the GET course in order to maintain badge. This is a four-hour course with a written exam, which must be passed. <u>No foreign nationals are permitted on site</u>.

1.15.2 The following information shall be provided for each individual; Name, Date of Birth, Social Security Number, Home Address, and Employer's Name. This information is to be shown on the form provided in the ATTACHMENTS

and submitted to the Contracting Officer a minimum of 5 working days prior to commencing work. All Employees are required to be finger printed and to have a valid drivers license (laminated with picture) or an acceptable employer identification card (laminated with picture) prior to being issued the temporary identification badge. Finger printing will be administered by Westinghouse.

1.15.3 All Contractor's personnel are required to wear an identification badge in plain view at all times when entering and leaving Savannah River Site and while at work on the project. The badge shall be worn on the front left side of the outer garments, between the shoulder and waistline. Contractor and other personnel needing access to the site for short periods will be issued temporary badges only for a specific number of hours in a given day. Material delivery by other than the Contractor's badge personnel requires a bill-of-lading and a badged escort of the vehicle and it's driver into and out of the area by the Contractor's personnel.

1.15.4 Items such as weapons, explosives, liquor or drugs, cameras and film, binoculars, tape recorders or any other item that site security personnel consider a possible threat to site security will be considered as contraband and will be impounded. Each employee must submit to vehicle and property searches.

1.15.5 All prescribed identification such as badges shall immediately be delivered to the Contracting Officer for cancellation upon the release of any employee and also prior to final payment of the contract.

1.16 SITE PERMITS

All work at Savannah River Site is subject to various permits to be issued by the Operating Contractor (WESTINGHOUSE). The Contracting Officer will be responsible for obtaining any such permits applicable to this work. The Contractor will be responsible for abiding by the conditions set forth in the permit. One of the key features of the site permit system is the Works Clearance Permit. This permit requires written work plans to be developed by the Contractor for submittal through the Resident Engineer to Savannah River Site representatives for concurrence. These plans must describe in narrative detail the sequencing of operations for all interfaces between the contract work and existing site utilities, facilities, and operations. These include but are not limited to tie-ins for water, sewer, steam, electrical, etc. No underground work may be started until such pertinent work plans have been submitted and the Savannah River Site representatives have examined and marked the area for existing underground interferences. The Works Clearance Permit will be monitored daily by Savannah River Site representatives. The Contractor will furnish a secure, weathertight container (similar to a mail box) at the job site for storing the permit document. Other key permits which may require coordination effort by the Contractor include, but are not limited to:

a. Forestry Clearance - clearing activities
b. Telecommunications - installation of wire lines
c. Geohydrological - any well or core drilling
d. SCDHEC Permits - any water supply or sewage
e. Burning - any burning
f. Air Quality - any operations affecting air quality
g. Ground Water - any work extending down to ground water level

All site permits affecting the work and contractor requirements therefore will be thoroughly discussed at the preconstruction conference.

1.17 EMERGENCY PREPAREDNESS.

The Contractor will be required to develop an emergency preparedness plan that will identify procedures to be taken in the event of accidental toxic gas/radiation releases or other nuclear incidents at the Savannah River Site. The plan shall cover such items as emergency notification and communications and personnel accountability and evacuation. The Savannah River Site Resident Office will assist the Contractor in developing this plan and it will be discussed in detail at the Preconstruction Conference. Contractor personnel will be required to use paging equipment to be furnished by the Government for emergency notification. Such equipment will be issued to key contractor personnel on a daily basis. The Contractor will be responsible for reasonable care of the equipment while it is in his possession and will return the equipment at the end of the project. Final payment will not be made until all paging equipment is returned.

1.18 DISPOSAL OF MATERIALS.

Unless otherwise indicated in the contract plans and specifications, all materials indicated for removal and disposal shall be disposed of off Site at the Contractor’s expense. If it should become necessary to dispose of any materials not specifically indicated in the contract, the Contractor will coordinate with the Resident Engineer to determine a suitable disposal location.

In some cases transfer of materials to disposal sites may require Health Protection monitoring prior to movement of materials. See paragraph 1.19 entitled HEALTH PROTECTION SURVEYS.

1.19 HEALTH PROTECTION SURVEYS.

Health Protection (Radiation Contamination) Surveys will be made by SRS representatives on all Contractor equipment and operations as follows:

a. All construction equipment (except light passenger vehicles) used in the work will be monitored before being removed from the Savannah River Site.

b. All equipment, materials, and personnel located in areas which may be subject to contamination will be monitored daily.

c. All materials which may be taken off site for repair, fabrication or overhaul will be monitored before being removed from Savannah River Site. The Contractor shall coordinate through the Resident Engineer in advance before removing any equipment from the site. Requirements for coordination of health protection surveys will be discussed and developed at the Preconstruction Conference.

1.20 VENDOR ACCESS TO SAVANNAH RIVER SITE

Incidental (one day) access by deliverymen, repairmen, or other vendors supplying the Contractor's operations may generally be gained without formal badging procedures. It will be the Contractor's responsibility to coordinate with the vendor and gatehouse security personnel and to furnish badged escorts when necessary. Generally, any delivery vehicles will be required to furnish bills of lading, identification or other documents as may be required by site security personnel. See Paragraphs 1.21 and 1.25 of this Section 01100 for additional site access requirements.

1.21 SAVANNAH RIVER SITE POINT OF ENTRY (POE) PROCESS

The Savannah River Site operating contractor (WSRC) has instituted a Site Point of Entry (POE) Process for all visitors, vendors and contractors working on the site. The contractor shall co-ordinate with WSRC and shall comply with all requirements of this POE process. WSRC will review all vendor and visitor work scopes from a safety (ISMS) perspective and will insure that appropriate controls have been established prior to allowing work to begin. The features of the process include hazard determination (high, medium or low) for work done by contractors, vendors and visitors, a general site safety briefing for all contractors, visitors and vendors, hazard-specific safety checklists used at the job site for high and medium hazard work by contractors, visitors and vendors, and an oversight and feedback process to trend contractor, visitor and vendor safety performance and improve as necessary. This hazard determination is conducted by an “Assigned Competent Person” (i.e., an SRS permanently-badged employee who understands the nature of the contractor, visitor or vendor’s work scope and hazards). The Assigned Competent Person initiates this POE process through the OSR-142 Form (SRS Visitor Access) used to request site access.

1.22 REMOVAL OF MATERIALS FROM SRS.

If during the course of the work, it becomes necessary to remove materials from the site for off-site repair, fabrication, overhaul, etc., it will be necessary to obtain necessary passes, bills-of-lading, or other documents as

may be required by security personnel for site egress. The Contractor will coordinate all such moves in advance with the Resident Engineer.

1.23 SITE EQUIPMENT TRANSFERS.

When existing equipment is to be physically relocated within the site boundaries, either through salvage or disposal, a site Equipment Transfer Document must be executed and accompany the equipment to its destination (i.e., salvage area or disposal site). The Plant Equipment Transfer document will be completed by Resident Office Personnel and given to the Contractor to accompany the equipment. The Contractor is responsible for obtaining the supervisor's signature of the department receiving the equipment and returning the original and all copies to the Resident Office. Equipment cannot be moved without this document.

1.24 EXISTING UNDERGROUND UTILITIES.

The Contractor is responsible for taking all appropriate measures to safeguard existing underground utilities. Only hand excavation is permitted within 5 feet vertical or horizontal of all known exist utilities.

1.25 SITE ACCESS.

At any time during the performance of work under this contract, the contractor and his subcontractors, suppliers and vendors, may upon one days notice be required to enter and exit Savannah River Site only through the use of two site perimeter gates called the “Pecan Gates”. These gates are approximately ten (10) miles from the North Perimeter Gate (Jackson Barricade) on South Carolina Highway 125. One gate accesses the east side of the site, and the other gate accesses the west side of the site. These gates are approximately two (2) miles apart off of South Carolina Highway 125. Everyone using these gates will be required to have a special badge, issued by the Badge Office in Central Shops, and will be required to sign in and out when entering and/or exiting these gates. All construction delivery vehicles will require a security escort provided by Site security to the jobsite. All equipment/vehicles left on site overnight shall have information clearly displayed which identifies the company and point-of-contact with company in case of emergency.

Primary access to the Savannah River Site is through the Jackson Barricade and the New Ellenton Barricade. Construction for replacement of the Jackson Barricades is presently in progress and construction for replacement of the New Ellenton Barricades is anticipated in the near future. This construction may result is delays in access to the site.

1.26 LIST OF DRAWINGS

See Section 00102N for list of Drawings

1.27 PROJECT SIGN (1984 NOV-SAC).

The Contractor shall furnish and install one (1) project sign at the location designated by the Contracting Officer's Representative within 30 days after Notice to Proceed. The sign(s) shall be constructed of 3/4 inch thick MDO Ext APA plywood, securely mounted on two 4 x 4 treated posts. The layout and size of the sign shall conform to the details shown in Exhibit E-1 of the contract specifications. The size of the sign is 4' x 6'. The large 4' x 4' section of the sign on the right is to be white with black lettering. The 2' x 4' section of the sign on the left is to be red with white lettering. Decals of the Corps of Engineers insignia (castle) will be furnished by the Government.

The sign board shall be given an oil base prime coat. The large 4' x 4' section shall be given a minimum of two finish coats of white semi-gloss oil base paint. The 2' x 4 ' section shall be given a minimum of two finish coats of red semi-gloss oil base paint which shall match the Corps castle decal. All lettering shall be executed by craftsmen skilled in this type of work. All lettering shall be of block type and painted with white semi-gloss oil base paint and black semi-gloss oil base paint. The contractor shall supply color samples to the Contracting Officer's Representative for approval.

Sign posts shall be placed to a depth of at least three feet in the ground. The height of the bottom of the sign above the ground shall be approximately three feet. The project sign shall be maintained for the entire construction period. All damages to the project signs including damage by the elements shall be corrected at no additional cost to the Government. Additional decals will be furnished by the Government if necessary. Upon completion of the project, the Contractor shall remove the signs from the worksite. No separate payment will be made for the work covered under this section.

PART 2 PRODUCTS (Not Applicable)

PART 3 EXECUTION (Not Applicable)

3.1 FINAL AND CONDITIONAL ACCEPTANCE OF GRASSING

When upon completion of the final construction inspection, the work is found to comply fully with contract plans, specifications, change orders, and modifications, the Contracting Officer will take final acceptance, provided a satisfactory strand of grass has been obtained. If, due to the season, satisfactory life and growth of grass cannot be determined when all work is completed, the Contracting Officer shall give the Contractor written notice of conditional acceptance. This notice of conditional acceptance will relieve the Contractor of further construction or maintenance work until the next growing season, at which time he will be required to produce a living and satisfactory strand of grass and apply water and/or fertilizer as required by the Contracting

Officer to produce a grass cover in full compliance with the intent of these specifications. Should such delay in grassing become necessary, the time for such work shall be extended by change order. Such extension shall be for grassing work only and not affect any other portions of the work or completion dates thereof.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 01 - GENERAL REQUIREMENTS

SECTION 01270A

MEASUREMENT AND PAYMENT

02/94

PART 1 GENERAL

1.1 REFERENCES

1.2 LUMP SUM PAYMENT ITEMS

1.2.1 Mobilization and Demobilization

1.2.1.1 Payment

1.2.1.2 Unit of Measure

1.2.2 Sitework and Utilities

1.2.2.1 Payment

1.2.2.2 Unit of Measure

1.2.3 Administration Building and Kennel Facility (all work inside the building 5 ft. line).

1.2.3.1 Payment

1.2.3.2 Unit of Measure

PART 2 PRODUCTS (Not Applicable)

PART 3 EXECUTION (Not Applicable)

-- End of Section Table of Contents --

SECTION 01270A

MEASUREMENT AND PAYMENT
02/94

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM A 615/A 615M	(2003a) Deformed and Plain Billet-Steel Bars for Concrete Reinforcement
ASTM C 127	(2001) Density, Relative Density (Specific Gravity), and Absorption of Coarse Aggregate
ASTM C 128	(2001e1) Density, Relative Density (Specific Gravity), and Absorption of Fine Aggregate
ASTM D 1250	(1980; R 2002) Petroleum Measurement Tables

1.2 LUMP SUM PAYMENT ITEMS

Payment items for the work of this contract for which contract lump sum payments will be made are listed in the BIDDING SCHEDULE and described below. All costs for items of work, which are not specifically mentioned to be included in a particular lump sum or unit price payment item, shall be included in the listed lump sum item most closely associated with the work involved. The lump sum price and payment made for each item listed shall constitute full compensation for furnishing all plant, labor, materials, and equipment, and performing any associated Contractor quality control, environmental protection, meeting safety requirements, tests and reports, and for performing all work required for which separate payment is not otherwise provided.

1.2.1 Mobilization and Demobilization

1.2.1.1 Payment

Payment will be made for costs associated with mobilization and demobilization, as defined in Special Clause PAYMENT FOR MOBILIZATION AND DEMOBILIZATION.

1.2.1.2 Unit of Measure

Unit of measure: lump sum.

1.2.2 Sitework and Utilities

1.2.2.1 Payment

Payment will be made for costs associated with operations necessary for construction of sitework and utilities.

1.2.2.2 Unit of Measure

Unit of measure: lump sum.

1.2.3 Administration Building and Kennel Facility (all work inside the building 5 ft. line).

1.2.3.1 Payment

Payment will be made for costs associated with operations necessary for construction of the facility.

1.2.3.2 Unit of Measure

Unit of measure: lump sum.

PART 2 PRODUCTS (NOT APPLICABLE)

PART 3 EXECUTION (NOT APPLICABLE)

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 01 - GENERAL REQUIREMENTS

SECTION 01312A

QUALITY CONTROL SYSTEM (QCS)

08/04

1.1 GENERAL
1.1.1 Correspondence and Electronic Communications
1.1.2 Other Factors
1.2 QCS SOFTWARE
1.3 SYSTEM REQUIREMENTS
1.4 RELATED INFORMATION
1.4.1 QCS User Guide
1.4.2 Contractor Quality Control(CQC) Training
1.5 CONTRACT DATABASE
1.6 DATABASE MAINTENANCE
1.6.1 Administration
1.6.1.1 Contractor Information
1.6.1.2 Subcontractor Information
1.6.1.3 Correspondence
1.6.1.4 Equipment
1.6.1.5 Management Reporting
1.6.2 Finances
1.6.2.1 Pay Activity Data
1.6.2.2 Payment Requests
1.6.3 Quality Control (QC)
1.6.3.1 Daily Contractor Quality Control (CQC) Reports.
1.6.3.2 Deficiency Tracking.
1.6.3.3 Three-Phase Control Meetings
1.6.3.4 Accident/Safety Tracking.
1.6.3.5 Features of Work
1.6.3.6 QC Requirements
1.6.4 Submittal Management
1.6.5 Schedule
1.6.6 Import/Export of Data
1.7 IMPLEMENTATION
1.8 DATA SUBMISSION VIA COMPUTER DISKETTE OR CD-ROM
1.8.1 File Medium
1.8.2 Disk or CD-ROM Labels
1.8.3 File Names
1.9 MONTHLY COORDINATION MEETING
1.10 NOTIFICATION OF NONCOMPLIANCE

-- End of Section Table of Contents --

SECTION 01312A

QUALITY CONTROL SYSTEM (QCS)
08/04

1.1 GENERAL

The Government will use the Resident Management System for Windows (RMS) to assist in its monitoring and administration of this contract. The Contractor shall use the Government-furnished Construction Contractor Module of RMS, referred to as QCS, to record, maintain, and submit various information throughout the contract period. The Contractor module, user manuals, updates, and training information can be downloaded from the RMS web site. This joint Government-Contractor use of RMS and QCS will facilitate electronic exchange of information and overall management of the contract. QCS provides the means for the Contractor to input, track, and electronically share information with the Government in the following areas:

Administration
Finances
Quality Control
Submittal Monitoring
Scheduling
Import/Export of Data

1.1.1 Correspondence and Electronic Communications

For ease and speed of communications, both Government and Contractor will, to the maximum extent feasible, exchange correspondence and other documents in electronic format. Correspondence, pay requests and other documents comprising the official contract record shall also be provided in paper format, with signatures and dates where necessary. Paper documents will govern, in the event of discrepancy with the electronic version.

1.1.2 Other Factors

Particular attention is directed to Contract Clause, "Schedules for Construction Contracts", Contract Clause, "Payments", Section 01320A, PROJECT SCHEDULE, Section 01330, SUBMITTAL PROCEDURES, and Section 01451A, CONTRACTOR QUALITY CONTROL, which have a direct relationship to the reporting to be accomplished through QCS. Also, there is no separate payment for establishing and maintaining the QCS database; all costs associated therewith shall be included in the contract pricing for the work.

1.2 QCS SOFTWARE

QCS is a Windows-based program that can be run on a stand-alone personal computer or on a network. The Government will make available the QCS software to the Contractor after award of the construction contract. Prior to the Pre-Construction Conference, the Contractor shall be responsible to download, install and use the latest version of the QCS software from the Government's RMS Internet Website. Upon specific justification and request by the Contractor, the Government can provide QCS on 3-1/2 inch high-density diskettes or CD-ROM. Any program updates of QCS will be made available to the Contractor via the Government RMS Website as they become available.

1.3 SYSTEM REQUIREMENTS

The following is the minimum system configuration that the Contractor shall have to run QCS:

RMS Server

Hardware

IBM-compatible PC with 1000 MHz Pentium or higher processor

1000+ MB RAM

1 GB free disk space

3 1/2 inch high-density floppy drive

Compact Disk (CD) Reader 8x speed or higher

TCP/IP Network/Internet Connection

Software

Windows 2000 or higher

Oracle 8i Server

Virus protection software that is regularly upgraded with all issued manufacturer's updates

Personnel

Oracle Database Administrator (DBA)

RMS Workstation

Hardware

IBM-compatible PC with 1000 MHz Pentium or higher processor

256+ MB RAM for workstation

500 MB free disk space

3 1/2 inch high-density floppy drive

Compact Disk (CD) Reader 8x speed or higher

SVGA or higher resolution monitor (1024x768, 256 colors)

Mouse or other pointing device

Windows compatible printer. (Laser printer must have 4 MB+ of RAM)

TCP/IP Network/Internet Connection

Software

MS Windows 2000 or higher

Oracle 8i Client

Word Processing software: MS Word 2000 or newer

Latest version of: Netscape Navigator, Microsoft Internet Explorer, or other browser that supports HTML 4.0 or higher

Electronic mail (E-mail) MAPI compatible

Virus protection software that is regularly upgraded with all issued manufacturer's updates

QCS and QAS System

Hardware

IBM-compatible PC with 1000 MHz Pentium or higher processor

256+ MB RAM for workstation / 512+ MB RAM for server

1 GB hard drive disk space for sole use by the QCS system

3 1/2 inch high-density floppy drive

Compact Disk (CD) Reader 8x speed or higher

SVGA or higher resolution monitor (1024x768, 256 colors)

Mouse or other pointing device

Windows compatible printer. (Laser printer must have 4 MB+ of RAM)

Connection to the Internet, minimum 56k BPS

Software

MS Windows 2000 or higher

QAS-Word Processing software: MS Word 2000 or newer

Latest version of: Netscape Navigator, Microsoft Internet Explorer, or other browser that supports HTML 4.0 or higher

Electronic mail (E-mail) MAPI compatible

Virus protection software that is regularly upgraded with all issued manufacturer's updates

1.4 RELATED INFORMATION

1.4.1 QCS User Guide

After contract award, the Contractor shall download instructions for the installation and use of QCS from the Government RMS Internet Website; the Contractor can obtain the current address from the Government. In case of justifiable difficulties, the Government will provide the Contractor with a CD-ROM containing these instructions.

1.4.2 Contractor Quality Control (CQC) Training

The use of QCS will be discussed with the Contractor's QC System Manager during the mandatory CQC Training class.

1.5 CONTRACT DATABASE

Prior to the pre-construction conference, the Government shall provide the Contractor with basic contract award data to use for QCS. The Government will provide data updates to the Contractor as needed, generally by files attached to E-mail. These updates will generally consist of submittal reviews, correspondence status, QA comments, and other administrative and QA data.

1.6 DATABASE MAINTENANCE

The Contractor shall establish, maintain, and update data for the contract in the QCS database throughout the duration of the contract. The Contractor shall establish and maintain the QCS database at the Contractor's site office. Data updates to the Government shall be submitted by E-mail with file attachments, e.g., daily reports, schedule updates, payment requests. If permitted by the Contracting Officer, a data diskette or CD-ROM may be used instead of E-mail (see Paragraph DATA SUBMISSION VIA COMPUTER DISKETTE OR CD-ROM). The QCS database typically shall include current data on the following items:

1.6.1 Administration

1.6.1.1 Contractor Information

The database shall contain the Contractor's name, address, telephone numbers, management staff, and other required items. Within 14 calendar days of receipt of QCS software from the Government, the Contractor shall deliver Contractor administrative data in electronic format via E-mail.

1.6.1.2 Subcontractor Information

The database shall contain the name, trade, address, phone numbers, and other required information for all subcontractors. A subcontractor must be listed separately for each trade to be performed. Each subcontractor/trade shall be assigned a unique Responsibility Code, provided in QCS. Within 14 calendar days of receipt of QCS software from the Government, the Contractor shall deliver subcontractor administrative data in electronic format via E-mail.

1.6.1.3 Correspondence

All Contractor correspondence to the Government shall be identified with a serial number. Correspondence initiated by the Contractor's site office

shall be prefixed with "S". Letters initiated by the Contractor's home (main) office shall be prefixed with "H". Letters shall be numbered starting from 0001. (e.g., H-0001 or S-0001). The Government's letters to the Contractor will be prefixed with "C".

1.6.1.4 Equipment

The Contractor's QCS database shall contain a current list of equipment planned for use or being used on the jobsite, including the most recent and planned equipment inspection dates.

1.6.1.5 Management Reporting

QCS includes a number of reports that Contractor management can use to track the status of the project. The value of these reports is reflective of the quality of the data input, and is maintained in the various sections of QCS. Among these reports are: Progress Payment Request worksheet, QA/QC comments, Submittal Register Status, Three-Phase Inspection checklists.

1.6.2 Finances

1.6.2.1 Pay Activity Data

The QCS database shall include a list of pay activities that the Contractor shall develop in conjunction with the construction schedule. The sum of all pay activities shall be equal to the total contract amount, including modifications. Pay activities shall be grouped by Contract Line Item Number (CLIN), and the sum of the activities shall equal the amount of each CLIN. The total of all CLINs equals the Contract Amount.

1.6.2.2 Payment Requests

All progress payment requests shall be prepared using QCS. The Contractor shall complete the payment request worksheet and include it with the payment request. The work completed under the contract, measured as percent or as specific quantities, shall be updated at least monthly. After the update, the Contractor shall generate a payment request report using QCS. The Contractor shall submit the payment requests with supporting data by E-mail with file attachment(s). If permitted by the Contracting Officer, a data diskette may be used instead of E-mail. A signed paper copy of the approved payment request is also required, which shall govern in the event of discrepancy with the electronic version.

1.6.3 Quality Control (QC)

QCS provides a means to track implementation of the 3-phase QC Control System, prepare daily reports, identify and track deficiencies, document progress of work, and support other contractor QC requirements. The Contractor shall maintain this data on a daily basis. Entered data will automatically output to the QCS generated daily report. The Contractor shall provide the Government a Contractor Quality Control (CQC) Plan within the time required in Section 01451A, CONTRACTOR QUALITY CONTROL. Within seven calendar days of Government acceptance, the Contractor shall submit a data diskette or CD-ROM reflecting the information contained in the accepted CQC Plan: schedule, pay activities, features of work, submittal register, QC requirements, and equipment list.

1.6.3.1 Daily Contractor Quality Control (CQC) Reports.

QCS includes the means to produce the Daily CQC Report. The Contractor may use other formats to record basic QC data. However, the Daily CQC Report generated by QCS shall be the Contractor's official report. Data from any supplemental reports by the Contractor shall be summarized and consolidated onto the QCS-generated Daily CQC Report. Daily CQC Reports shall be submitted as required by Section 01451A, CONTRACTOR QUALITY CONTROL. Reports shall be submitted electronically to the Government using E-mail or diskette within 24 hours after the date covered by the report. Use of either mode of submittal shall be coordinated with the Government representative. The Contractor shall also provide the Government a signed, printed copy of the daily CQC report.

1.6.3.2 Deficiency Tracking.

The Contractor shall use QCS to track deficiencies. Deficiencies identified by the Contractor will be numerically tracked using QC punch list items. The Contractor shall maintain a current log of its QC punch list items in the QCS database. The Government will log the deficiencies it has identified using its QA punch list items. The Government's QA punch list items will be included in its export file to the Contractor. The Contractor shall regularly update the correction status of both QC and QA punch list items.

1.6.3.3 Three-Phase Control Meetings

The Contractor shall maintain scheduled and actual dates and times of preparatory and initial control meetings in QCS.

1.6.3.4 Accident/Safety Tracking.

The Government will issue safety comments, directions, or guidance whenever safety deficiencies are observed. The Government's safety comments will be included in its export file to the Contractor. The Contractor shall regularly update the correction status of the safety comments. In addition, the Contractor shall utilize QCS to advise the Government of any accidents occurring on the jobsite. This brief supplemental entry is not to be considered as a substitute for completion of mandatory reports, e.g., ENG Form 3394 and OSHA Form 300.

1.6.3.5 Features of Work

The Contractor shall include a complete list of the features of work in the QCS database. A feature of work may be associated with multiple pay activities. However, each pay activity (see subparagraph "Pay Activity Data" of paragraph "Finances") will only be linked to a single feature of work.

1.6.3.6 QC Requirements

The Contractor shall develop and maintain a complete list of QC testing, transferred and installed property, and user training requirements in QCS. The Contractor shall update all data on these QC requirements as work progresses, and shall promptly provide this information to the Government via QCS.

1.6.4 Submittal Management

The Government will provide the initial submittal register in electronic format. Thereafter, the Contractor shall maintain a complete list of all submittals, including completion of all data columns. Dates on which submittals are received and returned by the Government will be included in its export file to the Contractor. The Contractor shall use QCS to track and transmit all submittals. ENG Form 4025, submittal transmittal form, and the submittal register update shall be produced using QCS. RMS will be used to update, store and exchange submittal registers and transmittals, but will not be used for storage of actual submittals.

1.6.5 Schedule

The Contractor shall develop a construction schedule consisting of pay activities, in accordance with Contract Clause "Schedules for Construction Contracts", or Section 01320A, PROJECT SCHEDULE, as applicable. This schedule shall be input and maintained in the QCS database either manually or by using the Standard Data Exchange Format (SDEF) (see Section 01320A PROJECT SCHEDULE). The updated schedule data shall be included with each pay request submitted by the Contractor.

1.6.6 Import/Export of Data

QCS includes the ability to export Contractor data to the Government and to import submittal register and other Government-provided data, and schedule data using SDEF.

1.7 IMPLEMENTATION

Contractor use of QCS as described in the preceding paragraphs is mandatory. The Contractor shall ensure that sufficient resources are available to maintain its QCS database, and to provide the Government with regular database updates. QCS shall be an integral part of the Contractor's management of quality control.

1.8 DATA SUBMISSION VIA COMPUTER DISKETTE OR CD-ROM

The Government-preferred method for Contractor's submission of updates, payment requests, correspondence and other data is by E-mail with file attachment(s). For locations where this is not feasible, the Contracting Officer may permit use of computer diskettes or CD-ROM for data transfer. Data on the disks or CDs shall be exported using the QCS built-in export function. If used, diskettes and CD-ROMs will be submitted in accordance with the following:

1.8.1 File Medium

The Contractor shall submit required data on 3-1/2 inch double-sided high-density diskettes formatted to hold 1.44 MB of data, capable of running under Microsoft Windows 95 or newer. Alternatively, CD-ROMs may be used. They shall conform to industry standards used in the United States. All data shall be provided in English.

1.8.2 Disk or CD-ROM Labels

The Contractor shall affix a permanent exterior label to each diskette and CD-ROM submitted. The label shall indicate in English, the QCS file name, full contract number, contract name, project location, data date, name and telephone number of person responsible for the data.

1.8.3 File Names

The Government will provide the file names to be used by the Contractor with the QCS software.

1.9 MONTHLY COORDINATION MEETING

The Contractor shall update the QCS database each workday. At least monthly, the Contractor shall generate and submit an export file to the Government with schedule update and progress payment request. As required in Contract Clause "Payments", at least one week prior to submittal, the Contractor shall meet with the Government representative to review the planned progress payment data submission for errors and omissions. The Contractor shall make all required corrections prior to Government acceptance of the export file and progress payment request. Payment requests accompanied by incomplete or incorrect data submittals will be returned. The Government will not process progress payments until an acceptable QCS export file is received.

1.10 NOTIFICATION OF NONCOMPLIANCE

The Contracting Officer will notify the Contractor of any detected noncompliance with the requirements of this specification. The Contractor shall take immediate corrective action after receipt of such notice. Such notice, when delivered to the Contractor at the work site, shall be deemed sufficient for the purpose of notification.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 01 - GENERAL REQUIREMENTS

SECTION 01320A

PROJECT SCHEDULE

05/02

PART 1 GENERAL

1.1 REFERENCES
1.2 QUALIFICATIONS

PART 2 PRODUCTS (Not Applicable)

PART 3 EXECUTION

3.1 GENERAL REQUIREMENTS
3.2 BASIS FOR PAYMENT
3.3 PROJECT SCHEDULE
3.3.1 Use of the Critical Path Method
3.3.2 Level of Detail Required
3.3.2.1 Activity Durations
3.3.2.2 Procurement Activities
3.3.2.3 Critical Activities
3.3.2.4 Government Activities
3.3.2.5 Responsibility
3.3.2.6 Work Areas
3.3.2.7 Modification or Claim Number
3.3.2.8 Bid Item
3.3.2.9 Phase of Work
3.3.2.10 Category of Work
3.3.2.11 Feature of Work
3.3.3 Scheduled Project Completion
3.3.3.1 Project Start Date
3.3.3.2 Constraint of Last Activity
3.3.3.3 Early Project Completion
3.3.4 Interim Completion Dates
3.3.4.1 Start Phase
3.3.4.2 End Phase
3.3.4.3 Phase X
3.3.5 Default Progress Data Disallowed
3.3.6 Out-of-Sequence Progress
3.3.7 Negative Lags
3.4 PROJECT SCHEDULE SUBMISSIONS
3.4.1 Preliminary Project Schedule Submission
3.4.2 Initial Project Schedule Submission
3.4.3 Periodic Schedule Updates
3.4.4 Standard Activity Coding Dictionary
3.5 SUBMISSION REQUIREMENTS
3.5.1 Data Disks
3.5.1.1 File Medium
3.5.1.2 Disk Label

3.5.1.3 File Name
3.5.2 Narrative Report
3.5.3 Approved Changes Verification
3.5.4 Schedule Reports
3.5.4.1 Activity Report
3.5.4.2 Logic Report
3.5.4.3 Total Float Report
3.5.4.4 Earnings Report
3.5.5 Network Diagram
3.5.5.1 Continuous Flow
3.5.5.2 Project Milestone Dates
3.5.5.3 Critical Path
3.5.5.4 Banding
3.5.5.5 S-Curves
3.6 PERIODIC PROGRESS MEETINGS
3.6.1 Meeting Attendance
3.6.2 Update Submission Following Progress Meeting
3.6.3 Progress Meeting Contents
3.6.3.1 Start and Finish Dates
3.6.3.2 Time Completion
3.6.3.3 Cost Completion
3.6.3.4 Logic Changes
3.6.3.5 Other Changes
3.7 REQUESTS FOR TIME EXTENSIONS
3.7.1 Justification of Delay
3.7.2 Submission Requirements
3.7.3 Additional Submission Requirements
3.8 DIRECTED CHANGES
3.9 OWNERSHIP OF FLOAT

-- End of Section Table of Contents --

SECTION 01320A

PROJECT SCHEDULE
05/02

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of the specification to the extent referenced. The publications are referenced in the text by basic designation only.

U.S. ARMY CORPS OF ENGINEERS (USACE)

ER 1-1-11	(1995) Progress, Schedules, and Network Analysis Systems

1.2 QUALIFICATIONS

The Contractor shall designate an authorized representative who shall be responsible for the preparation of all required project schedule reports.

PART 2 PRODUCTS (NOT APPLICABLE)

PART 3 EXECUTION

3.1 GENERAL REQUIREMENTS

Pursuant to the Contract Clause, SCHEDULE FOR CONSTRUCTION CONTRACTS, a Project Schedule as described below shall be prepared. The scheduling of construction shall be the responsibility of the Contractor. Contractor management personnel shall actively participate in its development. Subcontractors and suppliers working on the project shall also contribute in developing and maintaining an accurate Project Schedule. The approved Project Schedule shall be used to measure the progress of the work, to aid in evaluating time extensions, and to provide the basis of all progress payments.

3.2 BASIS FOR PAYMENT

The schedule shall be the basis for measuring Contractor progress. Lack of an approved schedule or scheduling personnel will result in an inability of the Contracting Officer to evaluate Contractor's progress for the purposes of payment. Failure of the Contractor to provide all information, as specified below, shall result in the disapproval of the entire Project Schedule submission and the inability of the Contracting Officer to evaluate Contractor progress for payment purposes. In the case where Project Schedule revisions have been directed by the Contracting Officer and those revisions have not been included in the Project Schedule, the Contracting Officer may hold retainage up to the maximum allowed by contract, each payment period, until revisions to the Project Schedule have been made.

3.3 PROJECT SCHEDULE

The computer software system utilized by the Contractor to produce the Project Schedule shall be capable of providing all requirements of this specification. Failure of the Contractor to meet the requirements of this specification shall result in the disapproval of the schedule. Manual methods used to produce any required information shall require approval by the Contracting Officer.

3.3.1 Use of the Critical Path Method

The Critical Path Method (CPM) of network calculation shall be used to generate the Project Schedule. The Contractor shall provide the Project Schedule in the Precedence Diagram Method (PDM).

3.3.2 Level of Detail Required

The Project Schedule shall include an appropriate level of detail. Failure to develop or update the Project Schedule or provide data to the Contracting Officer at the appropriate level of detail, as specified by the Contracting Officer, shall result in the disapproval of the schedule. The Contracting Officer will use, but is not limited to, the following conditions to determine the appropriate level of detail to be used in the Project Schedule:

3.3.2.1 Activity Durations

Contractor submissions shall follow the direction of the Contracting Officer regarding reasonable activity durations. Reasonable durations are those that allow the progress of activities to be accurately determined between payment periods (usually less than 2 percent of all non-procurement activities' Original Durations are greater than 20 days).

3.3.2.2 Procurement Activities

Tasks related to the procurement of long lead materials or equipment shall be included as separate activities in the project schedule. Long lead materials and equipment are those materials that have a procurement cycle of over 90 days. Examples of procurement process activities include, but are not limited to: submittals, approvals, procurement, fabrication, and delivery.

3.3.2.3 Critical Activities

The following activities shall be listed as separate line activities on the Contractor's project schedule:

a. Submission and approval of mechanical/electrical layout drawings.

b. Submission and approval of O & M manuals.

c. Submission and approval of as-built drawings.

d. HVAC commissioning dates.

e. Other systems testing, if required.

f. Prefinal inspection.

g. Correction of punchlist from prefinal inspection.

h. Final inspection.

3.3.2.4 Government Activities

Government and other agency activities that could impact progress shall be shown. These activities include, but are not limited to: approvals, inspections, utility tie-in, and Notice to Proceed (NTP) for phasing requirements.

3.3.2.5 Responsibility

All activities shall be identified in the project schedule by the party responsible to perform the work. Responsibility includes, but is not limited to, the subcontracting firm, contractor work force, or government agency performing a given task. Activities shall not belong to more than one responsible party. The responsible party for each activity shall be identified by the Responsibility Code.

3.3.2.6 Work Areas

All activities shall be identified in the project schedule by the work area in which the activity occurs. Activities shall not be allowed to cover more than one work area. The work area of each activity shall be identified by the Work Area Code.

3.3.2.7 Modification or Claim Number

Any activity that is added or changed by contract modification or used to justify claimed time shall be identified by a mod or claim code that changed the activity. Activities shall not belong to more than one modification or claim item. The modification or claim number of each activity shall be identified by the Mod or Claim Number. Whenever possible, changes shall be added to the schedule by adding new activities. Existing activities shall not normally be changed to reflect modifications.

3.3.2.8 Bid Item

All activities shall be identified in the project schedule by the Bid Item to which the activity belongs. An activity shall not contain work in more than one bid item. The bid item for each appropriate activity shall be identified by the Bid Item Code.

3.3.2.9 Phase of Work

All activities shall be identified in the project schedule by the phases of work in which the activity occurs. Activities shall not contain work in more than one phase of work. The project phase of each activity shall be by the unique Phase of Work Code.

3.3.2.10 Category of Work

All Activities shall be identified in the project schedule according to the category of work which best describes the activity. Category of work

refers, but is not limited, to the procurement chain of activities including such items as submittals, approvals, procurement, fabrication, delivery, installation, start-up, and testing. The category of work for each activity shall be identified by the Category of Work Code.

3.3.2.11 Feature of Work

All activities shall be identified in the project schedule according to the feature of work to which the activity belongs. Feature of work refers, but is not limited to, a work breakdown structure for the project. The feature of work for each activity shall be identified by the Feature of Work Code.

3.3.3 Scheduled Project Completion

The schedule interval shall extend from NTP to the contract completion date.

3.3.3.1 Project Start Date

The schedule shall start no earlier than the date on which the NTP was acknowledged. The Contractor shall include as the first activity in the project schedule an activity called "Start Project". The "Start Project" activity shall have an "ES" constraint date equal to the date that the NTP was acknowledged, and zero day duration.

3.3.3.2 Constraint of Last Activity

Completion of the last activity in the schedule shall be constrained by the contract completion date. Calculation on project updates shall be such that if the early finish of the last activity falls after the contract completion date, then the float calculation shall reflect a negative float on the critical path. The Contractor shall include as the last activity in the project schedule an activity called "End Project". The "End Project" activity shall have an "LF" constraint date equal to the completion date for the project, and a zero day duration.

3.3.3.3 Early Project Completion

In the event the project schedule shows completion of the project prior to the contract completion date, the Contractor shall identify those activities that have been accelerated and/or those activities that are scheduled in parallel to support the Contractor's "early" completion. Contractor shall specifically address each of the activities noted in the narrative report at every project schedule update period to assist the Contracting Officer in evaluating the Contractor's ability to actually complete prior to the contract period.

3.3.4 Interim Completion Dates

Contractually specified interim completion dates shall also be constrained to show negative float if the early finish date of the last activity in that phase falls after the interim completion date.

3.3.4.1 Start Phase

The Contractor shall include as the first activity for a project phase an activity called "Start Phase X" where "X" refers to the phase of work. The

"Start Phase X" activity shall have an "ES" constraint date equal to the date on which the NTP was acknowledged, and a zero day duration.

3.3.4.2 End Phase

The Contractor shall include as the last activity in a project phase an activity called "End Phase X" where "X" refers to the phase of work. The "End Phase X" activity shall have an "LF" constraint date equal to the completion date for the project, and a zero day duration.

3.3.4.3 Phase X

The Contractor shall include a hammock type activity for each project phase called "Phase X" where "X" refers to the phase of work. The "Phase X" activity shall be logically tied to the earliest and latest activities in the phase.

3.3.5 Default Progress Data Disallowed

Actual Start and Finish dates shall not be automatically updated by default mechanisms that may be included in CPM scheduling software systems. Actual Start and Finish dates on the CPM schedule shall match those dates provided from Contractor Quality Control Reports. Failure of the Contractor to document the Actual Start and Finish dates on the Daily Quality Control report for every in-progress or completed activity, and failure to ensure that the data contained on the Daily Quality Control reports is the sole basis for schedule updating shall result in the disapproval of the Contractor's schedule and the inability of the Contracting Officer to evaluate Contractor progress for payment purposes.

3.3.6 Out-of-Sequence Progress

Activities that have posted progress without all preceding logic being satisfied (Out-of-Sequence Progress) will be allowed only on a case-by-case approval of the Contracting Officer. The Contractor shall propose logic corrections to eliminate all out of sequence progress or justify not changing the sequencing for approval prior to submitting an updated project schedule.

3.3.7 Negative Lags

Lag durations contained in the project schedule shall not have a negative value.

3.4 PROJECT SCHEDULE SUBMISSIONS

The Contractor shall provide the submissions as described below. The data disk, reports, and network diagrams required for each submission are contained in paragraph SUBMISSION REQUIREMENTS.

3.4.1 Preliminary Project Schedule Submission

The Preliminary Project Schedule, defining the Contractor's planned operations for the first 60 calendar days shall be submitted for approval within 20 calendar days after the NTP is acknowledged. The approved preliminary schedule shall be used for payment purposes not to exceed 60 calendar days after NTP.

3.4.2 Initial Project Schedule Submission

The Initial Project Schedule shall be submitted for approval within 40 calendar days after NTP. The schedule shall provide a reasonable sequence of activities which represent work through the entire project and shall be at a reasonable level of detail.

3.4.3 Periodic Schedule Updates

Based on the result of progress meetings, specified in "Periodic Progress Meetings," the Contractor shall submit periodic schedule updates. These submissions shall enable the Contracting Officer to assess Contractor's progress. If the Contractor fails or refuses to furnish the information and project schedule data, which in the judgment of the Contracting Officer or authorized representative is necessary for verifying the Contractor's progress, the Contractor shall be deemed not to have provided an estimate upon which progress payment may be made.

3.4.4 Standard Activity Coding Dictionary

The Contractor shall use the activity coding structure defined in the Standard Data Exchange Format (SDEF) in ER 1-1-11, Appendix A. This exact structure is mandatory, even if some fields are not used.

3.5 SUBMISSION REQUIREMENTS

The following items shall be submitted by the Contractor for the preliminary submission, initial submission, and every periodic project schedule update throughout the life of the project:

3.5.1 Data Disks

Two data disks containing the project schedule shall be provided. Data on the disks shall adhere to the SDEF format specified in ER 1-1-11, Appendix A.

3.5.1.1 File Medium

Required data shall be submitted on 3.5 disks, formatted to hold 1.44 MB of data, under the MS-DOS Version 5. or 6.x, unless otherwise approved by the Contracting Officer.

3.5.1.2 Disk Label

A permanent exterior label shall be affixed to each disk submitted. The label shall indicate the type of schedule (Preliminary, Initial, Update, or Change), full contract number, project name, project location, data date, name and telephone number of person responsible for the schedule, and the MS-DOS version used to format the disk.

3.5.1.3 File Name

Each file submitted shall have a name related to either the schedule data date, project name, or contract number. The Contractor shall develop a naming convention that will ensure that the names of the files submitted are

unique. The Contractor shall submit the file naming convention to the Contracting Officer for approval.

3.5.2 Narrative Report

A Narrative Report shall be provided with the preliminary, initial, and each update of the project schedule. This report shall be provided as the basis of the Contractor's progress payment request. The Narrative Report shall include: a description of activities along the 2 most critical paths, a description of current and anticipated problem areas or delaying factors and their impact, and an explanation of corrective actions taken or required to be taken. The narrative report is expected to relay to the Government, the Contractor's thorough analysis of the schedule output and its plans to compensate for any problems, either current or potential, which are revealed through that analysis.

3.5.3 Approved Changes Verification

Only project schedule changes that have been previously approved by the Contracting Officer shall be included in the schedule submission. The Narrative Report shall specifically reference, on an activity by activity basis, all changes made since the previous period and relate each change to documented, approved schedule changes.

3.5.4 Schedule Reports

The format for each activity for the schedule reports listed below shall contain: Activity Numbers, Activity Description, Original Duration, Remaining Duration, Early Start Date, Early Finish Date, Late Start Date, Late Finish Date, and Total Float. Actual Start and Actual Finish Dates shall be printed for those activities in progress or completed.

3.5.4.1 Activity Report

A list of all activities sorted according to activity number.

3.5.4.2 Logic Report

A list of Preceding and Succeeding activities for every activity in ascending order by activity number. Preceding and succeeding activities shall include all information listed above in paragraph Schedule Reports. A blank line shall be left between each activity grouping.

3.5.4.3 Total Float Report

A list of all incomplete activities sorted in ascending order of total float. Activities which have the same amount of total float shall be listed in ascending order of Early Start Dates. Completed activities shall not be shown on this report.

3.5.4.4 Earnings Report

A compilation of the Contractor's Total Earnings on the project from the NTP until the most recent Monthly Progress Meeting. This report shall reflect the Earnings of specific activities based on the agreements made in the field and approved between the Contractor and Contracting Officer at the most recent Monthly Progress Meeting. Provided that the Contractor has

provided a complete schedule update, this report shall serve as the basis of determining Contractor Payment. Activities shall be grouped by bid item and sorted by activity numbers. This report shall: sum all activities in a bid item and provide a bid item percent; and complete and sum all bid items to provide a total project percent complete. The printed report shall contain, for each activity: the Activity Number, Activity Description, Original Budgeted Amount, Total Quantity, Quantity to Date, Percent Complete (based on cost), and Earnings to Date.

3.5.5 Network Diagram

The network diagram shall be required on the initial schedule submission and on monthly schedule update submissions. The network diagram shall depict and display the order and interdependence of activities and the sequence in which the work is to be accomplished. The Contracting Officer will use, but is not limited to, the following conditions to review compliance with this paragraph:

3.5.5.1 Continuous Flow

Diagrams shall show a continuous flow from left to right with no arrows from right to left. The activity number, description, duration, and estimated earned value shall be shown on the diagram.

3.5.5.2 Project Milestone Dates

Dates shall be shown on the diagram for start of project, any contract required interim completion dates, and contract completion dates.

3.5.5.3 Critical Path

The critical path shall be clearly shown.

3.5.5.4 Banding

Activities shall be grouped to assist in the understanding of the activity sequence. Typically, this flow will group activities by category of work, work area and/or responsibility.

3.5.5.5 S-Curves

Earnings curves showing projected early and late earnings and earnings to date.

3.6 PERIODIC PROGRESS MEETINGS

Progress meetings to discuss payment shall include a monthly onsite meeting or other regular intervals mutually agreed to at the preconstruction conference. During this meeting the Contractor shall describe, on an activity by activity basis, all proposed revisions and adjustments to the project schedule required to reflect the current status of the project. The Contracting Officer will approve activity progress, proposed revisions, and adjustments as appropriate.

3.6.1 Meeting Attendance

The Contractor's Project Manager and Scheduler shall attend the regular progress meeting.

3.6.2 Update Submission Following Progress Meeting

A complete update of the project schedule containing all approved progress, revisions, and adjustments, based on the regular progress meeting, shall be submitted not later than 4 working days after the monthly progress meeting.

3.6.3 Progress Meeting Contents

Update information, including Actual Start Dates, Actual Finish Dates, Remaining Durations, and Cost-to-Date shall be subject to the approval of the Contracting Officer. As a minimum, the Contractor shall address the following items on an activity by activity basis during each progress meeting.

3.6.3.1 Start and Finish Dates

The Actual Start and Actual Finish dates for each activity currently in-progress or completed.

3.6.3.2 Time Completion

The estimated Remaining Duration for each activity in-progress. Time-based progress calculations shall be based on Remaining Duration for each activity.

3.6.3.3 Cost Completion

The earnings for each activity started. Payment will be based on earnings for each in-progress or completed activity. Payment for individual activities will not be made for work that contains quality defects. A portion of the overall project amount may be retained based on delays of activities.

3.6.3.4 Logic Changes

All logic changes pertaining to NTP on change orders, change orders to be incorporated into the schedule, contractor proposed changes in work sequence, corrections to schedule logic for out-of-sequence progress, lag durations, and other changes that have been made pursuant to contract provisions shall be specifically identified and discussed.

3.6.3.5 Other Changes

Other changes required due to delays in completion of any activity or group of activities include: 1) delays beyond the Contractor's control, such as strikes and unusual weather. 2) delays encountered due to submittals, Government Activities, deliveries or work stoppages which make re-planning the work necessary. 3) Changes required to correct a schedule which does not represent the actual or planned prosecution and progress of the work.

3.7 REQUESTS FOR TIME EXTENSIONS

In the event the Contractor requests an extension of the contract completion date, or any interim milestone date, the Contractor shall furnish the

following for a determination as to whether or not the Contractor is entitled to an extension of time under the provisions of the contract: justification, project schedule data, and supporting evidence as the Contracting Officer may deem necessary. Submission of proof of delay, based on revised activity logic, duration, and costs (updated to the specific date that the delay occurred) is obligatory to any approvals.

3.7.1 Justification of Delay

The project schedule shall clearly display that the Contractor has used, in full, all the float time available for the work involved with this request. The Contracting Officer's determination as to the number of allowable days of contract extension shall be based upon the project schedule updates in effect for the time period in question, and other factual information. Actual delays that are found to be caused by the Contractor's own actions, which result in the extension of the schedule, will not be a cause for a time extension to the contract completion date.

3.7.2 Submission Requirements

The Contractor shall submit a justification for each request for a change in the contract completion date of under 2 weeks based upon the most recent schedule update at the time of the NTP or constructive direction issued for the change. Such a request shall be in accordance with the requirements of other appropriate Contract Clauses and shall include, as a minimum:

a. A list of affected activities, with their associated project schedule activity number.

b. A brief explanation of the causes of the change.

c. An analysis of the overall impact of the changes proposed.

d. A sub-network of the affected area.

Activities impacted in each justification for change shall be identified by a unique activity code contained in the required data file.

3.7.3 Additional Submission Requirements

For any requested time extension of over 2 weeks, the Contracting Officer may request an interim update with revised activities for a specific change request. The Contractor shall provide this disk within 4 days of the Contracting Officer's request.

3.8 DIRECTED CHANGES

If the NTP is issued for changes prior to settlement of price and/or time, the Contractor shall submit proposed schedule revisions to the Contracting Officer within 2 weeks of the NTP being issued. The proposed revisions to the schedule will be approved by the Contracting Officer prior to inclusion of those changes within the project schedule. If the Contractor fails to submit the proposed revisions, the Contracting Officer may furnish the Contractor with suggested revisions to the project schedule. The Contractor shall include these revisions in the project schedule until revisions are submitted and final changes and impacts have been negotiated. If the Contractor has any objections to the revisions furnished by the Contracting

Officer, the Contractor shall advise the Contracting Officer within 2 weeks of receipt of the revisions. Regardless of the objections, the Contractor shall continue to update the schedule with the Contracting Officer's revisions until a mutual agreement in the revisions is reached. If the Contractor fails to submit alternative revisions within 2 weeks of receipt of the Contracting Officer's proposed revisions, the Contractor will be deemed to have concurred with the Contracting Officer's proposed revisions. The proposed revisions will then be the basis for an equitable adjustment for performance of the work.

3.9 OWNERSHIP OF FLOAT

Float available in the schedule, at any time, shall not be considered for the exclusive use of either the Government or the Contractor.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 01 - GENERAL REQUIREMENTS

SECTION 01330

SUBMITTAL PROCEDURES

05/02

PART 1 GENERAL

1.1 SUMMARY
1.1.1 Government-Furnished Information
1.2 DEFINITIONS
1.2.1 Submittal
1.2.2 Types of Submittals
1.3 SUBMITTAL IDENTIFICATION (SD)
1.3.1 Approving Authority
1.3.2 Work
1.4 SUBMITTALS
1.5 USE OF SUBMITTAL REGISTER DATABASE
1.5.1 Submittal Register
1.5.2 Contractor Use of Submittal Register
1.5.3 Approving Authority Use of Submittal Register
1.5.4 Contractor Action Code and Action Code
1.5.5 Copies Delivered to the Government
1.6 PROCEDURES FOR SUBMITTALS
1.6.1 Reviewing, Certifying, Approving Authority
1.6.2 Constraints
1.6.3 Scheduling
1.6.4 Variations
1.6.4.1 Considering Variations
1.6.4.2 Proposing Variations
1.6.4.3 Warranting That Variations Are Compatible
1.6.4.4 Review Schedule Is Modified
1.6.5 Contractor's Responsibilities
1.6.6 QC Organization Responsibilities
1.6.7 Government's Responsibilities
1.6.8 Actions Possible
1.7 FORMAT OF SUBMITTALS
1.7.1 Transmittal Form
1.7.2 Identifying Submittals
1.7.3 Format for Shop Drawings
1.7.4 Format of Product Data
1.7.5 Format of Samples
1.7.6 Format of Operation and Maintenance (O&M) Data
1.7.7 Format of Administrative Submittals
1.8 QUANTITY OF SUBMITTALS
1.8.1 Number of Copies of Shop Drawings
1.8.2 Number of Copies of Product Data
1.8.3 Number of Samples
1.8.4 Number of Copies of Operation and Maintenance Data
1.8.5 Number of Copies of Administrative Submittals
1.9 SUBMITTAL CLASSIFICATION
1.9.1 Government Approved

1.9.2 Information Only
1.10 APPROVED SUBMITTALS
1.11 DISAPPROVED SUBMITTALS
1.12 WITHHOLDING OF PAYMENT
1.13 GENERAL
1.14 SUBMITTAL REGISTER
1.15 SCHEDULING
1.16 TRANSMITTAL FORM (ENG FORM 4025)
1.17 SUBMITTAL PROCEDURES
1.17.1 Procedures
1.17.2 Deviations
1.18 CONTROL OF SUBMITTALS
1.19 GOVERNMENT APPROVED SUBMITTALS
1.20 INFORMATION ONLY SUBMITTALS
1.21 STAMPS

PART 2 PRODUCTS

PART 3 EXECUTION

-- End of Section Table of Contents --

SECTION 01330

SUBMITTAL PROCEDURES
05/02

PART 1 GENERAL

1.1 SUMMARY

1.1.1 Government-Furnished Information

Submittal register database and submittal management program will be delivered to the contractor, by contracting officer on 3 1/2 inch disk or CD. Register database will have the following fields completed, to the extent that will be required by the Government during subsequent usage.

Column (c): Lists specification section in which submittal is required.

Column (d): Lists each submittal description (SD No. and type, e.g. SD-04 Drawings) required in each specification section.

Column (e): Lists one principal paragraph in specification section where a material or product is specified. This listing is only to facilitate locating submitted requirements. Do not consider entries in column (e) as limiting project requirements.

Column (f): Indicate approving authority for each submittal. A "G" indicates approval by contracting officer; a blank indicates approval by QC manager.

The database and submittal management program will be extractable from the disk furnished to contractor, for operation on contractor's IBM compatible personal computer with 640kb RAM, a hard drive, and 3 1/2 inch high density floppy disk drive.

1.2 DEFINITIONS

1.2.1 Submittal

Shop drawings, product data, samples, operation and maintenance data, and administrative submittals presented for review and approval. Contract Clauses "FAR 52.236-5, Material and Workmanship," paragraph (b) and "FAR 52.236-21, Specifications and Drawings for Construction," paragraphs (d), (e), and (f) apply to all "submittals."

1.2.2 Types of Submittals

All submittals are classified as indicated in paragraph "Submittal Descriptions (SD)". Submittals also are grouped as follows:

a. Shop drawings: As used in this section, drawings, schedules, diagrams, and other data prepared specifically for this contract, by contractor or through contractor by way of subcontractor,

manufacturer, supplier, distributor, or other lower tier contractor, to illustrate portion of work.

b. Product data: Preprinted material such as illustrations, standard schedules, performance charts, instructions, brochures, diagrams, manufacturer's descriptive literature, catalog data, and other data to illustrate portion of work, but not prepared exclusively for this contract.

c. Samples: Physical examples of products, materials, equipment, assemblies, or workmanship that are physically identical to portion of work, illustrating portion of work or establishing standards for evaluating appearance of finished work or both.

d. Operation and Maintenance (O&M) Data:
Data that is furnished by the manufacturer, or the system provider, to the equipment operating and maintenance personnel. This data is needed by operating and maintenance personnel for the safe and efficient operation, maintenance and repair of the item.
The data is required when the item is delivered to the project site.

e. Administrative submittals: Data presented for reviews and approval to ensure that administrative requirements of project are adequately met but not to ensure directly that work is in accordance with design concept and in compliance with contract documents.

1.3 SUBMITTAL IDENTIFICATION (SD)

Submittals required are identified by SD numbers and titles as follows:

SD-01 Preconstruction Submittals

Certificates of insurance.
Surety bonds.
List of proposed subcontractors.
List of proposed products.
Construction Progress Schedule.
Submittal register.
Schedule of values.
Health and safety plan.
Work plan.
Quality control plan.
Environmental protection plan.

SD-02 Shop Drawings

Drawings, diagrams and schedules specifically prepared to illustrate some portion of the work.

Diagrams and instructions from a manufacturer or fabricator for use in producing the product and as aids to the Contractor for integrating the product or system into the project.

Drawings prepared by or for the Contractor to show how multiple systems and interdisciplinary work will be coordinated.

SD-03 Product Data

Catalog cuts, illustrations, schedules, diagrams, performance charts, instructions and brochures illustrating size, physical appearance and other characteristics of materials or equipment for some portion of the work.

Samples of warranty language when the contract requires extended product warranties.

SD-04 Samples

Physical examples of materials, equipment or workmanship that illustrate functional and aesthetic characteristics of a material or product and establish standards by which the work can be judged.

Color samples from the manufacturer's standard line (or custom color samples if specified) to be used in selecting or approving colors for the project.

Field samples and mock-ups constructed on the project site establish standards by which the ensuring work can be judged. Includes assemblies or portions of assemblies which are to be incorporated into the project and those which will be removed at conclusion of the work.

SD-05 Design Data

Calculations, mix designs, analyses or other data pertaining to a part of work.

SD-06 Test Reports

Report signed by authorized official of testing laboratory that a material, product or system identical to the material, product or system to be provided has been tested in accord with specified requirements. (Testing must have been within three years of date of contract award for the project.)

Report which includes findings of a test required to be performed by the Contractor on an actual portion of the work or prototype prepared for the project before shipment to job site.

Report which includes finding of a test made at the job site or on sample taken from the job site, on portion of work during or after installation.

Investigation reports

Daily checklists

Final acceptance test and operational test procedure

SD-07 Certificates

Statements signed by responsible officials of manufacturer of product, system or material attesting that product, system or material meets

specification requirements. Must be dated after award of project contract and clearly name the project.

Document required of Contractor, or of a supplier, installer or subcontractor through Contractor, the purpose of which is to further quality of orderly progression of a portion of the work by documenting procedures, acceptability of methods or personnel qualifications.

Confined space entry permits.

SD-08 Manufacturer's Instructions

Preprinted material describing installation of a product, system or material, including special notices and Material Safety Data sheets concerning impedances, hazards and safety precautions.

SD-09 Manufacturer's Field Reports

Documentation of the testing and verification actions taken by manufacturer's representative to confirm compliance with manufacturer's standards or instructions.

Factory test reports.

SD-10 Operation and Maintenance Data

Data that is furnished by the manufacturer, or the system provider, to the equipment operating and maintenance personnel. This data is needed by operating and maintenance personnel for the safe and efficient operation, maintenance and repair of the item.

SD-11 Closeout Submittals

Documentation to record compliance with technical or administrative requirements or to establish an administrative mechanism.

1.3.1 Approving Authority

Person authorized to approve submittal.

1.3.2 Work

As used in this section, on- and off-site construction required by contract documents, including labor necessary to produce submittals, construction, materials, products, equipment, and systems incorporated or to be incorporated in such construction.

1.4 SUBMITTALS

Submit the following in accordance with the requirements of this section.

SD-01 Preconstruction Submittals

Submittal register; G

1.5 USE OF SUBMITTAL REGISTER DATABASE

Prepare and maintain submittal register, as the work progresses. Use electronic submittal register program furnished by the Government or any other format. Do not change data which is output in columns (c), (d), (e), and (f) as delivered by government; retain data which is output in columns (a), (g), (h), and (i) as approved.

1.5.1 Submittal Register

Submit submittal register as an electronic database, using submittals management program furnished to contractor. Submit with quality control plan and project schedule required by Section 01451A, "Contractor Quality Control" and Section 01320A, "Project Schedule." Do not change data in columns (c), (d), (e), and (f) as delivered by the government. Verify that all submittals required for project are listed and add missing submittals. Complete the following on the register database:

Column (a) Activity Number: Activity number from the project schedule.

Column (g) Contractor Submit Date: Scheduled date for approving authority to receive submittals.

Column (h) Contractor Approval Date: Date contractor needs approval of submittal.

Column (i) Contractor Material: Date that contractor needs material delivered to contractor control.

1.5.2 Contractor Use of Submittal Register

Update the following fields in the government-furnished submittal register program or equivalent fields in program utilized by contractor.

Column (b) Transmittal Number: Contractor assigned list of consecutive numbers.

Column (j) Action Code (k): Date of action used to record contractor's review when forwarding submittals to QC.

Column (l) List date of submittal transmission.

Column (q) List date approval received.

1.5.3 Approving Authority Use of Submittal Register

Update the following fields in the government-furnished submittal register program or equivalent fields in program utilized by contractor.

Column (b).

Column (l) List date of submittal receipt.

Column (m) through (p).

Column (q) List date returned to contractor.

1.5.4 Contractor Action Code and Action Code

Entries used will be as follows (others may be prescribed by Transmittal Form):

NR - Not Received

AN - Approved as noted

A - Approved

RR - Disapproved, Revise, and Resubmit

1.5.5 Copies Delivered to the Government

Deliver one copy of submitted register updated by contractor to government with each invoice request. Deliver in electronic format, unless a paper copy is requested by contracting officer.

1.6 PROCEDURES FOR SUBMITTALS

1.6.1 Reviewing, Certifying, Approving Authority

QC organization shall be responsible for reviewing and certifying that submittals are in compliance with contract requirements. Approving authority on submittals is QC manager unless otherwise specified for specific submittal. At each "Submittal" paragraph in individual specification sections, a notation "G," following a submittal item, indicates contracting officer is approving authority for that submittal item.

1.6.2 Constraints

a. Submittals listed or specified in this contract shall conform to provisions of this section, unless explicitly stated otherwise.

b. Submittals shall be complete for each definable feature of work; components of definable feature interrelated as a system shall be submitted at same time.

c. When acceptability of a submittal is dependent on conditions, items, or materials included in separate subsequent submittals, submittal will be returned without review.

d. Approval of a separate material, product, or component does not imply approval of assembly in which item functions.

1.6.3 Scheduling

a. Coordinate scheduling, sequencing, preparing and processing of submittals with performance of work so that work will not be delayed by submittal processing. Allow for potential requirements to resubmit.

b. Except as specified otherwise, allow review period, beginning with receipt by approving authority that includes at least 15 working days for submittals for QC Manager Approval and 20 working

days for submittals for contracting officer approval. Period of review for submittals with contracting officer approval begins when Government receives submittal from QC organization. Period of review for each resubmittal is the same as for initial submittal.

1.6.4 Variations

Variations from contract requirements require Government approval pursuant to contract Clause entitled "FAR 52.236-21, Specifications and Drawings for Construction" and will be considered where advantageous to government.

1.6.4.1 Considering Variations

Discussion with contracting officer prior to submission will help ensure functional and quality requirements are met and minimize rejections and resubmittals. When contemplating a variation which results in lower cost, consider submission of the variation as a Value Engineering Change Proposal (VECP).

1.6.4.2 Proposing Variations

When proposing variation, deliver written request to the contracting officer, with documentation of the nature and features of the variation and why the variation is desirable and beneficial to government. If lower cost is a benefit, also include an estimate of the cost saving. In addition to documentation required for variation, include the submittals required for the item. Clearly mark the proposed variation in all documentation.

1.6.4.3 Warranting That Variations Are Compatible

When delivering a variation for approval, contractor warrants that this contract has been reviewed to establish that the variation, if incorporated, will be compatible with other elements of work.

1.6.4.4 Review Schedule Is Modified

In addition to normal submittal review period, a period of 10 working days will be allowed for consideration by the Government of submittals with variations.

1.6.5 Contractor's Responsibilities

a. Determine and verify field measurements, materials, field construction criteria; review each submittal; and check and coordinate each submittal with requirements of the work and contract documents.

b. Transmit submittals to QC organization in accordance with schedule on approved Submittal Register, and to prevent delays in the work, delays to government, or delays to separate contractors.

c. Advise contracting officer of variation, as required by paragraph entitled "Variations."

d. Correct and resubmit submittal as directed by approving authority. When resubmitting disapproved transmittals or transmittals noted for resubmittal, the contractor shall provide

copy of that previously submitted transmittal including all reviewer comments for use by approving authority. Direct specific attention in writing or on resubmitted submittal, to revisions not requested by approving authority on previous submissions.

e. Furnish additional copies of submittal when requested by contracting officer, to a limit of 20 copies per submittal.

f. Complete work which must be accomplished as basis of a submittal in time to allow submittal to occur as scheduled.

g. Ensure no work has begun until submittals for that work have been returned as "approved," or "approved as noted", except to the extent that a portion of work must be accomplished as basis of submittal.

1.6.6 QC Organization Responsibilities

a. Note date on which submittal was received from contractor on each submittal.

b. Review each submittal; and check and coordinate each submittal with requirements of work and contract documents.

c. Review submittals for conformance with project design concepts and compliance with contract documents.

d. Act on submittals, determining appropriate action based on QC organization's review of submittal.

(1) When QC manager is approving authority, take appropriate action on submittal from the possible actions defined in paragraph entitled, "Actions Possible."

(2) When contracting officer is approving authority or when variation has been proposed, forward submittal to Government with certifying statement or return submittal marked "not reviewed" or "revise and resubmit" as appropriate. The QC organization's review of submittal determines appropriate action.

e. Ensure that material is clearly legible.

f. Stamp each sheet of each submittal with QC certifying statement or approving statement, except that data submitted in bound volume or on one sheet printed on two sides may be stamped on the front of the first sheet only.

(1) When approving authority is contracting officer, QC organization will certify submittals forwarded to contracting officer with the following certifying statement:

"I hereby certify that the (equipment) (material) (article) shown and marked in this submittal is that proposed to be incorporated with contract Number W912HP-05-R-0002, is in compliance with the contract drawings and specification, can be installed in the allocated spaces, and is submitted for Government approval.

Certified by Submittal Reviewer _____, Date _____
(Signature when applicable)

Certified by QC Manager _____, Date _____"
(Signature)

(2) When approving authority is QC Manager, QC Manager will use the following approval statement when returning submittals to contractor as "Approved" or "Approved as Noted."

"I hereby certify that the (material) (equipment) (article) shown and marked in this submittal and proposed to be incorporated with contract Number W912HP-05-R-0002, is in compliance with the contract drawings and specification, can be installed in the allocated spaces, and is _____ approved for use.

Certified by Submittal Reviewer _____, Date _____
(Signature when applicable)

Approved by QC Manager _____, Date _____"
(Signature)

g. Sign certifying statement or approval statement. The person signing certifying statements shall be QC organization member designated in the approved QC plan. The signatures shall be in original ink. Stamped signatures are not acceptable.

h. Update submittal register database as submittal actions occur and maintain the submittal register at project site until final acceptance of all work by contracting officer.

i. Retain a copy of approved submittals at project site, including contractor's copy of approved samples.

1.6.7 Government's Responsibilities

When approving authority is Contracting Officer, the Government will:

a. Note date on which submittal was received from QC manager, on each submittal for which the contracting officer is approving authority.

b. Review submittals for approval within scheduling period specified and only for conformance with project design concepts and compliance with contract documents.

c. Identify returned submittals with one of the actions defined in paragraph entitled "Actions Possible" and with markings appropriate for action indicated.

1.6.8 Actions Possible

Submittals will be returned with one of the following notations:

a. Submittals marked "not reviewed" will indicate submittal has been previously reviewed and approved, is not required, does not have evidence of being reviewed and approved by contractor, or is

not complete. A submittal marked "not reviewed" will be returned with an explanation of the reason it is not reviewed. Resubmit submittals returned for lack of review by contractor or for being incomplete, with appropriate action, coordination, or change.

b. Submittals marked "approved" "approved as submitted" authorize contractor to proceed with work covered.

c. Submittals marked "approved as noted" or "approval except as noted; resubmission not required" authorize contractor to proceed with work as noted provided contractor takes no exception to the notations.

d. Submittals marked "revise and resubmit" or "disapproved" indicate submittal is incomplete or does not comply with design concept or requirements of the contract documents and shall be resubmitted with appropriate changes. No work shall proceed for this item until resubmittal is approved.

1.7 FORMAT OF SUBMITTALS

1.7.1 Transmittal Form

Transmit each submittal, except sample installations and sample panels, to office of approving authority. Transmit submittals with transmittal form prescribed by Contracting Officer and standard for project. The transmittal form shall identify Contractor, indicate date of submittal, and include information prescribed by transmittal form and required in paragraph entitled "Identifying Submittals." Process transmittal forms to record actions regarding sample panels and sample installations.

1.7.2 Identifying Submittals

Identify submittals, except sample panel and sample installation, with the following information permanently adhered to or noted on each separate component of each submittal and noted on transmittal form. Mark each copy of each submittal identically, with the following:

a. Project title and location.

b. Construction contract number.

c. Section number of the specification section by which submittal is required.

d. Submittal description (SD) number of each component of submittal.

e. When a resubmission, add alphabetic suffix on submittal description, for example, SD-10A, to indicate resubmission.

f. Name, address, and telephone number of subcontractor, supplier, manufacturer and any other second tier contractor associated with submittal.

g. Product identification and location in project.

1.7.3 Format for Shop Drawings

a. Shop drawings shall not be less than 8 1/2 by 11 inches nor more than 30 by 42 inches.

b. Present 8 1/2 by 11 inches sized shop drawings as part of the bound volume for submittals required by section. Present larger drawings in sets.

c. Include on each drawing the drawing title, number, date, and revision numbers and dates, in addition to information required in paragraph entitled "Identifying Submittals."

d. Dimension drawings, except diagrams and schematic drawings; prepare drawings demonstrating interface with other trades to scale. Shop drawing dimensions shall be the same unit of measure as indicated on the contract drawings. Identify materials and products for work shown.

1.7.4 Format of Product Data

a. Present product data submittals for each section as a complete, bound volume. Include table of contents, listing page and catalog item numbers for product data.

b. Indicate, by prominent notation, each product which is being submitted; indicate specification section number and paragraph number to which it pertains.

c. Supplement product data with material prepared for project to satisfy submittal requirements for which product data does not exist. Identify this material as developed specifically for project.

1.7.5 Format of Samples

a. Furnish samples in sizes below, unless otherwise specified or unless the manufacturer has prepackaged samples of approximately same size as specified:

(1) Sample of Equipment or Device: Full size.

(2) Sample of Materials Less Than 2 by 3 inches: Built up to 8 1/2 by 11 inches.

(3) Sample of Materials Exceeding 8 1/2 by 11 inches: Cut down to 8 1/2 by 11 inches and adequate to indicate color, texture, and material variations.

(4) Sample of Linear Devices or Materials: 10 inch length or length to be supplied, if less than 10 inches. Examples of linear devices or materials are conduit and handrails.

(5) Sample of Non-Solid Materials: Pint. Examples of non-solid materials are sand and paint.

(6) Color Selection Samples: 2 by 4 inches.

(7) Sample Panel: 4 by 4 feet.

(8) Sample Installation: 100 square feet.

b. Samples Showing Range of Variation: Where variations are unavoidable due to nature of the materials, submit sets of samples of not less than three units showing extremes and middle of range.

c. Reusable Samples: Incorporate returned samples into work only if so specified or indicated. Incorporated samples shall be in undamaged condition at time of use.

d. Recording of Sample Installation: Note and preserve the notation of area constituting sample installation but remove notation at final clean up of project.

e. When color, texture or pattern is specified by naming a particular manufacturer and style, include one sample of that manufacturer and style, for comparison.

1.7.6 Format of Operation and Maintenance (O&M) Data

a. O&M Data format shall comply with the requirements specified in Section 01781, Operation and Maintenance Data"

1.7.7 Format of Administrative Submittals

a. When submittal includes a document which is to be used in project or become part of project record, other than as a submittal, do not apply contractor's approval stamp to document, but to a separate sheet accompanying document.

1.8 QUANTITY OF SUBMITTALS

1.8.1 Number of Copies of Shop Drawings

a. Submit six copies of submittals of shop drawings requiring review and approval only by QC organization and seven copies of shop drawings requiring review and approval by Contracting Officer.

1.8.2 Number of Copies of Product Data

Submit product data in compliance with quantity requirements specified for shop drawings.

1.8.3 Number of Samples

a. Submit two samples, or two sets of samples showing range of variation, of each required item. One approved sample or set of samples will be retained by approving authority and one will be returned to contractor.

b. Submit one sample panel. Include components listed in technical section or as directed.

c. Submit one sample installation, where directed.

d. Submit one sample of non-solid materials.

1.8.4 Number of Copies of Operation and Maintenance Data

Submit Five copies of O&M Data to the Contracting Officer for review and approval

1.8.5 Number of Copies of Administrative Submittals

a. Unless otherwise specified, submit administrative submittals compliance with quantity requirements specified for shop drawings.

1.9 SUBMITTAL CLASSIFICATION

Submittals are classified as follows:

1.9.1 Government Approved

Government approval is required for extensions of design, critical materials, deviations, equipment whose compatibility with the entire system must be checked, and other items as designated by the Contracting Officer. Government approval is required for any deviations from the Solicitation or Accepted Proposal and other items as designated by the Contracting Officer. Within the terms of the Contract Clause entitled "Specifications and Drawings for Construction," they are considered to be "shop drawings."

1.9.2 Information Only

All submittals not requiring Government approval will be for information only. They are not considered to be "shop drawings" within the terms of the Contract Clause referred to above.

1.10 APPROVED SUBMITTALS

The Contracting Officer's approval of submittals shall not be construed as a complete check, but will indicate only that the general method of construction, materials, detailing and other information are satisfactory Approval will not relieve the Contractor of the responsibility for any error which may exist, as the Contractor under the Contractor Quality Control (CQC) requirements of this contract is responsible for dimensions, the design of adequate connections and details, and the satisfactory construction of all work. After submittals have been approved by the Contracting Officer, no resubmittal for the purpose of substituting materials or equipment will be considered unless accompanied by an explanation of why a substitution is necessary.

1.11 DISAPPROVED SUBMITTALS

The Contractor shall make all corrections required by the Contracting Officer and promptly furnish a corrected submittal in the form and number of copies specified for the initial submittal. If the Contractor considers any correction indicated on the submittals to constitute a change to the contract, a notice in accordance with the Contract Clause "Changes" shall be given promptly to the Contracting Officer.

1.12 WITHHOLDING OF PAYMENT

Payment for materials incorporated in the work will not be made if required approvals have not been obtained.

1.13 GENERAL

The Contractor shall make submittals as required by the specifications. The Contracting Officer may request submittals in addition to those specified when deemed necessary to adequately describe the work covered in the respective sections. Units of weights and measures used on all submittals shall be the same as those used in the contract drawings. Each submittal shall be complete and in sufficient detail to allow ready determination of compliance with contract requirements. Prior to submittal, all items shall be checked and approved by the Contractor's Quality Control (CQC) System Manager and each item shall be stamped, signed, and dated by the CQC System Manager indicating action taken. Proposed deviations from the contract requirements shall be clearly identified. Submittals shall include items such as: Contractor's, manufacturer's, or fabricator's drawings; descriptive literature including (but not limited to) catalog cuts, diagrams, operating charts or curves; test reports; test cylinders; samples; O&M manuals (including parts list); certifications; warranties; and other such required submittals. Submittals requiring Government approval shall be scheduled and made prior to the acquisition of the material or equipment covered thereby. Samples remaining upon completion of the work shall be picked up and disposed of in accordance with manufacturer's Material Safety Data Sheets (MSDS) and in compliance with existing laws and regulations.

1.14 SUBMITTAL REGISTER

At the end of this section is a submittal register showing items of equipment and materials for which submittals are required by the specifications; this list may not be all inclusive and additional submittals may be required. The Government will provide the initial submittal register in electronic format. Thereafter, the Contractor shall maintain a complete list of all submittals, including completion of all data columns. Dates on which submittals are received and returned by the Government will be included in its export file to the Contractor. The Contractor shall track all submittals.

1.15 SCHEDULING

Submittals covering component items forming a system or items that are interrelated shall be scheduled to be coordinated and submitted concurrently. Certifications to be submitted with the pertinent drawings shall be so scheduled. Adequate time (a minimum of 15 calendar days exclusive of mailing time) shall be allowed and shown on the register for review and approval. No delay damages or time extensions will be allowed for time lost in late submittals.

1.16 TRANSMITTAL FORM (ENG FORM 4025)

The sample transmittal form (ENG Form 4025) attached to this section shall be used for submitting both Government approved and information only

submittals in accordance with the instructions on the reverse side of the form. These forms are included in the QCS software that the Contractor is required to use for this contract. This form shall be properly completed by filling out all the heading blank spaces and identifying each item submitted. Special care shall be exercised to ensure proper listing of the specification paragraph and/or sheet number of the contract drawings pertinent to the data submitted for each item.

1.17 SUBMITTAL PROCEDURES

Submittals shall be made as follows:

1.17.1 Procedures

The Government will further discuss detailed submittal procedures with the Contractor at the Preconstruction Conference.

1.17.2 Deviations

For submittals which include proposed deviations requested by the Contractor, the column "variation" of ENG Form 4025 shall be checked. The Contractor shall set forth in writing the reason for any deviations and annotate such deviations on the submittal. The Government reserves the right to rescind inadvertent approval of submittals containing unnoted deviations.

1.18 CONTROL OF SUBMITTALS

The Contractor shall carefully control his procurement operations to ensure that each individual submittal is made on or before the Contractor scheduled submittal date shown on the approved "Submittal Register."

1.19 GOVERNMENT APPROVED SUBMITTALS

Upon completion of review of submittals requiring Government approval, the submittals will be identified as having received approval by being so stamped and dated. Five copies of the submittal will be retained by the Contracting Officer and two copies of the submittal will be returned to the Contractor.

1.20 INFORMATION ONLY SUBMITTALS

Normally submittals for information only will not be returned. Approval of the Contracting Officer is not required on information only submittals. The Government reserves the right to require the Contractor to resubmit any item found not to comply with the contract. This does not relieve the Contractor from the obligation to furnish material conforming to the plans and specifications; will not prevent the Contracting Officer from requiring removal and replacement of nonconforming material incorporated in the work; and does not relieve the Contractor of the requirement to furnish samples for testing by the Government laboratory or for check testing by the Government in those instances where the technical specifications so prescribe.

1.21 STAMPS

Stamps used by the Contractor on the submittal data to certify that the submittal meets contract requirements shall be similar to the following:

```
 ____________________________________________________________________________
|                                CONTRACTOR                                  |
|                                                                            |
|                                (Firm Name)                                 |
|                                                                            |
|                                                                            |
|                                                                            |
| _____ Approved                                                             |
|                                                                            |
|                                                                            |
| _____ Approved with corrections as noted on submittal data and/or          |
| attached sheets(s).                                                        |
|                                                                            |
|                                                                            |
|                                                                            |
| SIGNATURE:  ___________________________________________________________    |
|                                                                            |
| TITLE:  _______________________________________________________________    |
|                                                                            |
| DATE:  _________________________________________________________________   |
|                                                                            |
|____________________________________________________________________________|
```

For design-build construction, both the Contractor Quality Control System Manager and the Designer of Record shall stamp and sign to certify that the submittal meets contract requirements.

PART 2 PRODUCTS

Not used.

PART 3 EXECUTION

Not used.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 01 - GENERAL REQUIREMENTS

SECTION 01355A

ENVIRONMENTAL PROTECTION

02/02

PART 1 GENERAL

1.1 REFERENCES
1.2 DEFINITIONS
1.2.1 Environmental Pollution and Damage
1.2.2 Environmental Protection
1.2.3 Contractor Generated Hazardous Waste
1.2.4 Land Application for Discharge Water
1.2.5 Pesticide
1.2.6 Pests
1.2.7 Surface Discharge
1.2.8 Waters of the United States
1.2.9 Wetlands
1.3 GENERAL REQUIREMENTS
1.4 SUBCONTRACTORS
1.5 PAYMENT
1.6 SUBMITTALS
1.7 ENVIRONMENTAL PROTECTION PLAN
1.7.1 Compliance
1.7.2 Contents
1.7.3 Appendix
1.8 PROTECTION FEATURES
1.9 ENVIRONMENTAL ASSESSMENT OF CONTRACT DEVIATIONS
1.10 NOTIFICATION

PART 2 PRODUCTS (NOT USED)

PART 3 EXECUTION

3.1 ENVIRONMENTAL PERMITS AND COMMITMENTS
3.2 LAND RESOURCES
3.2.1 Work Area Limits
3.2.2 Landscape
3.2.3 Erosion and Sediment Controls
3.2.4 Contractor Facilities and Work Areas
3.3 WATER RESOURCES
3.3.1 Wetlands
3.4 AIR RESOURCES
3.4.1 Particulates
3.4.2 Odors
3.4.3 Sound Intrusions
3.4.4 Burning
3.5 CHEMICAL MATERIALS MANAGEMENT AND WASTE DISPOSAL
3.5.1 Solid Wastes
3.5.2 Chemicals and Chemical Wastes

3.5.3 Contractor Generated Hazardous Wastes/Excess Hazardous Materials
3.5.4 Fuel and Lubricants
3.5.5 Waste Water
3.6 RECYCLING AND WASTE MINIMIZATION
3.7 HISTORICAL, ARCHAEOLOGICAL, AND CULTURAL RESOURCES
3.8 BIOLOGICAL RESOURCES
3.9 INTEGRATED PEST MANAGEMENT
3.9.1 Pesticide Delivery and Storage
3.9.2 Qualifications
3.9.3 Pesticide Handling Requirements
3.9.4 Application
3.10 PREVIOUSLY USED EQUIPMENT
3.11 MAINTENANCE OF POLLUTION FACILITIES
3.12 TRAINING OF CONTRACTOR PERSONNEL
3.13 POST CONSTRUCTION CLEANUP

-- End of Section Table of Contents --

SECTION 01355A

ENVIRONMENTAL PROTECTION
02/02

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

U.S. AIR FORCE (USAF)

AFI 32-1053	Pest Management Program

U.S. ARMY (DA)

AR 200-5	Pest Management

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

33 CFR 328	Definitions
40 CFR 68	Chemical Accident Prevention Provisions
40 CFR 152 - 186	Pesticide Programs
40 CFR 260	Hazardous Waste Management System: General
40 CFR 261	Identification and Listing of Hazardous Waste
40 CFR 262	Standards Applicable to Generators of Hazardous Waste
40 CFR 279	Standards for the Management of Used Oil
40 CFR 302	Designation, Reportable Quantities, and Notification
40 CFR 355	Emergency Planning and Notification
49 CFR 171 - 178	Hazardous Materials Regulations

U.S. ARMY CORPS OF ENGINEERS (USACE)

EM 385-1-1	(2003) U.S. Army Corps on Engineers Safety and Health Requirements Manual
WETLAND MANUAL	Corps of Engineers Wetlands Delineation Manual Technical Report Y-87-1

1.2 DEFINITIONS

1.2.1 Environmental Pollution and Damage

Environmental pollution and damage is the presence of chemical, physical, or biological elements or agents which adversely affect human health or welfare; unfavorably alter ecological balances of importance to human life; affect other species of importance to humankind; or degrade the environment aesthetically, culturally and/or historically.

1.2.2 Environmental Protection

Environmental protection is the prevention/control of pollution and habitat disruption that may occur to the environment during construction. The control of environmental pollution and damage requires consideration of land, water, and air; biological and cultural resources; and includes management of visual aesthetics; noise; solid, chemical, gaseous, and liquid waste; radiant energy and radioactive material as well as other pollutants.

1.2.3 Contractor Generated Hazardous Waste

Contractor generated hazardous waste means materials that, if abandoned or disposed of, may meet the definition of a hazardous waste. These waste streams would typically consist of material brought on site by the Contractor to execute work, but are not fully consumed during the course of construction. Examples include, but are not limited to, excess paint thinners (i.e. methyl ethyl ketone, toluene etc.), waste thinners, excess paints, excess solvents, waste solvents, and excess pesticides, and contaminated pesticide equipment rinse water.

1.2.4 Land Application for Discharge Water

The term "Land Application" for discharge water implies that the Contractor shall discharge water at a rate which allows the water to percolate into the soil. No sheeting action, soil erosion, discharge into storm sewers, discharge into defined drainage areas, or discharge into the "waters of the United States" shall occur. Land Application shall be in compliance with all applicable Federal, State, and local laws and regulations.

1.2.5 Pesticide

Pesticide is defined as any substance or mixture of substances intended for preventing, destroying, repelling, or mitigating any pest, or intended for use as a plant regulator, defoliant or desiccant.

1.2.6 Pests

The term "pests" means arthropods, birds, rodents, nematodes, fungi, bacteria, viruses, algae, snails, marine borers, snakes, weeds and other organisms (except for human or animal disease-causing organisms) that adversely affect readiness, military operations, or the well-being of personnel and animals; attack or damage real property, supplies, equipment, or vegetation; or are otherwise undesirable.

1.2.7 Surface Discharge

The term "Surface Discharge" implies that the water is discharged with possible sheeting action and subsequent soil erosion may occur. Waters that are surface discharged may terminate in drainage ditches, storm sewers, creeks, and/or "waters of the United States" and would require a permit to discharge water from the governing agency.

1.2.8 Waters of the United States

All waters which are under the jurisdiction of the Clean Water Act, as defined in 33 CFR 328.

1.2.9 Wetlands

Wetlands means those areas that are inundated or saturated by surface or ground water at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions. Wetlands generally include swamps, marshes, and bogs. Official determination of whether or not an area is classified as a wetland must be done in accordance with WETLAND MANUAL.

1.3 GENERAL REQUIREMENTS

The Contractor shall minimize environmental pollution and damage that may occur as the result of construction operations. The environmental resources within the project boundaries and those affected outside the limits of permanent work shall be protected during the entire duration of this contract. The Contractor shall comply with all applicable environmental Federal, State, and local laws and regulations. The Contractor shall be responsible for any delays resulting from failure to comply with environmental laws and regulations.

1.4 SUBCONTRACTORS

The Contractor shall ensure compliance with this section by subcontractors.

1.5 PAYMENT

No separate payment will be made for work covered under this section. The Contractor shall be responsible for payment of fees associated with environmental permits, application, and/or notices obtained by the Contractor. All costs associated with this section shall be included in the contract price. The Contractor shall be responsible for payment of all fines/fees for violation or non-compliance with Federal, State, Regional and local laws and regulations.

1.6 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Environmental Protection Plan; G,

The environmental protection plan.

1.7 ENVIRONMENTAL PROTECTION PLAN

Prior to commencing construction activities or delivery of materials to the site, the Contractor shall submit an Environmental Protection Plan for review and approval by the Contracting Officer. The purpose of the Environmental Protection Plan is to present a comprehensive overview of known or potential environmental issues which the Contractor must address during construction. Issues of concern shall be defined within the Environmental Protection Plan as outlined in this section. The Contractor shall address each topic at a level of detail commensurate with the environmental issue and required construction task(s). Topics or issues which are not identified in this section, but which the Contractor considers necessary, shall be identified and discussed after those items formally identified in this section. Prior to submittal of the Environmental Protection Plan, the Contractor shall meet with the Contracting Officer for the purpose of discussing the implementation of the initial Environmental Protection Plan; possible subsequent additions and revisions to the plan including any reporting requirements; and methods for administration of the Contractor's Environmental Plans. The Environmental Protection Plan shall be current and maintained onsite by the Contractor.

1.7.1 Compliance

No requirement in this Section shall be construed as relieving the Contractor of any applicable Federal, State, and local environmental protection laws and regulations. During Construction, the Contractor shall be responsible for identifying, implementing, and submitting for approval any additional requirements to be included in the Environmental Protection Plan.

1.7.2 Contents

The environmental protection plan shall include, but shall not be limited to, the following:

a. Name(s) of person(s) within the Contractor's organization who is (are) responsible for ensuring adherence to the Environmental Protection Plan.

b. Name(s) and qualifications of person(s) responsible for manifesting hazardous waste to be removed from the site, if applicable.

c. Name(s) and qualifications of person(s) responsible for training the Contractor's environmental protection personnel.

d. Description of the Contractor's environmental protection personnel training program.

f. Drawings showing locations of proposed temporary excavations or embankments for haul roads, stream crossings, material storage areas, structures, sanitary facilities, and stockpiles of excess or spoil materials including methods to control runoff and to contain materials on the site.

g. Traffic control plans including measures to reduce erosion of temporary roadbeds by construction traffic, especially during wet weather. Plan shall include measures to minimize the amount of mud transported onto paved public roads by vehicles or runoff.

h. Work area plan showing the proposed activity in each portion of the area and identifying the areas of limited use or nonuse. Plan should include measures for marking the limits of use areas including methods for protection of features to be preserved within authorized work areas.

i. Drawing showing the location of borrow areas, if any.

j. The Spill Control plan shall include the procedures, instructions, and reports to be used in the event of an unforeseen spill of a substance regulated by 40 CFR 68, 40 CFR 302, 40 CFR 355, and/or regulated under State or Local laws and regulations. The Spill Control Plan supplements the requirements of EM 385-1-1. This plan shall include as a minimum:

1. The name of the individual who will report any spills or hazardous substance releases and who will follow up with complete documentation. This individual shall immediately notify the Contracting Officer and the local Fire Department in addition to the legally required Federal, State, and local reporting channels (including the National Response Center 1-800-424-8802) if a reportable quantity is released to the environment. The plan shall contain a list of the required reporting channels and telephone numbers.

2. The name and qualifications of the individual who will be responsible for implementing and supervising the containment and cleanup.

3. Training requirements for Contractor's personnel and methods of accomplishing the training.

4. A list of materials and equipment to be immediately available at the job site, tailored to cleanup work of the potential hazard(s) identified.

5. The names and locations of suppliers of containment materials and locations of additional fuel oil recovery, cleanup, restoration, and material-placement equipment available in case of an unforeseen spill emergency.

6. The methods and procedures to be used for expeditious contaminant cleanup.

k. A non-hazardous solid waste disposal plan identifying methods and locations for solid waste disposal including clearing debris. The plan shall include schedules for disposal. The Contractor shall identify any subcontractors responsible for the transportation and disposal of solid waste. Licenses or permits shall be submitted for solid waste disposal sites that are not a commercial operating facility. Evidence of the disposal facility's acceptance of the solid waste shall be attached to this plan during the construction. The Contractor shall

attach a copy of each of the Non-hazardous Solid Waste Diversion Reports to the disposal plan. The report shall be submitted on the first working day after the first quarter that non-hazardous solid waste has been disposed and/or diverted and shall be for the previous quarter (e.g. the first working day of January, April, July, and October). The report shall indicate the total amount of waste generated and total amount of waste diverted in cubic yards or tons along with the percent that was diverted.

l. A recycling and solid waste minimization plan with a list of measures to reduce consumption of energy and natural resources. The plan shall detail the Contractor's actions to comply with and to participate in Federal, State, Regional, and local government sponsored recycling programs to reduce the volume of solid waste at the source.

m. An air pollution control plan detailing provisions to assure that dust, debris, materials, trash, etc., do not become air borne and travel off the project site.

n. A contaminant prevention plan that: identifies potentially hazardous substances to be used on the job site; identifies the intended actions to prevent introduction of such materials into the air, water, or ground; and details provisions for compliance with Federal, State, and local laws and regulations for storage and handling of these materials. In accordance with EM 385-1-1, a copy of the Material Safety Data Sheets (MSDS) and the maximum quantity of each hazardous material to be on site at any given time shall be included in the contaminant prevention plan. As new hazardous materials are brought on site or removed from the site, the plan shall be updated.

o. A waste water management plan that identifies the methods and procedures for management and/or discharge of waste waters which are directly derived from construction activities, such as concrete curing water, clean-up water, dewatering of ground water, disinfection water, hydrostatic test water, and water used in flushing of lines. If a settling/retention pond is required, the plan shall include the design of the pond including drawings, removal plan, and testing requirements for possible pollutants. If land application will be the method of disposal for the waste water, the plan shall include a sketch showing the location for land application along with a description of the pretreatment methods to be implemented. If surface discharge will be the method of disposal, a copy of the permit and associated documents shall be included as an attachment prior to discharging the waste water. If disposal is to a sanitary sewer, the plan shall include documentation that the Waste Water Treatment Plant Operator has approved the flow rate, volume, and type of discharge.

p. A historical, archaeological, cultural resources biological resources and wetlands plan that defines procedures for identifying and protecting historical, archaeological, cultural resources, biological resources and wetlands known to be on the project site: and/or identifies procedures to be followed if historical archaeological, cultural resources, biological resources and wetlands not previously known to be onsite or in the area are discovered during construction. The plan shall include methods to assure the protection of known or discovered resources and shall identify lines of communication between Contractor personnel and the Contracting Officer.

q. A pesticide treatment plan shall be included and updated, as information becomes available. The plan shall include: sequence of treatment, dates, times, locations, pesticide trade name, EPA registration numbers, authorized uses, chemical composition, formulation, original and applied concentration, application rates of active ingredient (i.e. pounds of active ingredient applied), equipment used for application and calibration of equipment. The Contractor is responsible for Federal, State, Regional and Local pest management record keeping and reporting requirements as well as any additional Installation Project Office specific requirements. The Contractor shall follow AR 200-5 Pest Management, Chapter 2, Section III "Pest Management Records and Reports" for data required to be reported to the Installation.

1.7.3 Appendix

Copies of all environmental permits, permit application packages, approvals to construct, notifications, certifications, reports, and termination documents shall be attached, as an appendix, to the Environmental Protection Plan.

1.8 PROTECTION FEATURES

This paragraph supplements the Contract Clause PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS. Prior to start of any onsite construction activities, the Contractor and the Contracting Officer shall make a joint condition survey. Immediately following the survey, the Contractor shall prepare a brief report including a plan describing the features requiring protection under the provisions of the Contract Clauses, which are not specifically identified on the drawings as environmental features requiring protection along with the condition of trees, shrubs and grassed areas immediately adjacent to the site of work and adjacent to the Contractor's assigned storage area and access route(s), as applicable. This survey report shall be signed by both the Contractor and the Contracting Officer upon mutual agreement as to its accuracy and completeness. The Contractor shall protect those environmental features included in the survey report and any indicated on the drawings, regardless of interference which their preservation may cause to the Contractor's work under the contract.

1.9 ENVIRONMENTAL ASSESSMENT OF CONTRACT DEVIATIONS

Any deviations, requested by the Contractor, from the drawings, plans and specifications which may have an environmental impact will be subject to approval by the Contracting Officer and may require an extended review, processing, and approval time. The Contracting Officer reserves the right to disapprove alternate methods, even if they are more cost effective, if the Contracting Officer determines that the proposed alternate method will have an adverse environmental impact.

1.10 NOTIFICATION

The Contracting Officer will notify the Contractor in writing of any observed noncompliance with Federal, State or local environmental laws or regulations, permits, and other elements of the Contractor's Environmental Protection plan. The Contractor shall, after receipt of such notice, inform

the Contracting Officer of the proposed corrective action and take such action when approved by the Contracting Officer. The Contracting Officer may issue an order stopping all or part of the work until satisfactory corrective action has been taken. No time extensions shall be granted or equitable adjustments allowed to the Contractor for any such suspensions. This is in addition to any other actions the Contracting Officer may take under the contract, or in accordance with the Federal Acquisition Regulation or Federal Law.

PART 2 PRODUCTS (NOT USED)

PART 3 EXECUTION

3.1 ENVIRONMENTAL PERMITS AND COMMITMENTS

The Contractor shall be responsible for obtaining and complying with all environmental permits and commitments required by Federal, State, Regional, and local environmental laws and regulations.

3.2 LAND RESOURCES

The Contractor shall confine all activities to areas defined by the drawings and specifications. Prior to the beginning of any construction, the Contractor shall identify any land resources to be preserved within the work area. Except in areas indicated on the drawings or specified to be cleared, the Contractor shall not remove, cut, deface, injure, or destroy land resources including trees, shrubs, vines, grasses, topsoil, and land forms without approval. No ropes, cables, or guys shall be fastened to or attached to any trees for anchorage unless specifically authorized. The Contractor shall provide effective protection for land and vegetation resources at all times as defined in the following subparagraphs. Stone, soil, or other materials displaced into uncleared areas shall be removed by the Contractor.

3.2.1 Work Area Limits

Prior to commencing construction activities, the Contractor shall mark the areas that need not be disturbed under this contract. Isolated areas within the general work area which are not to be disturbed shall be marked or fenced. Monuments and markers shall be protected before construction operations commence. Where construction operations are to be conducted during darkness, any markers shall be visible in the dark. The Contractor's personnel shall be knowledgeable of the purpose for marking and/or protecting particular objects.

3.2.2 Landscape

Trees, shrubs, vines, grasses, land forms and other landscape features indicated and defined on the drawings to be preserved shall be clearly identified by marking, fencing, or wrapping with boards, or any other approved techniques. The Contractor shall restore landscape features damaged or destroyed during construction operations outside the limits of the approved work area.

3.2.3 Erosion and Sediment Controls

The Contractor shall be responsible for providing erosion and sediment control measures in accordance with Federal, State, and local laws and regulations. The erosion and sediment controls selected and maintained by the Contractor shall be such that water quality standards are not violated as a result of the Contractor's construction activities. The area of bare soil exposed at any one time by construction operations should be kept to a minimum. The Contractor shall construct or install temporary erosion and sediment control best management practices (BMPs) as indicated on the drawings and as specified in Section 01356 STORM WATER POLLUTION PREVENTION MEASURES and Section 02370A SOIL SURFACE EROSION CONTROL. BMPs may include, but not be limited to, vegetation cover, stream bank stabilization, slope stabilization, silt fences, construction of terraces, interceptor channels, sediment traps, inlet and outfall protection, diversion channels, and sedimentation basins. Any temporary measures shall be removed after the area has been stabilized.

3.2.4 Contractor Facilities and Work Areas

The Contractor's field offices, staging areas, stockpile storage, and temporary buildings shall be placed in areas as directed by the Contracting Officer. Temporary movement or relocation of Contractor facilities shall be made only when approved. Erosion and sediment controls shall be provided for on-site borrow and spoil areas to prevent sediment from entering nearby waters. Temporary excavation and embankments for plant and/or work areas shall be controlled to protect adjacent areas.

3.3 WATER RESOURCES

The Contractor shall monitor construction activities to prevent pollution of surface and ground waters. Toxic or hazardous chemicals shall not be applied to soil or vegetation unless otherwise indicated. All water areas affected by construction activities shall be monitored by the Contractor.

3.3.1 Wetlands

The Contractor shall not enter, disturb, destroy, or allow discharge of contaminants into any wetlands.

3.4 AIR RESOURCES

Equipment operation, activities, or processes performed by the Contractor shall be in accordance with all Federal and State air emission and performance laws and standards.

3.4.1 Particulates

Dust particles; aerosols and gaseous by-products from construction activities; and processing and preparation of materials, such as from asphaltic batch plants; shall be controlled at all times, including weekends, holidays and hours when work is not in progress. The Contractor shall maintain excavations, stockpiles, haul roads, permanent and temporary access roads, plant sites, spoil areas, borrow areas, and other work areas within or outside the project boundaries free from particulates which would cause the Federal, State, and local air pollution standards to be exceeded or which would cause a hazard or a nuisance. Sprinkling, chemical treatment of an approved type, baghouse, scrubbers, electrostatic precipitators or other methods will be permitted to control particulates in the work area.

Sprinkling, to be efficient, must be repeated to keep the disturbed area damp at all times. The Contractor must have sufficient, competent equipment available to accomplish these tasks. Particulate control shall be performed as the work proceeds and whenever a particulate nuisance or hazard occurs. The Contractor shall comply with all State and local visibility regulations.

3.4.2 Odors

Odors from construction activities shall be controlled at all times. The odors shall not cause a health hazard and shall be in compliance with State regulations and/or local ordinances.

3.4.3 Sound Intrusions

The Contractor shall keep construction activities under surveillance and control to minimize environment damage by noise.

3.4.4 Burning

Burning will not be allowed on the project site unless specified in other sections of the specifications or authorized in writing by the Contracting Officer. The specific time, location, and manner of burning shall be subject to approval.

3.5 CHEMICAL MATERIALS MANAGEMENT AND WASTE DISPOSAL

Disposal of wastes shall be as directed below, unless otherwise specified in other sections and/or shown on the drawings.

3.5.1 Solid Wastes

Solid wastes (excluding clearing debris) shall be placed in containers which are emptied on a regular schedule. Handling, storage, and disposal shall be conducted to prevent contamination. Segregation measures shall be employed so that no hazardous or toxic waste will become co-mingled with solid waste. The Contractor shall transport solid waste off Government property and dispose of it in compliance with Federal, State, and local requirements for solid waste disposal. A Subtitle D RCRA permitted landfill shall be the minimum acceptable off-site solid waste disposal option. The Contractor shall verify that the selected transporters and disposal facilities have the necessary permits and licenses to operate.

3.5.2 Chemicals and Chemical Wastes

Chemicals shall be dispensed ensuring no spillage to the ground or water. Periodic inspections of dispensing areas to identify leakage and initiate corrective action shall be performed and documented. This documentation will be periodically reviewed by the Government. Chemical waste shall be collected in corrosion resistant, compatible containers. Collection drums shall be monitored and removed to a staging or storage area when contents are within 6 inches of the top. Wastes shall be classified, managed, stored, and disposed of in accordance with Federal, State, and local laws and regulations.

3.5.3 Contractor Generated Hazardous Wastes/Excess Hazardous Materials

Hazardous wastes are defined in 40 CFR 261, or are as defined by applicable State and local regulations. Hazardous materials are defined in 49 CFR 171 - 178. The Contractor shall, at a minimum, manage and store hazardous waste in compliance with 40 CFR 262. The Contractor shall take sufficient measures to prevent spillage of hazardous and toxic materials during dispensing. The Contractor shall segregate hazardous waste from other materials and wastes, shall protect it from the weather by placing it in a safe covered location, and shall take precautionary measures such as berming or other appropriate measures against accidental spillage. The Contractor shall be responsible for storage, describing, packaging, labeling, marking, and placarding of hazardous waste and hazardous material in accordance with 49 CFR 171 - 178, State, and local laws and regulations. The Contractor shall transport Contractor generated hazardous waste off Government property within 60 days in accordance with the Environmental Protection Agency and the Department of Transportation laws and regulations. The Contractor shall dispose of hazardous waste in compliance with Federal, State and local laws and regulations. Spills of hazardous or toxic materials shall be immediately reported to the Contracting Officer and the Facility Environmental Office. Cleanup and cleanup costs due to spills shall be the Contractor's responsibility. The disposition of Contractor generated hazardous waste and excess hazardous materials are the Contractor's responsibility.

3.5.4 Fuel and Lubricants

Storage, fueling and lubrication of equipment and motor vehicles shall be conducted in a manner that affords the maximum protection against spill and evaporation. Fuel, lubricants and oil shall be managed and stored in accordance with all Federal, State, Regional, and local laws and regulations. Used lubricants and used oil to be discarded shall be stored in marked corrosion-resistant containers and recycled or disposed in accordance with 40 CFR 279, State, and local laws and regulations. Storage of fuel on the project site shall be accordance with all Federal, State, and local laws and regulations.

3.5.5 Waste Water

Disposal of waste water shall be as specified below.

a. Waste water from construction activities, such as onsite material processing, concrete curing, foundation and concrete clean-up, water used in concrete trucks, forms, etc. shall not be allowed to enter water ways or to be discharged prior to being treated to remove pollutants. The Contractor shall dispose of the construction related waste water off-Government property in accordance with all Federal, State, Regional and Local laws and regulations.

b. For discharge of ground water, the Contractor shall surface discharge in accordance with all Federal, State, and local laws and regulations.

c. Water generated from the flushing of lines after disinfection or disinfection in conjunction with hydrostatic testing shall be land applied in accordance with all Federal, State, and local laws and regulations for land application.

3.6 RECYCLING AND WASTE MINIMIZATION

The Contractor shall participate in State and local government sponsored recycling programs.

3.7 HISTORICAL, ARCHAEOLOGICAL, AND CULTURAL RESOURCES

If during excavation or other construction activities any previously unidentified or unanticipated historical, archaeological, and cultural resources are discovered or found, all activities that may damage or alter such resources shall be temporarily suspended. Resources covered by this paragraph include but are not limited to: any human skeletal remains or burials; artifacts; shell, midden, bone, charcoal, or other deposits; rock or coral alignments, pavings, wall, or other constructed features; and any indication of agricultural or other human activities. Upon such discovery or find, the Contractor shall immediately notify the Contracting Officer so that the appropriate authorities may be notified and a determination made as to their significance and what, if any, special disposition of the finds should be made. The Contractor shall cease all activities that may result in impact to or the destruction of these resources. The Contractor shall secure the area and prevent employees or other persons from trespassing on, removing, or otherwise disturbing such resources.

3.8 BIOLOGICAL RESOURCES

The Contractor shall minimize interference with, disturbance to, and damage to fish, wildlife, and plants including their habitat. The Contractor shall be responsible for the protection of threatened and endangered animal and plant species including their habitat in accordance with Federal, State, Regional, and local laws and regulations.

3.9 INTEGRATED PEST MANAGEMENT

In order to minimize impacts to existing fauna and flora, the Contractor, through the Contracting Officer, shall coordinate with the Installation at the earliest possible time prior to any pesticide application. The Contractor shall prepare integrated pest management strategies prior to the application of any pesticide associated with these specifications. The use and management of pesticides are regulated under 40 CFR 152 - 186.

3.9.1 Pesticide Delivery and Storage

Pesticides shall be delivered to the site in the original, unopened containers bearing legible labels indicating the EPA registration number and the manufacturer's registered uses. Pesticides shall be stored according to manufacturer's instructions and under lock and key when unattended.

3.9.2 Qualifications

For the application of pesticides, the Contractor shall use the services of a subcontractor whose principal business is pest control. The subcontractor shall be licensed and certified in the state where the work is to be performed.

3.9.3 Pesticide Handling Requirements

The Contractor shall formulate, treat with, and dispose of pesticides and associated containers in accordance with label directions and shall use the clothing and personal protective equipment specified on the labeling for use during all phases of the application. Material Safety Data Sheets (MSDS)shall be available for all pesticide products.

3.9.4 Application

Pesticides shall be applied by a State Certified Pesticide Applicator in accordance with EPA label restrictions and recommendation. The Certified Applicator shall wear clothing and personal protective equipment as specified on the pesticide label. Water used for formulating shall only come from locations designated by the Contracting Officer. The Contractor shall not allow the equipment to overflow. Prior to application of pesticide, all equipment shall be inspected for leaks, clogging, wear, or damage and shall be repaired prior to being used.

3.10 PREVIOUSLY USED EQUIPMENT

The Contractor shall clean all previously used construction equipment prior to bringing it onto the project site. The Contractor shall ensure that the equipment is free from soil residuals, egg deposits from plant pests, noxious weeds, and plant seeds. The Contractor shall consult with the USDA jurisdictional office for additional cleaning requirements.

3.11 MAINTENANCE OF POLLUTION FACILITIES

The Contractor shall maintain permanent and temporary pollution control facilities and devices for the duration of the contract or for that length of time construction activities create the particular pollutant.

3.12 TRAINING OF CONTRACTOR PERSONNEL

The Contractor's personnel shall be trained in all phases of environmental protection and pollution control. The Contractor shall conduct environmental protection/pollution control meetings for all Contractor personnel prior to commencing construction activities. Additional meetings shall be conducted for new personnel and when site conditions change. The training and meeting agenda shall include: methods of detecting and avoiding pollution; familiarization with statutory and contractual pollution standards; installation and care of devices, vegetative covers, and instruments required for monitoring purposes to ensure adequate and continuous environmental protection/pollution control; anticipated hazardous or toxic chemicals or wastes, and other regulated contaminants; recognition and protection of archaeological sites, artifacts, wetlands, and endangered species and their habitat that are known to be in the area.

3.13 POST CONSTRUCTION CLEANUP

The Contractor shall clean up all areas used for construction in accordance with Contract Clause: "Cleaning Up". The Contractor shall, unless otherwise instructed in writing by the Contracting Officer, obliterate all signs of temporary construction facilities such as haul roads, work area, structures, foundations of temporary structures, stockpiles of excess or waste materials, and other vestiges of construction prior to final acceptance of the work. The disturbed area shall be graded, filled and the entire area seeded unless otherwise indicated.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 01 - GENERAL REQUIREMENTS

SECTION 01356A

STORM WATER POLLUTION PREVENTION MEASURES

08/96

PART 1 GENERAL

1.1 REFERENCES
1.2 GENERAL
1.3 EROSION AND SEDIMENT CONTROLS
1.3.1 Stabilization Practices
1.3.1.1 Unsuitable Conditions
1.3.1.2 No Activity for Less Than 21 Days
1.3.2 Structural Practices
1.3.2.1 Silt Fences

PART 2 PRODUCTS

2.1 COMPONENTS FOR SILT FENCES
2.1.1 Filter Fabric
2.1.2 Silt Fence Stakes and Posts
2.1.3 Identification Storage and Handling

PART 3 EXECUTION

3.1 INSTALLATION OF SILT FENCES
3.2 MAINTENANCE
3.2.1 Silt Fence Maintenance
3.3 INSPECTIONS
3.3.1 General
3.3.2 Inspections Details

-- End of Section Table of Contents --

SECTION 01356A

STORM WATER POLLUTION PREVENTION MEASURES
08/96

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 4439	(1997) Standard Terminology for Geosynthetics
ASTM D 4491	(1996) Water Permeability of Geotextiles by Permittivity
ASTM D 4533	(1991; R 1996) Trapezoid Tearing Strength of Geotextiles
ASTM D 4632	(1991; R 1996)) Grab Breaking Load and Elongation of Geotextiles
ASTM D 4751	(1995) Determining Apparent Opening Size of a Geotextile
ASTM D 4873	(1995) Identification, Storage, and Handling of Geosynthetic Rolls

1.2 GENERAL

The Contractor shall implement the storm water pollution prevention measures specified in this section in a manner which will meet the requirements of Section 01354 ENVIRONMENTAL PROTECTION. This section shall be coordinated with the requirements of Section 02300A EARTHWORK, Section 02370A SOIL SURFACE EROSION CONTROL and Section 02921A SEEDING. SEE SOIL EROSION AND SEDIMENT CONTROL PLAN.

1.3 EROSION AND SEDIMENT CONTROLS

The controls and measures required by the Contractor are described below.

1.3.1 Stabilization Practices

The stabilization practices to be implemented shall include temporary seeding, mulching, protection of trees, preservation of mature vegetation, etc. On his daily CQC Report, the Contractor shall record the dates when the major grading activities occur, (e.g., clearing and grubbing, excavation, embankment, and grading); when construction activities temporarily or permanently cease on a portion of the site; and when stabilization practices are initiated. Except as provided in paragraphs UNSUITABLE CONDITIONS and NO ACTIVITY FOR LESS THAN 21 DAYS, stabilization

practices shall be initiated as soon as practicable, but no more than 14 days, in any portion of the site where construction activities have temporarily or permanently ceased.

1.3.1.1 Unsuitable Conditions

Where the initiation of stabilization measures by the fourteenth day after construction activity temporarily or permanently ceases is precluded by unsuitable conditions caused by the weather, stabilization practices shall be initiated as soon as practicable after conditions become suitable.

1.3.1.2 No Activity for Less Than 21 Days

Where construction activity will resume on a portion of the site within 21 days from when activities ceased (e.g., the total time period that construction activity is temporarily ceased is less than 21 days), then stabilization practices do not have to be initiated on that portion of the site by the fourteenth day after construction activity temporarily ceased.

1.3.2 Structural Practices

Structural practices shall be implemented to limit runoff and the discharge of pollutants from exposed areas of the site. Structural practices shall be implemented in a timely manner during the construction process to minimize erosion and sediment runoff. Structural practices shall include the following devices.

1.3.2.1 Silt Fences

The Contractor shall provide silt fences as a temporary structural practice to minimize erosion and sediment runoff. Silt fences shall be properly installed to effectively retain sediment immediately after completing each phase of work where erosion would occur in the form of sheet and rill erosion (e.g. clearing and grubbing, excavation, embankment, and grading). Final removal of silt fence barriers shall be upon approval by the Contracting Officer.

PART 2 PRODUCTS

2.1 COMPONENTS FOR SILT FENCES

2.1.1 Filter Fabric

FILTER FABRICS SHALL CONFORM TO SCDOT STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION (LATEST EDITION). <MET>

FILTER FABRIC FOR SILT SCREEN FENCE

PHYSICAL PROPERTY	TEST PROCEDURE	STRENGTH REQUIREMENT
Grab Tensile	ASTM D 4632	445 N min.
Elongation (%)		30 % max.
Trapezoid Tear	ASTM D 4533	245 N min.
Permittivity	ASTM D 4491	0.2 sec-1
AOS (U.S. Std Sieve)	ASTM D 4751	20-100

</MET>

2.1.2 Silt Fence Stakes and Posts

The Contractor may use either wooden stakes or steel posts for fence construction. Wooden stakes utilized for silt fence construction, shall be oak and have a minimum cross section of 2 inches by 2 inches, and shall have a minimum length of 5 feet. Steel posts (standard "U" or "T" section) utilized for silt fence construction, shall have a minimum weight of 1.25 pounds per linear foot and a minimum length of 5 feet.

2.1.3 Identification Storage and Handling

Filter fabric shall be identified, stored and handled in accordance with ASTM D 4873.

PART 3 EXECUTION

3.1 INSTALLATION OF SILT FENCES

<MET> 860 mm</MET>Filter fabric shall be from a continuous roll cut to the length of the barrier to avoid the use of joints. When joints are unavoidable, filter fabric shall be spliced together at a support post, with a minimum 6 inch overlap, and securely sealed. A trench shall be excavated approximately 6 inches wide and 6 inches deep on the upslope side of the location of the silt fence. The 6-inch by 6-inch trench shall be backfilled and the soil compacted over the filter fabric. Silt fences shall be removed upon approval by the Contracting Officer.

3.2 MAINTENANCE

The Contractor shall maintain the temporary and permanent vegetation, erosion and sediment control measures, and other protective measures in good and effective operating condition by performing routine inspections to determine condition and effectiveness, by restoration of destroyed vegetative cover, and by repair of erosion and sediment control measures and other protective measures. The following procedures shall be followed to maintain the protective measures.

3.2.1 Silt Fence Maintenance

Silt fences shall be inspected in accordance with paragraph INSPECTIONS. Any required repairs shall be made promptly. Close attention shall be paid to the repair of damaged silt fence resulting from end runs and undercutting. Should the fabric on a silt fence decompose or become ineffective, and the barrier is still necessary, the fabric shall be replaced promptly. Sediment deposits shall be removed when deposits reach one-third of the height of the barrier. When a silt fence is no longer required, it shall be removed. The immediate area occupied by the fence and any sediment deposits shall be shaped to an acceptable grade. The areas disturbed by this shaping shall be seeded in accordance with Section 02921A SEEDING .

3.3 INSPECTIONS

3.3.1 General

The Contractor shall inspect disturbed areas of the construction site, areas used for storage of materials that are exposed to precipitation that have not been finally stabilized, stabilization practices, structural practices, other controls, and area where vehicles exit the site at least once every seven (7) calendar days and within 24 hours of the end of any storm that produces 0.5 inches or more rainfall at the site. Where sites have been finally stabilized, such inspection shall be conducted at least once every month.

3.3.2 Inspections Details

Disturbed areas shall be inspected for evidence of, or the potential for, pollutants entering the drainage system. Erosion and sediment control measures identified in the Storm Water Pollution Prevention Plan shall be observed to ensure that they are operating correctly. Discharge locations or points shall be inspected to ascertain whether erosion control measures are effective in preventing significant impacts to receiving waters. Locations where vehicles exit the site shall be inspected for evidence of offsite sediment tracking. In addition to the inspections listed above to be conducted by the Contractor, weekly inspections and inspections after any rain event greater that 0.5 inches will also be conducted by an approved Site Inspector.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 01 - GENERAL REQUIREMENTS

SECTION 01420

SOURCES FOR REFERENCE PUBLICATIONS

09/03

PART 1 GENERAL

1.1 REFERENCES
1.2 ORDERING INFORMATION

-- End of Section Table of Contents --

SECTION 01420

SOURCES FOR REFERENCE PUBLICATIONS
09/03

PART 1 GENERAL

1.1 REFERENCES

Various publications are referenced in other sections of the specifications to establish requirements for the work. These references are identified in each section by document number, date and title. The document number used in the citation is the number assigned by the standards producing organization, (e.g. ASTM B 564 Nickel Alloy Forgings). However, when the standards producing organization has not assigned a number to a document, an identifying number has been assigned for reference purposes.

1.2 ORDERING INFORMATION

The addresses of the standards publishing organizations whose documents are referenced in other sections of these specifications are listed below, and if the source of the publications is different from the address of the sponsoring organization, that information is also provided. Documents listed in the specifications with numbers which were not assigned by the standards producing organization should be ordered from the source by title rather than by number.

ACI INTERNATIONAL (ACI)
P.O. Box 9094
Farmington Hills, MI 48333-9094
Ph: 248-848-3700
Fax: 248-848-3701
Internet: http://www.aci-int.org

AIR CONDITIONING AND REFRIGERATION INSTITUTE (ARI)
4100 North Fairfax Drive, Suite 200
ATTN: Publications Department
Arlington, VA 22203
Ph: 703-524-8800
Fax: 703-528-3816
E-mail: ari@ari.org
Internet: http://www.ari.org

AIR CONDITIONING CONTRACTORS OF AMERICA (ACCA)
2800 Shirlington Road, Suite 300
Arlington, VA 22206
Ph: 703-575-4477
FAX: 703-575-4449
Internet: http://www.acca.org
E-mail: info@acca.org

AIR DIFFUSION COUNCIL (ADC)
1000 East Woodfield Road, Suite 102
Shaumburg, IL 60173-5921
Ph: 847-706-6750

Fax: 847-706-6751
Internet: http://www.flexibleduct.org
E-mail: info@flexibleduct.org

AIR MOVEMENT AND CONTROL ASSOCIATION INTERNATIONAL (AMCA)
30 West University Drive
Arlington Heights, IL 60004-1893
Ph: 847-394-0150
Fax: 847-253-0088
Internet: http://www.amca.org
E-Mail: amca@amca.org

ALUMINUM ASSOCIATION (AA)
900 19th Street N.W., Suite 300
Washington, DC 20006
Ph: 202-862-5100
Fax: 202-862-5164
Internet: http://www.aluminum.org

AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION (AAMA)
1827 Walden Office Square
Suite 104
Schaumburg, IL 60173-4268
Ph: 847-303-5664
Fax: 847-303-5774
Internet: http://www.aamanet.org
E-mail: webmaster@aamanet.org

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)
444 North Capital Street, NW, Suite 249
Washington, DC 20001
Ph: 202-624-5800
Fax: 202-624-5806
Internet: http://www.aashto.org
E-Mail: info@aashto.org

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)
P.O. Box 12215
Research Triangle Park, NC 27709-2215
Ph: 919-549-8141
Fax: 919-549-8933
Internet: http://www.aatcc.org

AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA)
2025 M Street, NW, Suite 800
Washington, DC 20036
Ph: 202-367-1155
Fax: 202-367-2155
Internet: http://www.abma-dc.org
E-mail: abma@fdc.sba.com

AMERICAN BOILER MANUFACTURERS ASSOCIATION (ABMA)
4001 North 9th Street, Suite 226
Arlington, VA 22203-1900
Ph: 703-522-7350
Fax: 703-522-2665

Internet: http://www.abma.com

AMERICAN CONCRETE PIPE ASSOCIATION (ACPA)
222 West Las Colinas Boulevard, Suite 641
Irving, TX 75039-5423
Ph: 972-506-7216
Fax: 972-506-7682
Internet: http://www.concrete-pipe.org
E-mail: info@concrete-pipe.org

AMERICAN CONFERENCE OF GOVERNMENTAL INDUSTRIAL HYGIENISTS (ACGIH)
1330 Kemper Meadow Drive
Cincinnati, OH 45240
Ph: 513-742-2020
Fax: 513-742-3355
Internet: http://www.acgih.org
E-mail: mail@acgih.org

AMERICAN FOREST & PAPER ASSOCIATION (AF&PA)
American Wood Council
ATTN: Publications Department
1111 Nineteenth Street NW, Suite 800
Washington, DC 20036
Ph: 800-878-8878 or 202-463-2700
Fax: 202-463-2785
Internet: http://www.afandpa.org/

AMERICAN GAS ASSOCIATION (AGA)
400 North Capitol Street N.W.
Washington, D.C. 20001
Ph: 202-824-7000
Fax: 202-824-7115
Internet: http://www.aga.org
E-mail: webmaster@aga.org

AMERICAN GAS ASSOCIATION LABORATORIES (AGAL)
400 North Capitol Street N.W.
Washington, D.C. 20001
Ph: 202-824-7000
Fax: 202-824-7115
Internet: http://www.aga.org

AMERICAN GEAR MANUFACTURERS ASSOCIATION (AGMA)
1500 King Street, Suite 201
Alexandria, VA 22314-2730
Ph: 703-684-0211
Fax: 703-684-0242
Internet: http://www.agma.org
E-mail: webmaster@agma.org

AMERICAN HARDBOARD ASSOCIATION (AHA)
1210 West Northwest Highway
Palatine, IL 60067
Ph: 847-934-8800
Fax: 847-934-8803
Internet: http://www.hardboard.org
E-mail: aha@hardboard.org

AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC)
One East Wacker Drive, Suite 3100
Chicago, IL 60601-2001
Ph: 312-670-2400
Fax: 312-670-5403
Publications: 800-644-2400
Internet: http://www.aisc.org

AMERICAN INSTITUTE OF TIMBER CONSTRUCTION (AITC)
7012 South Revere Parkway, Suite 140
Englewood, CO 80112
Ph: 303-792-9559
Fax: 303-792-0669
Internet: http://www.aitc-glulam.org
E-mail: info@aitc-glulam.org

AMERICAN IRON AND STEEL INSTITUTE (AISI)
1140 Connecticut Avenue, NW, Suite 705
Washington, DC 20036
Ph: 202-452-7100
Fax: 202-463-6573
Internet: http://www.steel.org

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)
1819 L Street, NW, 6th Floor
Washington, DC 20036
Ph: 202-293-8020
Fax: 202-293-9287
E-mail: info@ansi.org
Internet: http://www.ansi.org/
Note --- Documents beginning with the letter "S" can be ordered from:

Acoustical Society of America (ASA)
2 Huntington Quadrangle, Suite 1NO1
Melville, NY 11747-4502
Ph: 516-576-2360
Fax: 516-576-2377
Internet: http://asa.aip.org
E-mail: asa@aip.org

AMERICAN NURSERY AND LANDSCAPE ASSOCIATION (ANLA)
1000 Vermont Avenue, NW, Suite 300
Washington, DC 20005-4914
Ph: 202-789-2900
FAX: 202-789-1893
Internet: http://www.anla.org

AMERICAN PETROLEUM INSTITUTE (API)
1220 L Street, NW
Washington, DC 20005-4070
Ph: 202-682-8000
Fax: 202-682-8223
Internet: http://www.api.org

AMERICAN PUBLIC HEALTH ASSOCIATION (APHA)
800 I Street, NW

Washington, DC 20001
PH: 202-777-2742
FAX: 202-777-2534
Internet: http://www.apha.org

AMERICAN RAILWAY ENGINEERING AND MAINTENANCE-OF-WAY ASSOCIATION (AREMA)
8201 Corporate Drive, Suite 1125
Landover, MD 20785-2230
Ph: 301-459-3200
Fax: 301-459-8077
Internet: http://www.arema.org

AMERICAN SOCIETY FOR NONDESTRUCTIVE TESTING (ASNT)
1711 Arlingate Lane
P.O. Box 28518
Columbus, OH 43228-0518
Ph: 800-222-2768; 614-274-6003
Fax: 614-274-6899
E-mail: webmaster@asnt.org
Internet: http://www.asnt.org

AMERICAN SOCIETY FOR QUALITY (ASQ)
600 North Plankinton Avenue
Milwaukee, WI 53203
Ph: 800-248-1946; 414-272-8575
Fax: 414-272-1734
E-mail: cs@asq.org
Internet: http://www.asq.org

AMERICAN SOCIETY OF CIVIL ENGINEERS (ASCE)
1801 Alexander Bell Drive
Reston, VA 20191-4400
Ph: 703-295-6300 - 800-548-2723
Fax: 703-295-6222
Internet: http://www.asce.org
E-mail: marketing@asce.org

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)
1791 Tullie Circle, NE
Atlanta, GA 30329
Ph: 800-527-4723 or 404-636-8400
Fax: 404-321-5478
E-mail: ashrae@ashrae.org
Internet: http://www.ashrae.org

AMERICAN SOCIETY OF SANITARY ENGINEERING (ASSE)
901 Canterbury, Suite A
Westlake, OH 44145
Ph: 440-835-3040
Fax: 440-835-3488
E-mail: info@asse-plumbing.org
Internet: http://www.asse-plumbing.org

AMERICAN WATER WORKS ASSOCIATION(AWWA)
6666 West Quincy Avenue

Denver, CO 80235
Ph: 303-794-7711
Fax: 303-794-3951
Internet: http://www.awwa.org

AMERICAN WELDING SOCIETY (AWS)
550 N.W. LeJeune Road
Miami, FL 33126
Ph: 800-443-9353 - 305-443-9353
Fax: 305-443-7559
E-mail: info@aws.org
Internet: http://www.aws.org

AMERICAN WOOD-PRESERVERS' ASSOCIATION (AWPA)
P.O. Box 5690
Grandbury, TX 76049-0690
Ph: 817-326-6300
Fax: 817-326-6306
E-mail: awpa@itexas.net
Internet: http://www.awpa.com

APA - THE ENGINEERED WOOD ASSOCIATION (APA)
P.O. Box 11700
Tacoma, WA 98411-0700
Ph: 253-565-6600
Fax: 253-565-7265
Internet: http://www.apawood.org

ARCHITECTURAL WOODWORK INSTITUTE (AWI)
1952 Isaac Newton Square West
Reston, VA 20190
Ph: 703-733-0600
Fax: 703-733-0584
Internet: http://www.awinet.org

ASBESTOS CEMENT PRODUCT PRODUCERS ASSOCIATION (ACPA)
PMB114-1745 Jefferson Davis Highway
Arlington, VA 22202
Ph: 514-861-1153
Fax: 514-861-1152
Internet: www.asbestos-institute.ca

ASM INTERNATIONAL (ASM)
9639 Kinsman Road
Materials Park, OH 44073-0002
Ph: 440-338-5151
Fax: 440-338-4634
E-mail: mem-serv@asm-intl.org
Internet: http://www.asm-intl.org

ASME INTERNATIONAL (ASME)
Three Park Avenue
New York, NY 10016-5990
Ph: 212-591-7722
Fax: 212-591-7674
E-mail: infocentral@asme.org
Internet: http://www.asme.org

ASPHALT INSTITUTE (AI)
Research Park Drive
P.O. Box 14052
Lexington, KY 40512-4052
Ph: 859-288-4960
Fax: 859-288-4999
E-mail: webmaster@asphaltinstitute.org
Internet: http://www.asphaltinstitute.org

ASSOCIATED AIR BALANCE COUNCIL (AABC)
1518 K Street, NW
Washington, DC 20005
Ph: 202-737-0202
Fax: 202-638-4833
Internet: http://www.aabchq.com
E-mail: aabchq@aol.com

ASSOCIATION FOR THE ADVANCEMENT OF MEDICAL INSTRUMENTATION (AAMI)
1110 North Glebe Road, Suite 220
Arlington, VA 22201-4795
Ph: 800-332-2264 or 703-525-4890
Fax: 703-276-0793
E-mail: webmaster@aami.org
Internet: http://www.aami.org

ASSOCIATION OF EDISON ILLUMINATING COMPANIES (AEIC)
600 North 18th Street
P.O. Box 2641
Birmingham, AL 35291
Ph: 205-257-2530
Fax: 205-257-2540
Internet: http://www.aeic.org

ASSOCIATION OF HOME APPLIANCE MANUFACTURERS (AHAM)
1111 19th Street NW, Suite 402
Washington, DC 20036
Ph: 202-872-5955
Fax: 202-872-9354
E-mail: aham@aham.org
Internet: http://www.aham.org

ASSOCIATION OF THE WALL AND CEILING INDUSTRIES - INTERNATIONAL (AWCI)
803 West Broad Street
Falls Church, VA 22046
PH: 703-534-8300
FAX: 703-534-8307
Internet: http://www.awci.org

ASTM INTERNATIONAL (ASTM)
100 Barr Harbor Drive, P.O. Box C700
West Conshohocken, PA 19428-2959
Ph: 610-832-9500
Fax: 610-832-9555
E-mail: service@astm.org
Internet: http://www.astm.org

ALLIANCE FOR TELECOMMUNICATIONS INDUSTRY SOLUTIONS (ATIS)
1200 G Street, NW, Suite 500
Washington, D.C. 20005
Ph: 202-628-6380
Fax: 202-393-5453
Internet: http://www.atis.org

BIFMA INTERNATIONAL (BIFMA)
2680 Horizon Drive SE, Suite A-1
Grand Rapids, MI 49546-7500
Ph: 616-285-3963
Fax: 616-285-3765
Internet: http://www.bifma.org
E-mail: email@bifma.org

BIOCYCLE, JOURNAL OF COMPOSTING AND RECYCLING (BIOCYCLE)
The JG Press Inc.
419 State Avenue
Emmaus PA 18049
Ph: 610-967-4135
Internet: http://www.biocycle.net
E-mail: jgpress@jgpress.com

BRICK INDUSTRY ASSOCIATION (BIA)
11490 Commerce Park Drive
Reston, VA 22091-1525
Ph: 703-620-0010
Fax: 703-620-3928
E-mail: brickinfo@bia.org
Internet: http://www.bia.org

BRITISH STANDARDS INSTITUTE (BSI)
389 Chiswick High Road
London W4 4AL
United Kingdom
Phone: +44 (0)20 8996 9000
Fax: +44 (0)20 8996 7001
Email: cservices@bsi-global.com
Website: http://www.bsi-global.com

BUILDERS HARDWARE MANUFACTURERS ASSOCIATION (BHMA)
355 Lexington Avenue
17th Floor
New York, NY 10017
Ph: 212-297-2122
Fax: 212-370-9047
E-mail: assocmgmt@aol.com
Internet: http://www.buildershardware.com

CANADIAN STANDARDS ASSOCIATION(CSA)
8501 East Pleasant Valley Road
Cleveland, OH 44131
Ph: 216-524-4990
Fax: 216-328-8118
E-mail: sales@csa.ca
Internet: http://www.csa-international.org

CARPET AND RUG INSTITUTE (CRI)
P.O. Box 2048
Dalton, GA 30722-2048
Ph: 800-882-8846 or 706-278-3176
Fax: 706-278-8835
Internet: http://www.carpet-rug.com

CAST IRON SOIL PIPE INSTITUTE (CISPI)
5959 Shallowford Road, Suite 419
Chattanooga, TN 37421
Ph: 423-892-0137
Fax: 423-892-0817
Internet: http://www.cispi.org

CEILINGS & INTERIOR SYSTEMS CONSTRUCTION ASSOCIATION (CISCA)
1500 Lincoln Highway, Suite 202
St. Charles, IL 60174
Ph: 630-584-1919
Fax: 630-584-2003
E-mail: info@cisca.org
Internet: http://www.cisca.org

CENTERS FOR DISEASE CONTROL AND PREVENTION (CDC)
1600 Clifton Road
Atlanta, GA 30333
PH: 404-639-3311
Internet: http://www.cdc.gov

CHEMICAL FABRICS & FILM ASSOCIATION (CFFA)
1300 Sumner Avenue
Cleveland OH 44115-2851
PH: 216-241-7333
FAX: 216-241-0105
E-mail: cffa@chemicalfabricsandfilm.com
Internet: http://www.chemicalfabricsandfilm.com/

CHLORINE INSTITUTE (CI)
1300 Wilson Boulevard
Rosslyn, VA 22209
Ph: 703-741-5760
Fax: 703-741-6068
Internet: http://www.cl2.com

COMPRESSED AIR AND GAS INSTITUTE (CAGI)
1300 Sumner Avenue
Cleveland OH 44115-2851
PH: 216-241-7333
FAX: 216-241-0105
E-mail: cagi@cagi.org
Internet: http://www.cagi.org/

COMPRESSED GAS ASSOCIATION (CGA)
4221 Walney Road, 5th Floor
Chantilly, VA 20151-2923
Ph: 703-788-2700
Fax: 703-961-1831
Internet: http://www.cganet.com

E-mail: cga@cganet.com

CONCRETE REINFORCING STEEL INSTITUTE (CRSI)
933 North Plum Grove Road
Schaumburg, IL 60173-4758
Ph: 847-517-1200
Fax: 847-517-1206
Internet: http://www.crsi.org/

CONSUMER PRODUCT SAFETY COMMISSION (CPSC)
4330 East-West Highway
Bethesda, MD 20814-4408
Ph: 301-504-6816
Fax: 301-504-0124 and 301-504-0025
E-mail: info@cpsc.gov
Internet: http://www.cpsc.gov

CONVEYOR EQUIPMENT MANUFACTURERS ASSOCIATION (CEMA)
6724 Lone Oak Boulevard
Naples, FL 34109
Ph: 239-514-3441
Fax: 239-514-3470
E-mail: cema@cemanet.org
Internet: http://www.cemanet.org

COOLING TECHNOLOGY INSTITUTE (CTI)
2611 FM 1960 West
Suite H-200
Houston, TX 77068-3730
Ph: 281-583-4087
Fax: 281-537-1721
Internet: http://www.cti.org

COPPER DEVELOPMENT ASSOCIATION (CDA)
260 Madison Avenue
New York, NY 10016
Ph: 212-251-7200
Fax: 212-251-7234
Internet: http://www.copper.org
E-mail: questions@cda.copper.org

CRANE MANUFACTURERS ASSOCIATION OF AMERICA (CMAA)
8720 Red Oak Boulevard, Suite 201
Charlotte, NC 28217
Ph: 704-676-1190 or 800-722-6832
Fax: 704-676-1199
Internet: http://www.mhia.org/psc/psc_products_cranes.cfm

DISTRICT OF COLUMBIA MUNICIPAL REGULATIONS (DCMR)
441 4th Street NW, Suite 520
Washington DC 20001
PH: 202-727-5090
Internet: http://www.abfa.com/dcdocs/dcmrlist.htm

DOOR AND ACCESS SYSTEM MANUFACTURERS ASSOCIATION (DASMA)
1300 Sumner Avenue
Cleveland, OH 44115-2851

Ph: 216-241-7333
Fax: 216-241-0105
Internet: http://www.dasma.com
E-mail: dasma@dasma.com

DUCTILE IRON PIPE RESEARCH ASSOCIATION (DIPRA)
245 Riverchase Parkway East, Suite O
Birmingham, AL 35244
Ph: 205-402-8700
Fax: 205-402-8730
Internet: http://www.dipra.org
E-mail: info@dipra.org

EIFS INDUSTRY MEMBERS ASSOCIATION (EIMA)
3000 Corporate Center Drive, Suite 270
Morrow, GA 30260
Ph: 800-294-3462
Fax: 770-968-5818
Internet: http://www.eima.com

ELECTRICAL GENERATING SYSTEMS ASSOCIATION (EGSA)
1650 South Dixie Highway, Suite 500
Boca Raton, FL 33432-7462
Ph: 561-750-5575
Fax: 561-395-8557
E-mail: e-mail@egsa.org
Internet: http://www.egsa.org

ELECTRONIC INDUSTRIES ALLIANCE (EIA)
2500 Wilson Boulevard
Arlington, VA 22201-3834
Ph: 703-907-7500
Fax: 703-907-7501
Internet: http://www.eia.org

ENERGY RESEARCH AND DEVELOPMENT ADMINISTRATION (ERDA)
Organization abolished by Dept of Energy Act
(91 Stat 577)4 Aug 1977
Successor Organization is Department of Energy
Forrestal 4B-222
Washington, DC
PH: 202-586-4716
FAX: 202-586-1972
E-mail: dmteam@hq.doe.gov
Internet: http://www.directives.doe.gov/

ENGINE MANUFACTURERS ASSOCIATION (EMA)
Two North LaSalle Street, Suite 2200
Chicago, IL 60602
PH: 312-827-8700
FAX: 312-827-8737
E-mail: ema@enginemanufacturers.org
Internet: http://www.engine-manufacturers.org/

ETL TESTING LABORATORIES (ETL)
Intertek Testing Services, ETL SEMKO
70 Codman Hill Road

Boxborough, MA 01719
PH: 978-263-2662
FAX: 978-263-7086
Internet: http://www.etlsemko.com
E-mail: info@etlsemko.com

EXPANSION JOINT MANUFACTURERS ASSOCIATION (EJMA)
25 North Broadway
Tarrytown, NY 10591
Ph: 914-332-0040
Fax: 914-332-1541
E-mail: ejma@ejma.org
Internet: http://www.ejma.org

FM GLOBAL (FM)
1301 Atwood Avenue
P.O. Box 7500
Johnston, RI 02919
Ph: 401-275-3000
Fax: 401-275-3029
E-mail: information@fmglobal.com
Internet: http://www.fmglobal.com

FLUID SEALING ASSOCIATION (FSA)
994 Old Eagle School Road, #1019
Wayne, PA 19087
PH: 610-971-4850
FAX: 610-9971-4859
Internet: http://www.fluidsealing.com
E-mail: info@fluidsealing.com

FORESTRY SUPPLIERS (FSUP)
205 West Rankin Street
P.O. Box 8397
Jackson, MS 39284-8397
Ph: 601-354-3565
Fax: 601-292-0165
E-mail: cs@forestry-suppliers.com
Internet: http://www.forestry-suppliers.com

FOUNDATION FOR CROSS-CONNECTION CONTROL AND HYDRAULIC RESEARCH (FCCCHR)
University of South California
Kaprielian Hall 200
Los Angeles, CA 90089-2531
Ph: 213-740-2032
Fax: 213-740-8399
E-mail: fccchr@usc.edu
Internet: http://www.usc.edu/dept/fccchr

GEOLOGICAL SOCIETY OF AMERICA (GSA)
P.O. Box 9140
Boulder, CO 80301-9140
Ph: 303-447-2020
Fax: 303-357-1070
E-mail: gsa@geosociety.org
Internet: http://www.geosociety.org

GEOSYNTHETIC INSTITUTE (GSI)
475 Kedron Avenue
Folsom, PA 19033
Ph: 610-522-8440
Fax: 610-522-8441
Internet: http://www.geosynthetic-institute.org

GLASS ASSOCIATION OF NORTH AMERICA (GANA)
2945 SW Wanamaker Drive, Suite A
Topeka, KS 66614
Ph: 785-271-0208
Fax: 785-271-0166
E-mail: gana@glasswebsite.com
Internet: http://www.glasswebsite.com/GANA

GYPSUM ASSOCIATION (GA)
810 First Street, NE, Suite 510
Washington, DC 20002
Ph: 202-289-5440
Fax: 202-289-3707
E-mail: info@gypsum.org
Internet: http://www.gypsum.org

HARDWOOD PLYWOOD & VENEER ASSOCIATION (HPVA)
P.O. Box 2789
Reston, VA 20195-0789
Ph: 703-435-2900
Fax: 703-435-2537
E-mail: hpva@hpva.org
Internet: http://www.hpva.org

HEAT EXCHANGE INSTITUTE (HEI)
1300 Sumner Avenue
Cleveland, OH 44115-2851
Ph: 216-241-7333
Fax: 216-241-0105
Internet: http://www.heatexchange.org
Email: hei@heatexchange.org

HOIST MANUFACTURERS INSTITUTE (HMI)
8720 Red Oak Boulevard, Suite 201
Charlotte, NC 28217
PH: 704-676-1190
FAX: 704-676-1199
Internet: http://www.mhia.org/psc/PSC_Products_Hoists.cfm

H.P. WHITE LABORATORY (HPW)
3114 Scarboro Road
Street, MD 21154
Ph: 410-838-6550
Fax: 410-838-2802
E-mail: info@hpwhite.com
Internet: http://www.hpwhite.com

HYDRAULIC INSTITUTE (HI)
9 Sylvan Way

Parsippany, NJ 07054-3802
Ph: 973-267-9700
Fax: 973-267-9055
E-mail: webmaster@pumps.org
Internet: http://www.pumps.org

HYDRONICS INSTITUTE DIVISION OF GAMA (HYI)
35 Russo Place
P.O. Box 218
Berkeley Heights, NJ 07922-0218
Ph: 908-464-8200
Fax: 908-464-7818
E-mail: information@gamanet.org
Internet: http://www.gamanet.org/publist/hydroordr.htm

IBM CORPORATION (IBM)
Publications
4800 Falls of the Neuse
Raleigh, NC 27609
Ph: 800-879-2755, Option 1
Fax: 800-445-9269
E-mail: ibm_direct@vnet.ibm.com
Internet: http://www.ibm.com/shop/publications/order

ILLUMINATING ENGINEERING SOCIETY OF NORTH AMERICA (IESNA)
120 Wall Street, 17th Floor
New York, NY 10005
Ph: 212-248-5000
Fax: 212-248-5017
E-mail: iesna@iesna.org
Internet: http://www.iesna.org

INDUSTRIAL FASTENERS INSTITUTE (IFI)
1717 East 9th Street, Suite 1105
Cleveland, OH 44114-2879
Ph: 216-241-1482
Fax: 216-241-5901
Internet: http://www.industrial-fasteners.org
E-mail: indfast@aol.com

INSECT SCREENING WEAVERS ASSOCIATION (ISWA)
DEFUNCT in 1997

INSTITUTE OF CLEAN AIR COMPANIES (ICAC)
1660 L Street, NW, Suite 1100
Washington, DC 20036-5603
Ph: 202-457-0911
Fax: 202-331-1388
E-mail: jsmith@icac.com
Internet: http://icac.com

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)
445 Hoes Lane
Piscataway, NJ 08855-1331
Ph: 732-981-0060
Fax: 732-981-1712
Internet: http://www.ieee.org

E-mail: customer.services@ieee.org

INSTITUTE OF ENVIRONMENTAL SCIENCES AND TECHNOLOGY (IEST)
5005 Newport Drive, Suite 566
Rolling Meadows, IL 60008-3841
Ph: 847-255-1561
Fax: 847-255-1699
E-mail: iest@iest.org
Internet: http://www.iest.org

INSULATED CABLE ENGINEERS ASSOCIATION (ICEA)
P.O. Box 1568
Carrollton, GA 30112
Ph: 770-830-0369
Fax: 770-830-8501
Internet: http://www.icea.net

INSULATING GLASS MANUFACTURERS ALLIANCE (IGMA)
27 Goulburn Avenue
Ottawa, Ontario CANADA K1N 8C7
Phone: 613-233-1510
Fax: 613-233-1929
E-mail: info@igmaonline.org
Internet: http://www.igmaonline.org

INTERNATIONAL CODE COUNCIL (ICC)
5203 Leesburg Pike, Suite 600
Falls Church, VA 22041
Ph: 703-931-4533
Fax: 703-379-1546
E-mail: webmaster@iccsafe.org
Internet: http://www.intlcode.org

INTERNATIONAL CONCRETE REPAIR INSTITUTE (ICRI)
3166 South River Road, Suite 132
Des Plaines, IL 60018
Ph: 847-827-0830
Fax: 847-827-0832
Internet: http://www.icri.org

INTERNATIONAL CONFERENCE OF BUILDING OFFICIALS (ICBO)
5360 Workman Mill Road
Whittier, CA 90601-2298
Ph: 800-284-4406 and 562-699-0541
Fax: 562-692-3853
Internet: http://www.icbo.org

INTERNATIONAL ELECTRICAL TESTING ASSOCIATION (NETA)
P.O. Box 687
106 Stone Street
Morrison, CO 80465
PH: 303-697-8441
FAX: 303-697-8431
E-mail: neta@netaworld.org
Internet: http://www.netaworld.org

INTERNATIONAL ELECTROTECHNICAL COMMISSION (IEC)

3, rue de Varembe, P.O. Box 131
CH-1211 Geneva 20, Switzerland
Ph: 41-22-919-0211
Fax: 41-22-919-0300
Internet: http://www.iec.ch
E-mail: info@iec.ch

INTERNATIONAL GROUND SOURCE HEAT PUMP ASSOCIATION (IGSHPA)
Oklahoma State University
499 Cordell South
Stillwater OK 74078-8018
PH: 800-626-4747; 405-744-5175
FAX: 405-744-5283
Internet: http://www.igshpa.okstate.edu/

INTERNATIONAL INSTITUTE OF AMMONIA REFRIGERATION (IIAR)
1110 North Glebe Road, Suite 250
Arlington, VA 22201
Ph: 703-312-4200
Fax: 703-312-0065
Internet: http://www.iiar.org
E-mail: iiar@iiar.org

INTERNATIONAL MUNICIPAL SIGNAL ASSOCIATION (IMSA)
P.O. Box 539
165 East Union Street
Newark, NY 14513-0539
Ph: 315-331-2182 and 800-723-4672
Fax: 315-331-8205
E-mail: info@imsasafety.org
Internet: http://www.imsasafety.org/

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION (ISO)
1, rue de Varembe'
Case Postale 56
CH-1211 Geneve 20 Switzerland
Ph: 41-22-749-0111
Fax: 41-22-733-3430
Internet: http://www.iso.ch
E-mail: central@iso.ch

INTERNATIONAL SLURRY SURFACING ASSOCIATION (ISSA)
3 Church Circle, PMB 250
Annapolis, MD 21401
Ph: 410-267-0023
Fax: 410-267-7546
Internet: http://www.slurry.org
E-mail: krissoff@slurry.org

INTERNATIONAL TELECOMMUNICATION UNION (ITU)
Order from:
U.S. Dept of Commerce
National Technical Information Service
5285 Port Royal Road
Springfield, VA 22161
Ph: 703-605-6040
FAX: 703-605-6887

E-mail: webmaster@ntis.gov
Internet: http://www.ntis.gov
For documents not available from Dept of Commerce:
Sales Service
International Telecommunication Union
Place des Nations
CH-1211 Geneve 20 Switzerland
E-Mail: itumail@itu.int
Ph: 41.22.730.5111
Fax: 41.22.730.6500
E-mail: itumail@itu.int
Internet: http://www.itu.org

IPC - ASSOCIATION CONNECTING ELECTRONICS INDUSTRIES (IPC)
2215 Sanders Road
Northbrook, IL 60062-6135
Ph: 847-509-9700
Fax: 847-509-9798
Internet: http://www.ipc.org
E-mail: orderipc@ipc.org

IRON & STEEL SOCIETY (ISS)
186 Thorn Hill Road
Warrendale, PA 15086-7528
Ph: 724-776-1535 Ext 1
Fax: 724-776-0430
E-Mail: mailbag@issource.org
Internet: http://www.issource.org

ISA - THE INSTRUMENTATION, SYSTEMS AND AUTOMATION SOCIETY (ISA)
67 Alexander Drive
P.O. Box 12277
Research Triangle Park, NC 27709
Ph: 919-549-8411
Fax: 919-549-8288
E-mail: info@isa.org
Internet: http://www.isa.org

KITCHEN CABINET MANUFACTURERS ASSOCIATION (KCMA)
1899 Preston White Drive
Reston, VA 20191-5435
Ph: 703-264-1690
Fax: 703-620-6530
Internet: http://www.kcma.org

L.H. BAILEY HORTORIUM (LHBH)
Dept of Plant Biology
c/o Cornell University
228 Plant Science Building
Ithaca, NY 14853
PH: 607-255-4477
Internet: http://www.plantbio.cornell.edu/Hort.php

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY (MSS)
127 Park Street, NE
Vienna, VA 22180-4602

Ph: 703-281-6613
Fax: 703-281-6671
Internet: http://www.mss-hq.com
E-mail: info@mss-hq.com

MAPLE FLOORING MANUFACTURERS ASSOCIATION (MFMA)
60 Revere Drive, Suite 500
Northbrook, IL 60062
Ph: 847-480-9138
Fax: 847-480-9282
E-mail: mfma@maplefloor.org
Internet: http://www.maplefloor.org

MARBLE INSTITUTE OF AMERICA (MIA)
28901 Clemens Road, Suite 100
Westlake, OH 44145
Ph: 440-250-9222
Fax: 440-250-9223
Internet: http://www.marble-institute.com
E-mail: info@marble-institute.com

MASTER PAINTERS INSTITUTE (MPI)
4090 Graveley Street
Burnaby, BC CANADA V5C 3T6
PH: 888-674-8937
Fax: 888-211-8708
E-mail: info@paintinfo.com
Internet: http://www.paintinfo.com/mpi

METAL BUILDING MANUFACTURERS ASSOCIATION (MBMA)
1300 Sumner Avenue
Cleveland, OH 44115-2851
Ph: 216-241-7333
Fax: 216-241-0105
Internet: http://www.mbma.com
E-mail: mbma@mbma.com

MIDWEST INSULATION CONTRACTORS ASSOCIATION (MICA)
2017 South 139th Circle
Omaha, NE 68144-2149
Ph: 800-747-6422
Fax: 402-330-9702
Internet: http://www.micainsulation.org
E-mail: info@micainsulation.org

MONORAIL MANUFACTURERS ASSOCIATION (MMA)
8720 Red Oak Boulevard, Suite 201
Charlotte, NC 28217
PH: 704-676-1190
FAX: 704-676-1199
Internet: http://www.mhia.org/mma

NACE INTERNATIONAL (NACE)
1440 South Creek Drive
Houston, TX 77084-4906
Ph: 281-228-6200
Fax: 281-228-6300

Internet: http://www.nace.org

NATIONAL ASSOCIATION OF ARCHITECTURAL METAL MANUFACTURERS (NAAMM)
8 South Michigan Avenue, Suite 1000
Chicago, IL 60603
Ph: 312-322-0405
Fax: 312-332-0706
Internet: <URL>http://www.naamm.org</URL>
E-mail: naamm@gss.net

NATIONAL BOARD OF BOILER AND PRESSURE VESSEL INSPECTORS (NBBPVI)
1055 Crupper Avenue
Columbus, OH 43229-1183
Ph: 614-888-8320
Fax: 614-847-1147
Internet: http://www.nationalboard.org

NATIONAL CABLE TELECOMMUNICATIONS ASSOCIATION (NCTA)
1724 Massachusetts Avenue, NW
Washington, DC 20036
Ph: 202-775-3550
Fax: 202-775-1055
Internet: http://www.ncta.com
E-mail: webmaster@ncta.com

NATIONAL CONCRETE MASONRY ASSOCIATION (NCMA)
13750 Sunrise Valley Drive
Herndon, VA 20171-4662
Ph: 703-713-1900
Fax: 703-713-1910
Internet: http://www.ncma.org
E-mail: recepti@ncma.org

NATIONAL COUNCIL ON RADIATION PROTECTION AND MEASUREMENTS (NCRP)
7910 Woodmont Avenue, Suite 400
Bethesda, MD 20814-3095
Ph: 301-657-2652
Fax: 301-907-8768
Internet: http://www.ncrp.com
E-mail: ncrp@ncrp.com

NATIONAL DRILLING ASSOCIATION (NDA)
10901D Roosevelt Boulevard North, Suite 100
St. Petersburg, FL 33716
Ph: 727-577-5006
FAX: 727-577-5012
Internet: http://www.nda4u.com/
E-mail: info@nda4u.com

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)
1300 North 17th Street, Suite 1847
Rosslyn, VA 22209
Ph: 703-841-3200
Fax: 703-841-3300
Internet: http://www.nema.org/
E-mail: webmaster@nema.org

NATIONAL ENVIRONMENTAL BALANCING BUREAU (NEBB)
8575 Grovemont Circle
Gaithersburg, MD 20877
Ph: 301-977-3698
Fax: 301-977-9589
Internet: http://www.nebb.org

NATIONAL FENESTRATION RATING COUNCIL (NFRC)
8484 Georgia Avenue, Suite 320
Silver Spring, MD 20910
Ph: 301-589-1776
Fax: 303-589-3884
Internet: http://www.nfrc.org
E-Mail: info@nfrc.org

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)
1 Batterymarch Park
P.O. Box 9101
Quincy, MA 02269-9101
Ph: 617-770-3000
Fax: 617-770-0700
Internet: http://www.nfpa.org
E-mail: webmaster@nfpa.org

NATIONAL FLUID POWER ASSOCIATION (NFLPA)
3333 North Mayfair Road
Milwaukee, WI 53222-3219
Ph: 414-778-3344
Fax: 414-778-3361
Internet: http://www.nfpa.com
E-mail: nfpa@nfpa.com

NATIONAL HARDWOOD LUMBER ASSOCIATION (NHLA)
6830 Raleigh LaGrange Road
Memphis, TN 38184-0518
Ph: 901-377-1818
Fax: 901-382-6419
E-mail: info@natlhardwood.org
Internet: http://www.natlhardwood.org

NATIONAL INSTITUTE FOR CERTIFICATION IN ENGINEERING TECHNOLOGIES (NICET)
1420 King Street
Alexandria, VA 22314-2794
Ph: 888-476-4238
E-mail: tech@nicet.org
Internet: http://www.nicet.org

NATIONAL INSTITUTE FOR OCCUPATIONAL SAFETY AND HEALTH (NIOSH)
Mail Stop C-13
4676 Columbia Parkway
Cincinnati, OH 45226-1998
Ph: 800-356-4674
Fax: 513-533-8573
E-mail: pubstaff@cdc.gov
Internet: http://www.cdc.gov/niosh/homepage.html

NATIONAL INSTITUTE OF JUSTICE (NIJ)
National Law Enforcement and Corrections Technology Center
2277 Research Boulevard - Mailstop 8J
Rockville, MD 20850
Ph: 800-248-2742 or 301-519-5060
Fax: 301-519-5149
Internet: http://www.nlectc.org
E-mail: asknlectc@nlectc.org

NATIONAL INSTITUTE OF STANDARDS AND TECHNOLOGY (NIST)
100 Bureau Drive
Stop 3460
Gaithersburg, MD 20899-3460
Ph: 301-975-NIST
Internet: http://www.nist.gov
Order Publications From:
Superintendent of Documents
U.S. Government Printing Office
Washington, DC 20402-9325
Ph: 866-512-1800 or 202-512-1800
Fax: 202-512-2250
E-mail: gpoinfo@gpo.gov
Internet: http://www.gpo.gov
or
National Technical Information Services (NTIS)
5285 Port Royal Road
Springfield, VA 22161
Ph: 703-605-6000
Fax: 703-605-6900
E-mail: webmaster@ntis.gov
Internet: http://www.ntis.gov

NATIONAL LIME ASSOCIATION (NLA)
200 North Glebe Road, Suite 800
Arlington, VA 22203
PH: 703-243-5463
FAX: 703-243-5489
E-mail: natlime@lime.org
Internet: http://www.lime.org

NOFMA: THE WOOD FLOORING MANUFACTURERS ASSOCIATION (NOFMA)
P.O. Box 3009
Memphis, TN 38173-0009
Ph: 901-526-5016
Fax: 901-526-7022
E-mail: info@nofma.org
Internet: http://www.nofma.org

NATIONAL READY MIXED CONCRETE ASSOCIATION (NRMCA)
900 Spring Street
Silver Spring, MD 20910
Ph: 301-587-1400
Fax: 301-585-4219
Internet: http://www.nrmca.org

NATIONAL ROOFING CONTRACTORS ASSOCIATION (NRCA)
10255 West Higgins Road, Suite 600

Rosemont, IL 60018
Ph: 847-299-9070
Fax: 847-299-1183
Internet: http://www.nrca.net

NATIONAL TERRAZZO & MOSAIC ASSOCIATION (NTMA)
201 North Maple Avenue, Suite 208
Purcellville, VA 20132
Ph: 540-751-0930 or 800-323-9736
Fax: 540-751-0935
Internet: http://www.ntma.com
E-mail: info@ntma.com

NATURAL RESOURCE, AGRICULTURAL AND ENGINEERING SERVICE (NRAES)
Cornell University
Cooperative Extension
152 Riley-Robb Hall
Ithaca, NY 14853-5701
Ph: 607-255-7654
Fax: 607-254-8770
Internet: http://www.nraes.org
E-mail: nraes@cornell.edu

NORTH AMERICAN INSULATION MANUFACTURERS ASSOCIATION (NAIMA)
44 Canal Center Plaza, Suite 310
Alexandria, VA 22314
Ph: 703-684-0084
Fax: 703-684-0427
Internet: http://www.naima.org
E-mail: insulation@naima.org

NORTHEASTERN LUMBER MANUFACTURERS ASSOCIATION (NELMA)
272 Tuttle Road
P.O. Box 87A
Cumberland Center, ME 04021
Ph: 207-829-6901
Fax: 207-829-4293
Internet: http://www.nelma.org
E-mail: info@nelma.org

NSF INTERNATIONAL (NSF)
789 North Dixboro Road
P.O. Box 130140
Ann Arbor, MI 48113-0140
Ph: 734-769-8010
Fax: 734-769-0109 or 800-NSF-MARK
E-mail: info@nsf.org
Internet: http://www.nsf.org

ORGANISATION OF ECONOMIC COOPERATION AND DEVELOPMENT (OECD)
2, rue Andre Pascal
F-75 775 Paris Cedex 16
France
Ph: + 33 1 45 24 82 00
Internet: http://www.oecd.org
E-mail: bookshop@oecd.org

PIPE FABRICATION INSTITUTE (PFI)
655 32nd Avenue, Suite 201
Lachine, QC, Canada H8T 3G6
Ph: 514-634-3434
Fax: 514-634-9736
Internet: http://www.pfi-institute.org
E-mail: pfi@pfi-institute.org

PLASTIC PIPE AND FITTINGS ASSOCIATION (PPFA)
800 Roosevelt Road, Building C, Suite 20
Glen Ellyn, IL 60137
Ph: 630-858-6540
Fax: 630-790-3095
Internet: http://www.ppfahome.org

PLASTICS PIPE INSTITUTE (PPI)
1825 Connecticut Avenue, NW, Suite 680
Washington, D.C. 20009
Ph: 202-462-9607 or 888-314-6774
Fax: 202-462-9779
Internet: http://www.plasticpipe.org

PLUMBING AND DRAINAGE INSTITUTE (PDI)
45 Bristol Drive
South Easton, MA 02375
Ph: 508-230-3516 or 800-589-8956
Fax: 508-230-3529
Internet: http://www.pdionline.org
E-Mail: info@pdionline.org

PLUMBING AND MECHANICAL CONTRACTORS ASSOCIATION (PMCA)
9450 SW Commerce Circle, Suite 310
Wilsonville, OR 97070
Ph: 503-682-7919
Fax: 503-682-6241
Internet: http://www.pmcaoregon.com/

PLUMBING-HEATING-COOLING CONTRACTORS NATIONAL ASSOCIATION (PHCC)
180 South Washington Street
P.O. Box 6808
Falls Church, VA 22040
Ph: 800-533-7694 or 703-237-8100
Fax: 703-237-7442
E-mail: naphcc@naphcc.org
Internet: http://www.phccweb.org

PORCELAIN ENAMEL INSTITUTE (PEI)
PO Box 920220
Norcross, GA 30010
Ph: 770-281-8980
Fax: 770-281-8981
Internet: http://www.porcelainenamel.com
E-mail: penamel@aol.com

POST-TENSIONING INSTITUTE (PTI)
8601 North Black Canyon Highway, Suite 103
Phoenix, AZ 85021

Ph: 602-870-7540
Fax: 602-870-7541
E-mail: info@post-tensioning.org
Internet: http://www.post-tensioning.org/

PRECAST/PRESTRESSED CONCRETE INSTITUTE (PCI)
209 West Jackson Boulevard
Chicago, IL 60606-6938
Ph: 312-786-0300
Fax: 312-786-0353
Internet: http://www.pci.org
E-mail: info@pci.org

REDWOOD INSPECTION SERVICE (RIS)
405 Enfrente Drive, Suite 200
Novato, CA 94949
Ph: 415-382-0662 or 888-225-7339
Fax: 415-382-8531
Internet: http://www.calredwood.org
E-Mail: info@calredwood.org

RUBBER MANUFACTURERS ASSOCIATION (RMA)
1400 K Street, NW, Suite 900
Washington, DC 20005
Ph: 202-682-4800
Fax: 202-682-4854
E-mail: info@rma.org
Internet: http://www.rma.org
Order Publications from:
The Mail Room
P. O. Box 3147
Medina, OH 44258
Ph: 800-325-5095 EXT 242 or 330-723-2978
Fax: 330-725-0576

SCIENTIFIC CERTIFICATION SYSTEMS (SCS)
2000 Powell Street, Suite 1350
Emeryville, CA 94608
Ph: 510-452-8000
FAX: 510-452-8001
E-mail: webmaster@scscertified.com
Internet: http://www.scs1.com

SCREEN MANUFACTURERS ASSOCIATION (SMA)
2850 South Ocean Boulevard, Suite 114
Palm Beach, FL 33480-6205
Ph: 561-533-0991
Fax: 561-533-7466
E-mail: fitzgeraldfscott@aol.com
Internet: http://www.smacentral.org

SEMICONDUCTOR EQUIPMENT AND MATERIALS INTERNATIONAL (SEMI)
3081 Zanker Road
San Jose, CA 95134
Phone: 408-943-6900
Fax: 408-428-9600
Internet: http://www.semi.org

E-mail: semihq@semi.org

SHEET METAL & AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION (SMACNA)
4201 Lafayette Center Drive,
Chantilly, VA 20151-1209
Ph: 703-803-2980
Fax: 703-803-3732
Internet: http://www.smacna.org
E-mail: info@smacna.org

SPRI (SPRI)
77 Rumford Avenue, Suite 3B
Waltham, MA 02453
Ph: 781-647-7026
Fax: 781-647-7222
Internet: http://www.spri.org
E-mail: info@spri.org

SOCIETY OF AUTOMOTIVE ENGINEERS INTERNATIONAL (SAE)
400 Commonwealth Drive
Warrendale, PA 15096-0001
Ph: 724-776-4841
Fax: 724-776-0790
Internet: http://www.sae.org
E-mail: sae@sae.org

SOCIETY OF MOTION PICTURE AND TELEVISION ENGINEERS (SMPTE)
595 West Hartsdale Avenue
White Plains, New York 10607
PH: 914-761-1100
FAX: 914-761-3115
E-mail: smpte@smpte.org
Internet: http://www.smpte.org

SPRAY POLYURETHANE FOAM ALLIANCE (SPFA)
American Plastics Council
1300 Wilson Boulevard, Suite 800
Arlington Virginia 22209
PH: 800-523-6154
Fax: 703-252-0664
E-mail: feedback@sprayfoam.org
Internet: http://www.sprayfoam.org

SOLAR RATING AND CERTIFICATION CORPORATION (SRCC)
c/o FSEC, 1679 Clearlake Road
Cocoa, FL 32922-5703
PH: 321-638-1537
FAX: 321-638-1010
E-mail: srcc@fsec.ucf.edu
Internet: http://www.solar-rating.org

SOUTHERN CYPRESS MANUFACTURERS ASSOCIATION (SCMA)
400 Penn Center Boulevard, Suite 530
Pittsburgh, PA 15235
Ph: 412-829-0770 or 877-607-SCMA
Fax: 412-829-0844

Internet: http://www.cypressinfo.org

SOUTHERN PINE INSPECTION BUREAU (SPIB)
4709 Scenic Highway
Pensacola, FL 32504-9094
Ph: 850-434-2611
Fax: 850-433-5594
E-mail: spib@spib.org
Internet: http://www.spib.org

STATE OF CALIFORNIA DEPARTMENT OF FOOD AND AGRICULTURE (CDFA)
Plant Health and Pest Prevention Services
Pest Exclusion Branch/Nursery, Seed and Cotton Program
1220 N Street, Room A-316
Sacramento CA 95814
PH: 916-653-0317
Fax: 916-654-1018
Internet: http://www.cdfa.ca.gov/phpps

STATE OF CALIFORNIA DEPARTMENT OF TRANSPORTATION (CDT)
Publication Distribution Unit
1900 Royal Oaks Dr.
Sacramento, CA 95815-3800
Ph: 916-445-3520
Fax: 916-324-8997
E-mail: publications@dot.ca.gov
Internet: http://www.dot.ca.gov

STATE OF MARYLAND CODE OF MARYLAND REGULATIONS (COMAR)
Division of State Documents
1700 Margaret Avenue
Annapolis, MD 21401
PH: 410-974-2486
Fax: 410-974-2546
E-mail: support@dsd.state.md.us
Internet:
https://constmail.gov.state.md.us/comar/dsd_web/comar_web/comar.htm

STATE OF VIRGINIA ADMINISTRATIVE CODE (VAC)
Virginia Code Commission
General Assembly Building, 2nd Floor
910 Capitol Street
Richmond, Virginia 23219
Phone: 804-786-3591
Fax: 804-692-0625
Internet: http://legis.state.va.us/laws/admincode.htm

STEEL DECK INSTITUTE (SDI)
P.O. Box 25
Fox River Grove, IL 60021
Ph: 847-458-4647
Fax: 847-458-4648
Internet: http://www.sdi.org
E-mail: Steve@sdi.org

STEEL DOOR INSTITUTE (SDI)
30200 Detroit Road

Cleveland, OH 44145-1967
Ph: 440-899-0010
Fax: 440-892-1404
Internet: http://www.steeldoor.org

STEEL JOIST INSTITUTE (SJI)
3127 Tenth Avenue, North Extension
Myrtle Beach, SC 29577-6760
Ph: 843-626-1995
Fax: 843-626-5565
E-mail: sji@steeljoist.org
Internet: http://www.steeljoist.org

STEEL TANK INSTITUTE (STI)
570 Oakwood Road
Lake Zurich, IL 60047
Ph: 847-438-8265
Fax: 847-438-8766
Internet: http://www.steeltank.com

STEEL WINDOW INSTITUTE (SWI)
1300 Sumner Avenue
Cleveland, OH 44115-2851
Ph: 216-241-7333
Fax: 216-241-0105
E-mail: swi@steelwindows.com
Internet: http://www.steelwindows.com

TECHNICAL ASSOCIATION OF THE PULP AND PAPER INDUSTRY (TAPPI)
P.O. Box 105113
Atlanta, GA 30348-5113
PH: 800-322-8686 or 770-446-1400
FAX: 770-446-6947
E-mail: memberconnection@tappi.org
Internet: http://www.tappi.org

THE SOCIETY FOR PROTECTIVE COATINGS (SSPC)
40 24th Street, 6th Floor
Pittsburgh, PA 15222-4656
Ph: 412-281-2331
Fax: 412-281-9992
Internet: http://www.sspc.org

TILE COUNCIL OF AMERICA (TCA)
100 Clemson Research Boulevard
Anderson, SC 29625
Ph: 864-646-8453
FAX: 864-646-2821
Internet: http://www.tileusa.com
E-mail: literature@tileusa.com

TRUSS PLATE INSTITUTE (TPI)
583 D'Onofrio Drive, Suite 200
Madison, WI 53719
Ph: 608-833-5900
Fax: 608-833-4360
Internet: http://www.tpinst.org

TUBULAR EXCHANGER MANUFACTURERS ASSOCIATION (TEMA)
25 North Broadway
Tarrytown, NY 10591
Ph: 914-332-0040
Fax: 914-332-1541
E-mail: tema@tema.org
Internet: http://www.tema.org

TURFGRASS PRODUCERS INTERNATIONAL (TPI)
1855-A Hicks Road
Rolling Meadows, IL 60008
PH: 847-705-9898 or 800-405-8873
FAX: 847-705-8347
E-mail: info@turfgrasssod.org
Internet: http://www.turfgrasssod.org

UNDERWRITERS LABORATORIES (UL)
333 Pfingsten Road
Northbrook, IL 60062-2096
Ph: 847-272-8800
Fax: 847-272-8129
Internet: http://www.ul.com/
E-mail: northbrook@us.ul.com

UNI-BELL PVC PIPE ASSOCIATION (UBPPA)
2655 Villa Creek Drive, Suite 155
Dallas, TX 75234
Ph: 972-243-3902
Fax: 972-243-3907
Internet: http://www.uni-bell.org
E-mail: info@uni-bell.org

UNIVERSITY OF CALIFORNIA, AGRICULTURE AND NATURAL RESOURCES (UCDANR)
FRANKLIN BUILDING
1111 Franklin St., 6th floor
Oakland, CA 94607-5200
E-mail: anrcatalog@ucdavis.edu
Internet: http://http://www.ucanr.org

U.S. AIR FORCE (USAF)
Air Force Publishing Distribution Center
Ph: 410-687-3330
Fax: 410-436-4629
E-mail: afpdc-service@pentagon.af.mil
Internet: http://www.e-publishing.af.mil/

U.S. ARMY (DA)
U.S. Army Publications Directorate
Internet: http://www.usapa.army.mil/
AOK: 5/03
LOK: 5/03

U.S. ARMY CENTER FOR HEALTH PROMOTION AND PREVENTIVE MEDICINE (USACHPPM)
5158 Blackhawk Road
Aberdeen Proving Ground, MD 21010-5403

PH: 800-222-9698
Internet: http://chppm-www.apgea.army.mil

U.S. ARMY CORPS OF ENGINEERS (USACE)
Order CRD-C DOCUMENTS from:
U.S. Army Engineer Waterways Experiment Station
ATTN: Technical Report Distribution Section, Services Branch, TIC
3909 Halls Ferry Rd.
Vicksburg, MS 39180-6199
Ph: 601-634-2664
Fax: 601-634-2388
E-mail: mtc-info@erdc.usace.army.mil
Internet: http://www.wes.army.mil/SL/MTC/handbook.htm
Order Other Documents from:
USACE Publications Depot
Attn: CEIM-SP-D
2803 52nd Avenue
Hyattsville, MD 20781-1102
Ph: 301-394-0081
Fax: 301-394-0084
E-mail: pubs-army@usace.army.mil
Internet: http://www.usace.army.mil/publications
or http://www.hnd.usace.army.mil/techinfo/engpubs.htm

U.S. ARMY EDGEWOOD RESEARCH, DEVELOPMENT, AND ENGINEERING CENTER (EA)
Aberdeen Proving Ground, MD 21010-5423
Ph: 410-671-5770
Internet: Unknown

U.S. ARMY ENVIRONMENTAL CENTER (AEC)
5179 Hoadley Road
Aberdeen Proving Ground, MD 21010-5401
Internet: http://aec.army.mil
Order from:
National Technical Information Services (NTIS)
5285 Port Royal Road
Springfield, VA 22161
Ph: 703-605-6000
Fax: 703-605-6900
E-mail: webmaster@ntis.gov
Internet: http://www.ntis.gov

U.S. BUREAU OF RECLAMATION (BOR)
Denver Federal Center
P.O. Box 25007
Denver, CO 80225
Ph: 303-445-2072
Fax: 303-445-6303
Internet: http://www.usbr.gov
Order from:
National Technical Information Services (NTIS)
5285 Port Royal Road
Springfield, VA 22161
Ph: 703-605-6000
Fax: 703-605-6900
E-mail: webmaster@ntis.gov

Internet: http://www.ntis.gov

DEFENSE INFORMATION SYSTEMS AGENCY (DISA)
Washington, DC 20305-2000
Internet:http://www.disa.mil

U.S. DEFENSE INTELLIGENCE AGENCY (DIA)
Defense Intelligence Analysis Center (DIAC)
MacDill Boulevard and Luke Avenue
Bolling AFB, MD
Internet: http://www.dia.mil

U.S. DEFENSE LOGISTICS AGENCY (DLA)
Andrew T. McNamara Building
8725 John J. Kingman Road
Fort Belvoir, VA 22060
Internet: http://www.dla.mil

U.S. DEPARTMENT OF AGRICULTURE (USDA)
Order AMS Publications from:
AGRICULTURAL MARKETING SERVICE (AMS)
Seed Regulatory and Testing Branch
801 Summit Crossing Place, Suite C
Gastonia, NC 28054-2193
Ph: 704-810-8870
Fax: 704-852-4189
Internet: http://www.ams.usda.gov/lsg/seed.htm
E-mail: seed.ams@usda.gov
Order Other Publications from:
U.S. Department of Agriculture, Rural Utilities Service
14th and Independence Avenue, SW, Room 4028-S
Washington, DC 20250
Ph: 202-720-2791
Fax: 202-720-2166
Internet: http://www.usda.gov

U.S. DEPARTMENT OF COMMERCE (DOC)
1401 Constitution Avenue, NW
Washington, DC 20230
Ph: 202-482-4883
Internet: http://www.commerce.gov/
Order Publications From:
National Technical Information Service
5285 Port Royal Road
Springfield, VA 22161
Ph: 703-605-6000
Fax: 703-605-6900
E-mail: webmaster@ntis.gov
Internet: http://www.ntis.gov

U.S. DEPARTMENT OF DEFENSE (DOD)
Directorate for Public Inquiry and Analysis
Office of the Secretary of Defense (Public Affairs)
Room 3A750 -- The Pentagon
1400 Defense Pentagon
Washington, DC 20301-1400
Ph: 703-428-0711

E-mail: pia@hq.afis.asd.mil
Internet: http://www.dod.gov
Order DOD Documents from:
National Technical Information Service
5285 Port Royal Road
Springfield, VA 22161
Ph: 703-605-6000
FAX: 703-605-6900
E-mail: webmaster@ntis.gov
Internet: http://www.ntis.gov
Order Military Specifications, Standards and Related Publications from:
Department of Defense Single Stock Point for (DODSSP)
Defense Automation and Production Service (DAPS)
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5098
Ph: 215-697-2179
Fax: 215-697-1462
Internet: http://www.dodssp.daps.mil

U.S. DEPARTMENT OF HOUSING AND URBAN DEVELOPMENT (HUD)
Order from:
HUD User
P.O. Box 23268
Washington, DC 20026-3268
Ph: 800-245-2691
Fax: 202-708-9981
Internet: http://www.huduser.org
E-mail: Huduser@aspensys.com

U.S. DEPARTMENT OF STATE (SD)
2201 C Street, NW
Washington, DC 20520
Ph: 202-647-4000
Internet: http://www.state.gov

U.S. DEPARTMENT OF TRANSPORTATION (DOT)
400 7th Street, SW
Washington, DC 20590
PH: 202-366-4000
Internet: http://www.dot.gov

U.S. ENVIRONMENTAL PROTECTION AGENCY (EPA)
Ariel Rios Building
1200 Pennsylvania Avenue, N.W.
Washington, DC 20460
Ph: 202-260-2090
FAX: 202-260-6257
Internet: http://www.epa.gov
NOTE --- Some documents are available only from:
National Technical Information Services (NTIS)
5285 Port Royal Road
Springfield, VA 22161
Ph: 703-605-6000
Fax: 703-605-6900
E-mail: webmaster@ntis.gov

Internet: http://www.ntis.gov

U.S. FEDERAL AVIATION ADMINISTRATION (FAA)
Order for sale documents from:
Superintendent of Documents
U.S. Government Printing Office
Washington, DC 20402-9325
PH: 866-512-1800 or 202-512-1800
Fax: 202-512-2250
E-mail: gpoinfo@gpo.gov
Internet: http://www.gpo.gov
Order free documents from:
Federal Aviation Administration
Dept. of Transportation
Ardmore East Business Center
33410 75th Avenue
Landover, MD 20785
Ph:
FAX: 301-386-5394
Internet: http://www.faa.gov

U.S. FEDERAL COMMUNICATIONS COMMISSION (FCC)
445 12th Street SW
Washington, DC 20554
Phone: 888-CALL-FCC
Fax: 866-418-0232
Internet: http://www.fcc.gov
E-mail: fccinfo@fcc.gov
Order Publications From:
Superintendent of Documents
U.S. Government Printing Office
Washington, DC 20402-9325
Ph: 866-512-1800 or 202-512-1800
Fax: 202-512-2250
E-mail: gpoinfo@gpo.gov
Internet: http://www.gpo.gov

U.S. FEDERAL EMERGENCY MANAGEMENT AGENCY (FEMA)
500 C Street, SW
Washington, D.C. 20472
Phone: 202-566-1600
Internet: http://www.fema.gov

U.S. FEDERAL HIGHWAY ADMINISTRATION (FHWA)
Office of Highway Safety (HHS-31)
400 Seventh Street, SW
Washington, DC 20590-0001
Ph: 202-366-0411
Fax: 202-366-2249
Internet: http://www.fhwa.dot.gov
Order from:

Superintendent of Documents
U. S. Government Printing Office
Washington, DC 20402-9325
Ph: 866-512-1800 or 202-512-1800
Fax: 202-512-2250

E-mail: gpoinfo@gpo.gov
Internet: http://www.gpo.gov

U.S. GENERAL SERVICES ADMINISTRATION (GSA)
General Services Administration
1800 F Street, NW
Washington, DC 20405
PH: 202-501-1021
Order from:
General Services Administration
Federal Supply Service Bureau
1941 Jefferson Davis Highway
Arlington, VA 22202
PH: 703-605-5400
Internet: http://apps.fss.gsa.gov/pub/fedspecs/indexcfm

THE NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)
8601 Adelphi Road
College Park, MD 20740-6001
Ph: 866-272-6272
Fax: 301-837-0483
Internet: http://www.archives.gov
Order documents from:
Superintendent of Documents
U.S.Government Printing Office
Washington, DC 20402-9325
Ph: 866-512-1800 or 202-512-1800
Fax: 202-512-2250
E-mail: gpoinfo@gpo.gov
Internet: http://www.gpo.gov

U.S. NAVAL FACILITIES ENGINEERING COMMAND (NAVFAC)
1510 Gilbert Street
Norfolk, VA 23511-2699
Ph: 757-322-4200
Fax: 757-322-4416
Internet: http://www.navfac.navy.mil

U.S. NAVAL FACILITIES ENGINEERING SERVICE CENTER (NFESC)
1100 23rd Avenue
Port Hueneme, CA 93043-4370
Ph: 805-982-4980
Internet: http://www.nfesc.navy.mil

WATER ENVIRONMENT FEDERATION (WEF)
601 Wythe Street
Alexandria, VA 22314-1994
Ph: 703-684-2452
Fax: 703-684-2492
E-mail: pubs@wef.org
Internet: http://www.wef.org

WATER QUALITY ASSOCIATION (WQA)
4151 Naperville Road
Lisle, IL 60532
Ph: 630-505-0160
Fax: 630-505-9637

Internet: http://www.wqa.org
E-mail: info@wqa.org

WEST COAST LUMBER INSPECTION BUREAU (WCLIB)
P.O. Box 23145
Portland, OR 97281
Ph: 503-639-0651
Fax: 503-684-8928
Internet: http://www.wclib.org
E-mail: info@wclib.org

WESTERN WOOD PRESERVERS INSTITUTE (WWPI)
7017 N.E. Highway 99 # 108
Vancouver, WA 98665
Ph: 360-693-9958
Fax: 360-693-9967
Internet: http://www.wwpinstitute.org
E-mail: info@wwpinstitute.org

WESTERN WOOD PRODUCTS ASSOCIATION (WWPA)
Yeon Building
522 SW 5th Avenue
Suite 500
Portland, OR 97204-2122
Ph: 503-224-3930
Fax: 503-224-3934
Internet: http://www.wwpa.org
E-mail: info@wwpa.org

WINDOW AND DOOR MANUFACTURERS ASSOCIATION (WDMA)
1400 East Touhy Avenue, Suite 470
Des Plaines, IL 60018
Ph: 847-299-5200 or 800-223-2301
Fax: 847-299-1286
Internet: http://www.wdma.com
E-mail: admin@wdma.com

WOOD MOULDING AND MILLWORK PRODUCERS ASSOCIATION (WMMPA)
507 First Street
Woodland, CA 95695
Ph: 530-661-9591 or 800-550-7889
Fax: 530-661-9586
E-mail: info@wmmpa.com
Internet: http://www.wmmpa.com

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 01 - GENERAL REQUIREMENTS

SECTION 01451A

CONTRACTOR QUALITY CONTROL

01/03

PART 1 GENERAL

1.1 REFERENCES

PART 2 PRODUCTS (Not Applicable)

PART 3 EXECUTION

3.1 GENERAL REQUIREMENTS
3.2 QUALITY CONTROL PLAN
3.2.1 Content of the CQC Plan
3.2.2 Acceptance of Plan
3.2.3 Notification of Changes
3.3 COORDINATION MEETING
3.4 QUALITY CONTROL ORGANIZATION
3.4.1 Personnel Requirements
3.4.2 CQC System Manager
3.4.3 CQC Personnel
3.4.4 Additional Requirement
3.4.5 Organizational Changes
3.5 SUBMITTALS AND DELIVERABLES
3.6 CONTROL
3.6.1 Preparatory Phase
3.6.2 Initial Phase
3.6.3 Follow-up Phase
3.6.4 Additional Preparatory and Initial Phases
3.7 TESTS
3.7.1 Testing Procedure
3.7.2 Testing Laboratories
3.7.2.1 Capability Check
3.7.2.2 Capability Recheck
3.7.3 Onsite Laboratory
3.8 COMPLETION INSPECTION
3.8.1 Punch-Out Inspection
3.8.2 Pre-Final Inspection
3.8.3 Final Acceptance Inspection
3.9 DOCUMENTATION
3.10 NOTIFICATION OF NONCOMPLIANCE

-- End of Section Table of Contents --

SECTION 01451A

CONTRACTOR QUALITY CONTROL
01/03

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM D 3740	(2001) Minimum Requirements for Agencies Engaged in the Testing and/or Inspection of Soil and Rock as Used in Engineering Design and Construction
ASTM E 329	(2000b) Agencies Engaged in the Testing and/or Inspection of Materials Used in Construction

U.S. ARMY CORPS OF ENGINEERS (USACE)

ER 1110-1-12	Quality Management

PART 2 PRODUCTS (NOT APPLICABLE)

PART 3 EXECUTION

3.1 GENERAL REQUIREMENTS

The Contractor is responsible for quality control and shall establish and maintain an effective quality control system in compliance with the Contract Clause titled "Inspection of Construction." The quality control system shall consist of plans, procedures, and organization necessary to produce an end product which complies with the contract requirements. The system shall cover all construction operations, both onsite and offsite, and shall be keyed to the proposed construction sequence. The site project superintendent will be held responsible for the quality of work on the job and is subject to removal by the Contracting Officer for non-compliance with the quality requirements specified in the contract. The site project superintendent in this context shall be the highest level manager responsible for the overall construction activities at the site, including quality and production. The site project superintendent shall maintain a physical presence at the site at all times, except as otherwise acceptable to the Contracting Officer, and shall be responsible for all construction and construction related activities at the site.

3.2 QUALITY CONTROL PLAN

The Contractor shall furnish for review by the Government, not later than 14 days after receipt of notice to proceed, the Contractor Quality Control

(CQC) Plan proposed to implement the requirements of the Contract Clause titled "Inspection of Construction." The plan shall identify personnel, procedures, control, instructions, tests, records, and forms to be used. Construction will be permitted to begin only after acceptance of the CQC Plan or acceptance of an interim plan applicable to the particular feature of work to be started. Work outside of the features of work included in an accepted interim plan will not be permitted to begin until acceptance of a CQC Plan or another interim plan containing the additional features of work to be started.

3.2.1 Content of the CQC Plan

The CQC Plan shall include, as a minimum, the following to cover all construction operations, both onsite and offsite, including work by subcontractors, fabricators, suppliers, and purchasing agents:

a. A description of the quality control organization, including a chart showing lines of authority and acknowledgment that the CQC staff shall implement the three phase control system for all aspects of the work specified. The staff shall include a CQC System Manager who shall report to the project superintendent.

b. The name, qualifications (in resume format), duties, responsibilities, and authorities of each person assigned a CQC function.

c. A copy of the letter to the CQC System Manager signed by an authorized official of the firm which describes the responsibilities and delegates sufficient authorities to adequately perform the functions of the CQC System Manager, including authority to stop work which is not in compliance with the contract. The CQC System Manager shall issue letters of direction to all other various quality control representatives outlining duties, authorities, and responsibilities. Copies of these letters shall also be furnished to the Government.

d. Procedures for scheduling, reviewing, certifying, and managing submittals, including those of subcontractors, offsite fabricators, suppliers, and purchasing agents. These procedures shall be in accordance with Section 01330 SUBMITTAL PROCEDURES.

e. Control, verification, and acceptance testing procedures for each specific test to include the test name, specification paragraph requiring test, feature of work to be tested, test frequency, and person responsible for each test. (Laboratory facilities approved by the Contracting Officer shall be used.)

f. Procedures for tracking preparatory, initial, and follow-up control phases and control, verification, and acceptance tests including documentation.

g. Procedures for tracking construction deficiencies from identification through acceptable corrective action. These procedures shall establish verification that identified deficiencies have been corrected.

h. Reporting procedures, including proposed reporting formats.

i. A list of the definable features of work. A definable feature of work is a task which is separate and distinct from other tasks, has separate control requirements, and may be identified by different trades or disciplines, or it may be work by the same trade in a different environment. Although each section of the specifications may generally be considered as a definable feature of work, there are frequently more than one definable features under a particular section. This list will be agreed upon during the coordination meeting.

3.2.2 Acceptance of Plan

Acceptance of the Contractor's plan is required prior to the start of construction. Acceptance is conditional and will be predicated on satisfactory performance during the construction. The Government reserves the right to require the Contractor to make changes in his CQC Plan and operations including removal of personnel, as necessary, to obtain the quality specified.

3.2.3 Notification of Changes

After acceptance of the CQC Plan, the Contractor shall notify the Contracting Officer in writing of any proposed change. Proposed changes are subject to acceptance by the Contracting Officer.

3.3 COORDINATION MEETING

After the Preconstruction Conference, before start of construction, and prior to acceptance by the Government of the CQC Plan, the Contractor shall meet with the Contracting Officer or Authorized Representative and discuss the Contractor's quality control system. The CQC Plan shall be submitted for review a minimum of 7 calendar days prior to the Coordination Meeting. During the meeting, a mutual understanding of the system details shall be developed, including the forms for recording the CQC operations, control activities, testing, administration of the system for both onsite and offsite work, and the interrelationship of Contractor's Management and control with the Government's Quality Assurance. Minutes of the meeting shall be prepared by the Government and signed by both the Contractor and the Contracting Officer. The minutes shall become a part of the contract file. There may be occasions when subsequent conferences will be called by either party to reconfirm mutual understandings and/or address deficiencies in the CQC system or procedures which may require corrective action by the Contractor.

3.4 QUALITY CONTROL ORGANIZATION

3.4.1 Personnel Requirements

The requirements for the CQC organization are a CQC System Manager and sufficient number of additional qualified personnel to ensure safety and contract compliance. The Safety and Health Manager shall receive direction and authority from the CQC System Manager and shall serve as a member of the CQC staff. Personnel identified in the technical provisions as requiring specialized skills to assure the required work is being performed properly will also be included as part of the CQC organization. The Contractor's CQC staff shall maintain a presence at the site at all times during progress of

the work and have complete authority and responsibility to take any action necessary to ensure contract compliance. The CQC staff shall be subject to acceptance by the Contracting Officer. The Contractor shall provide adequate office space, filing systems and other resources as necessary to maintain an effective and fully functional CQC organization. Complete records of all letters, material submittals, show drawing submittals, schedules and all other project documentation shall be promptly furnished to the CQC organization by the Contractor. The CQC organization shall be responsible to maintain these documents and records at the site at all times, except as otherwise acceptable to the Contracting Officer.

3.4.2 CQC System Manager

The Contractor shall identify as CQC System Manager an individual within the onsite work organization who shall be responsible for overall management of CQC and have the authority to act in all CQC matters for the Contractor. The CQC System Manager shall be an engineer, architect, or a construction manager, with a minimum of 5 years construction experience on construction similar to this contract. This CQC System Manager shall be on the site at all times during construction and shall be employed by the prime Contractor. Unless otherwise specified, the CQC System Manager shall be assigned no other duties. An alternate for the CQC System Manager shall be identified in the plan to serve in the event of the System Manager's absence. The requirements for the alternate shall be the same as for the designated CQC System Manager.

3.4.3 CQC Personnel

In addition to CQC personnel specified elsewhere in the contract, the Contractor shall provide as part of the CQC organization specialized personnel to assist the CQC System Manager for the following areas: civil, materials, submittals clerk. These individuals shall be directly employed by the prime Contractor and may not be employed by a supplier or sub-contractor on this project; be responsible to the CQC System Manager; be physically present at the construction site during work on their areas of responsibility; have the necessary education and/or experience in accordance with the experience matrix listed herein. These individuals may perform other duties but must be allowed sufficient time to perform their assigned quality control duties as described in the Quality Control Plan.

Experience Matrix

	Area	Qualifications
a.	Civil	Graduate Civil Engineer with 2 years experience in the type of work being performed on this project or technician with 5 yrs related experience
g.	Submittals	Submittal Clerk with 1 yr experience
i.	Concrete, Pavements and Soils	Materials Technician with 2 yrs experience for the appropriate area

3.4.4 Additional Requirement

In addition to the above experience and/or education requirements the CQC System Manager shall have completed the course entitled "Construction Quality Management For Contractors".

3.4.5 Organizational Changes

The Contractor shall maintain the CQC staff at full strength at all times. When it is necessary to make changes to the CQC staff, the Contractor shall revise the CQC Plan to reflect the changes and submit the changes to the Contracting Officer for acceptance.

3.5 SUBMITTALS AND DELIVERABLES

Submittals, if needed, shall be made as specified in Section 01330 SUBMITTAL PROCEDURES. The CQC organization shall be responsible for certifying that all submittals and deliverables are in compliance with the contract requirements.

3.6 CONTROL

Contractor Quality Control is the means by which the Contractor ensures that the construction, to include that of subcontractors and suppliers, complies with the requirements of the contract. At least three phases of control shall be conducted by the CQC System Manager for each definable feature of the construction work as follows:

3.6.1 Preparatory Phase

This phase shall be performed prior to beginning work on each definable feature of work; after all required plans/documents/materials are approved/accepted, and after copies are at the work site. This phase shall include:

a. A review of each paragraph of applicable specifications, reference codes, and standards. A copy of those sections of referenced codes and standards applicable to that portion of the work to be accomplished in the field shall be made available by the Contractor at the preparatory inspection. These copies shall be maintained in the field and available for use by Government personnel until final acceptance of the work.

b. A review of the contract drawings.

c. A check to assure that all materials and/or equipment have been tested, submitted, and approved.

d. Review of provisions that have been made to provide required control inspection and testing.

e. Examination of the work area to assure that all required preliminary work has been completed and is in compliance with the contract.

f. A physical examination of required materials, equipment, and sample work to assure that they are on hand, conform to approved shop drawings or submitted data, and are properly stored.

g. A review of the appropriate activity hazard analysis to assure safety requirements are met.

h. Discussion of procedures for controlling quality of the work including repetitive deficiencies. Document construction tolerances and workmanship standards for that feature of work.

i. A check to ensure that the portion of the plan for the work to be performed has been accepted by the Contracting Officer.

j. Discussion of the initial control phase.

k. The Government shall be notified at least 48 hours in advance of beginning the preparatory control phase. This phase shall include a meeting conducted by the CQC System Manager and attended by the superintendent, other CQC personnel (as applicable), and the foreman responsible for the definable feature. The results of the preparatory phase actions shall be documented by separate minutes prepared by the CQC System Manager and attached to the daily CQC report. The Contractor shall instruct applicable workers as to the acceptable level of workmanship required in order to meet contract specifications.

3.6.2 Initial Phase

This phase shall be accomplished at the beginning of a definable feature of work. The following shall be accomplished:

a. A check of work to ensure that it is in full compliance with contract requirements. Review minutes of the preparatory meeting.

b. Verify adequacy of controls to ensure full contract compliance. Verify required control inspection and testing.

c. Establish level of workmanship and verify that it meets minimum acceptable workmanship standards. Compare with required sample panels as appropriate.

d. Resolve all differences.

e. Check safety to include compliance with and upgrading of the safety plan and activity hazard analysis. Review the activity analysis with each worker.

f. The Government shall be notified at least 48 hours in advance of beginning the initial phase. Separate minutes of this phase shall be prepared by the CQC System Manager and attached to the daily CQC report. Exact location of initial phase shall be indicated for future reference and comparison with follow-up phases.

g. The initial phase should be repeated for each new crew to work onsite, or any time acceptable specified quality standards are not being met.

3.6.3 Follow-up Phase

Daily checks shall be performed to assure control activities, including control testing, are providing continued compliance with contract requirements, until completion of the particular feature of work. The checks shall be made a matter of record in the CQC documentation. Final follow-up checks shall be conducted and all deficiencies corrected prior to the start of additional features of work which may be affected by the deficient work. The Contractor shall not build upon nor conceal non-conforming work.

3.6.4 Additional Preparatory and Initial Phases

Additional preparatory and initial phases shall be conducted on the same definable features of work if: the quality of on-going work is unacceptable; if there are changes in the applicable CQC staff, onsite production supervision or work crew; if work on a definable feature is resumed after a substantial period of inactivity; or if other problems develop.

3.7 TESTS

3.7.1 Testing Procedure

The Contractor shall perform specified or required tests to verify that control measures are adequate to provide a product which conforms to contract requirements. Upon request, the Contractor shall furnish to the Government duplicate samples of test specimens for possible testing by the Government. Testing includes operation and/or acceptance tests when specified. The Contractor shall procure the services of a Corps of Engineers approved testing laboratory or establish an approved testing laboratory at the project site. The Contractor shall perform the following activities and record and provide the following data:

a. Verify that testing procedures comply with contract requirements.

b. Verify that facilities and testing equipment are available and comply with testing standards.

c. Check test instrument calibration data against certified standards.

d. Verify that recording forms and test identification control number system, including all of the test documentation requirements, have been prepared.

e. Results of all tests taken, both passing and failing tests, shall be recorded on the CQC report for the date taken. Specification paragraph reference, location where tests were taken, and the sequential control number identifying the test shall be given. If approved by the Contracting Officer, actual test reports may be submitted later with a reference to the test number and date taken. An information copy of tests performed by an offsite or commercial test facility shall be provided directly to the Contracting Officer. Failure to submit timely test reports as

stated may result in nonpayment for related work performed and disapproval of the test facility for this contract.

3.7.2 Testing Laboratories

3.7.2.1 Capability Check

The Government reserves the right to check laboratory equipment in the proposed laboratory for compliance with the standards set forth in the contract specifications and to check the laboratory technician's testing procedures and techniques. Laboratories utilized for testing soils, concrete, asphalt, and steel shall meet criteria detailed in ASTM D 3740 and ASTM E 329.

3.7.2.2 Capability Recheck

If the selected laboratory fails the capability check, the Contractor will be assessed a charge of $1,000 to reimburse the Government for each succeeding recheck of the laboratory or the checking of a subsequently selected laboratory. Such costs will be deducted from the contract amount due the Contractor.

3.7.3 Onsite Laboratory

The Government reserves the right to utilize the Contractor's control testing laboratory and equipment to make assurance tests, and to check the Contractor's testing procedures, techniques, and test results at no additional cost to the Government.

3.8 COMPLETION INSPECTION

3.8.1 Punch-Out Inspection

Near the end of the work, or any increment of the work established by a time stated in the SPECIAL CONTRACT REQUIREMENTS Clause, "Commencement, Prosecution, and Completion of Work", or by the specifications, the CQC Manager shall conduct an inspection of the work. A punch list of items which do not conform to the approved drawings and specifications shall be prepared and included in the CQC documentation, as required by paragraph DOCUMENTATION. The list of deficiencies shall include the estimated date by which the deficiencies will be corrected. The CQC System Manager or staff shall make a second inspection to ascertain that all deficiencies have been corrected. Once this is accomplished, the Contractor shall notify the Government that the facility is ready for the Government Pre-Final inspection.

3.8.2 Pre-Final Inspection

The Government will perform the pre-final inspection to verify that the facility is complete and ready to be occupied. A Government Pre-Final Punch List may be developed as a result of this inspection. The Contractor's CQC System Manager shall ensure that all items on this list have been corrected before notifying the Government, so that a Final inspection with the customer can be scheduled. Any items noted on the Pre-Final inspection shall be corrected in a timely manner. These inspections and any deficiency corrections required by this paragraph shall be accomplished within the time

slated for completion of the entire work or any particular increment of the work if the project is divided into increments by separate completion dates.

3.8.3 Final Acceptance Inspection

The Contractor's Quality Control Inspection personnel, plus the superintendent or other primary management person, and the Contracting Officer's Representative shall be in attendance at the final acceptance inspection. Additional Government personnel including, but not limited to, those from Base/Post Civil Facility Engineer user groups, and major commands may also be in attendance. The final acceptance inspection will be formally scheduled by the Contracting Officer based upon results of the Pre-Final inspection. Notice shall be given to the Contracting Officer at least 14 days prior to the final acceptance inspection and shall include the Contractor's assurance that all specific items previously identified to the Contractor as being unacceptable, along with all remaining work performed under the contract, will be complete and acceptable by the date scheduled for the final acceptance inspection. Failure of the Contractor to have all contract work acceptably complete for this inspection will be cause for the Contracting Officer to bill the Contractor for the Government's additional inspection cost in accordance with the contract clause titled "Inspection of Construction".

3.9 DOCUMENTATION

The Contractor shall maintain current records providing factual evidence that required quality control activities and/or tests have been performed. These records shall include the work of subcontractors and suppliers and shall be on an acceptable form that includes, as a minimum, the following information:

a. Contractor/subcontractor and their area of responsibility.

b. Operating plant/equipment with hours worked, idle, or down for repair.

c. Work performed each day, giving location, description, and by whom. When Network Analysis (NAS) is used, identify each phase of work performed each day by NAS activity number.

d. Test and/or control activities performed with results and references to specifications/drawings requirements. The control phase shall be identified (Preparatory, Initial, Follow-up). List of deficiencies noted, along with corrective action.

e. Quantity of materials received at the site with statement as to acceptability, storage, and reference to specifications/drawings requirements.

f. Submittals and deliverables reviewed, with contract reference, by whom, and action taken.

g. Offsite surveillance activities, including actions taken.

h. Job safety evaluations stating what was checked, results, and instructions or corrective actions.

i. Instructions given/received and conflicts in plans and/or specifications.

j. Contractor's verification statement.

These records shall indicate a description of trades working on the project; the number of personnel working; weather conditions encountered; and any delays encountered. These records shall cover both conforming and deficient features and shall include a statement that equipment and materials incorporated in the work and workmanship comply with the contract. The original and one copy of these records in report form shall be furnished to the Government daily within 48 hours after the date covered by the report, except that reports need not be submitted for days on which no work is performed. As a minimum, one report shall be prepared and submitted for every 7 days of no work and on the last day of a no work period. All calendar days shall be accounted for throughout the life of the contract. The first report following a day of no work shall be for that day only. Reports shall be signed and dated by the CQC System Manager. The report from the CQC System Manager shall include copies of test reports and copies of reports prepared by all subordinate quality control personnel.

3.10 NOTIFICATION OF NONCOMPLIANCE

The Contracting Officer will notify the Contractor of any detected noncompliance with the foregoing requirements. The Contractor shall take immediate corrective action after receipt of such notice. Such notice, when delivered to the Contractor at the work site, shall be deemed sufficient for the purpose of notification. If the Contractor fails or refuses to comply promptly, the Contracting Officer may issue an order stopping all or part of the work until satisfactory corrective action has been taken. No part of the time lost due to such stop orders shall be made the subject of claim for extension of time or for excess costs or damages by the Contractor.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 01 - GENERAL REQUIREMENTS

SECTION 01500A

TEMPORARY CONSTRUCTION FACILITIES

02/97

PART 1 GENERAL

1.1 SUBMITTALS
1.2 GENERAL REQUIREMENTS
1.2.1 Construction Site Plan
1.2.2 Identification of Employees
1.2.3 Employee Parking
1.3 PROTECTION AND MAINTENANCE OF TRAFFIC
1.3.1 Haul Roads
1.3.2 Barricades
1.4 CONTRACTOR'S TEMPORARY FACILITIES
1.4.1 Administrative Field Offices
1.4.2 Storage Area
1.4.3 Supplemental Storage Area
1.4.4 Appearance of Trailers
1.4.5 Maintenance of Storage Area
1.4.6 Security Provisions
1.5 PLANT COMMUNICATION
1.6 TEMPORARY PROJECT SAFETY FENCING
1.7 CLEANUP
1.8 RESTORATION OF STORAGE AREA

-- End of Section Table of Contents --

SECTION 01500A

TEMPORARY CONSTRUCTION FACILITIES
02/97

PART 1 GENERAL

1.1 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only or as otherwise designated. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Construction site plan; G

1.2 GENERAL REQUIREMENTS

1.2.1 Construction Site Plan

The Contractor shall submit a construction site plan within 15 days of the Notice to Proceed indicating the proposed location and dimensions of any area to be fenced and used by the Contractor, the number of trailers to be used, avenues of ingress/egress to the fenced area and details of the fence installation. Any areas which may have to be graveled to prevent the tracking of mud shall also be identified. The Contractor shall also indicate if the use of a supplemental or other staging area is desired.

1.2.2 Identification of Employees

The Contractor shall be responsible for furnishing to each employee, and for requiring each employee engaged on the work to display, identification as approved and directed by the Contracting Officer. Prescribed identification shall immediately be delivered to the Contracting Officer for cancellation upon release of any employee. When required, the Contractor shall obtain and provide fingerprints of persons employed on the project. Contractor and subcontractor personnel shall wear identifying markings on hard hats clearly identifying the company for whom the employee works.

1.2.3 Employee Parking

Contractor employees shall park privately owned vehicles in an area designated by the Contracting Officer. This area will be within reasonable walking distance of the construction site. Contractor employee parking shall not interfere with existing and established parking requirements of the installation.

1.3 PROTECTION AND MAINTENANCE OF TRAFFIC

During construction the Contractor shall provide access and temporary relocated roads as necessary to maintain traffic. The Contractor shall maintain and provide all necessary safety measures to protect traffic on all affected roads during the construction period except as otherwise specifically approved, or directed, by the Contracting Officer. The

traveling public shall be protected from damage to person and property. The Contractor's traffic on roads selected for hauling material to and from the site shall result in minimal interference with public traffic. The Contractor shall investigate the adequacy of existing roads and the allowable load limit on these roads to adequately support all of the required construction vehicles. The Contractor shall be responsible for the repair of any damage to existing roads caused as a direct result of construction operations required to complete the work.

1.3.1 Haul Roads

The Contractor shall, at its own expense, construct access and haul roads necessary for proper prosecution of the work under this contract. Haul roads shall be constructed with suitable grades and widths; sharp curves, blind corners, and dangerous cross traffic shall be avoided. The Contractor shall provide necessary lighting, signs, barricades, and distinctive markings for the safe movement of traffic. The method of dust control shall be adequate to ensure safe operation at all times. Location, grade, width, and alignment of construction and hauling roads shall be subject to approval by the Contracting Officer. Lighting shall be adequate to assure full and clear visibility for full width of haul road and work areas during any night work operations. Upon completion of the work, haul roads designated by the Contracting Officer shall be removed.

1.3.2 Barricades

The Contractor shall erect and maintain temporary barricades to limit public access to hazardous areas. Such barricades shall be required whenever safe public access to paved areas such as roads, parking areas or sidewalks is prevented by construction activities or as otherwise necessary to ensure the safety of both pedestrian and vehicular traffic. Barricades shall be securely placed, clearly visible with adequate illumination to provide sufficient visual warning of the hazard during both day and night.

1.4 CONTRACTOR'S TEMPORARY FACILITIES

1.4.1 Administrative Field Offices

The Contractor shall provide and maintain administrative field office facilities within the construction area at the designated site. Government office and warehouse facilities will not be available to the Contractor's personnel.

1.4.2 Storage Area

The Contractor shall construct a temporary 6 foot high chain link fence around trailers and materials. Fence posts may be driven, in lieu of concrete bases, where soil conditions permit. Trailers, materials, or equipment shall not be placed or stored outside the fenced area. Materials shall not be stockpiled outside the fence in preparation for the next day's work. Mobile equipment, such as tractors, wheeled lifting equipment, cranes, trucks, and like equipment, shall be parked within the fenced area at the end of each work day.

1.4.3 Supplemental Storage Area

Upon Contractor's request, the Contracting Officer will designate another or supplemental area for the Contractor's use and storage of trailers, equipment, and materials. This area may not be in close proximity of the construction site. Fencing of materials or equipment will not be required at this site; however, the Contractor shall be responsible for cleanliness and orderliness of the area used and for the security of any material or equipment stored in this area.

1.4.4 Appearance of Trailers

Trailers utilized by the Contractor for administrative or material storage purposes shall present a clean and neat exterior appearance and shall be in a state of good repair. Trailers which, in the opinion of the Contracting Officer, require exterior painting or maintenance will not be allowed on the property.

1.4.5 Maintenance of Storage Area

Fencing shall be kept in a state of good repair and proper alignment. Should the Contractor elect to traverse, with construction equipment or other vehicles, grassed or unpaved areas which are not established roadways, such areas shall be covered with a layer of gravel as necessary to prevent rutting and the tracking of mud onto paved or established roadways; gravel gradation shall be at the Contractor's discretion. Grass located within the boundaries of the construction site shall be mowed for the duration of the project. Grass and vegetation along fences, buildings, under trailers, and in areas not accessible to mowers shall be edged or trimmed neatly.

1.4.6 Security Provisions

Adequate outside security lighting shall be provided at the Contractor's temporary facilities. The Contractor shall be responsible for the security of its own equipment; in addition, the Contractor shall notify the appropriate law enforcement agency requesting periodic security checks of the temporary project field office.

1.5 PLANT COMMUNICATION

Whenever the Contractor has the individual elements of its plant so located that operation by normal voice between these elements is not satisfactory, the Contractor shall install a satisfactory means of communication, such as telephone or other suitable devices. The devices shall be made available for use by Government personnel.

1.6 TEMPORARY PROJECT SAFETY FENCING

As soon as practicable, but not later than 15 days after the date established for commencement of work, the Contractor shall furnish and erect temporary project safety fencing at the work site. The safety fencing shall be a high visibility orange colored, high density polyethylene grid or approved equal, a minimum of 42 inches high, supported and tightly secured to steel posts located on maximum 10 foot centers, constructed at the approved location. The safety fencing shall be maintained by the Contractor during the life of the contract and, upon completion and acceptance of the work, shall become the property of the Contractor and shall be removed from the work site.

1.7 CLEANUP

Construction debris, waste materials, packaging material and the like shall be removed from the work site daily. Any dirt or mud which is tracked onto paved or surfaced roadways shall be cleaned away. Materials resulting from demolition activities which are salvageable shall be stored within the fenced area described above or at the supplemental storage area. Stored material not in trailers, whether new or salvaged, shall be neatly stacked when stored.

1.8 RESTORATION OF STORAGE AREA

Upon completion of the project and after removal of trailers, materials, and equipment from within the fenced area, the fence shall be removed and will become the property of the Contractor. Areas used by the Contractor for the storage of equipment or material, or other use, shall be restored to the original or better condition. Gravel used to traverse grassed areas shall be removed and the area restored to its original condition, including top soil and seeding as necessary.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 01 - GENERAL REQUIREMENTS

SECTION 01525

SAFETY AND OCCUPATIONAL HEALTH REQUIREMENTS

11/02

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 DEFINITIONS
1.4 REGULATORY REQUIREMENTS
1.5 DRUG PREVENTION PROGRAM
1.6 SITE QUALIFICATIONS, DUTIES AND MEETINGS
1.6.1 Personnel Qualifications
1.6.1.1 Site Safety and Health Officer (SSHO)
1.6.1.2 Competent Person for the Health Hazard Control and Respiratory Protection Program
1.6.1.3 Crane Operators
1.6.2 Personnel Duties
1.6.2.1 Site Safety and Health Officer (SSHO)
1.6.3 Meetings
1.6.3.1 Preconstruction Conference
1.6.3.2 Weekly Safety Meetings
1.6.3.3 Work Phase Meetings
1.7 TRAINING
1.7.1 New Employee Indoctrination
1.7.2 Periodic Training
1.7.3 Training on Activity Hazard Analysis (AHA)
1.8 ACCIDENT PREVENTION PLAN (APP)
1.8.1 EM 385-1-1 Contents
1.9 ACTIVITY HAZARD ANALYSIS (AHA)
1.10 DISPLAY OF SAFETY INFORMATION
1.11 SITE SAFETY REFERENCE MATERIALS
1.12 EMERGENCY MEDICAL TREATMENT
1.13 REPORTS
1.13.1 Accident Reports
1.13.2 Accident Notification
1.13.3 Monthly Exposure Reports
1.13.4 Regulatory Citations and Violations
1.13.5 Crane Reports
1.14 HOT WORK

PART 2 PRODUCTS

PART 3 EXECUTION

3.1 CONSTRUCTION AND/OR OTHER WORK
3.1.1 Hazardous Material Use
3.1.2 Hazardous Material Exclusions
3.1.3 Unforeseen Hazardous Material

3.2 PRE-OUTAGE COORDINATION MEETING
3.3 FALL HAZARD PROTECTION AND PREVENTION
3.3.1 Training
3.3.2 Fall Protection Equipment
3.3.2.1 Personal Fall Arrest Equipment
3.3.3 Fall Protection for Roofing Work
3.3.4 Safety Nets
3.3.5 Existing Anchorage
3.3.6 Horizontal Lifelines
3.4 SCAFFOLDING
3.5 EQUIPMENT
3.5.1 Material Handling Equipment
3.5.2 Weight Handling Equipment
3.5.3 Equipment and Mechanized Equipment
3.6 EXCAVATIONS
3.6.1 Utility Locations
3.6.2 Utility Location Verification
3.6.3 Utilities with Concrete Slabs
3.6.4 Shoring Systems
3.6.5 Trenching Machinery
3.7 ELECTRICAL
3.7.1 Conduct of Electrical Work
3.7.2 Portable Extension Cords
3.8 CRYSTALLINE SILICA
3.9 HOUSEKEEPING
3.9.1 Clean-Up
3.9.2 Dust control

-- End of Section Table of Contents --

SECTION 01525

SAFETY AND OCCUPATIONAL HEALTH REQUIREMENTS
11/02

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI Z359.1	(1999) Safety Requirements for Personal Fall Arrest Systems, Subsystems and Components

ASME INTERNATIONAL (ASME)

ASME B30.5	(2000) Mobile and Locomotive Cranes
ASME B30.8	(2000) Floating Cranes and Floating Derricks
ASME B30.22	(2000) Articulating Boom Cranes

OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA)

29 CFR 1910	Safety and Health Regulation in General Industry
29 CFR 1910.94	Ventilation
29 CFR 1910.120	Hazardous Waste Operations and Emergency Response
29 CFR 1910.146	Permit-required Confined Spaces
29 CFR 1915	Confined and Enclosed Spaces and Other Dangerous Atmospheres in Shipyard Employment
29 CFR 1926	Safety and Health Regulations for Construction
29 CFR 1926.62	Lead in Construction
29 CFR 1926.65	Hazardous Waste Operations and Emergency Response
29 CFR 1926.450	Scaffolds
29 CFR 1926.500	Fall Protection
29 CFR 1926.1101	Asbestos

U. S. ARMY CORPS OF ENGINEERS (USACE)

EM 385-1-1 9	(2003 NOV 03) Safety and Health Requirements Manual

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 10	(1998) Portable Fire Extinguishers
NFPA 70	(2002) National Electrical Code
NFPA 241	(2000) Safeguarding Construction, Alteration, and Demolition Operations

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only or as otherwise designated. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Accident Prevention Plan (APP); G

Activity Hazard Analysis (AHA); G

Crane Critical Lift Plan; G

SD-06 Test Reports

Reports

Submit reports as their incidence occurs, in accordance with the requirements of the paragraph entitled, "Reports."

Accident Reports

Monthly Exposure Reports

Regulatory Citations and Violations

Crane Reports

1.3 DEFINITIONS

a. Associate Safety Professional (ASP). An individual who is currently certified by the Board of Certified Safety Professionals.

b. Certified Construction Health & Safety Technician (CHST). An individual who is currently certified by the Board of Certified Safety Professionals.

c. Certified Industrial Hygienist (CIH). An individual who is currently certified by the American Board of Industrial Hygiene.

d. Certified Safety Professional (CSP). An individual who is currently certified by the Board of Certified Safety Professionals.

e. Certified Safety Trained Supervisor (STS). An individual who is currently certified by the Board of Certified Safety Professionals.

f. High Visibility Accident. Any mishap which may generate publicity and/or high visibility.

g. Low-slope roof. A roof having a slope less than or equal to 4 in 12 (vertical to horizontal).

h. Medical Treatment. Treatment administered by a physician or by registered professional personnel under the standing orders of a physician. Medical treatment does not include first aid treatment even through provided by a physician or registered personnel.

i. Multi-Employer Work Site (MEWS). A multi-employer work site, as defined by OSHA, is one in which many employers occupy the same site. The Government considers the Prime Contractor to be the "controlling authority" for all work site safety and health of the subcontractors.

j. Operating Envelope. The area surrounding any crane. Inside this "envelope" is the crane, the operator, riggers, rigging gear between the hook and the load, the load and the crane's supporting structure (ground, rail, etc.).

k. Recordable Injuries or Illnesses. Any work-related injury or illness that results in:

(1) Death, regardless of the time between the injury and death, or the length of the illness;

(2) Days away from work;

(3) Restricted work;

(4) Transfer to another job;

(5) Medical treatment beyond first aid;

(6) Loss of consciousness; or

(7) A significant injury or illness diagnosed by a physician or other licensed health care professional, even if it did not result in (1) through (6) above.

l. Site Safety and Health Officer (SSHO). A qualified or competent person who is responsible for the on-site safety and health required for the project. The Contractor quality control (QC) person can be the SSHO on this project.

m. Steep roof. A roof having a slope greater than 4 in 12 (vertical to horizontal).

n. "USACE" property and equipment specified in USACE EM 385-1-1 should be interpreted as Government property and equipment.

o. Weight Handling Equipment (WHE) Accident. A WHE accident occurs when any one or more of the six elements in the operating envelope fails to perform correctly during operation, including operation during maintenance or testing resulting in personnel injury or death; material or equipment damage; dropped load; derailment; two-blocking; overload; and collision, including unplanned contact between the load, crane, and/or other objects. A dropped load, derailment, two-blocking, overload and collision are considered accidents even though no material damage or injury occurs. A component failure (e.g., motor burnout, gear tooth failure, bearing failure) is not considered an accident solely due to material or equipment damage unless the component failure results in damage to other components (e.g., dropped boom, dropped load, roll over, etc.).

1.4 REGULATORY REQUIREMENTS

In addition to the detailed requirements included in the provisions of this contract, work performed shall comply with USACE EM 385-1-1, and all applicable federal, state, and local, laws, ordinances, criteria, rules and regulations. Submit matters of interpretation of standards to the appropriate administrative agency for resolution before starting work. Where the requirements of this specification, applicable laws, criteria, ordinances, regulations, and referenced documents vary, the most stringent requirements shall apply.

1.5 DRUG PREVENTION PROGRAM

Conduct a proactive drug and alcohol use prevention program for all workers, prime and subcontractor, on the site. Ensure that no employee uses illegal drugs or consumes alcohol during work hours. Ensure there are no employees under the influence of drugs or alcohol during work hours. After accidents, collect blood, urine, or saliva specimens and test the injured and involved employees for the influence of drugs and alcohol. A copy of the test shall be made available to the Contracting Officer upon request.

1.6 SITE QUALIFICATIONS, DUTIES AND MEETINGS

1.6.1 Personnel Qualifications

1.6.1.1 Site Safety and Health Officer (SSHO)

Site Safety and Health Officer (SSHO) shall be provided at the work site at all times to perform safety and occupational health management, surveillance, inspections, and safety enforcement for the Contractor. The SSHO shall meet the following requirements:

A minimum of 5 years safety work of a progressive nature with at least 5 years of experience on similar projects.
30-hour OSHA construction safety class or equivalent within the last 5 years.
An average of at least 24 hours of formal safety training each year for the past 3 years with training for competent person status for at least the following 4 areas of competency: Excavation; Fall protection; Hazardous energy.

1.6.1.2 Competent Person for the Health Hazard Control and Respiratory Protection Program

Provide a competent person meeting the requirements of EM 385-1-1 who is:

a. Capable by education, specialized training and/or experience of anticipating, recognizing, and evaluating employee exposure to hazardous chemical, physical and biological agents in accordance with USACE EM 385-1-1, Section 6.

b. Capable of specifying necessary controls and protective actions to ensure worker health.

1.6.1.3 Crane Operators

Crane operators shall meet the requirements in USACE EM 385-1-1, Appendix G and 16.C.05 (OPERATOR QUALIFICATIONS AND TRAINING), requirements for crane operators testing and medical qualifications.

1.6.2 Personnel Duties

1.6.2.1 Site Safety and Health Officer (SSHO)

a. Conduct daily safety and health inspections and maintain a written log which includes area/operation inspected, date of inspection, identified hazards, recommended corrective actions, estimated and actual dates of corrections. Safety inspection logs shall be attached to the Contractors' daily quality control report.

b. Conduct mishap investigations and complete required reports. Maintain the OSHA Form 300 and Daily Production reports for prime and sub-contractors.

c. Maintain applicable safety reference material on the job site.

d. Attend the pre-construction conference, pre-work meetings including preparatory inspection meeting, and periodic in-progress meetings.

e. Implement and enforce accepted APPS and AHAs.

f. Maintain a safety and health deficiency tracking system that monitors outstanding deficiencies until resolution. A list of unresolved safety and health deficiencies shall be posted on the safety bulletin board.

g. Ensure sub-contractor compliance with safety and health requirements.

Failure to perform the above duties will result in dismissal of the SSHO, and a project work stoppage. The project work stoppage will remain in effect pending approval of a suitable replacement.

1.6.3 Meetings

1.6.3.1 Preconstruction Conference

a. The Contractor will be informed, in writing, of the date of the preconstruction conference. The purpose of the preconstruction conference is for the Contractor and the Contracting Officer's representatives to become acquainted and explain the functions and operating procedures of their respective organizations and to reach mutual understanding relative to the administration of the overall project's APP before the initiation of work.

b. Contractor representatives who have a responsibility or significant role in accident prevention on the project shall attend the preconstruction conference. This includes the project superintendent, site safety and health officer, quality control supervisor, or any other assigned safety and health professionals who participated in the development of the APP (including the AHAs and special plans, program and procedures associated with it).

c. The Contractor shall discuss the details of the submitted APP to include incorporated plans, programs, procedures and a listing of anticipated activity hazard analyses (AHAs) that will be developed and implemented during the performance of the contract. This list of proposed AHAs will be reviewed at the conference and an agreement will be reached between the Contractor and the Contracting Officer's representative as to which phases will require an analysis. In addition, a schedule for the preparation, submittal, review, and acceptance of AHAs shall be established to preclude project delays.

d. Deficiencies in the submitted APP will be brought to the attention of the Contractor at the preconstruction conference, and the Contractor shall revise the plan to correct deficiencies and re-submit it for acceptance. Work shall not begin until there is an accepted APP.

1.6.3.2 Weekly Safety Meetings

Conduct weekly safety meetings at the project site for all employees. The Contracting Officer will be informed of the meeting in advance and be allowed attendance. Minutes showing contract title, signatures of attendees and a list of topics discussed shall be attached to the Contractors' daily quality control report.

1.6.3.3 Work Phase Meetings

The appropriate AHA shall be reviewed and attendance documented by the Contractor at the preparatory, initial, and follow-up phases of quality control inspection. The analysis should be used during daily inspections to ensure the implementation and effectiveness of safety and health controls.

1.7 TRAINING

1.7.1 New Employee Indoctrination

New employees (prime and sub-contractor) will be informed of specific site hazards before they begin work. Documentation of this orientation shall be kept on file at the project site.

1.7.2 Periodic Training

Provide Safety, Health and identify Emergency Response Training in accordance with USACE EM 385-1-1 and the accepted APP. Ensure all required training has been accomplished for all onsite employees.

1.7.3 Training on Activity Hazard Analysis (AHA)

Prior to beginning a new phase, training will be provided to all affected employees to include a review of the AHA to be implemented.

1.8 ACCIDENT PREVENTION PLAN (APP)

The Contractor shall use a qualified person to prepare the written site-specific APP. Prepare the APP in accordance with the format and requirements of USACE EM 385-1-1 9 (including interim changes) that are in effect at the date of solicitation, and as supplemented herein. Cover all paragraph and subparagraph elements in USACE EM 385-1-1, Appendix A, "Minimum Basic Outline for Preparation of Accident Prevention Plan". Where a paragraph or subparagraph element is not applicable to the work to be performed indicate "Not Applicable" next to the heading. Specific requirements for some of the APP elements are described below at paragraph 1.8.1. The APP shall be job-specific and shall address any unusual or unique aspects of the project or activity for which it is written. The APP shall interface with the Contractor's overall safety and health program. Any portions of the Contractor's overall safety and health program referenced in the APP shall be included in the applicable APP element and made site-specific. The Government considers the Prime Contractor to be the "controlling authority" for all work site safety and health of the subcontractors. Contractors are responsible for informing their subcontractors of the safety provisions under the terms of the contract and the penalties for noncompliance, coordinating the work to prevent one craft from interfering with or creating hazardous working conditions for other crafts, and inspecting subcontractor operations to ensure that accident prevention responsibilities are being carried out. The APP shall be signed by the person and firm (senior person) preparing the APP, the Contractor, the on-site superintendent, and the designated site safety and health officer .

Submit the APP to the Contracting Officer 15 calendar days prior to the date of the preconstruction conference for acceptance. Work cannot proceed without an accepted APP. The Contracting Officer reviews and comments on the Contractor's submitted APP and accepts it when it meets the requirements of the contract provisions.

Once accepted by the Contracting Officer, the APP and attachments will be enforced as part of the contract. Disregarding the provisions of this

contract or the accepted APP will be cause for stopping of work, at the discretion of the Contracting Officer, until the matter has been rectified.

Once work begins, changes to the accepted APP shall be made with the knowledge and concurrence of the Contracting Officer, project superintendent, SSHO and quality control manager. Should any unforeseen hazard become evident during the performance of work, the project superintendent shall inform the Contracting Officer, both verbally and in writing, for resolution as soon as possible. In the interim, all necessary action shall be taken by the Contractor to restore and maintain safe working conditions in order to safeguard onsite personnel, visitors, the public, and the environment.

Copies of the accepted plan will be maintained at the Contracting Officer's office and at the job site.
The APP shall be continuously reviewed and amended, as necessary, throughout the life of the contract. Unusual or high-hazard activities not identified in the original APP shall be incorporated in the plan as they are discovered.

1.8.1 EM 385-1-1 Contents

In addition to the requirements outlines in Appendix A of USACE EM 385-1-1, the following is required:

a. Names and qualifications (resumes including education, training, experience and certifications) of all site safety and health personnel designated to perform work on this project to include the designated site safety and health officer. The duties of each position shall be specified.

b. Qualifications of competent and of qualified persons. As a minimum, competent persons shall be designated and qualifications submitted for each of the following major areas: excavation; scaffolding; fall protection; hazardous energy; confined space; health hazard recognition, evaluation and control of chemical, physical and biological agents; personal protective equipment and clothing to include selection, use and maintenance.

d. Health Hazard Control Program. The Contractor shall designate a competent and qualified person to establish and oversee a Health Hazard Control Program in accordance with USACE EM 385-1-1, Section 6. The program shall ensure that employees, on-site Government representatives, and others, are not adversely exposed to chemical, physical and biological agents and that necessary controls and protective actions are instituted to ensure health.

e. Crane Critical Lift Plan. Prepare and sign weight handling critical lift plans for lifts over 75 percent of crane hoist's maximum load limit; lifts involving more than one crane or hoist; lifts of personnel; and technically difficult lifts involving non-routine rigging or operation, sensitive equipment, or unusual safety risks in accordance with USACE EM 385-1-1, paragraph 16.c.18. and submit 15 calendar days prior to on-site work.

f. Alcohol and Drug Abuse Plan

(1) Describe plan for random checks and testing with pre-employment screening in accordance with the DFAR Clause subpart 252.223-7004, "Drug Free Work Force."

(2) Description of the on-site prevention program

g. Fall Protection and Prevention (FP&P) Plan. The plan shall be site specific and address all fall hazards in the work place and during different phases of construction. It shall address how to protect and prevent workers from falling to lower levels when they are exposed to fall hazards above 1.8 m (6 feet). A qualified person shall prepare and sign the plan. The plan shall include fall protection and prevention systems, equipment and methods employed for every phase of work, responsibilities, rescue and escape equipment and operations, training requirements, and monitoring methods. Fall Protection and Prevention Plan shall be revised every six months for lengthy projects, reflecting any changes during the course of construction due to changes in personnel, equipment, systems or work habits. The accepted Fall Protection and Prevention Plan shall be kept and maintained at the job site for the duration of the project.

n. Excavation Plan. The safety and health aspects prepared in accordance with Section 02300, EARTHWORK.

o. Training Records and Requirements. List of mandatory training and certifications which are applicable to this project (e.g. explosive actuated tools, confined space entry, fall protection, crane operation, vehicle operator, forklift operators, personal protective equipment); list of requirements for periodic retraining/certification; outline requirements for supervisory and employee safety meetings.

1.9 ACTIVITY HAZARD ANALYSIS (AHA)

The Activity Hazard Analysis (AHA) format shall be in accordance with USACE EM 385-1-1. Submit the AHA for review at least 15 calendar days prior to the start of each phase. Format subsequent AHA as amendments to the APP. An AHA will be developed by the Contractor for every operation involving a type of work presenting hazards not experienced in previous project operations or where a new work crew or subcontractor is to perform work. The analysis must identify and evaluate hazards and outline the proposed methods and techniques for the safe completion of each phase of work. At a minimum, define activity being performed, sequence of work, specific safety and health hazards anticipated, control measures (to include personal protective equipment) to eliminate or reduce each hazard to acceptable levels, equipment to be used, inspection requirements, training requirements for all involved, and the competent person in charge of that phase of work. For work with fall hazards, including fall hazards associated with scaffold erection and removal, identify the appropriate fall arrest systems. For work with materials handling equipment, address safeguarding measures related to materials handling equipment. For work requiring excavations, include requirements for safeguarding excavations. An activity requiring an AHA shall not proceed until the AHA has been accepted by the Contracting Officer's representative and a meeting has been conducted by the Contractor to discuss its contents with everyone engaged in the activity, including on-site Government representatives. The Contractor shall document meeting

attendance at the preparatory, initial, and follow-up phases of quality control inspection. The AHA shall be continuously reviewed and, when appropriate, modified to address changing site conditions or operations. The analysis should be used during daily inspections to ensure the implementation and effectiveness of the activity's safety and health controls.

The AHA list will be reviewed periodically (at least monthly) at the Contractor supervisory safety meeting and updated as necessary when procedures, scheduling, or hazards change.

Activity hazard analyses shall be updated as necessary to provide an effective response to changing work conditions and activities. The on-site superintendent, site safety and health officer and competent persons used to develop the AHAs, including updates, shall sign and date the AHAs before they are implemented.

1.10 DISPLAY OF SAFETY INFORMATION

Within 5 calendar days after commencement of work, erect a safety bulletin board at the job site. The following information shall be displayed on the safety bulletin board in clear view of the on-site construction personnel, maintained current, and protected against the elements and unauthorized removal:

a. Map denoting the route to the nearest emergency care facility.

b. Emergency phone numbers.

c. Copy of the most up-to-date APP.

d. AHA(s).

e. OSHA 300A Form.

f. Safety promotional material (posters).

g. OHSA Safety and Health Poster.

h. Date of last lost workday injury.

i. SHO deficiency tracking system.

1.11 SITE SAFETY REFERENCE MATERIALS

Maintain safety-related references applicable to the project, including those listed in the article "References." Maintain applicable equipment manufacturer's manuals.

1.12 EMERGENCY MEDICAL TREATMENT

Contractors will arrange for their own emergency medical treatment. Government has no responsibility to provide emergency medical treatment.

1.13 REPORTS

1.13.1 Accident Reports

a. Accident Reporting. Reference EM 385-1-1, Appendix A.09

1) Contractor's procedures for immediate notification of major accidents meet current reporting requirements. 29 CFR 1904 requires that within eight (8) hours after the death of any employee from a work-related incident or the in-patient hospitalization of three or more employees as a result of a work-related incident, you must orally report the fatality/multiple hospitalization by telephone or in person to the Area Office of the Occupational Safety and Health Administration (OSHA), U.S. Department of Labor, that is nearest to the site of the incident. You may also use the OSHA toll-free central telephone number, 1-800-321-OSHA (1-800-321-6742). In the event of a major accident the USACE GDA will be notified immediate.

2) Injuries or illnesses should be recorded on the OSHA 300 Log and 301 Incident Report or prescribed forms within seven (7) calendar days of receiving information that a recordable injury or illness has occurred.

b. For recordable injuries and illnesses, and property damage accidents resulting in at least $2,000 in damages, the Prime Contractor shall conduct an accident investigation to establish the root cause(s) of the accident, complete the USACE Accident Report Form 3394 and provide the report to the Contracting Officer within 3 calendar day(s) of the accident. The Contracting Officer will provide copies of any required or special forms.

1.13.2 Accident Notification

Notify the Contracting Officer as soon as practical, but not later than four hours, after any accident meeting the definition of Recordable Injuries or Illnesses or High Visibility Accidents, property damage equal to or greater than $2,000, or any weight handling equipment accident involving a overturned crane, collapsed boom, or any other major damage to the crane or adjacent property. Information shall include contractor name; contract title; type of contract; name of activity, installation or location where accident occurred; date and time of accident; names of personnel injured; extent of property damage, if any; extent of injury, if known, and brief description of accident (to include type of construction equipment used, PPE used, etc.). Preserve the conditions and evidence on the accident site until the Government investigation team arrives on site and Government investigation is conducted.

1.13.3 Monthly Exposure Reports

Monthly exposure reporting to the Contracting Officer is required to be attached to the monthly billing request. This report is a compilation of employee-hours worked each month for all site workers, both prime and subcontractor. The Contracting Officer will provide copies of any special forms.

1.13.4 Regulatory Citations and Violations

Contact the Contracting Officer immediately of any OSHA or other regulatory agency inspection or visit, and provide the Contracting Officer with a copy of each citation, report, and contractor response. Correct violations and citations promptly and provide written corrective actions to the Contracting Officer.

1.13.5 Crane Reports

Submit crane inspection reports required in accordance with USACE EM 385-1-1, Appendix H and as specified herein with Daily Reports of Inspections.

1.14 HOT WORK

Prior to performing "Hot Work" (welding, etc.) or operating other flame-producing devices, a written permit shall be requested from the Contracting Officer. CONTRACTORS ARE REQUIRED TO MEET ALL CRITERIA BEFORE A PERMIT IS ISSUED. The Contractor will provide at least two (2) twenty (20) pound 4A:20 BC rated extinguishers for normal "Hot Work". All extinguishers shall be current inspection tagged, approved safety pin and tamper resistant seal. It is also mandatory to have a designated FIRE WATCH for any "Hot Work" done at this activity.

a. Oil painting materials (paint, brushes, empty paint cans, etc.), and all flammable liquids shall be removed from the facility at quitting time. All painting materials and flammable liquids shall be stored outside in a suitable metal locker or box and will require re-submittal with non-hazardous materials.

b. Accumulation of trays, paper, shavings, sawdust, boxes and other packing materials shall be removed from the facility at the close of each workday and such material disposed of in the proper containers located away from the facility.

c. The storage of combustible supplies shall be a safe distance from structures.

d. Area outside the facility undergoing work shall be cleaned of trash, paper, or other discarded combustibles at the close of each workday.

e. All portable electric devices (saws, sanders, compressors, extension chord, lights, etc.) shall be disconnected at the close of each workday. When possible, the main electric switch in the facility shall be deactivated.

f. ANY FIRE, NO MATTER HOW SMALL, SHALL BE REPORTED TO THE Contracting Officer IMMEDIATELY.

PART 2 PRODUCTS

PART 3 EXECUTION

3.1 CONSTRUCTION AND/OR OTHER WORK

The Contractor shall comply with USACE EM 385-1-1, NFPA 241, the APP, the AHA, and other related submittals and activity fire and safety regulations.

3.1.1 Hazardous Material Use

Each hazardous material must receive approval prior to being brought onto the job site or prior to any other use in connection with this contract. Allow a minimum of 10 working days for processing of the request for use of a hazardous material. Any work or storage involving hazardous chemicals or materials must be done in a manner that will not expose Government or Contractor employees to any unsafe or unhealthful conditions. Adequate protective measures must be taken to prevent Government or Contractor employees from being exposed to any hazardous condition that could result from the work or storage. The Prime Contractor shall keep a complete inventory of hazardous materials brought onto the work-site. Approval by the Contracting Officer of protective measures and storage area is required prior to the start of the work.

3.1.2 Hazardous Material Exclusions

Notwithstanding any other hazardous material used in this contract, radioactive materials or instruments capable of producing ionizing/non-ionizing radiation (with the exception of radioactive material and devices used in accordance with EM 385-1-1 such as nuclear density meters for compaction testing and laboratory equipment with radioactive sources) as well as materials which contain asbestos, mercury or polychlorinated biphenyls, di-isocynates, lead-based paint are prohibited. The Contracting Officer, upon written request by the Contractor, may consider exceptions to the use of any of the above excluded materials.

3.1.3 Unforeseen Hazardous Material

The design should have identified materials such as PCB, lead paint, and friable and non-friable asbestos. If material, not indicated, that may be hazardous to human health upon disturbance during construction operations is encountered, stop that portion of work and notify the Contracting Officer immediately. Within 14 calendar days the Government will determine if the material is hazardous. If material is not hazardous or poses no danger, the Government will direct the Contractor to proceed without change. If material is hazardous and handling of the material is necessary to accomplish the work, the Government will issue a modification pursuant to "FAR 52.243-4, Changes" and "FAR 52.236-2, Differing Site Conditions."

3.2 PRE-OUTAGE COORDINATION MEETING

Contractors are required to apply for utility outages at least 15 days in advance. As a minimum, the request should include the location of the outage, utilities being affected, duration of outage and any necessary sketches. Special requirements for electrical outage requests are contained elsewhere in this specification section. Once approved, and prior to beginning work on the utility system requiring shut down, the Contractor shall attend a pre-outage coordination meeting with the Contracting Officer to review the scope of work and the lock-out/tag-out procedures for worker protection. No work will be performed on energized electrical circuits unless proof is provided that no other means exist.

3.3 FALL HAZARD PROTECTION AND PREVENTION

The Contractor shall establish a fall protection and prevention program, for the protection of all employees exposed to fall hazards. The program shall include company policy, identify responsibilities, education and training requirements, fall hazard identification, prevention and control measures, inspection, storage, care and maintenance of fall protection equipment and rescue and escape procedures.

3.3.1 Training

The Contractor shall institute a fall protection training program. As part of the Fall Hazard Protection and Prevention Program, the Contractor shall provide training for each employee who might be exposed to fall hazards. Training requirements shall be in accordance with USACE EM 385-1-1, section 21.A.16.

3.3.2 Fall Protection Equipment

The Contractor shall enforce use of the fall protection equipment designated for each specific work activity in the Fall Protection and Prevention Plan and/or AHA at all times when an employee is on a surface 1.8 m(6 feet) or more above lower levels. Fall protection systems such as guardrails, personnel fall arrest system, safety nets, etc., are required when working within 1.8m (6 feet) of any leading edge. In addition to the required fall protection systems, safety skiff, personal floatation devices, life rings etc., are required when working above or next to water in accordance with USACE EM 385-1-1, paragraphs 05.I. and 05.J. Personal fall arrest systems are required when working from an articulating or extendible boom, swing stages, or suspended platform. In addition, personal fall arrest systems may be required when operating other equipment such as scissor lifts if the work platform is capable of being positioned outside the wheelbase. Fall protection must comply with 29 CFR 1926.500, Subpart M and USACE EM 385-1-1.

3.3.2.1 Personal Fall Arrest Equipment

Personal fall arrest equipment, systems, subsystems, and components shall meet ANSI Z359.1. Only a full-body harness with a shock-absorbing lanyard or self-retracting lanyard is an acceptable personal fall arrest device. Body belts may only be used as a positioning device system (for uses such as steel reinforcing assembly and in addition to an approved fall arrest system). Harnesses shall have a fall arrest attachment affixed to the body support (usually a Dorsal D-ring) and specifically designated for attachment to the rest of the system. Only locking snap hooks and carabiners shall be used. Webbing, straps, and ropes shall be made of synthetic fiber. The maximum free fall distance when using fall arrest equipment shall not exceed 1.8 m (6 feet). The total fall distance shall always be taken into consideration when attaching a person to a fall arrest system.

3.3.3 Fall Protection for Roofing Work

Fall protection controls shall be implemented based on the type of roof being constructed and work being performed. The roof area to be accessed shall be evaluated for its structural integrity including weight-bearing capabilities for the projected loading.

a. Low Sloped Roofs:

(1) For work within 1.8 m (6 feet) of an edge, on low-slope roofs, personnel shall be protected from falling by use of personal fall arrest systems, guardrails, or safety nets.

(2) For work greater than 1.8 m (6 feet) from an edge, warning lines shall be erected and installed in accordance with 29 CFR 1926.500 and USACE EM 385-1-1.

b. Steep Roofs: Work on steep roofs requires a personal fall arrest system, guardrails with toe-boards, or safety nets.

3.3.4 Safety Nets

If safety nets are used as the selected fall protection system on the project, they shall be provided at unguarded workplaces, over water, machinery, dangerous operations and leading edge work. Safety nets shall be tested immediately after installation with a drop test of 181.4 kg (400 pounds) and every six months thereafter.

3.3.5 Existing Anchorage

Existing anchorages, to be used for attachment of personal fall arrest equipment, shall be certified (or re-certified) by a qualified person in accordance with ANSI Z359.1.

3.3.6 Horizontal Lifelines

Horizontal lifelines shall be designed, installed, certified and used under the supervision of a qualified person as part of a complete fall arrest system (29 CFR 1926.500).

3.4 SCAFFOLDING

Employees shall be provided with a safe means of access to the work area on the scaffold. Climbing of any scaffold braces or supports not specifically designed for access is prohibited. Access to scaffold platforms greater than 6 m (20 feet) in height shall be accessed by use of a scaffold stair system. Vertical ladders commonly provided by scaffold system manufacturers shall not be used for accessing scaffold platforms greater than 6 m (20 feet) in height. The use of an adequate gate is required. Contractor shall ensure that employees are qualified to perform scaffold erection and dismantling. Do not use scaffold without the capability of supporting at least four times the maximum intended load or without appropriate fall protection as delineated in the accepted fall protection and prevention plan. Stationary scaffolds must be attached to structural building components to safeguard against tipping forward or backward. Special care shall be given to ensure scaffold systems are not overloaded. Side brackets used to extend scaffold platforms on self-supported scaffold systems for the storage of material is prohibited. The first tie-in shall be at the height equal to 4 times the width of the smallest dimension of the scaffold base. Work platforms shall be placed on mud sills. Scaffold or work platform erectors shall have fall protection during the erection and dismantling of scaffolding or work platforms that are more than six feet. Delineate fall protection requirements when working above six feet or above dangerous operations in the Fall Protection and Prevention (FP&P) Plan and Activity Hazard Analysis (AHA) for the phase of work.

3.5 EQUIPMENT

3.5.1 Material Handling Equipment

a. Material handling equipment such as forklifts shall not be modified with work platform attachments for supporting employees unless specifically delineated in the manufacturer's printed operating instructions.

b. The use of hooks on equipment for lifting of material must be in accordance with manufacturer's printed instructions.

c. Operators of forklifts or power industrial trucks shall be licensed in accordance with OSHA.

3.5.2 Weight Handling Equipment

a. Cranes must be equipped with:

(1) Load indicating devices (LIDs) and a boom angle or radius indicator,

(2) or load moment indicating devices (LMIs).

(3) Anti-two block prevention devices.

(4) Boom hoist hydraulic relief valve, disconnect, or shutoff (stops hoist when boom reaches a predetermined high angle).

(5) Boom length indicator (for telescoping booms).

(6) Device to prevent uncontrolled lowering of a telescoping hydraulic boom.

(7) Device to prevent uncontrolled retraction of a telescoping hydraulic boom.

b. The Contractor shall notify the Contracting Officer 15 days in advance of any cranes entering the activity so that necessary quality assurance spot checks can be coordinated. Contractor's operator shall remain with the crane during the spot check.

c. The Contractor shall comply with the crane manufacturer's specifications and limitations for erection and operation of cranes and hoists used in support of the work. Erection shall be performed under the supervision of a designated person (as defined in ASME B30.5). All testing shall be performed in accordance with the manufacturer's recommended procedures.

d. The Contractor shall comply with ASME B30.5 for mobile and locomotive cranes, ASME B30.22 for articulating boom cranes and ASME B30.8 for floating cranes and floating derricks.

e. The presence of Government personnel does not relieve the Contractor of an obligation to comply with all applicable safety regulations. The Government will investigate all complaints of unsafe

or unhealthful working conditions received in writing from contractor employees, federal civilian employees, or military personnel.

f. Each load shall be rigged/attached independently to the hook/master-link in such a fashion that the load cannot slide or otherwise become detached. Christmas-tree lifting (multiple rigged materials) is not allowed.

g. Under no circumstance shall a Contractor make a lift at or above 90% of the cranes rated capacity in any configuration.

h. When operating in the vicinity of overhead transmission lines, operators and riggers shall be alert to this special hazard and shall follow the requirements of USACE EM 385-1-1 section 11 and ASME B30.5 or ASME B30.22 as applicable.

i. Crane suspended personnel work platforms (baskets) shall not be used unless the Contractor proves that using any other access to the work location would provide a greater hazard to the workers or is impossible. Personnel shall not be lifted with a line hoist or friction crane.

j. A fire extinguisher having a minimum rating of 10BC and a minimum nominal capacity of 5lb of extinguishing agent shall be available at all operator stations or crane cabs. Portable fire extinguishers shall be inspected, maintained, and recharged as specified in NFPA 10, Standard for Portable Fire Extinguishers.

k. All employees shall be kept clear of loads about to be lifted and of suspended loads.

l. A weight handling equipment operator shall not leave his position at the controls while a load is suspended.

m. Only Contractor crane operators who have met the requirements of 29 CFR 1910.94, 29 CFR 1910.120, 29 CFR 1926.65, 29 CFR 1926.500, USACE EM 385-1-1, ASME B30.5, and ASME B30.22 and other local and state requirements shall be authorized to operate the crane.

n. The Contractor shall use cribbing when performing lifts on outriggers.

o. The crane hook/block must be positioned directly over the load. Side loading of the crane is prohibited.

p. A physical barricade must be positioned to prevent personnel from entering the counterweight swing (tail swing) area of the crane.

q. A substantial and durable rating chart containing legible letters and figures shall be provided with each crane and securely mounted onto the crane cab in a location allowing easy reading by the operator while seated in the control station.

r. Certification records which include the date of inspection, signature of the person performing the inspection, and the serial number or other identifier of the crane that was inspected shall always be available for review by Contracting Officer personnel.

s. Written reports listing the load test procedures used along with any repairs or alterations performed on the crane shall be available for review by Contracting Officer personnel.

t. The Contractor shall certify that all crane operators have been trained in proper use of all safety devices (e.g. anti-two block devices).

3.5.3 Equipment and Mechanized Equipment

a. Equipment shall be operated by designated qualified operators. Proof of qualifications shall be kept on the project site for review.

b. Manufacture specifications or owners manual for the equipment shall be on site and reviewed for additional safety precautions or requirements that are sometimes not identified by OSHA or USACE EM 385-1-1. Such additional safety precautions or requirements shall be incorporated into the AHAs.

c. Equipment and mechanized equipment shall be inspected in accordance with manufacturer's recommendations for safe operation by a competent person prior to being placed into use.

d. Daily checks or tests shall be conducted and documented on equipment and mechanized equipment by designated competent persons.

3.6 EXCAVATIONS

The competent person for excavations performed as a result of contract work shall be on-site when excavation work is being performed, and shall inspect, and document the excavations daily prior to entry by workers. The competent person must evaluate all hazards, including atmospheric, that may be associated with the work, and shall have the resources necessary to correct hazards promptly.

3.6.1 Utility Locations

Prior to digging, the appropriate digging permit must be obtained. All underground utilities in the work area must be positively identified by a private utility locating service in addition to any station locating service and coordinated with the station utility department. Any markings made during the utility investigation must be maintained throughout the contract.

3.6.2 Utility Location Verification

The Contractor must physically verify underground utility locations by hand digging using wood or fiberglass handled tools when any adjacent construction work is expected to come within three feet of the underground system. Digging within .061 m (2 feet) of a known utility must not be performed by means of mechanical equipment; hand digging shall be used. If construction is parallel to an existing utility the utility shall be exposed by hand digging every 30.5 m (100 feet) if parallel within 1.5 m (5 feet) of the excavation.

3.6.3 Utilities with Concrete Slabs

Utilities located within concrete slabs or pier decks, bridges, and the like are extremely difficult to identify. The location must be coordinated with station utility departments in addition to a private locating service. Outages on system utilities shall be used in circumstances where concrete chipping, saw cutting, or core drilling is required and utilities are unable to be completely identified.

3.6.4 Shoring Systems

Trench and shoring systems must be identified in the accepted safety plan and AHA. Manufacture tabulated data and specifications or registered engineer tabulated data for shoring or benching systems shall be readily available on site for review. Job-made shoring or shielding shall have the registered professional engineer stamp, specifications, and tabulated data. Extreme care must be used when excavating near direct burial electric underground cables.

3.6.5 Trenching Machinery

Trenching machines with digging chain drives shall be operated only when the spotters/laborers are in plain view of the operator. Operator and spotters/laborers shall be provided training on the hazards of the digging chain drives with emphasis on the distance that needs to be maintained when the digging chain is operating. Documentation of the training shall be kept on file at the project site.

3.7 ELECTRICAL

3.7.1 Conduct of Electrical Work

Underground electrical spaces must be certified safe for entry before entering to conduct work. Cables that will be cut must be positively identified and de-energized prior to performing each cut. Positive cable identification must be made prior to submitting any outage request for electrical systems. Arrangements are to be coordinated with the Contracting Officer and Station Utilities for identification. The Contracting Officer will not accept an outage request until the Contractor satisfactorily documents that the circuits have been clearly identified. Perform all high voltage cable cutting remotely using hydraulic cutting tool. When racking in or live switching of circuit breakers, no additional person other than the switch operator will be allowed in the space during the actual operation. Plan so that work near energized parts is minimized to the fullest extent possible. Use of electrical outages clear of any energized electrical sources is the preferred method. When working in energized substations, only qualified electrical workers shall be permitted to enter. When work requires Contractor to work near energized circuits as defined by the NFPA 70, high voltage personnel must use personal protective equipment that includes, as a minimum, electrical hard hat, safety shoes, insulating gloves with leather protective sleeves, fire retarding shirts, coveralls, face shields, and safety glasses. Insulating blankets, hearing protection, and switching suits may be required, depending on the specific job and as delineated in the Contractor's AHA.

3.7.2 Portable Extension Cords

Portable extension cords shall be sized in accordance with manufacturer ratings for the tool to be powered and protected from damage. All damaged extension cords shall be immediately removed from service. Portable extension cords shall meet the requirements of NFPA 70.

3.8 CRYSTALLINE SILICA

Grinding, abrasive blasting, and foundry operations of construction materials containing crystalline silica, shall comply with OSHA regulations, such as 29 CFR 1910.94, and USACE EM 385-1-1, Appendix C. The Contractor shall develop and implement effective exposure control and elimination procedures to include dust control systems, engineering controls, and establishment of work area boundaries, as well as medical surveillance, training, air monitoring, and personal protective equipment.

3.9 HOUSEKEEPING

3.9.1 Clean-Up

All debris in work areas shall be cleaned up daily or more frequently if necessary. Construction debris may be temporarily located in an approved location, however garbage accumulation must be removed each day.

3.9.2 Dust control

In addition to the dust control measures required elsewhere in the contract documents, dry cutting of brick or masonry shall be prohibited. The Contracting Officer, upon written request by the Contractor, may consider exceptions to this prohibition on a case-by-case basis. Wet cutting must address control of water run off.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 01 - GENERAL REQUIREMENTS

SECTION 01781

OPERATION AND MAINTENANCE DATA

12/01

PART 1 GENERAL

1.1 SUBMISSION OF OPERATION AND MAINTENANCE DATA
1.1.1 Package Quality
1.1.2 Package Content
1.1.3 Changes to Submittals
1.2 TYPES OF INFORMATION REQUIRED IN O&M DATA PACKAGES
1.2.1 Operating Instructions
1.2.1.1 Safety Precautions
1.2.1.2 Operator Prestart
1.2.1.3 Startup, Shutdown, and Post-Shutdown Procedures
1.2.1.4 Normal Operations
1.2.1.5 Emergency Operations
1.2.1.6 Operator Service Requirements
1.2.1.7 Environmental Conditions
1.2.2 Preventive Maintenance
1.2.2.1 Lubrication Data
1.2.2.2 Preventive Maintenance Plan and Schedule
1.2.3 Corrective Maintenance (Repair)
1.2.3.1 Troubleshooting Guides and Diagnostic Techniques
1.2.3.2 Wiring Diagrams and Control Diagrams
1.2.3.3 Maintenance and Repair Procedures
1.2.3.4 Removal and Replacement Instructions
1.2.3.5 Spare Parts and Supply Lists
1.2.4 Corrective Maintenance Work-Hours
1.2.5 Appendices
1.2.6 Parts Identification
1.2.6.1 Warranty Information
1.2.6.2 Personnel Training Requirements
1.2.6.3 Testing Equipment and Special Tool Information
1.2.6.4 Contractor Information
1.3 SCHEDULE OF OPERATION AND MAINTENANCE DATA PACKAGES

PART 2 PRODUCTS

PART 3 EXECUTION

-- End of Section Table of Contents --

SECTION 01781

OPERATION AND MAINTENANCE DATA
12/01

PART 1 GENERAL

1.1 SUBMISSION OF OPERATION AND MAINTENANCE DATA

Submit Operation and Maintenance (O&M) Data specifically applicable to this contract and a complete and concise depiction of the provided equipment, product, or system. Organize and present information in sufficient detail to clearly explain O&M requirements at the system, equipment, component, and subassembly level. Include an index preceding each submittal. Submit in accordance with this section and Section 01330, "Submittal Procedures."

1.1.1 Package Quality

Documents must be fully legible. Poor quality copies and material with hole punches obliterating the text or drawings will not be accepted.

1.1.2 Package Content

Data package content shall be as shown in the paragraph titled "Schedule of Operation and Maintenance Data Packages." Comply with the data package requirements specified in the individual technical sections, including the content of the packages and addressing each product, component, and system designated for data package submission.

1.1.3 Changes to Submittals

Manufacturer-originated changes or revisions to submitted data shall be furnished by the Contractor if a component of an item is so affected subsequent to acceptance of the O&M Data. Changes, additions, or revisions required by the Contracting Officer for final acceptance of submitted data, shall be submitted by the Contractor within 30 calendar days of the notification of this change requirement.

1.2 TYPES OF INFORMATION REQUIRED IN O&M DATA PACKAGES

1.2.1 Operating Instructions

Include specific instructions, procedures, and illustrations for the following phases of operation:

1.2.1.1 Safety Precautions

List personnel hazards and equipment or product safety precautions for all operating conditions.

1.2.1.2 Operator Prestart

Include procedures required to set up and prepare each system for use.

1.2.1.3 Startup, Shutdown, and Post-Shutdown Procedures

Provide narrative description for Startup, Shutdown and Post-shutdown operating procedures including the control sequence for each procedure.

1.2.1.4 Normal Operations

Provide narrative description of Normal Operating Procedures. Include Control Diagrams with data to explain operation and control of systems and specific equipment.

1.2.1.5 Emergency Operations

Include Emergency Procedures for equipment malfunctions to permit a short period of continued operation or to shut down the equipment to prevent further damage to systems and equipment. Include Emergency Shutdown Instructions for fire, explosion, spills, or other foreseeable contingencies. Provide guidance and procedures for emergency operation of all utility systems including required valve positions, valve locations and zones or portions of systems controlled.

1.2.1.6 Operator Service Requirements

Include instructions for services to be performed by the operator such as lubrication, adjustment, inspection, and recording gage readings.

1.2.1.7 Environmental Conditions

Include a list of Environmental Conditions (temperature, humidity, and other relevant data) that are best suited for the operation of each product, component or system. Describe conditions under which the item equipment should not be allowed to run.

1.2.2 Preventive Maintenance

Include the following information for preventive and scheduled maintenance to minimize corrective maintenance and repair.

1.2.2.1 Lubrication Data

Include preventative maintenance lubrication data, in addition to instructions for lubrication provided under paragraph titled "Operator Service Requirements":

a. A table showing recommended lubricants for specific temperature ranges and applications.

b. Charts with a schematic diagram of the equipment showing lubrication points, recommended types and grades of lubricants, and capacities.

c. A Lubrication Schedule showing service interval frequency.

1.2.2.2 Preventive Maintenance Plan and Schedule

Include manufacturer's schedule for routine preventive maintenance, inspections, tests and adjustments required to ensure proper and economical operation and to minimize corrective maintenance. Provide manufacturer's projection of preventive maintenance work-hours on a daily, weekly, monthly,

and annual basis including craft requirements by type of craft. For periodic calibrations, provide manufacturer's specified frequency and procedures for each separate operation.

1.2.3 Corrective Maintenance (Repair)

Include manufacturer's recommended procedures and instructions for correcting problems and making repairs.

1.2.3.1 Troubleshooting Guides and Diagnostic Techniques

Include step-by-step procedures to promptly isolate the cause of typical malfunctions. Describe clearly why the checkout is performed and what conditions are to be sought. Identify tests or inspections and test equipment required to determine whether parts and equipment may be reused or require replacement.

1.2.3.2 Wiring Diagrams and Control Diagrams

Wiring diagrams and control diagrams shall be point-to-point drawings of wiring and control circuits including factory-field interfaces. Provide a complete and accurate depiction of the actual job specific wiring and control work. On diagrams, number electrical and electronic wiring and pneumatic control tubing and the terminals for each type, identically to actual installation configuration and numbering.

1.2.3.3 Maintenance and Repair Procedures

Include instructions and alist of tools required to repair or restore the product or equipment to proper condition or operating standards.

1.2.3.4 Removal and Replacement Instructions

Include step-by-step procedures and a list required tools and supplies for removal, replacement, disassembly, and assembly of components, assemblies, subassemblies, accessories, and attachments. Provide tolerances, dimensions, settings and adjustments required. Instructions shall include a combination of text and illustrations.

1.2.3.5 Spare Parts and Supply Lists

Include lists of spare parts and supplies required for maintenance and repair to ensure continued service or operation without unreasonable delays. Special consideration is required for facilities at remote locations. List spare parts and supplies that have a long lead-time to obtain.

1.2.4 Corrective Maintenance Work-Hours

Include manufacturer's projection of corrective maintenance work-hours including requirements by type of craft. Corrective maintenance that requires completion or participation of the equipment manufacturer shall be identified and tabulated separately.

1.2.5 Appendices

Provide information required below and information not specified in the preceding paragraphs but pertinent to the maintenance or operation of the product or equipment. Include the following:

1.2.6 Parts Identification

Provide identification and coverage for all parts of each component, assembly, subassembly, and accessory of the end items subject to replacement. Include special hardware requirements, such as requirement to use high-strength bolts and nuts. Identify parts by make, model, serial number, and source of supply to allow reordering without further identification. Provide clear and legible illustrations, drawings, and exploded views to enable easy identification of the items. When illustrations omit the part numbers and description, both the illustrations and separate listing shall show the index, reference, or key number that will cross-reference the illustrated part to the listed part. Parts shown in the listings shall be grouped by components, assemblies, and subassemblies in accordance with the manufacturer's standard practice. Parts data may cover more than one model or series of equipment, components, assemblies, subassemblies, attachments, or accessories, such as typically shown in a master parts catalog

1.2.6.1 Warranty Information

List and explain the various warranties and include the servicing and technical precautions prescribed by the manufacturers or contract documents in order to keep warranties in force. Include warranty information for primary components such as the compressor of air conditioning system.

1.2.6.2 Personnel Training Requirements

Provide information available from the manufacturers that is needed for use in training designated personnel to properly operate and maintain the equipment and systems.

1.2.6.3 Testing Equipment and Special Tool Information

Include information on test equipment required to perform specified tests and on special tools needed for the operation, maintenance, and repair of components.

1.2.6.4 Contractor Information

Provide a list that includes the name, address, and telephone number of the General Contractor and each Subcontractor who installed the product or equipment, or system. For each item, also provide the name address and telephone number of the manufacturer's representative and service organization most convenient to the project site. Provide the name, address, and telephone number of the product, equipment, and system manufacturers.

1.3 SCHEDULE OF OPERATION AND MAINTENANCE DATA PACKAGES

Furnish the O&M data specified in individual technical sections. The required information for each O&M data package is as follows:

PART 2 PRODUCTS

Not used.

PART 3 EXECUTION

Not used.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 02 - SITE CONSTRUCTION

SECTION 02220

DEMOLITION

09/03

PART 1 GENERAL

1.1 REFERENCES
1.2 GENERAL REQUIREMENTS
1.3 SUBMITTALS
1.4 REGULATORY AND SAFETY REQUIREMENTS
1.5 DUST AND DEBRIS CONTROL
1.6 PROTECTION
1.6.1 Traffic Control Signs
1.6.2 Existing Work
1.6.3 Facilities
1.6.4 Protection of Personnel
1.7 BURNING
1.8 REQUIRED DATA
1.9 ENVIRONMENTAL PROTECTION
1.10 USE OF EXPLOSIVES

PART 2 PRODUCTS

PART 3 EXECUTION

3.1 EXISTING FACILITIES TO BE REMOVED
3.1.1 Utilities and Related Equipment
3.2 DISPOSITION OF MATERIAL
3.2.1 Title to Materials
3.2.2 Reuse of Materials and Equipment
3.3 CLEANUP

-- End of Section Table of Contents --

SECTION 02220

DEMOLITION
09/03

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI A10.6	(1990; R 1998) Safety Requirements for Demolition Operations

AIR CONDITIONING AND REFRIGERATION INSTITUTE (ARI)

ARI Guideline K	(1997) Containers for Recovered Fluorocarbon Refrigerants

THE NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

40 CFR 61-SUBPART M	National Emission Standard for Asbestos
40 CFR 82	Protection of Stratospheric Ozone
49 CFR 173.301	Shipment of Compressed Gases in Cylinders and Spherical Pressure Vessels

U.S. ARMY CORPS OF ENGINEERS (USACE)

EM 385-1-1	(1996) Safety and Health Requirements Manual

U.S. DEFENSE LOGISTICS AGENCY (DLA)

DLA 4145.25	(June 2000) Storage and Handling of Liquefied and Gaseous Compressed Gases and Their Full and Empty Cylinders

U.S. DEPARTMENT OF DEFENSE (DOD)

DOD 4000.25-1-M	Requisitioning and Issue Procedures
MIL-STD-129	(Rev. P) Military Marking for Shipment and Storage

1.2 GENERAL REQUIREMENTS

Do not begin demolition until authorization is received from the Contracting Officer. The work includes demolition and removal of resulting rubbish and debris. Rubbish and debris shall be removed from the work site daily, unless otherwise directed, to avoid accumulation at the demolition site. Materials that cannot be removed daily shall be stored in areas specified by

the Contracting Officer. In the interest of occupational safety and health, the work shall be performed in accordance with EM 385-1-1, Section 23, Demolition, and other applicable Sections.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only or as otherwise designated. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-07 Certificates

Demolition plan; G

Submit proposed demolition and removal procedures to the Contracting Officer for approval before work is started.

1.4 REGULATORY AND SAFETY REQUIREMENTS

Comply with federal, state, and local hauling and disposal regulations. In addition to the requirements of the "Contract Clauses," safety requirements shall conform with ANSI A10.6.

1.5 DUST AND DEBRIS CONTROL

Prevent the spread of dust and debris and avoid the creation of a nuisance or hazard in the surrounding area. Do not use water if it results in hazardous or objectionable conditions such as, but not limited to, ice, flooding, or pollution.

1.6 PROTECTION

1.6.1 Traffic Control Signs

Where pedestrian OR driver safety is endangered in the area of removal work, use traffic barricades with flashing lights.

1.6.2 Existing Work

Before beginning any demolition work, the Contractor shall survey the site and examine the drawings and specifications to determine the extent of the work. The Contractor shall take necessary precautions to avoid damage to existing items to remain in place, to be reused, or to remain the property of the Government; any damaged items shall be repaired or replaced as approved by the Contracting Officer. The Contractor shall coordinate the work of this section with all other work and shall construct and maintain shoring, bracing, and supports as required.

1.6.3 Facilities

Protect electrical and mechanical services and utilities. Where removal of existing utilities and pavement is specified or indicated, provide approved barricades, temporary covering of exposed areas, and temporary services or

connections for electrical and mechanical utilities. The Contractor shall ensure that no elements determined to be unstable are left unsupported and shall be responsible for placing and securing bracing, shoring, or lateral supports as may be required as a result of any cutting, removal, or demolition work performed under this contract.

1.6.4 Protection of Personnel

During the demolition work the Contractor shall continuously evaluate the condition of the structure being demolished and take immediate action to protect all personnel working in and around the demolition site. No area, section, or component of floors, roofs, walls, columns, pilasters, or other structural element will be allowed to be left standing without sufficient bracing, shoring, or lateral support to prevent collapse or failure while workmen remove debris or perform other work in the immediate area.

1.7 BURNING

The use of burning at the project site for the disposal of refuse and debris will not be permitted.

1.8 REQUIRED DATA

Demolition plan shall include procedures for coordination with other work in progress, a disconnection schedule of utility services, and a detailed description of methods and equipment to be used for each operation and of the sequence of operations. The procedures shall provide for safe conduct of the work in accordance with EM 385-1-1.

1.9 ENVIRONMENTAL PROTECTION

The work shall comply with the requirements of Section 01355A ENVIRONMENTAL PROTECTION.

1.10 USE OF EXPLOSIVES

Use of explosives will not be permitted.

PART 2 PRODUCTS

Not used.

PART 3 EXECUTION

3.1 EXISTING FACILITIES TO BE REMOVED

3.1.1 Utilities and Related Equipment

Remove existing utilities as indicated and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the Contracting Officer. When utility lines are encountered that are not indicated on the drawings, the Contracting Officer shall be notified prior to further work in that area. Remove meters and related equipment and deliver to a location in accordance with instructions of the Contracting Officer. If utility lines are encountered that are not shown on drawings, contact the Contracting Officer for further instructions.

3.2 DISPOSITION OF MATERIAL

3.2.1 Title to Materials

Except where specified in other sections, all materials and equipment removed, and not reused, shall become the property of the Contractor and shall be removed from the work site. Title to materials resulting from demolition, and materials and equipment to be removed, is vested in the Contractor upon approval by the Contracting Officer of the Contractor's demolition and removal procedures, and authorization by the Contracting Officer to begin demolition. The Government will not be responsible for the condition or loss of, or damage to, such property after contract award. Materials and equipment shall not be viewed by prospective purchasers or sold on the site.

3.2.2 Reuse of Materials and Equipment

Remove and store materials and equipment to be reused or relocated to prevent damage, and reinstall as the work progresses.

3.3 CLEANUP

Debris and rubbish shall be removed from excavations. Debris shall be removed and transported in a manner that prevents spillage on streets or adjacent areas. Local regulations regarding hauling and disposal shall apply.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 02 - SITE CONSTRUCTION

SECTION 02300

EARTHWORK

08/03

PART 1 GENERAL

1.1 REFERENCES
1.2 DEFINITIONS
1.2.1 Satisfactory Materials
1.2.2 Unsatisfactory Materials
1.2.3 Cohesionless and Cohesive Materials
1.2.4 Degree of Compaction
1.2.5 Topsoil
1.2.6 Hard/Unyielding Materials
1.2.7 Rock
1.2.8 Unstable Material
1.2.9 Select Granular Material
1.2.9.1 General Requirements
1.2.10 Initial Backfill Material
1.2.11 Nonfrost Susceptible (NFS) Material
1.3 SUBMITTALS
1.4 SUBSURFACE DATA
1.5 CLASSIFICATION OF EXCAVATION
1.5.1 BLASTING
1.6 DEWATERING WORK PLAN

PART 2 PRODUCTS

2.1 BURIED WARNING AND IDENTIFICATION TAPE
2.1.1 Warning Tape for Metallic Piping
2.1.2 Detectable Warning Tape for Non-Metallic Piping
2.2 DETECTION WIRE FOR NON-METALLIC PIPING
2.3 CAPILLARY WATER BARRIER

PART 3 EXECUTION

3.1 STRIPPING OF TOPSOIL
3.2 GENERAL EXCAVATION
3.2.1 Ditches, Gutters, and Channel Changes
3.2.2 Drainage
3.2.3 Dewatering
3.2.4 Trench Excavation Requirements
3.2.4.1 Bottom Preparation
3.2.4.2 Removal of Unyielding Material
3.2.4.3 Removal of Unstable Material
3.2.4.4 Excavation for Appurtenances
3.2.5 Underground Utilities
3.2.6 Structural Excavation
3.3 SELECTION OF BORROW MATERIAL
3.4 OPENING AND DRAINAGE OF EXCAVATION AND BORROW PITS

3.5 FINAL GRADE OF SURFACES TO SUPPORT CONCRETE
3.6 GROUND SURFACE PREPARATION
3.6.1 General Requirements
3.6.2 Frozen Material
3.7 UTILIZATION OF EXCAVATED MATERIALS
3.8 BURIED TAPE AND DETECTION WIRE
3.8.1 Buried Warning and Identification Tape
3.8.2 Buried Detection Wire
3.9 BACKFILLING AND COMPACTION
3.9.1 Trench Backfill
3.9.1.1 Replacement of Unyielding Material
3.9.1.2 Replacement of Unstable Material
3.9.1.3 Bedding and Initial Backfill
3.9.1.4 Final Backfill
3.9.2 Backfill for Appurtenances
3.10 SPECIAL REQUIREMENTS
3.10.1 Water Lines
3.10.2 Electrical Distribution System
3.11 EMBANKMENTS
3.11.1 Earth Embankments
3.12 SUBGRADE PREPARATION
3.12.1 Proof Rolling
3.12.2 Construction
3.14.3 Compaction
3.14.3.2 Subgrade for Pavements
3.13 FINISHING
3.13.1 Subgrade and Embankments
3.13.2 Capillary Water Barrier
3.13.3 Grading Around Structures
3.14 PLACING TOPSOIL
3.15 TESTING
3.15.1 Fill and Backfill Material Gradation
3.15.2 In-Place Densities
3.15.3 Check Tests on In-Place Densities
3.15.4 Moisture Contents
3.15.5 Optimum Moisture and Laboratory Maximum Density
3.15.6 Tolerance Tests for Subgrades
3.15.7 Displacement of Sewers
3.16 DISPOSITION OF SURPLUS MATERIAL

-- End of Section Table of Contents --

SECTION 02300

EARTHWORK
08/03

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)

AASHTO T 180	(2001) Moisture-Density Relations of Soils Using a 4.54-kg (10-lb) Rammer and an 457 mm (18-in) Drop
AASHTO T 224	(2001) Correction for Coarse Particles in the Soil Compaction Test

ASTM INTERNATIONAL (ASTM)

ASTM A 139	(2000) Electric-Fusion (Arc)-Welded Steel Pipe (NPS 4 and Over)
ASTM A 252	(1998; R 2002) Welded and Seamless Steel Pipe Piles
ASTM C 33	(2002a) Concrete Aggregates
ASTM C 136	(2001) Sieve Analysis of Fine and Coarse Aggregates
ASTM D 422	(1963; R 1998) Particle-Size Analysis of Soils
ASTM D 698	(2000a) Laboratory Compaction Characteristics of Soil Using Standard Effort (12,400 ft-lbf/cu. ft. (600 kN-m/cu. m.))
ASTM D 1140	(2000) Amount of Material in Soils Finer than the No. 200 (75-micrometer) Sieve
ASTM D 1556	(2000) Density and Unit Weight of Soil in Place by the Sand-Cone Method
ASTM D 1557	(2000) Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/cu. ft. (2,700 kN-m/cu. m.))
ASTM D 1883	(1999) CBR (California Bearing Ratio) of Laboratory-Compacted Soils

ASTM D 2167	(1994; R 2001) Density and Unit Weight of Soil in Place by the Rubber Balloon Method
ASTM D 2434	(1968; R 2000) Permeability of Granular Soils (Constant Head)
ASTM D 2487	(2000) Soils for Engineering Purposes (Unified Soil Classification System)
ASTM D 2922	(2001) Density of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth)
ASTM D 2937	(2000e1) Density of Soil in Place by the Drive-Cylinder Method
ASTM D 3017	(2001) Water Content of Soil and Rock in Place by Nuclear Methods (Shallow Depth)
ASTM D 4318	(2000) Liquid Limit, Plastic Limit, and Plasticity Index of Soils

AMERICAN WATER WORKS ASSOCIATION (AWWA)

AWWA C600	(1999) Installation of Ductile-Iron Water Mains and Their Appurtenances

AMERICAN WOOD-PRESERVER'S ASSOCIATION (AWPA)

AWPA C2	(2001) Lumber, Timber, Bridge Ties and Mine Ties - Preservative Treatment by Pressure Processes
AWPA P5	(2001) Standard for Waterborne Preservatives

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1/D1.1M	(2002) Structural Welding Code - Steel

U.S. ARMY CORPS OF ENGINEERS (USACE)

EM 385-1-1	(1996) U.S. Army Corps of Engineers Safety and Health Requirements Manual

U.S. ENVIRONMENTAL PROTECTION AGENCY (EPA)

EPA 530/F-93/004	1993; Rev O; Updates I, II, IIA, IIB, and III) Test Methods for Evaluating Solid Waste (Vol IA, IB, IC, and II) (SW-846)
EPA 600/4-79/020	(1983) Methods for Chemical Analysis of Water and Wastes

U.S. GENERAL SERVICES ADMINISTRATION (GSA)

FS A-A-203	Rev. C) Paper, Kraft, Untreated

1.2 DEFINITIONS

1.2.1 Satisfactory Materials

Satisfactory materials shall comprise any materials classified by ASTM D 2487 as GW, GP, GM, GP-GM, GW-GM, GC, GP-GC, GM-GC, SW, SP, SM, SW-SM, SC, SW-SC, SP-SM, SP-SC, CL. Satisfactory materials for grading shall be comprised of stones less than 3 inches in any dimension.

1.2.2 Unsatisfactory Materials

Materials which do not comply with the requirements for satisfactory materials are unsatisfactory. Unsatisfactory materials also include man-made fills; trash; refuse; backfills from previous construction; and material classified as satisfactory which contains root and other organic matter or frozen material. Wet, unstable soils and soils that exhibit low shear strength shall also be considered unsatisfactory. The Contracting Officer shall be notified of any contaminated materials.

1.2.3 Cohesionless and Cohesive Materials

Cohesionless materials include materials classified in ASTM D 2487 as GW, GP, SW, and SP. Cohesive materials include materials classified as GC, SC, ML, CL, MH, and CH. Materials classified as GM and SM will be identified as cohesionless only when the fines are nonplastic. Testing required for classifying materials shall be in accordance with ASTM D 4318, ASTM C 136, ASTM D 422, and ASTM D 1140.

1.2.4 Degree of Compaction

Degree of compaction required, except as noted in the second sentence, is expressed as a percentage of the maximum density obtained by the test procedure presented in ASTM D 1557 abbreviated as a percent of laboratory maximum density. Since ASTM D 1557 applies only to soils that have 30 percent or less by weight of their particles retained on the 3/4 inch sieve, the degree of compaction for material having more than 30 percent by weight of their particles retained on the 3/4 inch sieve shall be expressed as a percentage of the maximum density in accordance with AASHTO T 180 Method D and corrected with AASHTO T 224. To maintain the same percentage of coarse material, the "remove and replace" procedure as described in the NOTE 8 in Paragraph 7.2 of AASHTO T 180 shall be used.

1.2.5 Topsoil

Material suitable for topsoils obtained from excavations is defined as: Natural, friable soil representative of productive, well-drained soils in the area, free of subsoil, stumps, rocks larger than one inch diameter, brush, weeds, toxic substances, and other material detrimental to plant growth. Amend topsoil pH range to obtain a pH of 5.5 to 7.

1.2.6 Hard/Unyielding Materials

Weathered rock, dense consolidated deposits, or conglomerate materials which are not included in the definition of "rock" with stones greater than 3 inches in any dimension or as defined by the pipe manufacturer, whichever is smaller. These materials usually require the use of heavy excavation equipment, ripper teeth, or jack hammers for removal.

1.2.7 Rock

Solid homogeneous interlocking crystalline material with firmly cemented, laminated, or foliated masses or conglomerate deposits, neither of which can be removed without systematic drilling and blasting, drilling and the use of expansion jacks or feather wedges, or the use of backhoe-mounted pneumatic hole punchers or rock breakers; also large boulders, buried masonry, or concrete other than pavement exceeding 1/2 cubic yard in volume. Removal of hard material will not be considered rock excavation because of intermittent drilling and blasting that is performed merely to increase production.

1.2.8 Unstable Material

Unstable material shall consist of materials too wet to properly support backfill, the utility pipe, conduit, or appurtenant structure.

1.2.9 Select Granular Material

1.2.9.1 General Requirements

Select granular material shall consist of materials classified as GW, GP, SW, or SP by ASTM D 2487 where indicated.

1.2.10 Initial Backfill Material

Initial backfill shall consist of select granular material or satisfactory materials free from rocks 3 inches or larger in any dimension or free from rocks of such size as recommended by the pipe manufacturer, whichever is smaller. When the pipe is coated or wrapped for corrosion protection, the initial backfill material shall be free of stones larger than 1 inches in any dimension or as recommended by the pipe manufacturer, whichever is smaller.

1.2.11 Nonfrost Susceptible (NFS) Material

Nonfrost susceptible material shall be a uniformly graded washed sand with a maximum particle size of 5 and less than 5 percent passing the No. 200size sieve, and with not more than 3 percent by weight finer than 0.02 mm grain size.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only or as otherwise designated. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Dewatering Work Plan; G, DO

Submit 15 days prior to starting work.

SD-03 Product Data

Utilization of Excavated Materials; G, DO

Procedure and location for disposal of unused satisfactory material. Notification of encountering rock in the project. Advance notice on the opening of excavation

SD-06 Test Reports

Testing
Borrow Site Testing

Within 24 hours of conclusion of physical tests, 3 copies of test results, including calibration curves and results of calibration tests. Results of testing at the borrow site.

SD-07 Certificates

Testing

Qualifications of the commercial testing laboratory or Contractor's testing facilities.

1.4 SUBSURFACE DATA

Subsurface soil boring logs are appended to the SPECIAL CONTRACT REQUIREMENTS. The subsoil investigation report and samples of materials taken from subsurface investigations may be examined at the Charleston District. These data represent the best subsurface information available; however, variations may exist in the subsurface between boring locations.

1.5 CLASSIFICATION OF EXCAVATION

No consideration will be given to the nature of the materials, and all excavation will be designated as unclassified excavation.

1.5.1 BLASTING

Blasting will not be permitted.

1.6 DEWATERING WORK PLAN

Submit procedures for accomplishing dewatering work. Ground water depths, except for perched water, are below the depths of excavation for this work. Dewatering will mainly consist of removing surface runoff, water in drainage ditches, and perched water following periods of rainfall.

PART 2 PRODUCTS

2.1 BURIED WARNING AND IDENTIFICATION TAPE

Polyethylene plastic and/or metallic core or metallic-faced, acid- and alkali-resistant, polyethylene plastic warning tape manufactured specifically for warning and identification of buried utility lines. Provide tape on rolls, 3 inch minimum width, color coded as specified below

for the intended utility with warning and identification imprinted in bold black letters continuously over the entire tape length. Warning and identification to read, "CAUTION, BURIED (intended service) LINE BELOW" or similar wording. Color and printing shall be permanent, unaffected by moisture or soil.

Warning Tape Color Codes

Yellow:	Electric
Yellow:	Gas, Oil; Dangerous Materials
Orange:	Telephone and Other Communications
Blue:	Water Systems
Green:	Sewer Systems
White:	Steam Systems
Gray:	Compressed Air

2.1.1 Warning Tape for Metallic Piping

Acid and alkali-resistant polyethylene plastic tape conforming to the width, color, and printing requirements specified above. Minimum thickness of tape shall be 0.003 inch. Tape shall have a minimum strength of 1500 psi lengthwise, and 1250 psi crosswise, with a maximum 350 percent elongation.

2.1.2 Detectable Warning Tape for Non-Metallic Piping

Polyethylene plastic tape conforming to the width, color, and printing requirements specified above. Minimum thickness of the tape shall be 0.004 inch. Tape shall have a minimum strength of 1500 psi lengthwise and 1250 psi crosswise. Tape shall be manufactured with integral wires, foil backing, or other means of enabling detection by a metal detector when tape is buried up to 3 feet deep. Encase metallic element of the tape in a protective jacket or provide with other means of corrosion protection.

2.2 DETECTION WIRE FOR NON-METALLIC PIPING

Detection wire shall be insulated single strand, solid copper with a minimum of 12 AWG.

2.3 CAPILLARY WATER BARRIER

Capillary Water Barrier shall consist of clean, poorly graded crushed rock, crushed gravel, or uncrushed gravel placed beneath a building slab with a vapor barrier to cut off the capillary flow of pore water to the area immediately below. Fine aggregate grading shall conform to ASTM C 33 with a maximum of 3 percent by weight passing ASTM D 1140, No. 200 sieve, or 1-1/2 inches and no more than 2 percent by weight passing the No. 4 size sieve or coarse aggregate Size 57, 67, or 77.

PART 3 EXECUTION

3.1 STRIPPING OF TOPSOIL

Where indicated or directed, topsoil shall be stripped. Typical depth of topsoil is generally 2 inches or less. Topsoil shall be spread on areas already graded and prepared for topsoil, or transported and deposited in stockpiles convenient to areas that are to receive application of the

topsoil later, or at locations indicated or specified. Topsoil shall be kept separate from other excavated materials, brush, litter, objectionable weeds, roots, stones larger than 2 inches in diameter, and other materials that would interfere with planting and maintenance operations. Any surplus of topsoil from excavations and grading shall be stockpiled in designated areas, or wasted if predominately sandy, heavy clay or lean in organic content.

3.2 GENERAL EXCAVATION

The Contractor shall perform excavation of every type of material encountered within the limits of the project to the lines, grades, and elevations indicated and as specified. Grading shall be in conformity with the typical sections shown and the tolerances specified in paragraph FINISHING. Satisfactory excavated materials shall be transported to and placed in fill or embankment within the limits of the work. Unsatisfactory materials encountered within the limits of the work shall be excavated below grade and replaced with satisfactory materials as directed. Such excavated material and the satisfactory material ordered as replacement shall be included in excavation. Surplus satisfactory excavated material not required for fill or embankment shall be disposed of in areas approved for surplus material storage or designated waste areas. Unsatisfactory excavated material shall be disposed of in designated waste or spoil areas. During construction, excavation and fill shall be performed in a manner and sequence that will provide proper drainage at all times. Material required for fill or embankment in excess of that produced by excavation within the grading limits shall be obtained by increasing the limits of the ditch excavation in a manner approved by the Contracting Officer. Otherwise, borrow shall be obtained offsite by the Contractor at his expense.

3.2.1 Ditches, Gutters, and Channel Changes

Excavation of ditches shall be accomplished by cutting accurately to the cross sections, grades, and elevations shown. Ditches shall not be excavated below grades shown. Excessive open ditch excavation required for additional backfill shall be obtained from even expansion of the width of the ditch from the side opposite the roadway. Additional clearing and grubbing shall be at the Contractor's expense. Over-excavation of the depth of the ditch shall be backfilled with satisfactory, thoroughly compacted, material or with suitable stone or cobble to grades shown. Excess or unsatisfactory material excavated shall be disposed of as shown or as directed, except that in no case shall material be deposited less than 4 feet from the edge of a ditch. The Contractor shall maintain excavations free from detrimental quantities of leaves, brush, sticks, trash, and other debris until final acceptance of the work.

3.2.2 Drainage

Provide for the collection and disposal of surface and subsurface water encountered during construction. Completely drain construction site during periods of construction to keep soil materials sufficiently dry. The Contractor shall establish/construct storm drainage features at the earliest stages of site development, and throughout construction grade the construction area to provide positive surface water runoff away from the construction activity and/or provide temporary ditches, swales, and other drainage features and equipment as required to maintain dry soils. When unsuitable working platforms for equipment operation and unsuitable soil

support for subsequent construction features develop, remove unsuitable material and provide new soil material as specified herein. It is the responsibility of the Contractor to assess the soil and ground water conditions presented by the plans and specifications and to employ necessary measures to permit construction to proceed.

3.2.3 Dewatering

Groundwater flowing toward or into excavations shall be controlled to prevent sloughing of excavation slopes and walls, erosion, boils, uplift and heave in the excavation and to eliminate interference with orderly progress of construction. French drains, sumps, ditches or trenches will not be permitted within 3 feet of the foundation of any structure, except with specific written approval, and after specific contractual provisions for restoration of the foundation area have been made. Control measures shall be taken by the time the excavation reaches the water level in order to maintain the integrity of the in situ material. While the excavation is open, the water level shall be maintained continuously, at least 3feet below the working level.

3.2.4 Trench Excavation Requirements

The trench shall be excavated as recommended by the manufacturer of the pipe to be installed. Trench walls below the top of the pipe shall be sloped, or made vertical, and of such width as recommended in the manufacturer's installation manual. Where no manufacturer's installation manual is available, trench walls shall be made vertical. Trench walls more than 5 feet high shall be shored, cut back to a stable slope, or provided with equivalent means of protection for employees who may be exposed to moving ground or cave in. Trench walls which are cut back shall be excavated to at least the angle of repose of the soil. Special attention shall be given to slopes which may be adversely affected by weather or moisture content. The trench width below the top of pipe shall not exceed 24 inches plus pipe outside diameter (O.D.) for pipes of less than 24 inches inside diameter. Where recommended trench widths are exceeded, redesign, stronger pipe, or special installation procedures shall be utilized by the Contractor. The cost of redesign, stronger pipe, or special installation procedures shall be borne by the Contractor without any additional cost to the Government.

3.2.4.1 Bottom Preparation

The bottoms of trenches shall be accurately graded to provide uniform bearing and support for the bottom quadrant of each section of the pipe. Bell holes shall be excavated to the necessary size at each joint or coupling to eliminate point bearing. Stones of 3 inches or greater in any dimension, or as recommended by the pipe manufacturer, whichever is smaller, shall be removed to avoid point bearing.

3.2.4.2 Removal of Unyielding Material

Where unyielding material is encountered in the bottom of the trench, such material shall be removed 6 inches below the required grade and replaced with suitable materials as provided in paragraph BACKFILLING AND COMPACTION.

3.2.4.3 Removal of Unstable Material

Where unstable material is encountered in the bottom of the trench, such material shall be removed to the depth directed and replaced to the proper grade with select granular material as provided in paragraph BACKFILLING AND COMPACTION. When removal of unstable material is required due to the Contractor's fault or neglect in performing the work, the resulting material shall be excavated and replaced by the Contractor without additional cost to the Government.

3.2.4.4 Excavation for Appurtenances

Excavation for manholes, catch-basins, inlets, or similar structures shall be of sufficient size to permit the placement and removal of forms for the full length and width of structure footings and foundations as shown. Removal of unstable material shall be as specified above. When concrete or masonry is to be placed in an excavated area, special care shall be taken not to disturb the bottom of the excavation. Excavation to the final grade level shall not be made until just before the concrete or masonry is to be placed.

3.2.5 Underground Utilities

Movement of construction machinery and equipment over pipes and utilities during construction shall be at the Contractor's risk. Perform work adjacent to non-Government utilities as indicated in accordance with procedures outlined by utility company. Report damage to utility lines or subsurface construction immediately to the Contracting Officer.

3.2.6 Structural Excavation

Ensure that footing subgrades have been inspected and approved by the Contracting Officer prior to concrete placement.

3.3 SELECTION OF BORROW MATERIAL

Borrow material shall be selected to meet the requirements and conditions of the particular fill or embankment for which it is to be used. Borrow material shall be obtained from the excavations within the limits of the project site, or from approved private sources. Unless otherwise provided in the contract, the Contractor shall obtain from the owners the right to procure material, pay royalties and other charges involved, and bear the expense of developing the sources, including rights-of-way for hauling. Borrow material from approved sources on Government-controlled land may be obtained without payment of royalties. Unless specifically provided, no borrow shall be obtained outside the limits of the excavation on the SRS site without prior written approval. Necessary clearing, grubbing, and satisfactory drainage of borrow pits and the disposal of debris thereon shall be considered related operations to the borrow excavation.

3.4 OPENING AND DRAINAGE OF EXCAVATION AND BORROW PITS

Except as otherwise permitted, excavation areas shall be excavated providing adequate drainage. The Contractor shall ensure that excavation of any area, or dumping of spoil material results in minimum detrimental effects on natural environmental conditions.

3.5 FINAL GRADE OF SURFACES TO SUPPORT CONCRETE

Excavation to final grade shall not be made until just before concrete is to be placed. All surfaces shall be protected from erosion resulting from ponding or flow of water.

3.6 GROUND SURFACE PREPARATION

3.6.1 General Requirements

Unsatisfactory material in surfaces to receive fill or in excavated areas shall be removed and replaced with satisfactory materials as directed by the Contracting Officer. The surface shall be scarified to a depth of 6 inches before the fill is started. Sloped surfaces steeper than 1 vertical to 4 horizontal shall be plowed, stepped, benched, or broken up so that the fill material will bond with the existing material. When subgrades are less than the specified density, the ground surface shall be broken up to a minimum depth of 6 inches, pulverized, and compacted to the specified density. When the subgrade is part fill and part excavation or natural ground, the excavated or natural ground portion shall be scarified to a depth of 12 inches and compacted as specified for the adjacent fill.

3.6.2 Frozen Material

Material shall not be placed on surfaces that are muddy, frozen, or contain frost. Compaction shall be accomplished by sheepsfoot rollers, pneumatic-tired rollers, steel-wheeled rollers, or other approved equipment well suited to the soil being compacted. Material shall be moistened or aerated as necessary to provide the moisture content that will readily facilitate obtaining the specified compaction with the equipment used. Minimum subgrade density shall be as specified in paragraph TESTING.

3.7 UTILIZATION OF EXCAVATED MATERIALS

Unsatisfactory materials removed from excavations shall be disposed of in designated waste disposal or spoil areas. Satisfactory material removed from excavations shall be used, insofar as practicable, in the construction of fills, embankments, subgrades, shoulders, bedding (as backfill), and for similar purposes. No satisfactory excavated material shall be wasted without specific written authorization. Satisfactory material authorized to be wasted shall be disposed of in designated areas approved for surplus material storage or designated waste areas as directed. No excavated material shall be disposed of to obstruct the flow of any stream, endanger a partly finished structure, impair the efficiency or appearance of any structure, or be detrimental to the completed work in any way.

3.8 BURIED TAPE AND DETECTION WIRE

3.8.1 Buried Warning and Identification Tape

Provide buried utility lines with utility identification tape. Bury tape 12 inches below finished grade; under pavements and slabs, bury tape 6 inches below top of subgrade.

3.8.2 Buried Detection Wire

Bury detection wire directly above non-metallic piping at a distance not to exceed 12 inches above the top of pipe. The wire shall extend continuously and unbroken, from manhole to manhole. The ends of the wire shall terminate

inside the manholes at each end of the pipe, with a minimum of 3 feet of wire, coiled, remaining accessible in each manhole. The wire shall remain insulated over it's entire length. The wire shall enter manholes between the top of the corbel and the frame, and extend up through the chimney seal between the frame and the chimney seal. For force mains, the wire shall terminate in the valve pit at the pump station end of the pipe.

3.9 BACKFILLING AND COMPACTION

Backfill adjacent to any and all types of structures shall be placed and compacted to at least 95 percent laboratory maximum density for cohesive materials and cohesionless materials to prevent wedging action or eccentric loading upon or against the structure. Compaction requirements for backfill materials shall conform to the applicable portions of paragraphs EMBANKMENTS, and SUBGRADE PREPARATION, and Section 02630A STORM-DRAINAGE SYSTEM. Compaction shall be accomplished by sheepsfoot rollers, pneumatic-tired rollers, steel-wheeled rollers, vibratory compactors, or other approved equipment.

3.9.1 Trench Backfill

Trenches shall be backfilled to the grade shown. The trench shall be backfilled to 2 feet above the top of pipe prior to performing the required pressure tests. The joints and couplings shall be left uncovered during the pressure test.

3.9.1.1 Replacement of Unyielding Material

Unyielding material removed from the bottom of the trench shall be replaced with select granular material or initial backfill material.

3.9.1.2 Replacement of Unstable Material

Unstable material removed from the bottom of the trench or excavation shall be replaced with select granular material placed in layers not exceeding 6 inches loose thickness.

3.9.1.3 Bedding and Initial Backfill

Bedding shall be of the type and thickness shown. Initial backfill material shall be placed and compacted with approved tampers to a height of at least one foot above the utility pipe or conduit. The backfill shall be brought up evenly on both sides of the pipe for the full length of the pipe. Care shall be taken to ensure thorough compaction of the fill under the haunches of the pipe. Except as specified otherwise in the individual piping section, provide bedding for buried piping in accordance with AWWA C600, Type 4, except as specified herein. Backfill to top of pipe shall be compacted to 95 percent of ASTM D 698 maximum density. Plastic piping shall have bedding to spring line of pipe. Provide materials as follows:

a. Class I: Angular, 0.25 to 1.5 inches, graded stone, including a number of fill materials that have regional significance such as coral, slag, cinders, crushed stone, and crushed shells.

b. Class II: Coarse sands and gravels with maximum particle size of 1.5 inches, including various graded sands and gravels containing small percentages of fines, generally granular and

noncohesive, either wet or dry. Soil Types GW, GP, SW, and SP are included in this class as specified in ASTM D 2487.

c. Clean, coarse-grained sand classified as SW or SP by ASTM D 2487.

d. Clean, coarsely graded natural gravel, crushed stone or a combination thereof identified as having a classification of GW or GP in accordance with ASTM D 2487. Maximum particle size shall not exceed 3 inches.

3.9.1.4 Final Backfill

The remainder of the trench, except for special materials for roadways, shall be filled with satisfactory material. Backfill material shall be placed and compacted as follows:

a. Roadways: Backfill shall be placed up to the required elevation as specified. Water flooding or jetting methods of compaction will not be permitted.

b. Sidewalks, Turfed or Seeded Areas and Miscellaneous Areas: Backfill shall be deposited in layers of a maximum of 12 inch loose thickness, and compacted to 85 percent maximum density for cohesive soils and 90 percent maximum density for cohesionless soils. Compaction by water flooding or jetting will not be permitted. This requirement shall also apply to all other areas not specifically designated above.

3.9.2 Backfill for Appurtenances

After the manhole, catchbasin, inlet, or similar structure has been constructed and the concrete has been allowed to cure for 3 days, backfill shall be placed in such a manner that the structure will not be damaged by the shock of falling earth. The backfill material shall be deposited and compacted as specified for final backfill, and shall be brought up evenly on all sides of the structure to prevent eccentric loading and excessive stress.

3.10 SPECIAL REQUIREMENTS

Special requirements for both excavation and backfill relating to the specific utilities are as follows:

3.10.1 Water Lines

Trenches shall be of a depth to provide a minimum cover of 3 feet from the existing ground surface, or from the indicated finished grade of pavement, whichever is lower, to the top of the pipe.

3.10.2 Electrical Distribution System

Direct burial cable and conduit or duct line shall have a minimum cover of 24 inches from the finished grade, unless otherwise indicated.

3.11 EMBANKMENTS

3.11.1 Earth Embankments

Earth embankments shall be constructed from satisfactory materials free of organic or frozen material and rocks with any dimension greater than 3 inches. The material shall be placed in successive horizontal layers of loose material not more than 8 inches in depth. Each layer shall be spread uniformly on a soil surface that has been moistened or aerated as necessary, and scarified or otherwise broken up so that the fill will bond with the surface on which it is placed. After spreading, each layer shall be plowed, disked, or otherwise broken up; moistened or aerated as necessary; thoroughly mixed; and compacted to at least 90 percent laboratory maximum density for cohesive materials or 95 percent laboratory maximum density for cohesionless materials. Compaction requirements for the upper portion of earth embankments forming subgrade for pavements shall be identical with those requirements specified in paragraph SUBGRADE PREPARATION. Compaction shall be accomplished by sheepsfoot rollers, pneumatic-tired rollers, steel-wheeled rollers, vibratory compactors, or other approved equipment.

3.12 SUBGRADE PREPARATION

3.12.1 Proof Rolling

Proof rolling shall be done on an exposed subgrade free of surface water (wet conditions resulting from rainfall) which would promote degradation of an otherwise acceptable subgrade. Prior to placement of the macadam base, proof roll the existing subgrade of the roadway with six passes of a 15 ton, pneumatic-tired roller. Operate the roller in a systematic manner to ensure the number of passes over all areas, and at speeds between 2 1/2 to 3 1/2 mph. When proof rolling, one-half of the passes made with the roller shall be in a direction perpendicular to the other passes. Notify the Contracting Officer a minimum of 3 days prior to proof rolling. Proof rolling shall be performed in the presence of the Contracting Officer. Rutting or pumping of material shall be undercut to a depth of 24inches and replaced with select granular material.

3.12.2 Construction

Subgrade shall be shaped to line, grade, and cross section, and compacted as specified. This operation shall include plowing, disking, and any moistening or aerating required to obtain specified compaction. Soft or otherwise unsatisfactory material shall be removed and replaced with satisfactory excavated material or other approved material as directed. Low areas resulting from removal of unsatisfactory material shall be brought up to required grade with satisfactory materials, and the entire subgrade shall be shaped to line, grade, and cross section and compacted as specified. After rolling, the surface of the subgrade for roadways shall not show deviations greater than 1inch when tested with a 10foot straightedge applied both parallel and at right angles to the centerline of the area. The elevation of the finish subgrade shall not vary more than 0.05 foot from the established grade and cross section.

3.14.3 Compaction

Compaction shall be accomplished by sheepsfoot rollers, pneumatic-tired rollers, steel-wheeled rollers, vibratory compactors, or other approved equipment. Except for paved areas and railroads, each layer of the

embankment shall be compacted to at least 95 percent of laboratory maximum density.

3.14.3.2 Subgrade for Pavements

Depth Below Pavement (or Shoulder) Surface		Percentage of Laboratory Maximum Density Required			
Inches<MET>mm</MET> Inches		Fill		Cut	
From	To	Cohesive Materials	Cohesionless Materials	Cohesive Materials	Cohesionless Materials

Subgrade for pavements shall be compacted to at least 95 percentage laboratory maximum density for the full depth of fill placed below the surface of the pavement shown.

3.13 FINISHING

The surface of excavations, embankments, and subgrades shall be finished to a smooth and compact surface in accordance with the lines, grades, and cross sections or elevations shown. The degree of finish for graded areas shall be within 0.1 foot of the grades and elevations indicated except that the degree of finish for subgrades shall be specified in paragraph SUBGRADE PREPARATION. Ditches shall be finished in a manner that will result in effective drainage. The surface of areas to be turfed shall be finished to a smoothness suitable for the application of turfing materials. Settlement or washing that occurs in graded, topsoiled, or backfilled areas prior to acceptance of the work, shall be repaired and grades re-established to the required elevations and slopes.

3.13.1 Subgrade and Embankments

During construction, embankments and excavations shall be kept shaped and drained. Ditches along subgrade shall be maintained to drain effectively at all times. The finished subgrade shall not be disturbed by traffic or other operation and shall be protected and maintained by the Contractor in a satisfactory condition until base, or pavement is placed. The storage or stockpiling of materials on the finished subgrade will not be permitted. No base course shall be laid until the subgrade has been checked and approved, and in no case shall base pavement be placed on a muddy, spongy, or frozen subgrade or base.

3.13.2 Capillary Water Barrier

Capillary water barrier under concrete floor and area-way slabs on grade shall be placed directly on the subgrade and shall be compacted with a minimum of two passes of a hand-operated plate-type vibratory compactor.

3.13.3 Grading Around Structures

Areas within 5 feet outside of each building and structure line shall be constructed true-to-grade, shaped to drain, and shall be maintained free of trash and debris until final inspection has been completed and the work has been accepted.

3.14 PLACING TOPSOIL

On areas to receive topsoil, the compacted subgrade soil shall be scarified to a 2 inch depth for bonding of topsoil with subsoil. Topsoil then shall be spread evenly to a thickness of 4inches and graded to the elevations and slopes shown. Topsoil shall not be spread when frozen or excessively wet or dry. Material required for topsoil in excess of that produced by excavation within the grading limits shall be obtained from offsite areas.

3.15 TESTING

Testing shall be performed by an approved commercial testing laboratory or by the Contractor subject to approval. If the Contractor elects to establish testing facilities, no work requiring testing will be permitted until the Contractor's facilities have been inspected and approved by the Contracting Officer. Field in-place density shall be determined in accordance with ASTM D 1556, ASTM D 2167 or ASTM D 2922. When ASTM D 2922 is used, the calibration curves shall be checked and adjusted using only the sand cone method as described in ASTM D 1556. ASTM D 2922 results in a wet unit weight of soil and when using this method ASTM D 3017 shall be used to determine the moisture content of the soil. The calibration curves furnished with the moisture gauges shall also be checked along with density calibration checks as described in ASTM D 3017; the calibration checks of both the density and moisture gauges shall be made at the beginning of a job on each different type of material encountered and at intervals as directed by the Contracting Officer. When test results indicate, as determined by the Contracting Officer, that compaction is not as specified, the material shall be removed, replaced and recompacted to meet specification requirements. Tests on recompacted areas shall be performed to determine conformance with specification requirements. Inspections and test results shall be certified by a registered professional geotechnical engineer. These certifications shall state that the tests and observations were performed by or under the direct supervision of the engineer and that the results are representative of the materials or conditions being certified by the tests. The following number of tests, if performed at the appropriate time, will be the minimum acceptable for each type operation.

3.15.1 Fill and Backfill Material Gradation

One test per 250 cubic yards or fraction thereof stockpiled or in-place source material. Gradation of fill and backfill material shall be determined in accordance with ASTM C 136, ASTM D 422 or ASTM D 1140, as applicable.

3.15.2 In-Place Densities

Material Type	Location of Material	Test Frequency
Undisturbed	Structures	Two random tests in

native soil		building footings and two tests on subgrade within building line.
Fills and backfills	Structures (adjacent to)	One test per structure per 2,000 sq. ft taken 12 inches below finished grade.
Subgrades	Site (except airfields)	One test per lift per 2,500 sq. ft
Embankments or borrow	Any	One test per lift per 500 cubic yds placed.
Native soil subgrade other than structures and parking	Any	One test or one test per 10,000 sq. ft, whichever is greater.
Borrow	Any	One test per lift per 500 cubuc yds placed.

a. One test per each lift of fill or backfill compacted by hand-operated machines.

b. One test per 300 linear feet, or fraction thereof, of each lift of embankment or backfill for roads and parking areas.

3.15.3 Check Tests on In-Place Densities

If ASTM D 2922 is used, in-place densities shall be checked by ASTM D 1556 as follows:

a. One check test per every third lift of backfill compacted by hand-operated machines.

c. One check test per lift for each 1200 linear feet, or fraction thereof, of embankment or backfill for roads.

3.15.4 Moisture Contents

In the stockpile, excavation, or borrow areas, a minimum of two tests per day per type of material or source of material being placed during stable weather conditions shall be performed. During unstable weather, tests shall be made as dictated by local conditions and approved by the Contracting Officer.

3.15.5 Optimum Moisture and Laboratory Maximum Density

Tests shall be made for each type material or source of material including borrow material to determine the optimum moisture and laboratory maximum density values. One representative test per 100 cubic yards of fill and

backfill, or when any change in material occurs which may affect the optimum moisture content or laboratory maximum density.

3.15.6 Tolerance Tests for Subgrades

Continuous checks on the degree of finish specified in paragraph SUBGRADE PREPARATION shall be made during construction of the subgrades.

3.15.7 Displacement of Sewers

After other required tests have been performed and the trench backfill compacted to 2 feet above the top of the pipe, the pipe shall be inspected to determine whether significant displacement has occurred. This inspection shall be conducted in the presence of the Contracting Officer. Pipe sizes larger than 36 inches shall be entered and examined, while smaller diameter pipe shall be inspected by shining a light or laser between manholes or manhole locations, or by the use of television cameras passed through the pipe. If, in the judgement of the Contracting Officer, the interior of the pipe shows poor alignment or any other defects that would cause improper functioning of the system, the defects shall be remedied as directed at no additional cost to the Government.

3.16 DISPOSITION OF SURPLUS MATERIAL

Surplus material or other soil material not required or suitable for filling or backfilling, and brush, refuse, stumps, roots, and timber shall become the property of the Contractor and removed from the site for offsite disposal.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 02 - SITE CONSTRUCTION

SECTION 02370A

SOIL SURFACE EROSION CONTROL

01/03

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 DESCRIPTION OF WORK
1.4 DELIVERY, INSPECTION, STORAGE, AND HANDLING
1.5 SUBSTITUTIONS

PART 2 PRODUCTS

2.1 SEED - see Section 02921A SEEDING.
2.2 MULCH
2.2.1 Straw
2.2.2 Hay
2.2.3 Shredded Bark
2.2.4 Wood By-Products
2.3 WATER

PART 3 EXECUTION

3.1 CONDITIONS
3.1.1 Finished Grade
3.2 SITE PREPARATION
3.2.1 Layout
3.2.2 Protecting Existing Vegetation
3.3 INSTALLATION
3.3.1 Seeding
3.3.2 Mulch Installation
3.4 CLEAN-UP
3.5 WATERING SEED
3.6 MAINTENANCE

-- End of Section Table of Contents --

SECTION 02370A

SOIL SURFACE EROSION CONTROL

01/03

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by basic designation only.

U.S. DEPARTMENT OF AGRICULTURE (USDA)

AMS Seed Act	(1940; R 1988; R 1998) Federal Seed Act

ASTM INTERNATIONAL (ASTM) (ASTM)

ASTM C 39/C 39M	(2001) Compressive Strength of Cylindrical Concrete Specimens
ASTM C 42/C 42M	(1999) Obtaining and Testing Drilled Cores and Sawed Beams of Concrete
ASTM C 140	(2001ae1) Sampling and Testing Concrete Masonry Units and Related Units
ASTM D 648	(2001) Deflection Temperature of Plastics Under Flexural Load in the Edgewise Position
ASTM D 698	(2000a) Laboratory Compaction Characteristics of Soil Using Standard Effort (12,400 ft-lbf/cu. ft.(600kN-m/cu. m.))
ASTM D 977	(1998) Emulsified Asphalt
ASTM D 1248	(2000a) Polyethylene Plastics Extrusion Materials for Wire and Cable
ASTM D 1560	(1992; R 2000) Resistance to Deformation and Cohesion of Bituminous Mixtures by Means of Hveem Apparatus
ASTM D 1682	(1959T; R 1975) Test for Breaking Load and Elongation of Textile Fabrics
ASTM D 1777	(1996) Thickness of Textile Materials
ASTM D 2028	(1997) Cutback Asphalt (Rapid-Curing Type)
ASTM D 2844	(1994) Resistance R-Value and Expansion Pressure of Compacted Soils

ASTM D 3776	(1996) Mass per Unit Area (Weight)of Fabric
ASTM D 3787	(2001) Bursting Strength of Textiles - Constant-Rate-of-Traverse (CRT), Ball Burst Test
ASTM D 3884	(2001e1) Abrasion Resistance of Textile Fabrics (Rotary Platform, Double Head Method)
ASTM D 4355	(1999) Deterioration of Geotextiles From Exposure to Ultraviolet Light and Water (Xenon-Arc Type Apparatus)
ASTM D 4491	(1999a) Water Permeability of Geotextiles by Permittivity
ASTM D 4533	(1991; R 1996) Trapezoidal Tearing Strength of Geotextiles
ASTM D 4595	(1986; R 2001) Tensile Properties of Geotextiles by the Wide-Width Strip Method
ASTM D 4632	(1991; R 1996) Grab Breaking Load and Elongation of Geotextiles
ASTM D 4751	(1999a) Determining Apparent Opening Size of a Geotextile
ASTM D 4833	(2000) Index Puncture Resistance of Geotextiles, Geomembranes, and Related Products
ASTM D 4972	(2001) pH of Soils
ASTM D 5035	(1995) Breaking Force and Elongation of Textile Fabrics (Strip Method)
ASTM D 5268	(1992; R 1997) Topsoil Used for Landscaping Purposes

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only or as otherwise designated. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-07 Certificates

Construction Work Sequence Schedule; G

1.3 DESCRIPTION OF WORK

The work shall consist of furnishing and installing soil surface erosion control materials and miscellaneous related work, within project limits and in areas outside the project limits where the soil surface is disturbed from work under this contract. This work shall include all necessary materials, labor, supervision and equipment for installation of a complete system. This section shall be coordinated with the requirements of Section 02300 EARTHWORK, Section 01356A STORM WATER POLLUTION PREVENTION MEASURES and Section 02921A SEEDING. SEE SOIL EROSION AND SEDIMENT CONTROL PLAN.

1.4 DELIVERY, INSPECTION, STORAGE, AND HANDLING

Materials shall be stored in designated areas and as recommended by the manufacturer protected from the elements, direct exposure, and damage. Containers shall not be dropped from trucks. Material shall be free of defects that would void required performance or warranty.

Seed shall be inspected upon arrival at the jobsite for conformity to species and quality. Seed that is wet, moldy, or bears a test date five months or older, shall be rejected.

1.5 SUBSTITUTIONS

Substitutions will not be allowed without written request and approval from the Contracting Officer.

PART 2 PRODUCTS

2.1 SEED - SEE SECTION 02921A SEEDING.

2.2 MULCH

Mulch shall be free from weeds, mold, and other deleterious materials. Mulch materials shall be native to the region.

2.2.1 Straw

Straw shall be stalks from oats, wheat, rye, barley, or rice, furnished in air-dry condition and with a consistency for placing with commercial mulch-blowing equipment.

2.2.2 Hay

Hay shall be native hay, sudan-grass hay, broomsedge hay, or other herbaceous mowings, furnished in an air-dry condition suitable for placing with commercial mulch-blowing equipment.

2.2.3 Shredded Bark

Locally shredded material shall be treated to retard the growth of mold and fungi.

2.2.4 Wood By-Products

Wood locally chipped or ground bark shall be treated to retard the growth of mold and fungi. Gradation: A maximum 2 inch wide by 4 inch long.

2.3 WATER

Unless otherwise directed, water shall be the responsibility of the Contractor. Water shall be potable or supplied by an existing irrigation system.

PART 3 EXECUTION

3.1 CONDITIONS

Erosion control operations shall be performed under favorable weather conditions; when excessive moisture, frozen ground or other unsatisfactory conditions prevail, the work shall be stopped. Erosion control materials shall not be applied in adverse weather conditions which could affect their performance.

3.1.1 Finished Grade

The Contractor shall verify that finished grades are as indicated on the drawings; finish grading and compaction shall be completed in accordance with Section 02300 EARTHWORK, prior to the commencement of the work. The location of underground utilities and facilities in the area of the work shall be verified and marked. Damage to underground utilities and facilities shall be repaired at the Contractor's expense.

3.2 SITE PREPARATION

3.2.1 Layout

Erosion control material locations may be adjusted to meet field conditions.

3.2.2 Protecting Existing Vegetation

When there are established lawns in the work area, the turf shall be covered and/or protected or replaced after construction operations. Existing trees that are to be preserved shall be barricaded along the dripline. Damage to existing trees shall be mitigated by the Contractor at no additional cost to the Government. Damage shall be assessed by a state certified arborist or other approved professional using the National Arborist Association's tree valuation guideline.

3.3 INSTALLATION

3.3.1 Seeding

See Section 02921A SEEDING.

3.3.2 Mulch Installation

Mulch shall be installed as required.

3.4 CLEAN-UP

Excess material, debris, and waste materials shall be disposed offsite at an approved landfill or recycling center. Adjacent paved areas shall be cleared. Immediately upon completion of the installation in an area, the area shall be protected against traffic or other use.

3.5 WATERING SEED

Water shall be applied to supplement rainfall at a sufficient rate to ensure moist soil conditions to a minimum 1 inch depth. Run-off and puddling shall be prevented. Watering trucks shall not be driven over turf areas, unless otherwise directed. Watering of other adjacent areas or plant material shall be prevented.

3.6 MAINTENANCE

Maintenance shall include eradicating weeds; protecting embankments and ditches from surface erosion; maintaining the performance of the erosion control materials and mulch; protecting installed areas from traffic.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 02 - SITE CONSTRUCTION

SECTION 02510A

WATER DISTRIBUTION SYSTEM

05/02

PART 1 GENERAL

1.1 REFERENCES
1.2 PIPING
1.2.1 Service Lines
1.2.2 Potable Water Lines
1.2.3 Plastic Piping System
1.2.4 Excavation, Trenching, and Backfilling
1.3 SUBMITTALS
1.4 HANDLING
1.4.1 Miscellaneous Plastic Pipe and Fittings

PART 2 PRODUCTS

2.1 PIPE
2.1.1 Plastic Pipe
2.1.1.1 PVC Plastic Pipe
2.1.1.2 Oriented Polyvinyl Chloride (PVCO) Plastic Pipe
2.1.2 Copper Tubing
2.2 FITTINGS AND SPECIALS
2.2.1 PVC Pipe System
2.2.2 Copper Tubing System
2.3 JOINTS
2.3.1 Plastic Pipe Jointing
2.3.1.1 PVC Pipe
2.3.1.2 PVCO Pipe
2.3.2 Isolation Joints
2.3.3 Copper Tubing Jointing
2.4 VALVES
2.4.1 Gate Valves
2.5 VALVE BOXES
2.6 VALVE PITS
2.7 MISCELLANEOUS ITEMS
2.7.1 Service Clamps
2.7.2 Corporation Stops
2.7.3 Goosenecks
2.7.4 Tapping Sleeves
2.7.5 Service Boxes
2.7.6 Disinfection

PART 3 EXECUTION

3.1 INSTALLATION
3.1.1 Cutting of Pipe
3.1.2 Adjacent Facilities
3.1.2.1 Sewer Lines

3.1.2.2 Water Lines
3.1.2.3 Copper Tubing Lines
3.1.2.4 Nonferrous Metallic Pipe
3.1.3 Joint Deflection
3.1.3.1 Offset for Flexible Plastic Pipe
3.1.4 Placing and Laying
3.1.4.1 Plastic Pipe Installation
3.1.4.2 Piping Connections
3.1.4.3 Flanged Pipe
3.1.5 Jointing
3.1.5.1 PVC Plastic Pipe Requirements
3.1.5.2 Copper Tubing Requirements
3.1.5.3 Isolation Joints and Dielectric Fittings
3.1.5.4 Transition Fittings
3.1.6 Installation of Service Lines
3.1.6.1 Service Lines 2 Inches and Smaller
3.1.7 Setting of Valves and Valve Boxes
3.1.7.1 Location of Valves
3.2 HYDROSTATIC TESTS
3.2.1 Pressure Test
3.2.2 Leakage Test
3.2.3 Time for Making Test
3.2.4 Concurrent Hydrostatic Tests
3.3 BACTERIAL DISINFECTION
3.3.1 Bacteriological Disinfection
3.4 CLEANUP

-- End of Section Table of Contents --

SECTION 02510A

WATER DISTRIBUTION SYSTEM
05/02

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN RAILWAY ENGINEERING & MAINTENANCE-OF-WAY ASSOCIATION (AREMA)

AREMA Manual	(1999) Manual for Railway Engineering (4 Vol.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 36/A 36M	(1997ael) Carbon Structural Steel
ASTM A 53	(1999b) Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM B 88	(1996) Seamless Copper Water Tube
ASTM B 88M	(1996) Seamless Copper Water Tube (Metric)
ASTM C 76	(1999) Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe
ASTM C 76M	(1999a) Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe (Metric)
ASTM D 1599	(1999) Resistance to Short-Time Hydraulic Failure Pressure of Plastic Pipe, Tubing, and Fittings
ASTM D 1784	(1999a) Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
ASTM D 1785	(1999) Poly(Vinyl Chloride) (PVC) Plastic Pipe, Schedules 40, 80, and 120
ASTM D 2241	(1996b) Poly(Vinyl Chloride) (PVC) Pressure-Rated Pipe (SDR Series)
ASTM D 2464	(1999) Threaded Poly(Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 80
ASTM D 2466	(1999) Poly(Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 40

ASTM D 2467	(1999) Poly(Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 80
ASTM D 2564	(1996a) Solvent Cements for Poly(Vinyl Chloride) (PVC) Plastic Piping Systems
ASTM D 2657	(1997) Heat Fusion Joining Polyolefin Pipe and Fittings
ASTM D 2774	(1994) Underground Installation of Thermoplastic Pressure Piping
ASTM D 2855	(1996) Making Solvent-Cemented Joints with Poly(Vinyl Chloride) (PVC) Pipe and Fittings
ASTM D 2996	(1995) Filament-Wound "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pipe
ASTM D 2997	(1995) Centrifugally Cast "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pipe
ASTM D 3139	(1998) Joints for Plastic Pressure Pipes Using Flexible Elastomeric Seals
ASTM D 3839	(1994a) Underground Installation of "Fiberglass" (Glass-Fiber-Reinforced Thermosetting Resin) Pipe
ASTM D 4161	(1996) "Fiberglass"(Glass-Fiber-Reinforced Thermosetting Resin) Pipe Joints Using Elastomeric Seals
ASTM F 477	(1999) Elastomeric Seals (Gaskets) for Joining Plastic Pipe
ASTM F 1483	(1998) Oriented Poly(Vinyl Chloride), PVCO, Pressure Pipe

ASME INTERNATIONAL (ASME)

ASME B1.20.1	(1983; R 1992) Pipe Threads, General Purpose (Inch)
ASME B16.1	(1998) Cast Iron Pipe Flanges and Flanged Fittings
ASME B16.3	(1992) Malleable Iron Threaded Fittings
ASME B16.26	(1988) Cast Copper Alloy Fittings for Flared Copper Tubes
ASME B36.10M	(1996) Welded and Seamless Wrought Steel Pipe

AMERICAN WATER WORKS ASSOCIATION (AWWA)

AWWA B300	(1992) Hypochlorites

AWWA B301	(1992) Liquid Chlorine
AWWA C104	(1995) Cement-Mortar Lining for Ductile-Iron Pipe and Fittings for Water
AWWA C110	(1993) Ductile-Iron and Gray-Iron Fittings, 3 In. Through 48 In. (75 mm through 1200 mm), for Water and Other Liquids
AWWA C111	(1995) Rubber-Gasket Joints for Ductile-Iron Pressure Pipe and Fittings
AWWA C115	(1996) Flanged Ductile-Iron Pipe With Ductile-Iron or Gray-Iron Threaded Flanges
AWWA C151	(1996) Ductile-Iron Pipe, Centrifugally Cast, for Water or Other Liquids
AWWA C153	(1994; Errata Nov 1996) Ductile-Iron Compact Fittings, 3 In. Through 24 In. (76 mm through 610 mm) and 54 In. through 64 In. (1,400 mm through 1,600 mm) for Water Service
AWWA C200	(1997) Steel Water Pipe - 6 In. (150 mm) and Larger
AWWA C203	(1997) Coal-Tar Protective Coatings and Linings for Steel Water Pipelines - Enamel and Tape - Hot-Applied
AWWA C205	(1995) Cement-Mortar Protective Lining and Coating for Steel Water Pipe - 4 In. (100 mm) and Larger - Shop Applied
AWWA C207	(1994) Steel Pipe Flanges for Waterworks Service - Sizes 4 In. Through 144 In. (100 mm through 3,600 mm)
AWWA C208	(1996) Dimensions for Fabricated Steel Water Pipe Fittings
AWWA C300	(1997) Reinforced Concrete Pressure Pipe, Steel-Cylinder Type, for Water and Other Liquids
AWWA C301	(1992) Prestressed Concrete Pressure Pipe, Steel-Cylinder Type, for Water and Other Liquids
AWWA C303	(1995) Concrete Pressure Pipe, Bar-Wrapped, Steel Cylinder Type
AWWA C500	(1993; C500a) Metal-Sealed Gate Valves for Water Supply Service
AWWA C502	(1994; C502a) Dry-Barrel Fire Hydrants

AWWA C503	(1997) Wet-Barrel Fire Hydrants
AWWA C504	(1994) Rubber-Seated Butterfly Valves
AWWA C509	(1994; Addendum 1995) Resilient-Seated Gate Valves for Water Supply Service
AWWA C600	(1993) Installation of Ductile-Iron Water Mains and Their Appurtenances
AWWA C606	(1997) Grooved and Shouldered Joints
AWWA C651	(1992) Disinfecting Water Mains
AWWA C700	(1995) Cold-Water Meters - Displacement Type, Bronze Main Case
AWWA C701	(1988) Cold-Water Meters - Turbine Type, for Customer Service
AWWA C702	(1992) Cold-Water Meters - Compound Type
AWWA C703	(1996) Cold-Water Meters - Fire Service Type
AWWA C704	(1992) Propeller-Type Meters Waterworks Applications
AWWA C706	(1996) Direct-Reading, Remote-Registration Systems for Cold-Water Meters
AWWA C707	(1982; R 1992) Encoder-Type Remote-Registration Systems for Cold-Water Meters
AWWA C800	(1989) Underground Service Line Valves and Fittings
AWWA C900	(1997; C900a) Polyvinyl Chloride (PVC) Pressure Pipe, 4 In. Through 12 In., for Water Distribution
AWWA C901	(1996) Polyethylene (PE) Pressure Pipe and Tubing, 1/2 In. Through 3 In., for Water Service
AWWA C905	(1997) Polyvinyl Chloride (PVC) Water Transmission Pipe, Nominal Diameters 14 In. Through 36 In.
AWWA C909	(1998) Molecularly Oriented Polyvinyl Chloride (PVCO) Pressure Pipe, 4 IN through 12 IN (100 mm through 300 mm), for Water Distribution
AWWA C950	(1995) Fiberglass Pressure Pipe

AWWA M23	(1980) Manual: PVC Pipe - Design and Installation

ASBESTOS CEMENT PIPE PRODUCERS ASSOCIATION (ACPPA)

ACPPA 1344	(1988) Recommended Work Practices for A/C Pipe

DUCTILE IRON PIPE RESEARCH ASSOCIATION (DIPRA)

DIPRA TRD	(1997) Thrust Restraint Design for Ductile Iron Pipe

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY (MSS)

MSS SP-80	(1997) Bronze Gate, Globe, Angle and Check Valves

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 24	(1995) Installation of Private Fire Service Mains and Their Appurtenances
NFPA 49	(1994) Hazardous Chemicals Data
NFPA 325-1	(1994) Fire Hazard Properties of Flammable Liquids, Gases, and Volatile Solids
NFPA 704	(1996) Identification of the Fire Hazards of Materials for Emergency Response
NFPA 1961	(1997) Fire Hose

NSF INTERNATIONAL (NSF)

NSF 14	(1998) Plastics Piping Components and Related Materials
NSF 61	(1999) Drinking Water System Components - Health Effects (Sections 1-9)

THE SOCIETY FOR PROTECTIVE COATINGS (SSPC)

SSPC Paint 21	(1991) White or Colored Silicone Alkyd Paint
SSPC Paint 25	(1991) Red Iron Oxide, Zinc Oxide, Raw Linseed Oil and Alkyd Primer (Without Lead and Chromate Pigments)

1.2 PIPING

This section covers water service lines, and connections to building service at a point approximately 5 feet outside buildings and structures to which service is required. The Contractor shall have a copy of the manufacturer's recommendations for each material or procedure to be utilized available at the construction site at all times.

1.2.1 Service Lines

Piping for water service lines less than 3 inches in diameter shall be polyvinyl chloride (PVC) plastic, Oriented PVC plastic polyethylene, or copper tubing, unless otherwise shown or specified.

1.2.2 Potable Water Lines

Piping and components of potable water systems which come in contact with the potable water shall conform to NSF 61.

1.2.3 Plastic Piping System

Plastic piping system components (PVC, polyethylene) intended for transportation of potable water shall comply with NSF 14 and be legibly marked with their symbol.

1.2.4 Excavation, Trenching, and Backfilling

Excavation, trenching, and backfilling shall be in accordance with the applicable provisions of Section 02300 EARTHWORK, except as modified herein.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Installation; G.

The manufacturer's recommendations for each material or procedure to be utilized.

Satisfactory Installation; G.

A statement signed by the principal officer of the contracting firm stating that the installation is satisfactory and in accordance with the contract drawings and specifications, and the manufacturer's prescribed procedures and techniques, upon completion of the project and before final acceptance.

SD-06 Test Reports

Bacteriological Disinfection; G.

Test results from commercial laboratory verifying disinfection.

SD-07 Certificates

Installation;

A statement signed by the manufacturer's field representative certifying that the Contractor's personnel are capable of properly installing the pipe on the project.

1.4 HANDLING

Pipe and accessories shall be handled to ensure delivery to the trench in sound, undamaged condition, including no injury to the pipe coating or lining. If the coating or lining of any pipe or fitting is damaged, the repair shall be made by the Contractor in a satisfactory manner, at no additional cost to the Government. No other pipe or material shall be placed inside a pipe or fitting after the coating has been applied. Pipe shall be carried into position and not dragged. Use of pinch bars and tongs for aligning or turning pipe will be permitted only on the bare ends of the pipe. The interior of pipe and accessories shall be thoroughly cleaned of foreign matter before being lowered into the trench and shall be kept clean during laying operations by plugging or other approved method. Before installation, the pipe shall be inspected for defects. Material found to be defective before or after laying shall be replaced with sound material without additional expense to the Government. Rubber gaskets that are not to be installed immediately shall be stored in a cool and dark place.

1.4.1 Miscellaneous Plastic Pipe and Fittings

Polyvinyl Chloride (PVC) pipe and fittings shall be handled and stored in accordance with the manufacturer's recommendations. Storage facilities shall be classified and marked in accordance with NFPA 704, with classification as indicated in NFPA 49 and NFPA 325-1.

PART 2 PRODUCTS

2.1 PIPE

Pipe shall conform to the respective specifications and other requirements specified below.

2.1.1 Plastic Pipe

2.1.1.1 PVC Plastic Pipe

Pipe, couplings and fittings shall be manufactured of material conforming to ASTM D 1784, Class 12454B.

Pipe Less Than 4 inch Diameter:

(1) Screw-Joint: Pipe shall conform to dimensional requirements of ASTM D 1785 Schedule 80, with joints meeting requirements of 150 psi working pressure, 200 psi hydrostatic test pressure, unless otherwise shown or specified. Pipe couplings when used, shall be tested as required by ASTM D 2464.

(2) Elastomeric-Gasket Joint: Pipe shall conform to dimensional requirements of ASTM D 1785 Schedule 40, with joints meeting the requirements of 150 psi working pressure, 200 psi hydrostatic test pressure, unless otherwise shown or specified, or it may be pipe

conforming to requirements of ASTM D 2241, elastomeric joint, with the following applications:

SDR	Maximum Working Pressure psi	Minimum Hydrostatic Pressure psi
26	100	133
21	120	160
17	150	200
13.5	200	266

(3) Solvent Cement Joint: Pipe shall conform to dimensional requirements of ASTM D 1785 or ASTM D 2241 with joints meeting the requirements of 150 psi working pressure and 200 psi hydrostatic test pressure.

2.1.1.2 Oriented Polyvinyl Chloride (PVCO) Plastic Pipe

Pipe, couplings, and fittings shall be manufactured of material conforming to ASTM D 1784, Class 12454-B. Pipe shall conform to AWWA C909, Class 150, and to ASTM F 1483 and shall have an outside diameter equal to cast iron outside diameter.

2.1.2 Copper Tubing

Copper tubing shall conform to ASTM B 88, Type K, annealed.

2.2 FITTINGS AND SPECIALS

2.2.1 PVC Pipe System

For pipe less than 4 inch diameter, fittings for threaded pipe shall conform to requirements of ASTM D 2464, threaded to conform to the requirements of ASME B1.20.1 for use with Schedule 80 pipe and fittings; fittings for solvent cement jointing shall conform to ASTM D 2466 or ASTM D 2467; and fittings for elastomeric-gasket joint pipe shall be iron conforming to AWWA C110 or AWWA C111. Iron fittings and specials shall be cement-mortar lined (standard thickness) in accordance with AWWA C104.

2.2.2 Copper Tubing System

Fittings and specials shall be flared and conform to ASME B16.26.

2.3 JOINTS

2.3.1 Plastic Pipe Jointing

2.3.1.1 PVC Pipe

Joints, fittings, and couplings shall be as specified for PVC pipe. Joints connecting pipe of differing materials shall be made in accordance with the manufacturer's recommendations, and as approved by the Contracting Officer.

2.3.1.2 PVCO Pipe

Joints shall conform to ASTM D 3139. Elastomeric gaskets shall conform to ASTM F 477.

2.3.2 Isolation Joints

Isolation joints shall be installed between nonthreaded ferrous and nonferrous metallic pipe, fittings and valves. Isolation joints shall consist of a sandwich-type flange isolation gasket of the dielectric type, isolation washers, and isolation sleeves for flange bolts. Isolation gaskets shall be full faced with outside diameter equal to the flange outside diameter. Bolt isolation sleeves shall be full length. Units shall be of a shape to prevent metal-to-metal contact of dissimilar metallic piping elements.

a. Sleeve-type couplings shall be used for joining plain end pipe sections. The two couplings shall consist of one steel middle ring, two steel followers, two gaskets, and the necessary steel bolts and nuts to compress the gaskets.

b. Split-sleeve type couplings may be used in aboveground installations when approved in special situations and shall consist of gaskets and a housing in two or more sections with the necessary bolts and nuts.

2.3.3 Copper Tubing Jointing

Joints shall be compression-pattern flared and shall be made with the specified fittings.

2.4 VALVES

2.4.1 Gate Valves

Gate valves shall be designed for a working pressure of not less than 150 psi. Valve connections shall be as required for the piping in which they are installed. Valves shall have a clear waterway equal to the full nominal diameter of the valve, and shall be opened by turning counterclockwise. The operating nut or wheel shall have an arrow, cast in the metal, indicating the direction of opening.

Valves smaller than 3 inches shall be all bronze and shall conform to MSS SP-80, Type 1, Class 150.

2.5 VALVE BOXES

Valve boxes shall be cast iron or concrete, except that concrete boxes may be installed only in locations not subjected to vehicular traffic. Cast-iron boxes shall be extension type with slide-type adjustment and with flared base. The minimum thickness of metal shall be 3/16 inch. Concrete boxes shall be the standard product of a manufacturer of precast concrete equipment. The word "WATER" shall be cast in the cover. The box length shall adapt, without full extension, to the depth of cover required over the pipe at the valve location.

2.6 VALVE PITS

Valve pits shall be constructed at locations indicated or as required above and in accordance with the details shown. Concrete shall have compressive strength of 3000 psi.

2.7 MISCELLANEOUS ITEMS

2.7.1 Service Clamps

Service clamps shall have a pressure rating not less than that of the pipe to be connected and shall be either the single or double flattened strap type. Clamps shall have a galvanized malleable-iron body with cadmium plated straps and nuts. Clamps shall have a rubber gasket cemented to the body.

2.7.2 Corporation Stops

Corporation stops shall have standard corporation stop thread conforming to AWWA C800 on the inlet end, with flanged joints, compression pattern flared tube couplings, or wiped joints for connections to goosenecks.

2.7.3 Goosenecks

Copper tubing for gooseneck connections shall conform to the applicable requirements of ASTM B 88, Type K, annealed. Length of cable requirement connections shall be in accordance with standard practice.

2.7.4 Tapping Sleeves

Tapping sleeves for connection to existing main shall be the cast gray, ductile, or malleable iron, split-sleeve type with flanged or grooved outlet, and with bolts, follower rings and gaskets on each end of the sleeve. Construction shall be suitable for a maximum working pressure of 150 psi. Bolts shall have square heads and hexagonal nuts. Longitudinal gaskets and mechanical joints with gaskets shall be as recommended by the manufacturer of the sleeve. When using grooved mechanical tee, it shall consist of an upper housing with full locating collar for rigid positioning which engages a machine-cut hole in pipe, encasing an elastomeric gasket which conforms to the pipe outside diameter around the hole and a lower housing with positioning lugs, secured together during assembly by nuts and bolts as specified, pretorqued to 50 foot-pound.

2.7.5 Service Boxes

Service boxes shall be cast iron or concrete and shall be extension service boxes of the length required for the depth of the line, with either screw or slide-type adjustment. The boxes shall have housings of sufficient size to completely cover the service stop or valve and shall be complete with identifying covers.

2.7.6 Disinfection

Chlorinating materials shall conform to the following:

Chlorine, Liquid: AWWA B301.

Hypochlorite, Calcium and Sodium: AWWA B300.

PART 3 EXECUTION

3.1 INSTALLATION

3.1.1 Cutting of Pipe

Cutting of pipe shall be done in a neat and workmanlike manner without damage to the pipe. Unless otherwise recommended by the manufacturer and authorized by the Contracting Officer, cutting shall be done with an approved type mechanical cutter. Wheel cutter shall be used when practicable. Copper tubing shall be cut square and all burrs shall be removed. Squeeze type mechanical cutters shall not be used for ductile iron.

3.1.2 Adjacent Facilities

3.1.2.1 Sewer Lines

Where the location of the water pipe is not clearly defined in dimensions on the drawings, the water pipe shall not be laid closer horizontally than 10 feet from a sewer except where the bottom of the water pipe will be at least 12 inches above the top of the sewer pipe, in which case the water pipe shall not be laid closer horizontally than 6 feet from the sewer. Where water lines cross under gravity-flow sewer lines, the sewer pipe, for a distance of at least 10 feet each side of the crossing, shall be fully encased in concrete or shall be made of pressure pipe with no joint located within 3 feet horizontally of the crossing. Water lines shall in all cases cross above sewage force mains or inverted siphons and shall be not less than 2 feet above the sewer main. Joints in the sewer main, closer horizontally than 3 feet to the crossing, shall be encased in concrete.

3.1.2.2 Water Lines

Water lines shall not be laid in the same trench with sewer lines, gas lines, fuel lines, or electric wiring.

3.1.2.3 Copper Tubing Lines

Copper tubing shall not be installed in the same trench with ferrous piping materials.

3.1.2.4 Nonferrous Metallic Pipe

Where nonferrous metallic pipe, e.g. copper tubing, crosses any ferrous piping material, a minimum vertical separation of 12 inches shall be maintained between pipes.

3.1.3 Joint Deflection

3.1.3.1 Offset for Flexible Plastic Pipe

Maximum offset in alignment between adjacent pipe joints shall be as recommended by the manufacturer and approved by the Contracting Officer, but shall not exceed 5 degrees.

3.1.4 Placing and Laying

Pipe and accessories shall be carefully lowered into the trench. Water-line materials shall not be dropped or dumped into the trench. Abrasion of the pipe coating shall be avoided. Except where necessary in making connections with other lines or as authorized by the Contracting Officer, pipe shall be laid with the bells facing in the direction of laying. The full length of each section of pipe shall rest solidly upon the pipe bed, with recesses excavated to accommodate bells, couplings, and joints. Pipe that has the grade or joint disturbed after laying shall be taken up and relaid. Pipe shall not be laid in water or when trench conditions are unsuitable for the work. Water shall be kept out of the trench until joints are complete. When work is not in progress, open ends of pipe, fittings, and valves shall be securely closed so that no trench water, earth, or other substance will enter the pipes or fittings. Where any part of the coating or lining is damaged, the repair shall be made by and at the Contractor's expense in a satisfactory manner. Pipe ends left for future connections shall be valved, plugged, or capped, and anchored, as shown.

3.1.4.1 Plastic Pipe Installation

PVC pipe shall be installed in accordance with AWWA M23.

3.1.4.2 Piping Connections

Where connections are made between new work and existing mains, the connections shall be made by using specials and fittings to suit the actual conditions. When made under pressure, these connections shall be installed using standard methods as approved by the Contracting Officer. Connections to existing asbestos-cement pipe shall be made in accordance with ACPPA 1344.

3.1.4.3 Flanged Pipe

Flanged pipe shall only be installed above ground or with the flanges in valve pits.

3.1.5 Jointing

3.1.5.1 PVC Plastic Pipe Requirements

Pipe less than 4 inch diameter: Threaded joints shall be made by wrapping the male threads with approved thread tape or applying an approved lubricant, then threading the joining members together. The joint shall be tightened using strap wrenches to prevent damage to the pipe and/or fitting. To avoid excessive torque, joints shall be tightened no more than one thread past hand-tight. Preformed rubber-ring gaskets for elastomeric-gasket joints shall be made in accordance with ASTM F 477 and as specified. Pipe ends for push-on joints shall be beveled to facilitate assembly and marked to indicate when the pipe is fully seated. The gasket shall be prelubricated to prevent displacement. The gasket and ring groove in the bell or coupling shall match. The manufacturer of the pipe or fitting shall supply the elastomeric gasket. Couplings shall be provided with stops or centering rings to assure that the coupling is centered on the joint. Solvent cement joints shall use sockets conforming to ASTM D 2467. The solvent cement used shall

meet the requirements of ASTM D 2564; the joint assembly shall be made in accordance with ASTM D 2855 and the manufacturer's specific recommendations.

3.1.5.2 Copper Tubing Requirements

Joints shall be made with flared fittings. The flared end tube shall be pulled tightly against the tapered part of the fitting by a nut which is part of the fitting, so there is metal-to-metal contact.

3.1.5.3 Isolation Joints and Dielectric Fittings

Isolation joints and dielectric fittings shall be installed in accordance with details specified in paragraph JOINTS. Dielectric unions shall be encapsulated in a field-poured coal-tar covering, with at least 1/8 inch thickness of coal tar over all fitting surfaces.

3.1.5.4 Transition Fittings

Connections between different types of pipe and accessories shall be made with transition fittings approved by the Contracting Officer.

3.1.6 Installation of Service Lines

Service lines shall include the pipeline connecting building piping to water distribution lines to the connections with the building service at a point approximately 5 feet outside the building where such building service exists. Where building services are not installed, the Contractor shall terminate the service lines approximately 5 feet from the site of the proposed building at a point designated by the Contracting Officer. Such service lines shall be closed with plugs or caps. All service stops and valves shall be provided with service boxes. Service lines shall be constructed in accordance with the following requirements:

3.1.6.1 Service Lines 2 Inches and Smaller

Service lines 2 inches and smaller shall be connected to the main by a directly-tapped corporation stop or by a service clamp. A corporation stop and a copper gooseneck shall be provided with either type of connection. Maximum sizes for directly-tapped corporation stops and for outlets with service clamps shall be as in TABLE I. Where 2 or more gooseneck connections to the main are required for an individual service, such connections shall be made with standard branch connections. The total clear area of the branches shall be at least equal to the clear area of the service which they are to supply.

TABLE I. SIZE OF CORPORATION STOPS AND OUTLET

Pipe Size Inches	Corporation Stops, Inches For Ductile-Iron Pipe	Outlets w/Service Clamps, Inches Single & Double Strap
3	--	1

4	1	1
6	1-1/4	1-1/2
8	1-1/2	2
10	1-1/2	2
12 & larger	2	2

NOTE:

a. Service lines 1-1/2 inches and smaller shall have a service stop.

b. Service lines 2 inches in size shall have a gate valve.

3.1.7 Setting of Valves and Valve Boxes

3.1.7.1 Location of Valves

After delivery, valves shall be drained to prevent freezing and shall have the interiors cleaned of all foreign matter before installation. Stuffing boxes shall be tightened and valves shall be fully opened and fully closed to ensure that all parts are in working condition. Check valves shall be installed in valve pits. Valves and valve boxes shall be installed where shown or specified, and shall be set plumb. Valve boxes shall be centered on the valves. Where feasible, valves shall be located outside the area of roads and streets. Earth fill shall be tamped around each valve box or pit to a distance of 4 feet on all sides of the box, or the undisturbed trench face if less than 4 feet.

3.2 HYDROSTATIC TESTS

3.2.1 Pressure Test

After the pipe is laid, the joints completed, and the trench partially backfilled leaving the joints exposed for examination, the newly laid piping or any valved section of piping shall, unless otherwise specified, be subjected for 1 hour to a hydrostatic pressure test of 200 psi. Each valve shall be opened and closed several times during the test. Exposed pipe, joints, fittings, and valves shall be carefully examined during the partially open trench test. Joints showing visible leakage shall be replaced or remade as necessary. Cracked or defective pipe, joints, fittings, and valves discovered in consequence of this pressure test shall be removed and replaced with sound material, and the test shall be repeated until the test results are satisfactory. The requirement for the joints to remain exposed for the hydrostatic tests may be waived by the Contracting Officer when one or more of the following conditions is encountered:

a. Wet or unstable soil conditions in the trench.

b. Compliance would require maintaining barricades and walkways around and across an open trench in a heavily used area that would require continuous surveillance to assure safe conditions.

c. Maintaining the trench in an open condition would delay completion of the project.

The Contractor may request a waiver, setting forth in writing the reasons for the request and stating the alternative procedure proposed to comply with the required hydrostatic tests. Backfill placed prior to the tests shall be placed in accordance with the requirements of Section 02300 EARTHWORK.

3.2.2 Leakage Test

Leakage test shall be conducted after the pressure tests have been satisfactorily completed. The duration of each leakage test shall be at least 2 hours, and during the test the water line shall be subjected to not less than 200 psi pressure. Leakage is defined as the quantity of water to be supplied into the newly laid pipe, or any valved or approved section, necessary to maintain pressure within 5 psi of the specified leakage test pressure after the pipe has been filled with water and the air expelled. Piping installation will not be accepted if leakage exceeds the allowable leakage which is determined by the following formula:

L = 0.0001351ND(P raised to 0.5 power)

L = Allowable leakage in gallons per hour
N = Number of joints in the length of pipeline tested
D = Nominal diameter of the pipe in inches
P = Average test pressure during the leakage test, in psi gauge

Should any test of pipe disclose leakage greater than that calculated by the above formula, the defective joints shall be located and repaired until the leakage is within the specified allowance, without additional cost to the Government.

3.2.3 Time for Making Test

Except for joint material setting, pipelines jointed with rubber gaskets, mechanical or push-on joints, or couplings may be subjected to hydrostatic pressure, inspected, and tested for leakage at any time after partial completion of backfill. Cement-mortar lined pipe may be filled with water as recommended by the manufacturer before being subjected to the pressure test and subsequent leakage test.

3.2.4 Concurrent Hydrostatic Tests

The Contractor may elect to conduct the hydrostatic tests using either or both of the following procedures. Regardless of the sequence of tests employed, the results of pressure tests, leakage tests, and disinfection shall be as specified. Replacement, repair or retesting required shall be accomplished by the Contractor at no additional cost to the Government.

a. Pressure test and leakage test may be conducted concurrently.

b. Hydrostatic tests and disinfection may be conducted concurrently, using the water treated for disinfection to accomplish the hydrostatic tests. If water is lost when treated for disinfection and air is admitted to the unit being tested, or

if any repair procedure results in contamination of the unit, disinfection shall be reaccomplished.

3.3 BACTERIAL DISINFECTION

3.3.1 Bacteriological Disinfection

Before acceptance of potable water operation, each unit of completed waterline shall be disinfected as prescribed by AWWA C651. After pressure tests have been made, the unit to be disinfected shall be thoroughly flushed with water until all entrained dirt and mud have been removed before introducing the chlorinating material. The chlorinating material shall be either liquid chlorine, calcium hypochlorite, or sodium hypochlorite, conforming to paragraph MISCELLANEOUS ITEMS. The chlorinating material shall provide a dosage of not less than 50 ppm and shall be introduced into the water lines in an approved manner. Polyvinyl Chloride (PVC) pipe lines shall be chlorinated using only the above specified chlorinating material in solution. The agent shall not be introduced into the line in a dry solid state. The treated water shall be retained in the pipe long enough to destroy all non-spore forming bacteria. Except where a shorter period is approved, the retention time shall be at least 24 hours and shall produce not less than 25 ppm of free chlorine residual throughout the line at the end of the retention period. Valves on the lines being disinfected shall be opened and closed several times during the contact period. The line shall then be flushed with clean water until the residual chlorine is reduced to less than 1.0 ppm. From several points in the unit, personnel from the Contractor's commercial laboratory shall take at least 3 water samples from different points, approved by the Contracting Officer, in proper sterilized containers and perform a bacterial examination in accordance with state approved methods. The commercial laboratory shall be certified by the state's approving authority for examination of potable water. The disinfection shall be repeated until tests indicate the absence of pollution for at least 2 full days. The unit will not be accepted until satisfactory bacteriological results have been obtained.

3.4 CLEANUP

Upon completion of the installation of water lines, and appurtenances, all debris and surplus materials resulting from the work shall be removed.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 02 - SITE CONSTRUCTION

SECTION 02531

SANITARY SEWERS

07/03

PART 1 GENERAL

1.1 REFERENCES
1.2 GENERAL REQUIREMENTS
1.3 SUBMITTALS
1.4 DELIVERY, STORAGE, AND HANDLING
1.4.1 Delivery and Storage
1.4.1.1 Piping
1.4.2 Handling

PART 2 PRODUCTS

2.1 PIPELINE MATERIALS
2.1.1 Clay Piping
2.1.1.1 Clay Pipe and Fittings
2.1.1.2 Clay Piping Jointing Materials
2.1.2 ABS Composite Plastic Piping
2.1.2.1 ABS Composite Plastic Pipe and Fittings
2.1.2.2 Jointing Materials for ABS Composite Plastic Piping
2.1.3 ABS Solid-Wall Plastic Piping
2.1.3.1 ABS Solid-Wall Plastic Pipe and Fittings
2.1.3.2 ABS Solid-Wall Plastic Joints and Jointing Materials
2.1.4 PVC Plastic Gravity Sewer Piping
2.1.4.1 PVC Plastic Gravity Pipe and Fittings
2.1.4.2 PVC Plastic Gravity Joints and Jointing Material
2.1.5 High Density Polyethylene Pipe
2.1.6 Reinforced Thermosetting Resin Pipe (RTRP)
2.1.6.1 Filament Wound RTRP-I
2.1.6.2 Centrifugally Cast RTRP-II

PART 3 EXECUTION

3.1 INSTALLATION OF PIPELINES AND APPURTENANT CONSTRUCTION
3.1.1 General Requirements for Installation of Pipelines
3.1.1.1 Location
3.1.1.2 Pipe Laying and Jointing
3.1.2 Special Requirements
3.1.2.1 Installation of Clay Piping
3.1.2.2 Installation of ABS Composite Plastic Piping
3.1.2.3 Installation of ABS Solid-Wall Plastic Piping
3.1.2.4 Installation of PVC Plastic Piping
3.2 FIELD QUALITY CONTROL
3.2.1 Field Tests and Inspections
3.2.2 Tests for Nonpressure Lines
3.2.2.1 Leakage Tests

-- End of Section Table of Contents --

SECTION 02531

SANITARY SEWERS
07/03

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM A 123/A 123M	(2002) Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A 307	(2002) Carbon Steel Bolts and Studs, 60 000 PSI Tensile Strength
ASTM A 47/A 47M	(1999) Ferritic Malleable Iron Castings
ASTM A 48/A 48M	(2000) Gray Iron Castings
ASTM A 536	(1984; R 1999e1) Ductile Iron Castings
ASTM A 563	(2000) Carbon and Alloy Steel Nuts
ASTM A 563M	(2001) Carbon and Alloy Steel Nuts (Metric)
ASTM A 74	(1998) Cast Iron Soil Pipe and Fittings
ASTM A 746	(1999) Ductile Iron Gravity Sewer Pipe
ASTM C 12	(2002) Installing Vitrified Clay Pipe Lines
ASTM C 14	(1999) Concrete Sewer, Storm Drain, and Culvert Pipe
ASTM C 14M	(1999) Concrete Sewer, Storm Drain, and Culvert Pipe (Metric)
ASTM C 150	(2002a) Portland Cement
ASTM C 260	(2001) Air-Entraining Admixtures for Concrete
ASTM C 270	(2002) Mortar for Unit Masonry
ASTM C 33	(2002a) Concrete Aggregates
ASTM C 361	(1999) Reinforced Concrete Low-Head Pressure Pipe
ASTM C 361M	(1999) Reinforced Concrete Low-Head Pressure Pipe (Metric)

ASTM C 425	(2002) Compression Joints for Vitrified Clay Pipe and Fittings
ASTM C 443	(2002) Joints for Concrete Pipe and Manholes, Using Rubber Gaskets
ASTM C 443M	(2002) Joints for Concrete Pipe and Manholes, Using Rubber Gaskets (Metric)
ASTM C 478	(2002a) Precast Reinforced Concrete Manhole Sections
ASTM C 478M	(1997) Precast Reinforced Concrete Manhole Sections (Metric)
ASTM C 564	(1997) Rubber Gaskets for Cast Iron Soil Pipe and Fittings
ASTM C 700	(2002) Vitrified Clay Pipe, Extra Strength, Standard Strength, and Perforated
ASTM C 76	(2002) Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe
ASTM C 76M	(2002) Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe (Metric)
ASTM C 828	(2001) Low-Pressure Air Test of Vitrified Clay Pipe Lines
ASTM C 923	(2002) Resilient Connectors Between Reinforced Concrete Manhole Structures, Pipes and Laterals
ASTM C 923M	(2002) Resilient Connectors Between Reinforced Concrete Manhole Structures, Pipes and Laterals (Metric)
ASTM C 924	(2002) Testing Concrete Pipe Sewer Lines by Low-Pressure Air Test Method
ASTM C 924M	(2002) Testing Concrete Pipe Sewer Lines by Low-Pressure Air Test Method (Metric)
ASTM C 94/C 94M	(2000e2) Ready-Mixed Concrete
ASTM C 969	(2002) Infiltration and Exfiltration Acceptance Testing of Installed Precast Concrete Pipe Sewer Lines
ASTM C 969M	(2002) Infiltration and Exfiltration Acceptance Testing of Installed Precast Concrete Pipe Sewer Lines (Metric)
ASTM C 972	(2000) Compression-Recovery of Tape Sealant

ASTM C 990	(2001a) Joints for Concrete Pipe, Manholes, and Precast Box Sections Using Preformed Flexible Joint Sealers
ASTM C 990M	(2001a) Joints for Concrete Pipe, Manholes, and Precast Box Sections Using Preformed Flexible Joint Sealants (Metric)
ASTM D 1784	(1999ae1) Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
ASTM D 1785	(1999) Poly(Vinyl Chloride)(PVC) Plastic Pipe, Schedules 40, 80, and 120
ASTM D 2235	(2001) Solvent Cement for Acrylonitrile-Butadiene-Styrene (ABS) Plastic Pipe and Fittings
ASTM D 2241	(2000) Poly(Vinyl Chloride) (PVC) Pressure-Rated Pipe (SDR Series)
ASTM D 2321	(2000) Underground Installation of Thermoplastic Pipe for Sewers and Other Gravity-Flow Applications
ASTM D 2412	(2002) Determination of External Loading Characteristics of Plastic Pipe by Parallel-Plate Loading
ASTM D 2464	(1999) Threaded Poly(Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 80
ASTM D 2466	(2002) Poly(Vinyl Chloride)(PVC) Plastic Pipe Fittings, Schedule 40
ASTM D 2467	(2002) Poly(Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 80
ASTM D 2680	(2001) Acrylonitrile-Butadiene-Styrene (ABS) and Poly(Vinyl Chloride) (PVC) Composite Sewer Piping
ASTM D 2751	(1996a) Acrylonitrile-Butadiene-Styrene (ABS) Sewer Pipe and Fittings
ASTM D 2996	(2001) Filament-Wound "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pipe
ASTM D 2997	(2001) Centrifugally Cast "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pipe
ASTM D 3034	(2000) Type PSM Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings

ASTM D 3139	(1998) Joints for Plastic Pressure Pipes Using Flexible Elastomeric Seals
ASTM D 3212	(1996a) Joints for Drain and Sewer Plastic Pipes Using Flexible Elastomeric Seals
ASTM D 3262	(2001) "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Sewer Pipe
ASTM D 3350	(2002a) Polyethylene Plastics Pipe and Fittings Materials
ASTM D 3753	(1999) Glass-Fiber-Reinforced Polyester Manholes and Wet Wells
ASTM D 3840	(2001) "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pipe Fittings for Nonpressure Applications
ASTM D 4101	(2002a) Propylene Injection and Extrusion Materials
ASTM D 412	(1998a) Vulcanized Rubber and Thermoplastic Rubbers and Thermoplastic Elastomers - Tension
ASTM D 4161	(2001) "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pipe Joints Using Flexible Elastomeric Seals
ASTM D 624	(2000e1) Tear Strength of Conventional Vulcanized Rubber and Thermoplastic Elastomers
ASTM F 402	(1993; R 1999) Safe Handling of Solvent Cements, Primers, and Cleaners Used for Joining Thermoplastic Pipe and Fittings
ASTM F 405	(1997) Corrugated Polyethylene (PE) Tubing and Fittings
ASTM F 477	(2002e1) Elastomeric Seals (Gaskets) for Joining Plastic Pipe
ASTM F 714	(2001) Polyethylene (PE) Plastic Pipe (SDR-PR) Based on Outside Diameter
ASTM F 758	(1995; R 2000) Smooth-Wall Poly(Vinyl Chloride) (PVC) Plastic Underdrain Systems for Highway, Airport, and Similar Drainage
ASTM F 794	(2001) Poly(Vinyl Chloride) (PVC) Profile Gravity Sewer Pipe and Fittings Based on Controlled Inside Diameter
ASTM F 894	(1998a) Polyethylene (PE) Large Diameter Profile Wall Sewer and Drain Pipe

ASTM F 949	(2001a) Poly(Vinyl Chloride) (PVC) Corrugated Sewer Pipe with a Smooth Interior and Fittings

AMERICAN WATER WORKS ASSOCIATION(AWWA)

AWWA C104	(1995) Cement-Mortar Lining for Ductile-Iron Pipe and Fittings for Water
AWWA C105	(1999) Polyethylene Encasement for Ductile-Iron Pipe Systems
AWWA C110	(1998) Ductile-Iron and Gray-Iron Fittings, 3 In. Through 48 In. (76 mm through 1219 mm), for Water
AWWA C111	(2000) Rubber-Gasket Joints for Ductile-Iron Pressure Pipe and Fittings
AWWA C115	(1999) Flanged Ductile-Iron Pipe With Ductile-Iron or Gray-Iron Threaded Flanges
AWWA C151	(2002) Ductile-Iron Pipe, Centrifugally Cast, for Water
AWWA C153	(2000) Ductile-Iron Compact Fittings for Water Service
AWWA C302	(1995) Reinforced Concrete Pressure Pipe, Noncylinder Type
AWWA C600	(1999) Installation of Ductile-Iron Water Mains and Their Appurtenances
AWWA C606	(1997) Grooved and Shouldered Joints
AWWA C900	(1997) Polyvinyl Chloride (PVC) Pressure Pipe, and Fabricated Fittings, 4 In. Through 12 In. (100 mm Through 300 mm), for Water Distribution
AWWA M23	(2002) Manual: PVC Pipe - Design and Installation
AWWA M9	(1995) Manual: Concrete Pressure Pipe

ASME INTERNATIONAL (ASME)

ASME B1.20.1	(1983; R 2001) Pipe Threads, General Purpose, Inch
ASME B16.1	(1998) Cast Iron Pipe Flanges and Flanged Fittings
ASME B18.2.2	(1987; R 1999) Square and Hex Nuts

ASME B18.5.2.1M	(1981; R 1995) Metric Round Head Short Square Neck Bolts
ASME B18.5.2.2M	(1982; R 2000) Metric Round Head Square Neck Bolts

UNI-BELL PVC PIPE ASSOCIATION (UBPPA)

UBPPA UNI-B-3	(1992) Recommended Practice for the Installation of Polyvinyl Chloride (PVC) Pressure Pipe (Nominal Diameters 4-36 Inch)
UBPPA UNI-B-6	(1998) Recommended Practice for the Low-Pressure Air Testing of Installed Sewer Pipe

1.2 GENERAL REQUIREMENTS

The construction required herein shall include appurtenant structures and building sewers to points of connection with the building drains 5 feet outside the building to which the sewer system is to be connected. The Contractor shall replace damaged material and redo unacceptable work at no additional cost to the Government. Excavation and backfilling is specified in Section 02300 EARTHWORK. Backfilling shall be accomplished after inspection by the Contracting Officer. Before, during, and after installation, plastic pipe and fittings shall be protected from any environment that would result in damage or deterioration to the material. The Contractor shall have a copy of the manufacturer's instructions available at the construction site at all times and shall follow these instructions unless directed otherwise by the Contracting Officer. Solvents, solvent compounds, lubricants, elastomeric gaskets, and any similar materials required to install the plastic pipe shall be stored in accordance with the manufacturer's recommendation and shall be discarded if the storage period exceeds the recommended shelf life. Solvents in use shall be discarded when the recommended pot life is exceeded.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only or as otherwise designated. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Precast concrete doghouse manhole

SD-03 Product Data

Pipeline materials

Submit manufacturer's standard drawings or catalog cuts.

1.4 DELIVERY, STORAGE, AND HANDLING

1.4.1 Delivery and Storage

1.4.1.1 Piping

Inspect materials delivered to site for damage; store with minimum of handling. Store materials on site in enclosures or under protective coverings. Store plastic piping and jointing materials and rubber gaskets under cover out of direct sunlight. Do not store materials directly on the ground. Keep inside of pipes and fittings free of dirt and debris.

1.4.2 Handling

Handle pipe, fittings, and other accessories in such manner as to ensure delivery to the trench in sound undamaged condition. Carry, do not drag, pipe to trench.

PART 2 PRODUCTS

2.1 PIPELINE MATERIALS

Pipe shall conform to the respective specifications and other requirements specified below.

2.1.1 Clay Piping

2.1.1.1 Clay Pipe and Fittings

ASTM C 700, bell-and-spigot piping only.

2.1.1.2 Clay Piping Jointing Materials

ASTM C 425.

2.1.2 ABS Composite Plastic Piping

2.1.2.1 ABS Composite Plastic Pipe and Fittings

ASTM D 2680.

2.1.2.2 Jointing Materials for ABS Composite Plastic Piping

Solvent cement and primer shall conform to ASTM D 2680.

2.1.3 ABS Solid-Wall Plastic Piping

2.1.3.1 ABS Solid-Wall Plastic Pipe and Fittings

ASTM D 2751, SDR 35, with ends suitable for either solvent cement joints or elastomer joints.

2.1.3.2 ABS Solid-Wall Plastic Joints and Jointing Materials

Solvent cement for solvent cement joints shall conform to ASTM D 2235. Elastomeric joints shall conform to ASTM D 3212. Gaskets for elastomeric joints shall conform to ASTM F 477.

2.1.4 PVC Plastic Gravity Sewer Piping

2.1.4.1 PVC Plastic Gravity Pipe and Fittings

ASTM D 3034, SDR 35, or ASTM F 949 with ends suitable for elastomeric gasket joints.

2.1.4.2 PVC Plastic Gravity Joints and Jointing Material

Joints shall conform to ASTM D 3212. Gaskets shall conform to ASTM F 477.

2.1.5 High Density Polyethylene Pipe

ASTM F 714, size 4 inch through 48 inch.
The polyethylene shall be certified by the resin producer as meeting the requirements of ASTM D 3350, cell Class 334433C. The pipe stiffness shall be greater than or equal to 1170/D for cohesionless material pipe trench backfills. Fittings for High Density Polyethylene Pipe: ASTM F 894. Joints for high density polyethylene pipe: Rubber gasket joints shall conform to ASTM C 443.

2.1.6 Reinforced Thermosetting Resin Pipe (RTRP)

RTRP pipe: ASTM D 3262. Fittings for RTRP: ASTM D 3262. Joints for RTRP: Bell and spigot type utilizing an elastomeric gasket in accordance with ASTM F 477.

2.1.6.1 Filament Wound RTRP-I

RTRP-I shall conform to ASTM D 2996, except pipe shall have an outside diameter equal to cast iron outside diameter or standard weight steel pipe. The pipe shall be suitable for a normal working pressure of 150 psi at 73 degrees F.The inner surface of the pipe shall have a smooth uniform continuous resin-rich surface liner conforming to ASTM D 2996.

2.1.6.2 Centrifugally Cast RTRP-II

RTRP-II shall conform to ASTM D 2997. Pipe shall have an outside diameter equal to standard weight steel pipe.

PART 3 EXECUTION

3.1 INSTALLATION OF PIPELINES AND APPURTENANT CONSTRUCTION

3.1.1 General Requirements for Installation of Pipelines

3.1.1.1 Location

The work covered by this section shall terminate at a point approximately 5 feet from the building , unless otherwise indicated. Where the location of the sewer is not clearly defined by dimensions on the drawings, do not lay sewer line closer horizontally than 10 feet to a water main or service line.

1.2 Pipe Laying and Jointing

Inspect each pipe and fitting before and after installation; replace those found defective and remove from site. Provide proper facilities for lowering sections of pipe into trenches. Lay nonpressure pipe with the bell ends in the upgrade direction. Adjust spigots in bells to give a uniform space all around. Blocking or wedging between bells and spigots will not be permitted. Replace by one of the proper dimensions, pipe or fittings that do not allow sufficient space for installation of joint material. At the end of each work day, close open ends of pipe temporarily with wood blocks or bulkheads. Provide batterboards not more than 25 feet apart in trenches for checking and ensuring that pipe invert elevations are as indicated. Laser beam method may be used in lieu of batterboards for the same purpose.

Branch connections shall be made by use of regular fittings or solvent cemented saddles as approved. Saddles for ABS and PVC composite pipe shall conform to Figure 2 of ASTM D 2680; saddles for ABS pipe shall comply with Table 3 of ASTM D 2751; and saddles for PVC pipe shall conform to Table 4 of ASTM D 3034.

3.1.2 Special Requirements

3.1.2.1 Installation of Clay Piping

Install pipe and fittings in accordance with paragraph entitled "General Requirements for Installation of Pipelines" of this section and with the requirements of ASTM C 12 for pipe laying. Make joints with a compression joint material specified for clay pipe joints and assemble in accordance with the recommendations of the manufacturer of the pipe.

3.1.2.2 Installation of ABS Composite Plastic Piping

Install pipe and fittings in accordance with paragraph entitled "General Requirements for Installation of Pipelines" of this section and with the recommendations of the plastic pipe manufacturer. Make joints with the primer and solvent cement specified for this joint and assemble in accordance with the recommendations of the pipe manufacturer. Handle solvent cement in accordance with ASTM F 402.

3.1.2.3 Installation of ABS Solid-Wall Plastic Piping

Install pipe and fittings in accordance with paragraph entitled "General Requirements for Installation of Pipelines" of this section and with the recommendations of the plastic pipe manufacturer. Make solvent cement joints with the solvent cement previously specified for this type joint. Make elastomeric joints with the gaskets specified for this type joint and assemble in accordance with the recommendations of the pipe manufacturer. Handle solvent cement in accordance with ASTM F 402.

3.1.2.4 Installation of PVC Plastic Piping

Install pipe and fittings in accordance with paragraph entitled "General Requirements for Installation of Pipelines" of this section and with the requirements of ASTM D 2321 for laying and joining pipe and fittings. Make joints with the gaskets specified for joints with this piping and assemble in accordance with the requirements of ASTM D 2321 for assembly of joints. Make joints to other pipe materials in accordance with the recommendations of the plastic pipe manufacturer.

3.2 FIELD QUALITY CONTROL

3.2.1 Field Tests and Inspections

The Contracting Officer will conduct field inspections and witness field tests specified in this section. The Contractor shall perform field tests and provide labor, equipment, and incidentals required for testing. Be able to produce evidence, when required, that each item of work has been constructed in accordance with the drawings and specifications.

3.2.2 Tests for Nonpressure Lines

Check each straight run of pipeline for gross deficiencies by holding a light at one end; it shall show a practically full circle of light through the pipeline when viewed from the adjoining end of line.

3.2.2.1 Leakage Tests

Test lines for leakage by either infiltration tests or exfiltration tests, or by low-pressure air tests. Prior to testing for leakage, backfill trench up to at least lower half of pipe. When necessary to prevent pipeline movement during testing, place additional backfill around pipe sufficient to prevent movement, but leaving joints uncovered to permit inspection. When leakage or pressure drop exceeds the allowable amount specified, make satisfactory correction and retest pipeline section in the same manner. Correct visible leaks regardless of leakage test results.

a. Infiltration tests and exfiltration tests: Perform these tests for sewer lines made of the specified materials, not only concrete, in accordance with ASTM C 969. Make calculations in accordance with the Appendix to ASTM C 969.

b. Low-pressure air tests: Perform tests as follows:

(1) Clay pipelines: Test in accordance with ASTM C 828. Allowable pressure drop shall be as given in ASTM C 828. Make calculations in accordance with the Appendix to ASTM C 828.

(4) ABS composite plastic pipelines: Test in accordance with the applicable requirements of UBPPA UNI-B-6. Allowable pressure drop shall be as given in UBPPA UNI-B-6. Make calculations in accordance with the Appendix to UBPPA UNI-B-6.

(5) PVC plastic pipelines: Test in accordance with UBPPA UNI-B-6. Allowable pressure drop shall be as given in UBPPA UNI-B-6. Make calculations in accordance with the Appendix to UBPPA UNI-B-6.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 02 - SITE CONSTRUCTION

SECTION 02630

STORM DRAINAGE

07/03

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 DELIVERY, STORAGE, AND HANDLING
1.3.1 Delivery and Storage
1.3.2 Handling

PART 2 PRODUCTS

2.1 PIPE FOR CULVERTS AND STORM DRAINS
2.1.1 Concrete Pipe
2.2 MISCELLANEOUS MATERIALS
2.2.1 Mortar

PART 3 EXECUTION

3.1 EXCAVATION FOR PIPE CULVERTS, STORM DRAINS, AND DRAINAGE STRUCTURES
3.1.1 Removal of Rock
3.1.2 Removal of Unstable Material
3.2 BEDDING
3.2.1 Concrete Pipe Requirements
3.3 PLACING PIPE
3.3.1 Concrete
3.4 JOINTING
3.4.1 Concrete Pipe
3.4.1.1 Cement-Mortar Tongue-and-Groove Joint
3.4.1.2 Cement-Mortar Diaper Joint for Tongue-and-Groove Pipe
3.4.1.3 Plastic Sealing Compound Joints for Tongue-and-Grooved Pipe
3.7 BACKFILLING
3.5 Backfilling Pipe in Trenches
3.6 Backfilling Pipe in Fill Sections
3.7 Movement of Construction Machinery
3.8 Compaction
3.8.1 General Requirements
3.8.2 Minimum Density
3.9 Determination of Density

-- End of Section Table of Contents --

SECTION 02630

STORM DRAINAGE
07/03

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

ACI INTERNATIONAL (ACI)

ACI 346	(2001) Specification for Cast-in-Place Concrete Pipe

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)

AASHTO HB-17	(2002) Standard Specifications for Highway Bridges
AASHTO M 167	(2000) Corrugated Steel Structural Plate, Zinc Coated, for Field Bolted Pipe, Pipe-Arches and Arches
AASHTO M 190	(1995; R 2000) Bituminous-Coated Corrugated Metal Culvert Pipe and Pipe Arches
AASHTO M 198	(1998) Joints for Circular Concrete Sewer and Culvert Pipe Using Flexible Watertight Gaskets
AASHTO M 219	(1992; R 2000) Corrugated Aluminum Alloy Pipe, Structural Plate for Field Bolted Pipe-Arches and Arches
AASHTO M 243	(1996; R 2000) Field Applied Coating of Corrugated Metal Structural Plate for Pipe, Pipe-Arches, and Arches
AASHTO M 294	(2002) Corrugated Polyethylene Pipe, 300- to 1200- mm Diameter
AASHTO MP 7	(2001) Specification for Corrugated Polyethylene Pipe, 1350 and 1500 mm Diameter

AMERICAN RAILWAY ENGINEERING & MAINTENANCE-OF-WAY ASSOCIATION (AREMA)

AREMA Manual	(2003) Manual for Railway Engineering

ASTM INTERNATIONAL (ASTM)

ASTM A 48/A 48M	(2000) Gray Iron Castings
ASTM A 74	(1998) Cast Iron Soil Pipe and Fittings
ASTM A 123/A 123M	(2002) Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A 536	(1984; R 1999el) Ductile Iron Castings
ASTM A 716	(1999) Ductile Iron Culvert Pipe
ASTM A 742/A 742M	(1998) Steel Sheet, Metallic Coated and Polymer Precoated for Corrugated Steel Pipe
ASTM A 760/A 760M	(2001a) Corrugated Steel Pipe, Metallic-Coated for Sewers and Drains
ASTM A 762/A 762M	(2000) Corrugated Steel Pipe, Polymer Precoated for Sewers and Drains
ASTM A 798/A 798M	(2001) Installing Factory-Made Corrugated Steel Pipe for Sewers and Other Applications
ASTM A 807/A 807M	(2002e1) Installing Corrugated Steel Structural Plate Pipe for Sewers and Other Applications
ASTM A 849	(2000) Post-Applied Coatings, Pavings, and Linings for Corrugated Steel Sewer and Drainage Pipe
ASTM A 929/A 929M	(2001) Steel Sheet, Metallic-Coated by the Hot-Dip Process for Corrugated Steel Pipe
ASTM B 26/B 26M	(2002) Aluminum-Alloy Sand Castings
ASTM B 745/B 745M	(1997) Corrugated Aluminum Pipe for Sewers and Drains
ASTM C 12	(2002) Installing Vitrified Clay Pipe Lines
ASTM C 14	(1999) Concrete Sewer, Storm Drain, and Culvert Pipe
ASTM C 14M	(1999) Concrete Sewer, Storm Drain, and Culvert Pipe (Metric)
ASTM C 32	(1993; R 1999el) Sewer and Manhole Brick (Made from Clay or Shale)
ASTM C 55	(2001a) Concrete Brick
ASTM C 62	(2001) Building Brick (Solid Masonry Units Made from Clay or Shale)
ASTM C 76	(2002) Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe

ASTM C 76M	(2002) Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe (Metric)
ASTM C 139	(2001) Concrete Masonry Units for Construction of Catch Basins and Manholes
ASTM C 231	(1997el) Air Content of Freshly Mixed Concrete by the Pressure Method
ASTM C 270	(2002) Mortar for Unit Masonry
ASTM C 425	(2002) Compression Joints for Vitrified Clay Pipe and Fittings
ASTM C 443	(2002) Joints for Concrete Pipe and Manholes, Using Rubber Gaskets
ASTM C 443M	(2002) Joints for Concrete Pipe and Manholes, Using Rubber Gaskets (Metric)
ASTM C 444M	(1995) Perforated Concrete Pipe (Metric)
ASTM C 444	(1995) Perforated Concrete Pipe
ASTM C 478	(2002a) Precast Reinforced Concrete Manhole Sections
ASTM C 478M	(1997) Precast Reinforced Concrete Manhole Sections (Metric)
ASTM C 506	(2002) Reinforced Concrete Arch Culvert, Storm Drain, and Sewer Pipe
ASTM C 506M	(2002) Reinforced Concrete Arch Culvert, Storm Drain, and Sewer Pipe (Metric)
ASTM C 507	(2002) Reinforced Concrete Elliptical Culvert, Storm Drain, and Sewer Pipe
ASTM C 507M	(2002) Reinforced Concrete Elliptical Culvert, Storm Drain, and Sewer Pipe (Metric)
ASTM C 564	(1997) Rubber Gaskets for Cast Iron Soil Pipe and Fittings
ASTM C 655	(2002) Reinforced Concrete D-Load Culvert, Storm Drain, and Sewer Pipe
ASTM C 700	(2002) Vitrified Clay Pipe, Extra Strength, Standard Strength, and Perforated
ASTM C 789	(2000) Precast Reinforced Concrete Box Sections for Culverts, Storm Drains, and Sewers

ASTM C 828	(2001) Low-Pressure Air Test of Vitrified Clay Pipe Lines
ASTM C 877	(2002) External Sealing Bands for Concrete Pipe, Manholes, and Precast Box Sections
ASTM C 877M	(2002) External Sealing Bands for Concrete Pipe, Manholes, and Precast Box Sections (Metric)
ASTM C 923	(2002) Resilient Connectors Between Reinforced Concrete Manhole Structures, Pipes and Laterals
ASTM C 923M	(2002) Resilient Connectors Between Reinforced Concrete Manhole Structures, Pipes and Laterals (Metric)
ASTM C 924	(2002) Testing Concrete Pipe Sewer Lines by Low-Pressure Air Test Method
ASTM C 924M	(2002) Testing Concrete Pipe Sewer Lines by Low-Pressure Air Test Method (Metric)
ASTM C 1103	(2002) Joint Acceptance Testing of Installed Precast Concrete Pipe Sewer Lines
ASTM C 1103M	(2002) Joint Acceptance Testing of Installed Precast Concrete Pipe Sewer Lines (Metric)
ASTM D 1056	(2000) Flexible Cellular Materials - Sponge or Expanded Rubber
ASTM D 1171	(1999) Rubber Deterioration - Surface Ozone Cracking Outdoors or Chamber (Triangular Specimens)
ASTM D 1557	(2000) Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/cu. ft. (2,700 kN-m/cu.m.))
ASTM D 1751	(1999) Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types)
ASTM D 1752	(1984; R 1996el) Preformed Sponge Rubber and Cork Expansion Joint Fillers for Concrete Paving and Structural Construction
ASTM D 1784	(1999ae1) Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
ASTM D 2167	(1994; R 2001) Density and Unit Weight of Soil in Place by the Rubber Balloon Method

ASTM D 2321	(2000) Underground Installation of Thermoplastic Pipe for Sewers and Other Gravity-Flow Applications
ASTM D 2729	(1996a) Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings
ASTM D 2922	(2001) Density of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth)
ASTM D 3017	(2001) Water Content of Soil and Rock in Place by Nuclear Methods (Shallow Depth)
ASTM D 3034	(2000) Type PSM Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings
ASTM D 3212	(1996a) Joints for Drain and Sewer Plastic Pipes Using Flexible Elastomeric Seals
ASTM D 3350	(2002a) Polyethylene Plastics Pipe and Fittings Materials
ASTM F 477	(2002e1) Elastomeric Seals (Gaskets) for Joining Plastic Pipe
ASTM F 679	(2001) Poly(Vinyl Chloride) (PVC) Large-Diameter Plastic Gravity Sewer Pipe and Fittings
ASTM F 714	(2001) Polyethylene (PE) Plastic Pipe (SDR-PR) Based on Outside Diameter
ASTM F 794	(2001) Poly(Vinyl Chloride) (PVC) Profile Gravity Sewer Pipe and Fittings Based on Controlled Inside Diameter
ASTM F 894	(1998a) Polyethylene (PE) Large Diameter Profile Wall Sewer and Drain Pipe
ASTM F 949	(2001a) Poly(Vinyl Chloride) (PVC) Corrugated Sewer Pipe with a Smooth Interior and Fittings
ASTM F 1417	(1992; R 1998) Installation Acceptance of Plastic Gravity Sewer Lines Using Low-Pressure Air

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only or as otherwise designated. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Placing Pipe

Printed copies of the manufacturer's recommendations for installation procedures of the material being placed, prior to installation.

1.3 DELIVERY, STORAGE, AND HANDLING

1.3.1 Delivery and Storage

Materials delivered to site shall be inspected for damage, unloaded, and stored with a minimum of handling. Materials shall not be stored directly on the ground. The inside of pipes and fittings shall be kept free of dirt and debris. The Contractor shall have a copy of the manufacturer's instructions available at the construction site at all times and shall follow these instructions unless directed otherwise by the Contracting Officer.

1.3.2 Handling

Materials shall be handled in a manner that ensures delivery to the trench in sound, undamaged condition. Pipe shall be carried to the trench, not dragged.

PART 2 PRODUCTS

2.1 PIPE FOR CULVERTS AND STORM DRAINS

Pipe for culverts and storm drains shall be of the sizes indicated and shall conform to the requirements specified.

2.1.1 Concrete Pipe

ASTM C 76, Class IV.

2.2 MISCELLANEOUS MATERIALS

2.2.1 Mortar

Mortar for pipe joints, connections to other drainage structures, and brick or block construction shall conform to ASTM C 270, Type M, except that the maximum placement time shall be 1 hour. The quantity of water in the mixture shall be sufficient to produce a stiff workable mortar. Water shall be clean and free of harmful acids, alkalies, and organic impurities. The mortar shall be used within 30 minutes after the ingredients are mixed with water. The inside of the joint shall be wiped clean and finished smooth. The mortar head on the outside shall be protected from air and sun with a proper covering until satisfactorily cured.

PART 3 EXECUTION

3.1 EXCAVATION FOR PIPE CULVERTS, STORM DRAINS, AND DRAINAGE STRUCTURES

Excavation of trenches, and for appurtenances and backfilling for culverts and storm drains, shall be in accordance with the applicable portions of Section 02300 EARTHWORK and the requirements specified below.

3.1.1 Removal of Rock

Rock in either ledge or boulder formation shall be replaced with suitable materials to provide a compacted earth cushion having a thickness between unremoved rock and the pipe of at least 8 inches or 1/2 inch for each foot of fill over the top of the pipe, whichever is greater, but not more than three-fourths the nominal diameter of the pipe. Rock excavation shall be as specified and defined in Section 02300 EARTHWORK.

3.1.2 Removal of Unstable Material

Where wet or otherwise unstable soil incapable of properly supporting the pipe is unexpectedly encountered in the bottom of a trench, such material shall be removed to the depth required and replaced to the proper grade with select granular material, compacted as provided in paragraph BACKFILLING.

3.2 BEDDING

The bedding surface for the pipe shall provide a firm foundation of uniform density throughout the entire length of the pipe.

3.2.1 Concrete Pipe Requirements

When no bedding class is specified or detailed on the drawings, concrete pipe shall be bedded in a soil foundation accurately shaped and rounded to conform to the lowest one-fourth of the outside portion of circular pipe or to the lower curved portion of pipe arch for the entire length of the pipe or pipe arch. When necessary, the bedding shall be tamped. Bell holes and depressions for joints shall be not more than the length, depth, and width required for properly making the particular type of joint.

3.3 PLACING PIPE

Each pipe shall be thoroughly examined before being laid; defective or damaged pipe shall not be used. Pipelines shall be laid to the grades and alignment indicated. Proper facilities shall be provided for lowering sections of pipe into trenches. Pipe shall not be laid in water, and pipe shall not be laid when trench conditions or weather are unsuitable for such work. Diversion of drainage or dewatering of trenches during construction shall be provided as necessary.

3.3.1 Concrete

Laying shall proceed upgrade with tongue ends of tongue-and-groove pipe pointing in the direction of the flow.

3.4 JOINTING

3.4.1 Concrete Pipe

3.4.1.1 Cement-Mortar Tongue-and-Groove Joint

The first pipe shall be bedded carefully to the established gradeline with the groove upstream. A shallow excavation shall be made underneath the pipe at the joint and filled with mortar to provide a bed for the pipe. The grooved end of the first pipe shall be thoroughly cleaned with a wet brush, and a layer of soft mortar applied to the lower half of the groove. The tongue of the second pipe shall be cleaned with a wet brush; while in horizontal position, a layer of soft mortar shall be applied to the upper half of the tongue. The tongue end of the second pipe shall be inserted in the grooved end of the first pipe until mortar is squeezed out on interior and exterior surfaces. Sufficient mortar shall be used to fill the joint completely and to form a bead on the outside.

3.4.1.2 Cement-Mortar Diaper Joint for Tongue-and-Groove Pipe

The joint shall be of the type described for cement-mortar tongue-and-groove joint in this paragraph, except that the shallow excavation directly beneath the joint shall not be filled with mortar until after a gauze or cheesecloth band dipped in cement mortar has been wrapped around the outside of the joint. The cement-mortar bead at the joint shall be at least 1/2 inch, thick and the width of the diaper band shall be at least 8 inches. The diaper shall be left in place. Placing of this type of joint shall be kept at least five joints behind the actual laying of the pipe. Backfilling around the joints shall not be done until the joints have been fully inspected and approved.

3.4.1.3 Plastic Sealing Compound Joints for Tongue-and-Grooved Pipe

Sealing compounds shall follow the recommendation of the particular manufacturer in regard to special installation requirements. Surfaces to receive lubricants, primers, or adhesives shall be dry and clean. Sealing compounds shall be affixed to the pipe not more than 3 hours prior to installation of the pipe, and shall be protected from the sun, blowing dust, and other deleterious agents at all times. Sealing compounds shall be inspected before installation of the pipe, and any loose or improperly affixed sealing compound shall be removed and replaced. The pipe shall be aligned with the previously installed pipe, and the joint pulled together. If, while making the joint with mastic-type sealant, a slight protrusion of the material is not visible along the entire inner and outer circumference of the joint when the joint is pulled up, the pipe shall be removed and the joint remade. After the joint is made, all inner protrusions shall be cut off flush with the inner surface of the pipe. If nonmastic-type sealant material is used, the "Squeeze-Out" requirement above will be waived.

3.7 BACKFILLING

3.5 BACKFILLING PIPE IN TRENCHES

After the pipe has been properly bedded, selected material from excavation or borrow, at a moisture content that will facilitate compaction, shall be placed along both sides of pipe in layers not exceeding 6 inches in compacted depth. The backfill shall be brought up evenly on both sides of pipe for the full length of pipe. The fill shall be thoroughly compacted under the haunches of the pipe. Each layer shall be thoroughly compacted with mechanical tampers or rammers. This method of filling and compacting shall continue until the fill has reached an elevation of at least 12 inches above the top of the pipe. The remainder of the trench shall be backfilled and compacted by spreading and rolling or compacted by mechanical rammers or

tampers in layers not exceeding 12 inches. Tests for density shall be made as necessary to ensure conformance to the compaction requirements specified below.

3.6 BACKFILLING PIPE IN FILL SECTIONS

For pipe placed in fill sections, backfill material and the placement and compaction procedures shall be as specified below. The fill material shall be uniformly spread in layers longitudinally on both sides of the pipe, not exceeding 6 inches in compacted depth, and shall be compacted by rolling parallel with pipe or by mechanical tamping or ramming. Prior to commencing normal filling operations, the crown width of the fill at a height of 12 inches above the top of the pipe shall extend a distance of not less than twice the outside pipe diameter on each side of the pipe or 12 feet, whichever is less. After the backfill has reached at least 12 inches above the top of the pipe, the remainder of the fill shall be placed and thoroughly compacted in layers not exceeding 12 inches.

3.7 MOVEMENT OF CONSTRUCTION MACHINERY

When compacting by rolling or operating heavy equipment parallel with the pipe, displacement of or injury to the pipe shall be avoided. Movement of construction machinery over a culvert or storm drain at any stage of construction shall be at the Contractor's risk. Any damaged pipe shall be repaired or replaced.

3.8 COMPACTION

3.8.1 General Requirements

Cohesionless materials include gravels, gravel-sand mixtures, sands, and gravelly sands. Cohesive materials include clayey and silty gravels, gravel-silt mixtures, clayey and silty sands, sand-clay mixtures, clays, silts, and very fine sands. When results of compaction tests for moisture-density relations are recorded on graphs, cohesionless soils will show straight lines or reverse-shaped moisture-density curves, and cohesive soils will show normal moisture-density curves.

3.8.2 Minimum Density

Backfill over and around the pipe and backfill around and adjacent to drainage structures shall be compacted at the approved moisture content to the following applicable minimum density, which will be determined as specified below.

Under paved roads, streets, parking areas, and similar-use pavements including adjacent shoulder areas, the density shall be not less than 90 percent of maximum density for cohesive material and 95 percent of maximum density for cohesionless material, up to the elevation where requirements for pavement subgrade materials and compaction shall control.

3.9 DETERMINATION OF DENSITY

Testing shall be the responsibility of the Contractor and performed at no additional cost to the Government. Testing shall be performed by an approved commercial testing laboratory or by the Contractor subject to

approval. Tests shall be performed in sufficient number to ensure that specified density is being obtained. Laboratory tests for moisture-density relations shall be made in accordance with ASTM D 1557 except that mechanical tampers may be used provided the results are correlated with those obtained with the specified hand tamper. Field density tests shall be determined in accordance with ASTM D 2167 or ASTM D 2922. When ASTM D 2922 is used, the calibration curves shall be checked and adjusted, if necessary, using the sand cone method as described in paragraph Calibration of the referenced publications. ASTM D 2922 results in a wet unit weight of soil and when using this method ASTM D 3017 shall be used to determine the moisture content of the soil. The calibration curves furnished with the moisture gauges shall be checked along with density calibration checks as described in ASTM D 3017 or ASTM D 2922. Test results shall be furnished the Contracting Officer. The calibration checks of both the density and moisture gauges shall be made at the beginning of a job on each different type of material encountered and at intervals as directed.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 02 - SITE CONSTRUCTION

SECTION 02722N

GRADED CRUSHED AGGREGATE BASE COURSE FOR FLEXIBLE PAVEMENT

09/99

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 DELIVERY AND STORAGE
1.4 WEATHER LIMITATIONS
1.5 CONSTRUCTION EQUIPMENT

PART 2 PRODUCTS

2.1 MATERIALS
2.1.1 2.1.1 Aggregates

PART 3 EXECUTION

3.1 BASE COURSE
3.2 FIELD QUALITY CONTROL
3.2.1 Sampling
3.2.1.1 Aggregates at the Source
3.2.1.2 During Construction
3.2.1.3 Sample Identification
3.2.2 Testing
3.2.2.1 Aggregates
3.2.2.2 Smoothness Tests
3.2.2.3 Field Density Tests
3.2.2.4 Laboratory Density Tests
3.2.2.5 Thickness Tests
3.3 MAINTENANCE

-- End of Section Table of Contents --

SECTION 02722N

GRADED CRUSHED AGGREGATE BASE COURSE FOR FLEXIBLE PAVEMENT
09/99

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 29/C 29M	(1991; Rev. A) Unit Weight and Voids in Aggregate
ASTM C 117	(1995) Materials Finer than 75-Micrometer (No. 200) Sieve in Mineral Aggregates by Washing
ASTM C 131	(1996) Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine
ASTM C 136	(1996; Rev. A) Sieve Analysis of Fine and Coarse Aggregates
ASTM D 75	(1987; R 1992) Sampling Aggregates
ASTM D 1556	(1990; R 1996) Density and Unit Weight of Soil in Place by the Sand-Cone Method
ASTM D 1557	(1991) Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/ft (2,700 kN-m/m))
ASTM D 1883	(1994) CBR (California Bearing Ratio) of Laboratory-Compacted Soils
ASTM D 2217	(1985; R 1993) Wet Preparation of Soil Samples for Particle-Size Analysis and Determination of Soil Constants
ASTM D 2922	(1996) Density of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth)
ASTM D 3017	(1996) Water Content of Soil and Rock in Place by Nuclear Methods (Shallow Depth)
ASTM D 4318	(1995; Rev. A) Liquid Limit, Plastic Limit, and Plasticity Index of Soils

SOUTH CAROLINA DEPARTMENT OF TRANSPORTATION

SECTION 305 GRADED AGGREGATE BASE COURSE

1.2 SUBMITTALS

Submit the following in accordance with Section 01330, "Submittal Procedures."

SD-06 Test Reports

Gradation

Bearing ratio

Liquid limit

Plasticity index

Percentage of wear

Dry weight of slag

Density

Gradation

Smoothness

Density

Thickness

1.3 DELIVERY AND STORAGE

Inspect materials delivered to site for damage and store as to prevent segregation and contamination.

1.4 WEATHER LIMITATIONS

Do not construct base course when atmospheric temperature is below 35 degrees F or when rainfall or other weather conditions detrimentally affect the quality of the finished course.

1.5 CONSTRUCTION EQUIPMENT

Equipment shall be dependable and adequate for the purpose intended. Maintain equipment in satisfactory and safe operating condition. Subject to approval, special equipment dictated by local conditions may be used. Calibrated equipment, such as scales, batching equipment, spreaders, and similar items, shall have been recalibrated by an approved calibration laboratory within 12 months of commencing work.

PART 2 PRODUCTS

2.1 MATERIALS

2.1.1 Aggregates

Reference Section 305 of the South Carolina Standard Specifications, Edition of 2000, Section 305, Graded Aggregate Base Course. Only the Macadam Base Course will be considered suitable for this work. The following paragraphs apply to this work, except where noted. When the term "Engineer" is used, substitute the words "Contracting Officer".

Paragraph
305.01 Description
305.02(A) Macadam Base Course
305.03 Coarse Aggregate
305.03(a)
305.04 Fine Aggregate
305.04(1)
305.05 Composite Mixture, Table A. Macadam Base Course
305.06 Bituminous Materials deleted; replaced by UFGS SECTION 02743 BITUMINOUS PRIME COAT

PART 3 EXECUTION

3.1 BASE COURSE

The base course to be constructed follows the requirements given in Section 305 of the South Carolina Standard Specifications, Edition of 2000, Section 305, Graded Aggregate Base Course. Only the Macadam Base Course shall be approved for this work. The following paragraphs from Section 305 apply to this work, except where noted. The SCDOT specifications supplement this specification. When the term "Engineer" is used in the SCDOT specifications, substitute the words "Contracting Officer".

305.07 Equipment
305.08 Preparation of Subgrade is replaced by UFGS 02300 EARTHWORK.
305.09 Placing of Base Course Material
305.10 Compaction, Rolling, and Finishing
305.11 Smoothness Test
305.12 Tolerance in Thickness
305.14 Application of Prime Coat deleted; replaced by UFGS 02743 BITUMINOUS PRIME COAT

3.2 FIELD QUALITY CONTROL

Approve materials and material sources in advance of the use of such materials in the work. Replace base where samples are removed.

3.2.1 Sampling

3.2.1.1 Aggregates at the Source

Prior to production and delivery of aggregates, take at least one initial sample in accordance with ASTM D 75. Collect each sample by taking three incremental samples at random from the source material to make a composite sample of not less than 50 pounds. Repeat above sampling when source of material is changed or when unacceptable deficiencies or variations from specified grading of materials are found in testing.

3.2.1.2 During Construction

Take one random sample from each 500 tons of completed course material, but not less than one random sample per day's run. Take samples in accordance with ASTM D 75.

3.2.1.3 Sample Identification

Place each sample in a clean container, securely fastened to prevent loss of material. Tag each sample for identification and with the following information:

Contract No._____
Sample No._____ Quality _____
Date of Sample_____
Sampler_____
Source_____
Intended Use_____
For Testing_____

3.2.2 Testing

3.2.2.1 Aggregates

Test each sample of base course material without delay. Make gradation tests from each sample in accordance with ASTM C 136. Make sieve analysis on material passing the No. 200 sieve in accordance with ASTM C 117.

3.2.2.2 Smoothness Tests

Test with a 10 foot straightedge, applied parallel with and at right angles to the center line of the paved area. Correct deviations in the surface in excess of 1/2 inch by loosening, adding or removing material, reshaping, watering, and compacting. The smoothness requirements specified herein apply only to the top layer when base course is constructed in more than one layer.

3.2.2.3 Field Density Tests

ASTM D 1556 or ASTM D 2922 and ASTM D 3017. Take one test for each 500 square yards of each layer of base course.

3.2.2.4 Laboratory Density Tests

In accordance with ASTM D 1557, Method D.

3.2.2.5 Thickness Tests

Measure thickness of base course at intervals such that there will be a depth measurement for at least each 500 square yards of complete base course. Make depth measurements by test holes, at least 3 inches in diameter, through the base course. Where base course deficiency is more than 1/2 inch, correct by scarifying, adding mixture of proper gradation, reblading, and recompacting. Where the measured thickness is more than 1/2 inch thicker than indicated, consider it as the indicated thickness plus 1/2 inch for determining the average. The average thickness is the average of the depth measurements and shall not underrun the thickness indicated.

3.3 MAINTENANCE

After construction is completed, maintain the base course throughout, except where portion of the succeeding course is under construction thereon. Maintenance includes drainage, rolling, shaping, and watering, as necessary, to maintain the course in proper condition. Correct deficiencies in thickness, composition, construction, smoothness, and density, which develop during the maintenance, to conform to the requirements specified herein. Maintain sufficient moisture by light sprinkling with water at the surface to prevent a dusty condition.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 02 - SITE CONSTRUCTION

SECTION 02741A

HOT-MIX ASPHALT (HMA) FOR ROADS

09/99

PART 1 GENERAL

1.1 REFERENCES
1.2 DESCRIPTION OF WORK
1.3 SUBMITTALS
1.4 ASPHALT MIXING PLANT
1.5 HAULING EQUIPMENT
1.6 ASPHALT PAVERS
1.6.1 Receiving Hopper
1.6.2 Automatic Grade Controls
1.7 ROLLERS
1.8 WEATHER LIMITATIONS

PART 2 PRODUCTS

2.1 AGGREGATES
2.1.1 Aggregate Gradation
2.2 ASPHALT CEMENT BINDER
2.3 MIX DESIGN
2.3.1 JMF Requirements
2.3.2 Adjustments to Field JMF

PART 3 EXECUTION

3.1 PREPARATION OF ASPHALT BINDER MATERIAL
3.2 PREPARATION OF MINERAL AGGREGATE
3.3 PREPARATION OF HOT-MIX ASPHALT MIXTURE
3.4 PREPARATION OF THE UNDERLYING SURFACE
3.5 TESTING LABORATORY
3.6 TRANSPORTING AND PLACING
3.6.1 Transporting
3.6.2 Placing
3.7 COMPACTION OF MIXTURE
3.8 JOINTS
3.8.1 Transverse Joints
3.8.2 Longitudinal Joints
3.9 CONTRACTOR QUALITY CONTROL
3.9.1 General Quality Control Requirements
3.9.2 Testing Laboratory
3.9.3 Quality Control Testing
3.9.3.1 Asphalt Content
3.9.3.2 Gradation
3.9.3.3 Temperatures
3.9.3.4 Aggregate Moisture
3.9.3.5 Moisture Content of Mixture
3.9.3.6 Laboratory Air Voids, Marshall Stability and Flow

3.9.3.7 In-Place Density
3.9.3.8 Grade and Smoothness
3.9.3.9 Additional Testing
3.9.3.10 QC Monitoring
3.9.4 Sampling
3.10 MATERIAL ACCEPTANCE
3.10.1 Sublot Sampling
3.10.2 Additional Sampling and Testing
3.10.3 Laboratory Air Voids
3.10.4 In-place Density
3.10.4.1 General Density Requirements
3.10.4.2 Mat and Joint Densities
3.10.5 Grade
3.10.6 Surface Smoothness
3.10.6.1 Smoothness Requirements
3.10.6.2 Testing Method

-- End of Section Table of Contents --

SECTION 02741A

HOT-MIX ASPHALT (HMA) FOR ROADS
09/99

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)

AASHTO MP 1a	(2002) Performance Graded Asphalt Binder
AASHTO MP 2	(1998; Interim 1999) Superpave Volumetric Mix Design
AASHTO TP53	(1998; Interim 1999) Determining Asphalt Content of Hot Mix Asphalt by the Ignition Method

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 29/C 29M	(1997) Bulk Density ("Unit Weight") and Voids in Aggregates
ASTM C 88	(1999a) Soundness of Aggregates by Use of Sodium Sulfate or Magnesium Sulfate
ASTM C 117	(1995) Materials Finer than 75 micrometer (No. 200) Sieve in Mineral Aggregates by Washing
ASTM C 131	(1996) Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine
ASTM C 136	(1996a) Sieve Analysis of Fine and Coarse Aggregates
ASTM C 566	(1997) Evaporable Total Moisture Content of Aggregate by Drying
ASTM C 1252	(1998) Uncompacted Void Content of Fine Aggregate (as Influenced by Particle Shape, Surface Texture, and Grading)
ASTM D 140	(1998) Sampling Bituminous Materials

ASTM D 242	(1995) Mineral Filler for Bituminous Paving Mixtures
ASTM D 946	(1999) Penetration-Graded Asphalt Cement for Use in Pavement Construction
ASTM D 995	(1995b) Mixing Plants for Hot-Mixed, Hot-Laid Bituminous Paving Mixtures
ASTM D 1461	(1985)) Moisture or Volatile Distillates in Bituminous Paving Mixtures
ASTM D 1559	(1989) Resistance to Plastic Flow of Bituminous Mixtures Using Marshall Apparatus
ASTM D 2041	(1995) Theoretical Maximum Specific Gravity and Density of Bituminous Paving Mixtures
ASTM D 2172	(1995) Quantitative Extraction of Bitumen from Bituminous Paving Mixtures
ASTM D 2419	(1995) Sand Equivalent Value of Soils and Fine Aggregate
ASTM D 2489	(1984; R 1994el) Degree of Particle Coating of Bituminous-Aggregate Mixtures
ASTM D 2726	(1996el) Bulk Specific Gravity and Density of Non-Absorptive Compacted Bituminous Mixture
ASTM D 2950	(1997) Density of Bituminous Concrete in Place by Nuclear Method
ASTM D 3381	(1999) Viscosity-Graded Asphalt Cement for Use in Pavement Construction
ASTM D 3665	(1999) Random Sampling of Construction Materials
ASTM D 3666	(1998) Minimum Requirements for Agencies Testing and Inspecting Bituminous Paving Materials
ASTM D 4125	(1994el) Asphalt Content of Bituminous Mixtures by the Nuclear Method
ASTM D 4791	(1999) Flat Particles, Elongated Particles, or Flat and Elongated Particles in Coarse Aggregate
ASTM D 4867/D 4867M	(1996) Effect of Moisture on Asphalt Concrete Paving Mixtures
ASTM D 5444	(1998) Mechanical Size Analysis of Extracted Aggregate

ASTM D 6307	(1998) Asphalt Content of Hot Mix Asphalt by Ignition Method

ASPHALT INSTITUTE (AI)

AI MS-02	(1997) Mix Design Methods for Asphalt Concrete and Other Hot-Mix Types
AI MS-22	(1998; 2nd Edition) Construction of Hot-Mix Asphalt Pavements

STATE OF CALIFORNIA DEPARTMENT OF TRANSPORTATION (CDT)

CDT Test 526	(1978) Operation of California Profilograph and Evaluation of Profiles

STATE OF SOUTH CAROLINA DEPARTMENT OF TRANSPORTATION

SECTION 401	STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION, EDITION OF 2000
SECTION 402	STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION, EDITION OF 2000
SECTION 403	STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION, EDITION OF 2000
HOT MIX ASPHALT PAVEMENT	SCDOT SUPPLEMENTAL SPECIFICATIONS, DATED JUNE 4, 2003

U.S. ARMY CORPS OF ENGINEERS (USACE)

COE CRD-C 171	(1995) Test Method for Determining Percentage of Crushed Particles in Aggregate

1.2 DESCRIPTION OF WORK

The work shall consist of intermediate and surface pavement courses composed of mineral aggregate and asphalt material heated and mixed in a central mixing plant and placed on a prepared course. Hot Mix Asphalt (HMA) designed and constructed in accordance with this section shall conform to the lines, grades, thicknesses, and typical cross sections shown on the drawings. State DOT material's requirements for hot mix asphalt binder (intermediate) course, TYPE-1, SCDOT SECTION 402, and surface course TYPE-1C, SCDOT SECTION 403, as revised by the SCDOT SUPPLEMENTAL SPECIFICATION, and other pertinent materials and composition limits specifications within the SCDOT STANDARD SPECIFICATIONS shall govern. The terms "Engineer" and "Research and Materials Laboratory" used in SCDOT Standard Specifications shall be replaced by the term "Contracting Officer". Only the materials requirements of the SCDOT shall be used; Corps of Engineers administrative procedures, construction procedures and acceptability of work requirements shall govern all other aspects of the work. Each course shall be constructed to the depth, section, or elevation required by the drawings and shall be rolled, finished, and approved before the placement of the next course. In the event there are conflicts between this specification and the SCDOT specification, on the matter of materials, SCDOT shall govern. On all other matters, this specification shall govern. SCDOT test methods may be

substituted for equivalent AASTHO and ASTM test methods. References to SCDOT STANDARD SPECIFICATIONS shall always be construed to include revisions made to Edition of 2000 by the latest SCDOT SUPPLEMENTAL SPECIFICATION.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Mix Design; G, DO.

Proposed JMF.

Contractor Quality Control; G; RO.

Quality control plan.

Material Acceptance; G, RO.

Acceptance test results.

SD-04 Samples

Asphalt Cement Binder; G, DO.

(5 gallon) sample for mix design verification.

Aggregates; G, DO.

Sufficient materials to produce 200 lb of blended mixture for mix design verification.

SD-06 Test Reports

Aggregates; G, DO.
QC Monitoring; G, RO.

Aggregate and QC test results.

SD-07 Certificates

Asphalt Cement Binder; G, DO.

Copies of certified test data.

Testing Laboratory; G, RO.

Certification of compliance.

Plant Scale Calibration Certification

1.4 ASPHALT MIXING PLANT

Plants used for the preparation of hot-mix asphalt shall conform to the requirements of ASTM D 995 with the following changes:

a. Testing Facilities. The Contractor shall provide laboratory facilities at the plant for the use of the Government's acceptance testing and the Contractor's quality control testing.

b. Inspection of Plant. The Contracting Officer shall have access at all times, to all areas of the plant for checking adequacy of equipment; inspecting operation of the plant; verifying weights, proportions, and material properties; checking the temperatures maintained in the preparation of the mixtures and for taking samples. The Contractor shall provide assistance as requested, for the Government to procure any desired samples.

c. Storage Bins. Use of storage bins for temporary storage of hot-mix asphalt will be permitted as follows:

(1) The asphalt mixture may be stored in non-insulated storage bins for a period of time not exceeding 3 hours.

(2) The asphalt mixture may be stored in insulated storage bins for a period of time not exceeding 8 hours. The mix drawn from bins shall meet the same requirements as mix loaded directly into trucks.

1.5 HAULING EQUIPMENT

Trucks used for hauling hot-mix asphalt shall have tight, clean, and smooth metal beds. To prevent the mixture from adhering to them, the truck beds shall be lightly coated with a minimum amount of paraffin oil, lime solution, or other approved material. Petroleum based products shall not be used as a release agent. Each truck shall have a suitable cover to protect the mixture from adverse weather. When necessary to ensure that the mixture will be delivered to the site at the specified temperature, truck beds shall be insulated or heated and covers (tarps) shall be securely fastened.

1.6 ASPHALT PAVERS

Asphalt pavers shall be self-propelled, with an activated screed, heated as necessary, and shall be capable of spreading and finishing courses of hot-mix asphalt which will meet the specified thickness, smoothness, and grade. The paver shall have sufficient power to propel itself and the hauling equipment without adversely affecting the finished surface.

1.6.1 Receiving Hopper

The paver shall have a receiving hopper of sufficient capacity to permit a uniform spreading operation. The hopper shall be equipped with a distribution system to place the mixture uniformly in front of the screed without segregation. The screed shall effectively produce a finished surface of the required evenness and texture without tearing, shoving, or gouging the mixture.

1.6.2 Automatic Grade Controls

If an automatic grade control device is used, the paver shall be equipped with a control system capable of automatically maintaining the specified screed elevation. The control system shall be automatically actuated from either a reference line and/or through a system of mechanical sensors or sensor-directed mechanisms or devices which will maintain the paver screed at a predetermined transverse slope and at the proper elevation to obtain the required surface. The transverse slope controller shall be capable of maintaining the screed at the desired slope within plus or minus 0.1 percent. A transverse slope controller shall not be used to control grade. The controls shall be capable of working in conjunction with any of the following attachments:

a. Ski-type device of not less than 30 feet in length.

b. Taut stringline set to grade.

c. Short ski or shoe for joint matching.

d. Laser control.

1.7 ROLLERS

Rollers shall be in good condition and shall be operated at slow speeds to avoid displacement of the asphalt mixture. The number, type, and weight of rollers shall be sufficient to compact the mixture to the required density while it is still in a workable condition. Equipment which causes excessive crushing of the aggregate shall not be used.

1.8 WEATHER LIMITATIONS

The hot-mix asphalt shall not be placed upon a wet surface or when the surface temperature of the underlying course is less than specified in Table 1. The temperature requirements may be waived by the Contracting Officer, if requested; however, all other requirements, including compaction, shall be met.

Table 1. Surface Temperature Limitations of Underlying Course

Mat Thickness, inches	Degrees F
3 or greater	40
Less than 3	45

PART 2 PRODUCTS

2.1 AGGREGATES

Aggregates shall consist of crushed stone, crushed gravel, crushed slag, screenings, natural sand and mineral filler, as required by SCDOT SECTIONS 401.02, 401.03 (except as noted below), 402.02, 402.03, 403.02, 403.03, and revisions of these specifications contained in the SCDOT SUPPLEMENTAL SPECIFICATIONS. Marine limestone, Recycled Asphalt Pavement (RAP), (Subsection 401.03F), Crushed Glass (Subsection 401.03G), and Shingles (Subsection 401.03H) shall not be used. All aggregate test results and

samples shall be submitted to the Contracting Officer at least 14 days prior to start of construction.

2.1.1 Aggregate Gradation

The combined aggregate gradations for the binder (intermediate) course and surface course shall conform to gradations specified in SECTION 402.02 - 402.03, HOT MIX ASPHALT BINDER COURSE, TYPE-1, and SECTION 403.02 - 403.03, HOT MIX ASPHALT SURFACE COURSE, TYPE-1C, and as revised by the SUPPLEMENTAL SPECIFICATIONS. When tested in accordance with ASTM C 136 and ASTM C 117, the gradations shall not vary from the low limit on one sieve to the high limit on the adjacent sieve or vice versa, but grade uniformly from coarse to fine.

2.2 ASPHALT CEMENT BINDER

Asphalt cement binder shall conform to SCDOT STANDARD SPECIFICATIONS SECTIONS 401, 402 and 403, as revised by SCDOT SUPPLEMENTAL SPECIFICATION. Test data indicating grade certification shall be provided by the supplier at the time of delivery of each load to the mix plant. Copies of these certifications shall be submitted to the Contracting Officer. The supplier is defined as the last source of any modification to the binder. The Contracting Officer may sample and test the binder at the mix plant at any time before or during mix production. Samples for this verification testing shall be obtained by the Contractor in accordance with ASTM D 140 and in the presence of the Contracting Officer. These samples shall be furnished to the Contracting Officer for the verification testing, which shall be at no cost to the Contractor. Samples of the asphalt cement specified shall be submitted for approval not less than 14 days before start of the test section.

2.3 MIX DESIGN

The Contractor shall develop the mix design in accordance with SCDOT Standard Specifications, SECTION 401, HOT MIXED ASPHALT PAVEMENT, SECTION 402, HOT MIX ASPHALT BINDER COURSE, SECTION 403, HOT MIX ASPHALT SURFACE COURSE, and as revised by SCDOT SUPPLEMENTAL SPECIFICATION. No hot-mix asphalt for payment shall be produced until a JMF has been approved. Sufficient materials to produce 200 pound of blended mixture shall be provided to the Contracting Officer for verification of mix design at least 14 days prior to construction of test section.

At the option of the contractor a currently used SCDOT superpave hot mix may be used in lieu of developing a new hot mix design study as described herein. The superpave volumetric mix shall be designed in accordance with AASHTO MP 2.

2.3.1 JMF Requirements

The job mix formula shall be submitted in writing by the Contractor for approval at least 14 days prior to the start of the test section and shall include as a minimum:

a. Percent passing each sieve size.

b. Percent of asphalt cement.

c. Percent of each aggregate and mineral filler to be used.

d. Asphalt viscosity grade, penetration grade, or performance grade.

e. Number of blows of hammer per side of molded specimen.

f. Laboratory mixing temperature.

g. Lab compaction temperature.

h. Temperature-viscosity relationship of the asphalt cement.

i. Plot of the combined gradation on the 0.45 power gradation chart, stating the nominal maximum size.

j. Graphical plots of stability, flow, air voids, voids in the mineral aggregate, and unit weight versus asphalt content as shown in AI MS-02.

k. Specific gravity and absorption of each aggregate.

l. Percent natural sand.

m. Percent particles with 2 or more fractured faces (in coarse aggregate).

n. Fine aggregate angularity.

o. Percent flat or elongated particles (in coarse aggregate).

p. Tensile Strength Ratio (TSR).

q. Antistrip agent and amount.

r. List of all modifiers and amount.

Reference requirements of SCDOT Subsection 401.04, as revised.

2.3.2 Adjustments to Field JMF

The Laboratory JMF for each mixture shall be in effect until a new formula is approved in writing by the Contracting Officer. Should a change in sources of any materials be made, a new laboratory JMF design shall be performed and a new JMF approved before the new material is used. The Contractor will be allowed to adjust the Laboratory JMF within the limits specified below to optimize mix volumetric properties with the approval of the Contracting Officer. Adjustments to the Laboratory JMF shall be applied to the field (plant) established JMF and limited to those values as shown. Adjustments shall be targeted to produce or nearly produce 4 percent voids total mix (VTM).

TABLE 2. Field (Plant) Established JMF Tolerances

Sieves	Adjustments (plus or minus), percent
No. 4	3
No. 8	3
No. 200	1
Binder Content	0.40

If adjustments are needed that exceed these limits, a new mix design shall be developed. Tolerances given above may permit the aggregate grading to be outside the acceptable limits; while not desirable, this is acceptable.

PART 3 EXECUTION

3.1 PREPARATION OF ASPHALT BINDER MATERIAL

The asphalt cement material shall be heated avoiding local overheating and providing a continuous supply of the asphalt material to the mixer at a uniform temperature. The temperature of unmodified asphalts shall be no more than 325 degrees F when added to the aggregates. Modified asphalts shall be no more than 350 degrees F when added to the aggregates.

3.2 PREPARATION OF MINERAL AGGREGATE

The aggregate for the mixture shall be heated and dried prior to mixing. No damage shall occur to the aggregates due to the maximum temperature and rate of heating used. The temperature of the aggregate and mineral filler shall not exceed 350 degrees F when the asphalt cement is added. The temperature shall not be lower than is required to obtain complete coating and uniform distribution on the aggregate particles and to provide a mixture of satisfactory workability.

3.3 PREPARATION OF HOT-MIX ASPHALT MIXTURE

The aggregates and the asphalt cement shall be weighed or metered and introduced into the mixer in the amount specified by the JMF. The combined materials shall be mixed until the aggregate obtains a uniform coating of asphalt binder and is thoroughly distributed throughout the mixture. Wet mixing time shall be the shortest time that will produce a satisfactory mixture, but no less than 25 seconds for batch plants. The wet mixing time for all plants shall be established by the Contractor, based on the procedure for determining the percentage of coated particles described in ASTM D 2489, for each individual plant and for each type of aggregate used. The wet mixing time will be set to at least achieve 95 percent of coated particles. The moisture content of all hot-mix asphalt upon discharge from the plant shall not exceed 0.5 percent by total weight of mixture as measured by ASTM D 1461.

3.4 PREPARATION OF THE UNDERLYING SURFACE

Immediately before placing the hot mix asphalt, the underlying course shall be cleaned of dust and debris. A prime coat shall be applied in accordance with the contract specifications.

3.5 TESTING LABORATORY

The laboratory used to develop the JMF shall meet the requirements of ASTM D 3666. A certification signed by the manager of the laboratory stating that it meets these requirements or clearly listing all deficiencies shall be submitted to the Contracting Officer prior to the start of construction. The certification shall contain as a minimum:

a. Qualifications of personnel; laboratory manager, supervising technician, and testing technicians.

b. A listing of equipment to be used in developing the job mix.

c. A copy of the laboratory's quality control system.

d. Evidence of participation in the AASHTO Materials Reference Laboratory (AMRL) program.

3.6 TRANSPORTING AND PLACING

3.6.1 Transporting

The hot-mix asphalt shall be transported from the mixing plant to the site in clean, tight vehicles. Deliveries shall be scheduled so that placing and compacting of mixture is uniform with minimum stopping and starting of the paver. Adequate artificial lighting shall be provided for night placements. Hauling over freshly placed material will not be permitted until the material has been compacted as specified, and allowed to cool to 140 degrees F. To deliver mix to the paver, the Contractor shall use a material transfer vehicle which shall be operated to produce continuous forward motion of the paver.

3.6.2 Placing

The mix shall be placed and compacted at a temperature suitable for obtaining density, surface smoothness, and other specified requirements. Upon arrival, the mixture shall be placed to the full width by an asphalt paver; it shall be struck off in a uniform layer of such depth that, when the work is completed, it shall have the required thickness and conform to the grade and contour indicated. The speed of the paver shall be regulated to eliminate pulling and tearing of the asphalt mat. Unless otherwise permitted, placement of the mixture shall begin along the centerline of a crowned section or on the high side of areas with a one-way slope. The mixture shall be placed in consecutive adjacent strips having a minimum width of 10 feet. The longitudinal joint in one course shall offset the longitudinal joint in the course immediately below by at least 1 foot; however, the joint in the surface course shall be at the centerline of the pavement. Transverse joints in one course shall be offset by at least 10 feet from transverse joints in the previous course. Transverse joints in adjacent lanes shall be offset a minimum of 10 feet. On isolated areas where irregularities or unavoidable obstacles make the use of mechanical spreading and finishing equipment impractical, the mixture may be spread and luted by hand tools.

3.7 COMPACTION OF MIXTURE

After placing, the mixture shall be thoroughly and uniformly compacted by rolling. The surface shall be compacted as soon as possible without causing displacement, cracking or shoving. The sequence of rolling operations and the type of rollers used shall be at the discretion of the Contractor. The speed of the roller shall, at all times, be sufficiently slow to avoid displacement of the hot mixture and be effective in compaction. Any displacement occurring as a result of reversing the direction of the roller, or from any other cause, shall be corrected at once. Sufficient rollers shall be furnished to handle the output of the plant. Rolling shall

continue until the surface is of uniform texture, true to grade and cross section, and the required field density is obtained. To prevent adhesion of the mixture to the roller, the wheels shall be kept properly moistened but excessive water will not be permitted. In areas not accessible to the roller, the mixture shall be thoroughly compacted with hand tampers. Any mixture that becomes loose and broken, mixed with dirt, contains check-cracking, or is in any way defective shall be removed full depth, replaced with fresh hot mixture and immediately compacted to conform to the surrounding area. This work shall be done at the Contractor's expense. Skin patching will not be allowed.

3.8 JOINTS

The formation of joints shall be made ensuring a continuous bond between the courses and to obtain the required density. All joints shall have the same texture as other sections of the course and meet the requirements for smoothness and grade.

3.8.1 Transverse Joints

The roller shall not pass over the unprotected end of the freshly laid mixture, except when necessary to form a transverse joint. When necessary to form a transverse joint, it shall be made by means of placing a bulkhead or by tapering the course. The tapered edge shall be cut back to its full depth and width on a straight line to expose a vertical face prior to placing material at the joint. The cutback material shall be removed from the project. In both methods, all contact surfaces shall be given a light tack coat of asphalt material before placing any fresh mixture against the joint.

3.8.2 Longitudinal Joints

Longitudinal joints which are irregular, damaged, uncompacted, cold (less than 175 degrees F at the time of placing adjacent lanes), or otherwise defective, shall be cut back a minimum of 2 inches from the edge with a cutting wheel to expose a clean, sound vertical surface for the full depth of the course. All cutback material shall be removed from the project. All contact surfaces shall be given a light tack coat of asphalt material prior to placing any fresh mixture against the joint. The Contractor will be allowed to use an alternate method if it can be demonstrated that density, smoothness, and texture can be met.

3.9 CONTRACTOR QUALITY CONTROL

3.9.1 General Quality Control Requirements

The Contractor shall develop an approved Quality Control Plan. Hot-mix asphalt for payment shall not be produced until the quality control plan has been approved. The plan shall address all elements which affect the quality of the pavement including, but not limited to:

a. Mix Design

b. Aggregate Grading

c. Quality of Materials

d. Stockpile Management

e. Proportioning

f. Mixing and Transportation

g. Mixture Volumetrics

h. Moisture Content of Mixtures

i. Placing and Finishing

j. Joints

k. Compaction

l. Surface Smoothness

3.9.2 Testing Laboratory

The Contractor shall provide a fully equipped asphalt laboratory located at the plant or job site. The laboratory shall meet the requirements as required in ASTM D 3666. The effective working area of the laboratory shall be a minimum of 150 square feet with a ceiling height of not less than 7.5 feet. Lighting shall be adequate to illuminate all working areas. It shall be equipped with heating and air conditioning units to maintain a temperature of 75 degrees F plus or minus 5 degrees F. Laboratory facilities shall be kept clean and all equipment shall be maintained in proper working condition. The Contracting Officer shall be permitted unrestricted access to inspect the Contractor's laboratory facility, to witness quality control activities, and to perform any check testing desired. The Contracting Officer will advise the Contractor in writing of any noted deficiencies concerning the laboratory facility, equipment, supplies, or testing personnel and procedures. When the deficiencies are serious enough to adversely affect test results, the incorporation of the materials into the work shall be suspended immediately and will not be permitted to resume until the deficiencies are corrected.

3.9.3 Quality Control Testing

The Contractor shall perform all quality control tests applicable to these specifications and as set forth in the Quality Control Program. The testing program shall include, but shall not be limited to, tests for the control of asphalt content, aggregate gradation, temperatures, aggregate moisture, moisture in the asphalt mixture, laboratory air voids, stability, flow, in-place density, grade and smoothness. A Quality Control Testing Plan shall be developed as part of the Quality Control Program.

3.9.3.1 Asphalt Content

A minimum of two tests to determine asphalt content will be performed per lot (a lot is defined in paragraph MATERIAL ACCEPTANCE) by one of the following methods: the extraction method in accordance with ASTM D 2172, Method A or B, the ignition method in accordance with the AASHTO TP53or ASTM D 6307, or the nuclear method in accordance with ASTM D 4125, provided the nuclear gauge is calibrated for the specific mix being used. For the extraction method, the weight of ash, as described in ASTM D 2172, shall be

determined as part of the first extraction test performed at the beginning of plant production; and as part of every tenth extraction test performed thereafter, for the duration of plant production. The last weight of ash value obtained shall be used in the calculation of the asphalt content for the mixture.

3.9.3.2 Gradation

Aggregate gradations shall be determined a minimum of twice per lot from mechanical analysis of recovered aggregate in accordance with ASTM D 5444. When asphalt content is determined by the nuclear method, aggregate gradation shall be determined from hot bin samples on batch plants, or from the cold feed on drum mix plants. For batch plants, aggregates shall be tested in accordance with ASTM C 136 using actual batch weights to determine the combined aggregate gradation of the mixture.

3.9.3.3 Temperatures

Temperatures shall be checked at least four times per lot, at necessary locations, to determine the temperature at the dryer, the asphalt cement in the storage tank, the asphalt mixture at the plant, and the asphalt mixture at the job site.

3.9.3.4 Aggregate Moisture

The moisture content of aggregate used for production shall be determined a minimum of once per lot in accordance with ASTM C 566.

3.9.3.5 Moisture Content of Mixture

The moisture content of the mixture shall be determined at least once per lot in accordance with ASTM D 1461 or an approved alternate procedure.

3.9.3.6 Laboratory Air Voids, Marshall Stability and Flow

Mixture samples shall be taken at least four times per lot and compacted into specimens, using 75 blows per side with the Marshall hammer as described in ASTM D 1559. After compaction, the laboratory air voids of each specimen shall be determined, as well as the Marshall stability and flow.

3.9.3.7 In-Place Density

The Contractor shall conduct any necessary testing to ensure the specified density is achieved. A nuclear gauge may be used to monitor pavement density in accordance with ASTM D 2950.

3.9.3.8 Grade and Smoothness

The Contractor shall conduct the necessary checks to ensure the grade and smoothness requirements are met in accordance with paragraph MATERIAL ACCEPTANCE.

3.9.3.9 Additional Testing

Any additional testing, which the Contractor deems necessary to control the process, may be performed at the Contractor's option.

3.9.3.10 QC Monitoring

The Contractor shall submit all QC test results to the Contracting Officer on a daily basis as the tests are performed. The Contracting Officer reserves the right to monitor any of the Contractor's quality control testing and to perform duplicate testing as a check to the Contractor's quality control testing.

3.9.4 Sampling

When directed by the Contracting Officer, the Contractor shall sample and test any material which appears inconsistent with similar material being produced, unless such material is voluntarily removed and replaced or deficiencies corrected by the Contractor. All sampling shall be in accordance with standard procedures specified.

3.10 MATERIAL ACCEPTANCE

Testing for acceptability of work will be performed by an independent laboratory hired by the Contractor. Test results shall be forwarded daily to the Contracting Officer. Acceptance of the plant produced mix and in-place requirements will be on a lot to lot basis. A standard lot for all requirements will be equal to 4 hours of production. Grade and surface smoothness determinations will be made on the lot as a whole. Exceptions or adjustments to this will be made in situations where the mix within one lot is placed as part of both the intermediate and surface courses, thus grade and smoothness measurements for the entire lot cannot be made. In order to evaluate laboratory air voids and in-place (field) density, each lot will be divided into four equal sublots.

When a lot of material fails to meet the specification requirements, that lot shall be removed and replaced.

3.10.1 Sublot Sampling

One random mixture sample for determining laboratory air voids, theoretical maximum density, and for any additional testing the Contracting Officer desires, will be taken from a loaded truck delivering mixture to each sublot, or other appropriate location for each sublot. All samples will be selected randomly, using commonly recognized methods of assuring randomness conforming to ASTM D 3665 and employing tables of random numbers or computer programs. Laboratory air voids will be determined from three laboratory compacted specimens of each sublot sample in accordance with ASTM D 1559. The specimens will be compacted within 2 hours of the time the mixture was loaded into trucks at the asphalt plant. Samples will not be reheated prior to compaction and insulated containers will be used as necessary to maintain the temperature.

3.10.2 Additional Sampling and Testing

The Contracting Officer reserves the right to direct additional samples and tests for any area which appears to deviate from the specification requirements. The cost of any additional testing will be paid for by the Government. Testing in these areas will be in addition to the lot testing, and the requirements for these areas will be the same as those for a lot.

3.10.3 Laboratory Air Voids

Laboratory air voids will be calculated by determining the Marshall density of each lab compacted specimen using ASTM D 2726 and determining the theoretical maximum density of every other sublot sample using ASTM D 2041. Laboratory air void calculations for each sublot will use the latest theoretical maximum density values obtained, either for that sublot or the previous sublot. All laboratory air void tests will be completed and reported within 24 hours after completion of construction of each lot.

3.10.4 In-place Density

3.10.4.1 General Density Requirements

For determining in-place density, one random core will be taken by the Government from the mat (interior of the lane) of each sublot, and one random core will be taken from the joint (immediately over joint) of each sublot. Each random core will be full thickness of the layer being placed. When the random core is less than 1 inch thick, it will not be included in the analysis. In this case, another random core will be taken. After air drying to a constant weight, cores obtained from the mat and from the joints will be used for in-place density determination.

3.10.4.2 Mat and Joint Densities

The average in-place mat and joint densities are expressed as a percentage of the average Marshall density for the lot. The Marshall density for each lot will be determined as the average Marshall density of the four random samples (3 specimens compacted per sample). The area associated with the joint is then determined and will be considered to be 10 feet wide times the length of completed longitudinal construction joint in the lot. This area will not exceed the total lot size. The length of joint to be considered will be that length where a new lane has been placed against an adjacent lane of hot-mix asphalt pavement, either an adjacent freshly paved lane or one paved at any time previously. The area associated with the joint is expressed as a percentage of the total lot area. When the Marshall density on both sides of a longitudinal joint is different, the average of these two densities will be used as the Marshall density needed to calculate the percent joint density. All density results for a lot will be completed and reported within 24 hours after the construction of that lot.

3.10.5 Grade

The final wearing surface of pavement shall conform to the elevations and cross sections shown and shall vary not more than 0.05 foot from the plan grade established and approved at site of work. Finished surfaces at juncture with other pavements shall coincide with finished surfaces of abutting pavements. Deviation from the plan elevation will not be permitted in areas of pavements where closer conformance with planned elevation is required for the proper functioning of drainage and other appurtenant structures involved. The final wearing surface of the pavement will be tested for conformance with specified plan grade requirements. The grade will be determined by running lines of levels at intervals of 25 feet, or less, longitudinally and transversely, to determine the elevation of the completed pavement surface. Within 5 working days, after the completion of a particular lot incorporating the final wearing surface, the Contracting Officer will inform the Contractor in writing, of the results of the grade-

conformance tests. In areas where the grade exceeds the tolerance by more than 50 percent, the Contractor shall remove the surface lift full depth; the Contractor shall then replace the lift with hot-mix asphalt to meet specification requirements, at no additional cost to the Government. Diamond grinding may be used to remove high spots to meet grade requirements. Skin patching for correcting low areas or planning or milling for correcting high areas will not be permitted.

3.10.6 Surface Smoothness

The Contractor shall use the following method to test and evaluate surface smoothness of the pavement. All testing shall be performed in the presence of the Contracting Officer. Detailed notes of the results of the testing shall be kept and a copy furnished to the Government immediately after each day's testing. Where drawings show required deviations from a plane surface (crowns, drainage inlets, etc.), the surface shall be finished to meet the approval of the Contracting Officer.

3.10.6.1 Smoothness Requirements

Straightedge Testing: The finished surfaces of the pavements shall have no abrupt change of 1/4 inch or more, and all pavements shall be within the tolerances specified in Table 9 when checked with an approved 12 foot straightedge.

Table 9. Straightedge Surface Smoothness--Pavements

Pavement Category	Direction of Testing	Tolerance, inches
All paved areas	Longitudinal	1/4
	Transverse	1/4

3.10.6.2 Testing Method

After the final rolling, but not later than 24 hours after placement, the surface of the pavement in each entire lot shall be tested by the Contractor in such a manner as to reveal all surface irregularities exceeding the tolerances specified above. Separate testing of individual sublots is not required. If any pavement areas are ground, these areas shall be retested immediately after grinding. The entire area of the pavement shall be tested in both a longitudinal and a transverse direction on parallel lines. The transverse lines shall be 25 feet or less apart, as directed. The longitudinal lines shall be at the centerline of each paving lane for lines less than 20 feet and at the third points for lanes 20 feet or greater. Other areas having obvious deviations shall also be tested. Longitudinal testing lines shall be continuous across all joints.

Straightedge Testing. The straightedge shall be held in contact with the surface and moved ahead one-half the length of the straightedge for each successive measurement. The amount of surface irregularity shall be determined by placing the freestanding (unleveled) straightedge on the pavement surface and allowing it to rest upon the two highest spots covered by its length, and measuring the maximum gap between the straightedge and the pavement surface in the area between these two high points.

Location and deviation from straightedge for all measurements shall be recorded. When 20.0 percent or more of the measurements exceed the tolerance, the lot shall be removed and replaced at no additional cost to the Government. Regardless of the above, any small individual area with surface deviation which exceeds the tolerance given above by more than 50 percent, shall be corrected by diamond grinding to meet the specification requirements above or shall be removed and replaced at no additional cost to the Government.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 02 - SITE CONSTRUCTION

SECTION 02743N

BITUMINOUS PRIME COAT

09/99

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 DELIVERY, STORAGE, AND HANDLING
1.4 ENVIRONMENTAL REQUIREMENTS
1.5 SAFETY REQUIREMENTS
1.6 CONSTRUCTION EQUIPMENT
1.6.1 Bituminous Distributor
1.6.2 Heating Equipment for Storage Tanks
1.6.3 Brooms and Blowers

PART 2 PRODUCTS

2.1 BITUMINOUS MATERIAL
2.1.1 Emulsified Asphalt

PART 3 EXECUTION

3.1 SURFACE PREPARATION
3.2 APPLICATION
3.2.1 Curing
3.2.2 Application Temperature for Emulsified Asphalt
3.3 PROTECTION

-- End of Section Table of Contents --

SECTION 02743N

BITUMINOUS PRIME COAT
09/99

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 140	(1993) Sampling Bituminous Materials
ASTM D 977	(1991) Emulsified Asphalt
ASTM D 2397	(1994) Cationic Emulsified Asphalt

SOUTH CAROLINA DEPARTMENT OF TRANSPORTATION (SCDOT)

SECTION 406	(2000) STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION

U.S. ARMY CORPS OF ENGINEERS (USACE)

EM 385-1-1	(1996) Safety and Health Requirements Manual

1.2 SUBMITTALS

Submit the following in accordance with Section 01330, "Submittal Procedures."

SD-03 Product Data

Certified test reports: For emulsified asphalt

SD-06 Test Reports

Bituminous materials

1.3 DELIVERY, STORAGE, AND HANDLING

Inspect the materials for contamination and damage. Unload and store the materials with a minimum of handling.

1.4 ENVIRONMENTAL REQUIREMENTS

Apply the prime coat only when the surface is dry or contains moisture not in excess of the amount that will permit uniform distribution and the desired penetration. Apply the prime coat only when the ambient temperature is 50 degrees F or above and when the temperature has not been below 35

degrees F for 12 hours immediately prior to application, unless otherwise directed.

1.5 SAFETY REQUIREMENTS

Perform the work in accordance with EM 385-1-1.

1.6 CONSTRUCTION EQUIPMENT

Provide equipment dependable and adequate for the purpose intended and properly maintained in satisfactory and safe operating condition at all times. Calibrated equipment such as asphalt distributors, scales, batching equipment, spreaders and similar equipment, shall have been recalibrated by an approved calibration laboratory within 12 months prior to commencing work.

1.6.1 Bituminous Distributor

Bituminous distributor shall have pneumatic tires of such width and number that the load produced on the base surface shall not exceed 650 pounds per inch of tire width. The bituminous distributor shall be designed and equipped to distribute the bituminous material uniformly at even heat on variable widths of surface at readily determined and controlled rates from 0.05 to 2.0 gallons per square yard, with a pressure range of 25 to 75 pounds per square inch and an allowable variation not to exceed 5 percent from any specified rate. Distributor equipment shall include a separate power unit for the bitumen pump, full-circulation spray bars, tachometer, pressure gauges, volume-measuring devices, adequate heaters for heating the materials to the proper application temperature, a thermometer for reading the temperature of the tank contents, and a hose and spray nozzle attachment for applying bituminous material to spots unavoidably missed by the distributor and to areas inaccessible to the distributor. The distributor shall be equipped to circulate and agitate the bituminous material during the heating process.

1.6.2 Heating Equipment for Storage Tanks

The equipment for heating the bituminous material shall be steam, electric, or hot oil heaters. Steam heaters shall consist of steam coils and equipment for producing steam, so designed that the steam cannot get into the material. An armored thermometer with a temperature range from 40 to 400 degrees F shall be fixed to the tank so that the temperature of the bituminous material may be determined at all times.

1.6.3 Brooms and Blowers

Brooms and blowers shall be of the power type and suitable for cleaning prepared subgrades or bases.

PART 2 PRODUCTS

2.1 BITUMINOUS MATERIAL

2.1.1 Emulsified Asphalt

SECTION 406, EA-P Special.

Reference SCDOT Standard Specifications on page 314-315, Paragraph 406.05 for specifications of allowable emulsified asphalt.

PART 3 EXECUTION

3.1 SURFACE PREPARATION

Immediately before applying the prime coat, remove loose material, dirt, clay, and other objectionable material from the surface to be primed. After the cleaning operation and prior to the application of the prime coat, examine the area to be primed. Ensure that the area is fit to receive the bituminous priming material.

3.2 APPLICATION

Immediately following the surface preparation, apply the bituminous material by means of the bituminous distributor. Apply the bituminous material at a pressure range of 25 to 75 pounds per square inch within the temperature limits specified herein, and at the rate of not less than 0.25 gallon nor more than 0.30 gallon of bituminous material per square yard. Apply the bituminous material so that uniform distribution is obtained over the entire surface to be treated. Unless the distributor is equipped to obtain satisfactory results at the junction of previous and subsequent applications, spread building paper on the surface of the applied material for a sufficient distance back from the ends of each application, so that flow from the sprays may be started and stopped on the paper, and so that all sprayers will operate at full force on the surface to be treated. Immediately after the application, remove the building paper and apply bituminous material to spots missed by the distributor.

3.2.1 Curing

Following the application of bituminous material, allow the surface to cure without being disturbed for a period of not less than 48 hours or longer, as may be necessary to attain penetration into the foundation course and evaporation of the volatiles from the bituminous material. Furnish and spread enough sand to effectively blot up and cure excess bituminous material. Maintain the primed surface until the succeeding layer of pavement is placed, by protecting the surface against damage and by repairing and repriming deficient areas.

3.2.2 Application Temperature for Emulsified Asphalt

Between 75 and 130 degrees F.

3.3 PROTECTION

Keep traffic off surfaces freshly treated with bituminous material. Provide sufficient warning signs and barricades to prevent traffic over freshly treated surfaces.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 02 - SITE CONSTRUCTION

SECTION 02744N

BITUMINOUS TACK COAT

09/99

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 DELIVERY AND STORAGE
1.4 WEATHER LIMITATIONS

PART 2 PRODUCTS

2.1 MATERIALS
2.1.1 Emulsified Asphalt
2.2 CONSTRUCTION EQUIPMENT
2.2.1 Bituminous Distributor
2.2.2 Heating Equipment for Storage Tanks
2.2.3 Brooms and Blowers

PART 3 EXECUTION

3.1 PREPARATION OF SURFACE
3.2 APPLICATION OF BITUMINOUS MATERIAL
3.2.1 Application Temperature for Emulsified Asphalt
3.3 FIELD SAMPLING AND TESTING
3.3.1 Bituminous Material Tests
3.4 TRAFFIC CONTROLS

-- End of Section Table of Contents --

SECTION 02744N

BITUMINOUS TACK COAT
09/99

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)

AASHTO T 102	(1983) Spot Test of Asphaltic Materials

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 140	(1993) Sampling Bituminous Materials
ASTM D 977	(1991) Emulsified Asphalt
ASTM D 2397	(1994) Cationic Emulsified Asphalt

SOUTH CAROLINA DEPARTMENT OF TRANSPORTATION (SCDOT) Org

EDITION OF 2000	STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION, EDITION OF 2000

1.2 SUBMITTALS

Submit the following in accordance with Section 01330, "Submittal Procedures."

SD-06 Test Reports

Certified test reports: For emulsified asphalt

1.3 DELIVERY AND STORAGE

Inspect the materials delivered to the site for contamination and damage. Unload and store the materials with a minimum of handling.

1.4 WEATHER LIMITATIONS

Apply the tack coat only when the surface is dry. Apply the tack coat only when the ambient temperature is 50 degrees F or above and when the temperature has not been below 35 degrees F for 12 hours immediately prior to application, unless otherwise directed.

PART 2 PRODUCTS

2.1 MATERIALS

Bituminous material for the tack coat shall be emulsified asphalt.

2.1.1 Emulsified Asphalt

ASTM D 2397, Type CSS-1 or CSS-1h or acceptable emulsified asphalts approved by SCDOT. Dilute the emulsified asphalt with equal parts of water. The base asphalt used to manufacture the emulsion shall show a negative spot when tested in accordance with AASHTO T 102 using standard naphtha.

2.2 CONSTRUCTION EQUIPMENT

Provide equipment dependable and adequate for the purpose intended and properly maintained in satisfactory and safe operating condition. Calibrated equipment such as asphalt distributors, scales, batching equipment, spreaders and similar equipment, shall have been recalibrated by a calibration laboratory within 12 months prior to commencing work.

2.2.1 Bituminous Distributor

The bituminous distributor shall be designed and equipped to distribute the bituminous material uniformly at even heat on variable widths of surface at readily determined and controlled rates from 0.05 to 2.0 gallons per square yard, with a pressure range of 25 to 75 pounds per square inch and with an allowable variation not to exceed 5 percent from any specified rate. Distributor equipment shall include a separate power unit for the bitumen pump, full-circulation spray bars, tachometer, pressure gages, volume-measuring devices, adequate heaters for heating the materials to the proper application temperature, a thermometer for reading the temperature of the tank contents, and a hose and spray nozzle attachment suitable for applying bituminous material to spots unavoidably missed by the distributor and to areas inaccessible to the distributor. The distributor shall be equipped to circulate and agitate the bituminous material during the heating process.

2.2.2 Heating Equipment for Storage Tanks

The equipment for heating the bituminous material shall be steam, electric, or hot oil heaters. Steam heaters shall consist of steam coils and equipment for producing steam, so designed that the steam cannot get into the material. An armored thermometer with a temperature range from 40 to 400 degrees F shall be fixed to the tank so that the temperature of the bituminous material may be determined at all times.

2.2.3 Brooms and Blowers

Brooms and blowers shall be of the power type suitable for cleaning the surfaces for application of the bituminous material.

PART 3 EXECUTION

3.1 PREPARATION OF SURFACE

Immediately before applying the tack coat, remove loose material, dirt, clay, and other objectionable material from the surface to be treated by a power broom or blower supplemented with hand brooms. After the cleaning operation and prior to the application of the tack coat, inspect the area to be paved to determine the fitness of the area to receive the bituminous material.

3.2 APPLICATION OF BITUMINOUS MATERIAL

Apply the tack coat when the surface to be treated is dry. Immediately following the preparation of the surface for treatment, apply the bituminous material by means of the bituminous distributor, within the limits of temperature specified herein and at a rate of not less than 0.05 gallon nor more than 0.15 gallon of diluted emulsion per square yard. Apply the bituminous material so that uniform distribution is obtained over the entire surface to be treated. Treat lightly coated areas and spots missed by the distributor with the bituminous material. Following the application of bituminous material, allow the surface to cure without being disturbed for period of time necessary to permit setting of the tack coat. Apply the bituminous tack coat only as far in advance of the placing of the overlying layer as required for that day's operation. Maintain and protect the treated surface from damage until the succeeding course of pavement is placed.

3.2.1 Application Temperature for Emulsified Asphalt

Between 75 and 130 degrees F.

3.3 FIELD SAMPLING AND TESTING

3.3.1 Bituminous Material Tests

Perform spot test for asphalt in accordance with AASHTO T 102 on each shipment.

3.4 TRAFFIC CONTROLS

Keep traffic off surfaces freshly treated with bituminous material. Provide sufficient warning signs and barricades so that traffic will not travel over freshly treated surfaces.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 02 - SITE CONSTRUCTION

SECTION 02763A

PAVEMENT MARKINGS

04/01

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 DELIVERY AND STORAGE
1.4 EQUIPMENT
1.4.1 Paint Application Equipment
1.4.2 Surface Preparation Equipment
1.4.2.1 Sandblasting Equipment
1.4.2.2 Waterblast Equipment
1.5 HAND-OPERATED, PUSH-TYPE MACHINES
1.6 WEATHER LIMITATIONS FOR REMOVAL

PART 2 PRODUCTS

2.1 PAINT

PART 3 EXECUTION

3.1 SURFACE PREPARATION
3.1.1 Pretreatment for Early Painting
3.2 APPLICATION
3.2.1 Paint
3.2.1.1 Rate of Application
3.2.1.2 Drying

-- End of Section Table of Contents --

SECTION 02763A

PAVEMENT MARKINGS
04/01

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)

AASHTO M 247	(1981; R 1996) Glass Beads Used in Traffic Paint

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 792	(1998) Density and Specific Gravity (Relative Density) of Plastics by Displacement
ASTM D 4280	(1996) Extended Life Type, Nonplowable, Prismatic, Raised, Retroreflective Pavement Markers
ASTM D 4505	(1996) Preformed Plastic Pavement Marking Tape for Extended Service Life
ASTM E 28	(1999) Softening Point of Resins by Ring and Ball Apparatus

U.S. GENERAL SERVICES ADMINISTRATION (GSA)

FS TT-B-1325	(Rev C; Notice 1; Canc. Notice 2) Beads (Glass Spheres) Retro-Reflective (Metric)
FS TT-P-1952	(Rev D; Canc. Notice 1) Paint, Traffic and Airfield Marking, Waterborne (Metric)

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Equipment;

Lists of proposed equipment, including descriptive data, and notifications of proposed Contractor actions as specified in this section.

Composition Requirements;

Manufacturer's current printed product description and Material Safety Data Sheets (MSDS) for each type paint/color proposed for use.

SD-07 Certificates

Volatile Organic Compound (VOC);

Certificate stating that the proposed pavement marking paint meets the VOC regulations of the local Air Pollution Control District having jurisdiction over the geographical area in which the project is located.

1.3 DELIVERY AND STORAGE

All materials shall be delivered and stored in sealed containers that plainly show the designated name, formula or specification number, batch number, color, date of manufacture, manufacturer's name, and directions, all of which shall be plainly legible at time of use.

1.4 EQUIPMENT

All machines, tools and equipment used in the performance of the work shall be approved and maintained in satisfactory operating condition. Equipment operating on roads shall display low speed traffic markings and traffic warning lights.

1.4.1 Paint Application Equipment

The equipment to apply paint to pavements shall be a self-propelled or mobile-drawn pneumatic spraying machine with suitable arrangements of atomizing nozzles and controls to obtain the specified results. The machine shall have a speed during application not less than 5 mph, and shall be capable of applying the stripe widths indicated, at the paint coverage rate specified in paragraph APPLICATION, and of even uniform thickness with clear-cut edges. Equipment used for marking streets shall be capable of placing the prescribed number of lines at a single pass as solid lines, intermittent lines or a combination of solid and intermittent lines using a maximum of two different colors of paint as specified 150 mm (6 inches). The paint applicator shall have paint reservoirs or tanks of sufficient capacity and suitable gauges to apply paint in accordance with requirements specified. Tanks shall be equipped with suitable air-driven mechanical agitators. The spray mechanism shall be equipped with quick-action valves conveniently located, and shall include necessary pressure regulators and gauges in full view and reach of the operator. Paint strainers shall be installed in paint supply lines to ensure freedom from residue and foreign matter that may cause malfunction of the spray guns. The paint applicator shall be readily adaptable for attachment of an air-actuated dispenser for the reflective media approved for use. Pneumatic spray guns shall be provided for hand application of paint in areas where the mobile paint applicator cannot be used.

1.4.2 Surface Preparation Equipment

1.4.2.1 Sandblasting Equipment

Sandblasting equipment shall include an air compressor, hoses, and nozzles of proper size and capacity as required for cleaning surfaces to be painted. The compressor shall be capable of furnishing not less than 150 cfm of air at a pressure of not less than 90 psi at each nozzle used, and shall be equipped with traps that will maintain the compressed air free of oil and water.

1.4.2.2 Waterblast Equipment

The water pressure shall be specified at 2600 psi at 140 degrees F in order to adequately clean the surfaces to be marked.

1.5 HAND-OPERATED, PUSH-TYPE MACHINES

All machines, tools, and equipment used in performance of the work shall be approved and maintained in satisfactory operating condition. Hand-operated push-type machines of a type commonly used for application of paint to pavement surfaces will be acceptable for marking small streets and parking areas. Applicator machine shall be equipped with the necessary paint tanks and spraying nozzles, and shall be capable of applying paint uniformly at coverage specified. Sandblasting equipment shall be provided as required for cleaning surfaces to be painted. Hand-operated spray guns shall be provided for use in areas where push-type machines cannot be used.

1.6 WEATHER LIMITATIONS FOR REMOVAL

Pavement surface shall be free of snow, ice, or slush. Surface temperature shall be at least 40 degrees F and rising at the beginning of operations, except those involving shot or sand blasting. Operation shall cease during thunderstorms. Operation shall cease during rainfall, except for waterblasting and removal of previously applied chemicals. Waterblasting shall cease where surface water accumulation alters the effectiveness of material removal.

PART 2 PRODUCTS

2.1 PAINT

The paint shall be homogeneous, easily stirred to smooth consistency, and shall show no hard settlement or other objectionable characteristics during a storage period of 6 months. Paints for roads and streets shall conform to FS TT-P-1952, color as indicated. Pavement marking paints shall comply with applicable state and local laws enacted to ensure compliance with Federal Clean Air Standards.

PART 3 EXECUTION

3.1 SURFACE PREPARATION

Surfaces to be marked shall be thoroughly cleaned before application of the pavement marking material. Dust, dirt, and other granular surface deposits shall be removed by sweeping, blowing with compressed air, rinsing with

water or a combination of these methods as required. Rubber deposits, surface laitance, and other coatings adhering to the pavement shall be completely removed with scrapers, wire brushes, sandblasting, approved chemicals, or mechanical abrasion as directed. After cleaning, oil-soaked areas shall be sealed with cut shellac to prevent bleeding through the new paint. Pavement surfaces shall be allowed to dry, when water is used for cleaning, prior to striping or marking. Surfaces shall be recleaned, when work has been stopped due to rain.

3.1.1 Pretreatment for Early Painting

Where early painting is required on rigid pavements, a pretreatment with an aqueous solution containing 3 percent phosphoric acid and 2 percent zinc chloride shall be applied to prepared pavement areas prior to painting.

3.2 APPLICATION

All pavement markings and patterns shall be placed as shown on the plans.

3.2.1 Paint

Paint shall be applied to clean, dry surfaces, and only when air and pavement temperatures are above 40 degrees F and less than 95 degrees F. Paint temperature shall be maintained within these same limits. New asphalt pavement surfaces shall be allowed to cure for a period of not less than 30 days before applications of paint. Paint shall be applied pneumatically with approved equipment at rate of coverage specified. The Contractor shall provide guide lines and templates as necessary to control paint application. Special precautions shall be taken in marking numbers, letters, and symbols. Edges of markings shall be sharply outlined.

3.2.1.1 Rate of Application

Paint shall be applied evenly to the pavement surface to be coated at a rate of 105 plus or minus 5 square feet per gallon.

3.2.1.2 Drying

The maximum drying time requirements of the paint specifications will be strictly enforced to prevent undue softening of bitumen, and pickup, displacement, or discoloration by tires of traffic. If there is a delay in drying of the markings, painting operations shall be discontinued until cause of the slow drying is determined and corrected.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 02 - SITE CONSTRUCTION

SECTION 02770A

CONCRETE SIDEWALKS

03/98

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 WEATHER LIMITATIONS
1.3.1 Placing During Cold Weather
1.3.2 Placing During Warm Weather
1.4 PLANT, EQUIPMENT, MACHINES, AND TOOLS
1.4.1 General Requirements

PART 2 PRODUCTS

2.1 CONCRETE
2.1.1 Air Content
2.1.2 Slump
2.2 CONCRETE CURING MATERIALS
2.2.1 Impervious Sheet Materials
2.2.2 Burlap
2.2.3 White Pigmented Membrane-Forming Curing Compound
2.3 CONCRETE PROTECTION MATERIALS
2.4 JOINT FILLER STRIPS
2.4.1 Expansion Joint Filler, Premolded
2.5 JOINT SEALANTS
2.6 FORM WORK
2.6.1 Sidewalk Forms

PART 3 EXECUTION

3.1 SUBGRADE PREPARATION
3.1.1 Sidewalk Subgrade
3.1.2 Maintenance of Subgrade
3.2 FORM SETTING
3.2.1 Sidewalks
3.3 SIDEWALK CONCRETE PLACEMENT AND FINISHING
3.3.1 Formed Sidewalks
3.3.2 Concrete Finishing
3.3.3 Edge and Joint Finishing
3.3.4 Surface and Thickness Tolerances
3.4 SIDEWALK JOINTS
3.4.1 Sidewalk Contraction Joints
3.4.2 Sidewalk Expansion Joints
3.5 CURING AND PROTECTION
3.5.1 General Requirements
3.5.1.1 Mat Method
3.5.1.2 Impervious Sheeting Method
3.5.1.3 Membrane Curing Method

3.5.2 Backfilling
3.5.3 Protection
3.6 FIELD QUALITY CONTROL
3.6.1 General Requirements
3.6.2 Concrete Testing
3.6.2.1 Strength Testing
3.6.2.2 Air Content
3.6.2.3 Slump Test
3.6.3 Thickness Evaluation
3.6.4 Surface Evaluation
3.7 SURFACE DEFICIENCIES AND CORRECTIONS
3.7.1 Thickness Deficiency
3.7.2 High Areas
3.7.3 Appearance

-- End of Section Table of Contents --

SECTION 02770A

CONCRETE SIDEWALKS
03/98

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)

AASHTO M 182	(1991) Burlap Cloth Made from Jute or Kenaf

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 185	(1997) Steel Welded Wire Fabric, Plain, for Concrete Reinforcement
ASTM A 615/A 615M	(1996a) Deformed and Plain Billet-Steel Bars for Concrete Reinforcement
ASTM A 616/A 616M	(1996a) Rail-Steel Deformed and Plain Bars for Concrete Reinforcement
ASTM A 617/A 617M	(1996a) Axle-Steel Deformed and Plain Bars for Concrete Reinforcement
ASTM C 31/C 31M	(1996) Making and Curing Concrete Test Specimens in the Field
ASTM C 143	(1990a) Slump of Hydraulic Cement Concrete
ASTM C 171	(1997) Sheet Materials for Curing Concrete
ASTM C 172	(1997) Sampling Freshly Mixed Concrete
ASTM C 173	(1996) Air Content of Freshly Mixed Concrete by the Volumetric Method
ASTM C 231	(1997) Air Content of Freshly Mixed Concrete by the Pressure Method
ASTM C 309	(1997) Liquid Membrane-Forming Compounds for Curing Concrete
ASTM C 920	(2002) Elastomeric Joint Sealants
ASTM D 1751	(1999) Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types)

ASTM D 1752 (2004a) Preformed Sponge Rubber and Cork Expansion Joint Fillers for Concrete Paving and Structural Construction

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-06 Test Reports

Field Quality Control;

Copies of all test reports within 24 hours of completion of the test.

1.3 WEATHER LIMITATIONS

1.3.1 Placing During Cold Weather

Concrete placement shall not take place when the air temperature reaches 40 degrees F and is falling, or is already below that point. Placement may begin when the air temperature reaches 35 degrees F and is rising, or is already above 40 degrees F. Provisions shall be made to protect the concrete from freezing during the specified curing period. If necessary to place concrete when the temperature of the air, aggregates, or water is below 35 degrees F, placement and protection shall be approved in writing. Approval will be contingent upon full conformance with the following provisions. The underlying material shall be prepared and protected so that it is entirely free of frost when the concrete is deposited. Mixing water and aggregates shall be heated as necessary to result in the temperature of the in-place concrete being between 50 and 85 degrees F. Methods and equipment for heating shall be approved. The aggregates shall be free of ice, snow, and frozen lumps before entering the mixer. Covering and other means shall be provided for maintaining the concrete at a temperature of at least 50 degrees F for not less than 72 hours after placing, and at a temperature above freezing for the remainder of the curing period.

1.3.2 Placing During Warm Weather

The temperature of the concrete as placed shall not exceed 85 degrees F except where an approved retarder is used. The mixing water and/or aggregates shall be cooled, if necessary, to maintain a satisfactory placing temperature. The placing temperature shall not exceed 95 degrees F at any time.

1.4 PLANT, EQUIPMENT, MACHINES, AND TOOLS

1.4.1 General Requirements

Plant, equipment, machines, and tools used in the work shall be subject to approval and shall be maintained in a satisfactory working condition at all

times. The equipment shall have the capability of producing the required product, meeting grade controls, thickness control and smoothness requirements as specified. Use of the equipment shall be discontinued if it produces unsatisfactory results. The Contracting Officer shall have access at all times to the plant and equipment to ensure proper operation and compliance with specifications.

PART 2 PRODUCTS

2.1 CONCRETE

Concrete shall have a minimum compressive strength of 3500 psi at 28 days. Maximum size of aggregate shall be 1-1/2 inches.

2.1.1 Air Content

Mixtures shall have air content by volume of concrete of 5 to 7 percent, based on measurements made immediately after discharge from the mixer.

2.1.2 Slump

The concrete slump shall be 2 inches plus or minus 1 inch where determined in accordance with ASTM C 143.

2.2 CONCRETE CURING MATERIALS

2.2.1 Impervious Sheet Materials

Impervious sheet materials shall conform to ASTM C 171, type optional, except that polyethylene film, if used, shall be white opaque.

2.2.2 Burlap

Burlap shall conform to AASHTO M 182.

2.2.3 White Pigmented Membrane-Forming Curing Compound

White pigmented membrane-forming curing compound shall conform to ASTM C 309, Type 2.

2.3 CONCRETE PROTECTION MATERIALS

Concrete protection materials shall be a linseed oil mixture of equal parts, by volume, of linseed oil and either mineral spirits, naphtha, or turpentine. At the option of the contractor, commercially prepared linseed oil mixtures, formulated specifically for application to concrete to provide protection against the action of deicing chemicals may be used, except that emulsified mixtures are not acceptable.

2.4 JOINT FILLER STRIPS

2.4.1 Expansion Joint Filler, Premolded

Expansion joint filler, premolded, shall conform to ASTM D 1751 or ASTM D 1752, 3/8 inch thick, unless otherwise indicated.

2.5 JOINT SEALANTS

Joint sealant, cold-applied shall conform to ASTM C 920 GRADE P; CLASS 100/50; USE T.

2.6 FORM WORK

Form work shall be designed and constructed to ensure that the finished concrete will conform accurately to the indicated dimensions, lines, and elevations, and within the tolerances specified. Forms shall be of wood or steel, straight, of sufficient strength to resist springing during depositing and consolidating concrete. Wood forms shall be surfaced plank, 2 inches nominal thickness, straight and free from warp, twist, loose knots, splits or other defects. Wood forms shall have a nominal length of 10 feet. Radius bends may be formed with 3/4 inch boards, laminated to the required thickness. Steel forms shall be channel-formed sections with a flat top surface and with welded braces at each end and at not less than two intermediate points. Ends of steel forms shall be interlocking and self-aligning. Steel forms shall include flexible forms for radius forming, corner forms, form spreaders, and fillers. Steel forms shall have a nominal length of 10 feet with a minimum of 3 welded stake pockets per form. Stake pins shall be solid steel rods with chamfered heads and pointed tips designed for use with steel forms.

2.6.1 Sidewalk Forms

Sidewalk forms shall be of a height equal to the full depth of the finished sidewalk.

PART 3 EXECUTION

3.1 SUBGRADE PREPARATION

The subgrade shall be constructed to the specified grade and cross section prior to concrete placement. Subgrade shall be placed and compacted in conformance with Section 02300 EARTHWORK.

3.1.1 Sidewalk Subgrade

The subgrade shall be tested for grade and cross section with a template extending the full width of the sidewalk and supported between side forms.

3.1.2 Maintenance of Subgrade

The subgrade shall be maintained in a smooth, compacted condition in conformity with the required section and established grade until the concrete is placed. The subgrade shall be in a moist condition when concrete is placed. The subgrade shall be prepared and protected to produce a subgrade free from frost when the concrete is deposited.

3.2 FORM SETTING

Forms shall be set to the indicated alignment, grade and dimensions. Forms shall be held rigidly in place by a minimum of 3 stakes per form placed at intervals not to exceed 4 feet. Corners, deep sections, and radius bends shall have additional stakes and braces, as required. Clamps, spreaders, and braces shall be used where required to ensure rigidity in the forms.

Forms shall be removed without injuring the concrete. Bars or heavy tools shall not be used against the concrete in removing the forms. Any concrete found defective after form removal shall be promptly and satisfactorily repaired. Forms shall be cleaned and coated with form oil each time before concrete is placed. Wood forms may, instead, be thoroughly wetted with water before concrete is placed, except that with probable freezing temperatures, oiling is mandatory.

3.2.1 Sidewalks

Forms for sidewalks shall be set with the upper edge true to line and grade with an allowable tolerance of 1/8 inch in any 10 foot long section. After forms are set, grade and alignment shall be checked with a 10 foot straightedge. Side forms shall not be removed for 12 hours after finishing has been completed.

3.3 SIDEWALK CONCRETE PLACEMENT AND FINISHING

3.3.1 Formed Sidewalks

Concrete shall be placed in the forms in one layer. When consolidated and finished, the sidewalks shall be of the thickness indicated. After concrete has been placed in the forms, a strike-off guided by side forms shall be used to bring the surface to proper section to be compacted. The concrete shall be consolidated with an approved vibrator, and the surface shall be finished to grade with a strike off.

3.3.2 Concrete Finishing

After straight edging, when most of the water sheen has disappeared, and just before the concrete hardens, the surface shall be finished with a wood float or darby to a smooth and uniformly fine granular or sandy texture free of waves, irregularities, or tool marks. A scored surface shall be produced by brooming with a fiber-bristle brush in a direction transverse to that of the traffic, followed by edging.

3.3.3 Edge and Joint Finishing

All slab edges, including those at formed joints, shall be finished with an edger having a radius of 1/8 inch. Transverse joint shall be edged before brooming, and the brooming shall eliminate the flat surface left by the surface face of the edger. Corners and edges which have crumbled and areas which lack sufficient mortar for proper finishing shall be cleaned and filled solidly with a properly proportioned mortar mixture and then finished.

3.3.4 Surface and Thickness Tolerances

Finished surfaces shall not vary more than 5/16 inch from the testing edge of a 10-foot straightedge. Permissible deficiency in section thickness will be up to 1/4 inch.

3.4 SIDEWALK JOINTS

Sidewalk joints shall be constructed to divide the surface into rectangular areas. Transverse contraction joints shall be spaced at a distance equal to the sidewalk width or 5 feet on centers, whichever is less, and shall be

continuous across the slab. Longitudinal contraction joints shall be constructed along the centerline of all sidewalks 10 feet or more in width. Transverse expansion joints shall be installed at sidewalk returns and as indicated. Expansion joints shall be formed about structures and features which project through or into the sidewalk pavement, using joint filler of the type, thickness, and width indicated.

3.4.1 Sidewalk Contraction Joints

The contraction joints shall be formed in the fresh concrete by cutting a groove in the top portion of the slab to a depth of at least one-fourth of the sidewalk slab thickness, using a jointer to cut the groove, or by sawing a groove in the hardened concrete with a power-driven saw, unless otherwise approved. Sawed joints shall be constructed by sawing a groove in the concrete with a 1/8 inch blade to the depth indicated. An ample supply of saw blades shall be available on the job before concrete placement is started, and at least one standby sawing unit in good working order shall be available at the jobsite at all times during the sawing operations.

3.4.2 Sidewalk Expansion Joints

Expansion joints shall be formed with 3/8 inch joint filler strips. Joint filler shall be placed with top edge 1/4 inch below the surface and shall be held in place with steel pins or other devices to prevent warping of the filler during floating and finishing. Immediately after finishing operations are completed, joint edges shall be rounded with an edging tool having a radius of 1/8 inch, and concrete over the joint filler shall be removed. At the end of the curing period, expansion joints shall be cleaned and filled with joint sealant. The joint opening shall be thoroughly cleaned before the sealing material is placed. Sealing material shall not be spilled on exposed surfaces of the concrete. Concrete at the joint shall be surface dry and atmospheric and concrete temperatures shall be above 50 degrees F at the time of application of joint sealing material. Excess material on exposed surfaces of the concrete shall be removed immediately and concrete surfaces cleaned.

3.5 CURING AND PROTECTION

3.5.1 General Requirements

Concrete shall be protected against loss of moisture and rapid temperature changes for at least 7 days from the beginning of the curing operation. Unhardened concrete shall be protected from rain and flowing water. All equipment needed for adequate curing and protection of the concrete shall be on hand and ready for use before actual concrete placement begins. Protection shall be provided as necessary to prevent cracking of the pavement due to temperature changes during the curing period.

3.5.1.1 Mat Method

The entire exposed surface shall be covered with 2 or more layers of burlap. Mats shall overlap each other at least 6 inches. The mat shall be thoroughly wetted with water prior to placing on concrete surface and shall be kept continuously in a saturated condition and in intimate contact with concrete for not less than 7 days.

3.5.1.2 Impervious Sheeting Method

The entire exposed surface shall be wetted with a fine spray of water and then covered with impervious sheeting material. Sheets shall be laid directly on the concrete surface with the light-colored side up and overlapped 12 inches when a continuous sheet is not used. The curing medium shall not be less than 18-inches wider than the concrete surface to be cured, and shall be securely weighted down by heavy wood planks, or a bank of moist earth placed along edges and laps in the sheets. Sheets shall be satisfactorily repaired or replaced if torn or otherwise damaged during curing. The curing medium shall remain on the concrete surface to be cured for not less than 7 days.

3.5.1.3 Membrane Curing Method

A uniform coating of white-pigmented membrane-curing compound shall be applied to the entire exposed surface of the concrete as soon after finishing as the free water has disappeared from the finished surface. Formed surfaces shall be coated immediately after the forms are removed and in no case longer than 1 hour after the removal of forms. Concrete shall not be allowed to dry before the application of the membrane. If any drying has occurred, the surface of the concrete shall be moistened with a fine spray of water and the curing compound applied as soon as the free water disappears. Curing compound shall be applied in two coats by hand-operated pressure sprayers at a coverage of approximately 200 square feet per gallon for the total of both coats. The second coat shall be applied in a direction approximately at right angles to the direction of application of the first coat. The compound shall form a uniform, continuous, coherent film that will not check, crack, or peel and shall be free from pinholes or other imperfections. If pinholes, abrasion, or other discontinuities exist, an additional coat shall be applied to the affected areas within 30 minutes. Concrete surfaces that are subjected to heavy rainfall within 3 hours after the curing compound has been applied shall be resprayed by the method and at the coverage specified above. Areas where the curing compound is damaged by subsequent construction operations within the curing period shall be resprayed. Necessary precautions shall be taken to insure that the concrete is properly cured at sawed joints, and that no curing compound enters the joints. The top of the joint opening and the joint groove at exposed edges shall be tightly sealed before the concrete in the region of the joint is resprayed with curing compound. The method used for sealing the joint groove shall prevent loss of moisture from the joint during the entire specified curing period. Approved standby facilities for curing concrete pavement shall be provided at a location accessible to the jobsite for use in the event of mechanical failure of the spraying equipment or other conditions that might prevent correct application of the membrane-curing compound at the proper time. Concrete surfaces to which membrane-curing compounds have been applied shall be adequately protected during the entire curing period from pedestrian and vehicular traffic, except as required for joint-sawing operations and surface tests, and from any other possible damage to the continuity of the membrane.

3.5.2 Backfilling

After curing, debris shall be removed and the area adjoining the concrete shall be backfilled, graded, and compacted to conform to the surrounding area in accordance with lines and grades indicated.

3.5.3 Protection

Completed concrete shall be protected from damage until accepted. The Contractor shall repair damaged concrete and clean concrete discolored during construction. Concrete that is damaged shall be removed and reconstructed for the entire length between regularly scheduled joints. Refinishing the damaged portion will not be acceptable. Removed damaged portions shall be disposed of as directed.

3.6 FIELD QUALITY CONTROL

3.6.1 General Requirements

The Contractor shall perform the inspection and tests described and meet the specified requirements for inspection details and frequency of testing. Based upon the results of these inspections and tests, the Contractor shall take the action and submit reports as required below, and any additional tests to insure that the requirements of these specifications are met.

3.6.2 Concrete Testing

3.6.2.1 Strength Testing

The Contractor shall provide molded concrete specimens for strength tests. Samples of concrete placed each day shall be taken not less than once a day nor less than once for every 250 cubic yards of concrete. The samples for strength tests shall be taken in accordance with ASTM C 172. Cylinders for acceptance shall be molded in conformance with ASTM C 31/C 31M by an approved testing laboratory. Each strength test result shall be the average of 2 test cylinders from the same concrete sample tested at 28 days, unless otherwise specified or approved. Concrete specified on the basis of compressive strength will be considered satisfactory if the averages of all sets of three consecutive strength test results equal or exceed the specified strength, and no individual strength test result falls below the specified strength by more than 500 psi.

3.6.2.2 Air Content

Air content shall be determined in accordance with ASTM C 173 or ASTM C 231. ASTM C 231 shall be used with concretes and mortars made with relatively dense natural aggregates. Two tests for air content shall be made on randomly selected batches of each class of concrete placed during each shift. Additional tests shall be made when excessive variation in concrete workability is reported by the placing foreman or the Government inspector. If results are out of tolerance, the placing foreman shall be notified and he shall take appropriate action to have the air content corrected at the plant. Additional tests for air content will be performed on each truckload of material until such time as the air content is within the tolerance specified.

3.6.2.3 Slump Test

Two slump tests shall be made on randomly selected batches of each class of concrete for every 250 cubic yards, or fraction thereof, of concrete placed during each shift. Additional tests shall be performed when excessive variation in the workability of the concrete is noted or when excessive crumbling or slumping is noted along the edges of slip-formed concrete.

3.6.3 Thickness Evaluation

The anticipated thickness of the concrete shall be determined prior to placement by passing a template through the formed section. If a slip form paver is used for sidewalk placement, the subgrade shall be true to grade prior to concrete placement and the thickness will be determined by measuring each edge of the completed slab.

3.6.4 Surface Evaluation

The finished surface of each category of the completed work shall be uniform in color and free of blemishes and form or tool marks.

3.7 SURFACE DEFICIENCIES AND CORRECTIONS

3.7.1 Thickness Deficiency

When measurements indicate that the completed concrete section is deficient in thickness by more than 1/4 inch the deficient section will be removed, between regularly scheduled joints, and replaced.

3.7.2 High Areas

In areas not meeting surface smoothness and plan grade requirements, high areas shall be reduced either by rubbing the freshly finished concrete with carborundum brick and water when the concrete is less than 36 hours old or by grinding the hardened concrete with an approved surface grinding machine after the concrete is 36 hours old or more. The area corrected by grinding the surface of the hardened concrete shall not exceed 5 percent of the area of any integral slab, and the depth of grinding shall not exceed 1/4 inch. Pavement areas requiring grade or surface smoothness corrections in excess of the limits specified above shall be removed and replaced.

3.7.3 Appearance

Exposed surfaces of the finished work will be inspected by the Government and any deficiencies in appearance will be identified. Areas which exhibit excessive cracking, discoloration, form marks, or tool marks or which are otherwise inconsistent with the overall appearances of the work shall be removed and replaced.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 02 - SITE CONSTRUCTION

SECTION 02821N

CHAIN LINK FENCES AND GATES

09/99

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 DELIVERY, STORAGE, AND HANDLING

PART 2 PRODUCTS

PART 3 EXECUTION

3.1 FENCE INSTALLATION
3.2 CLEANUP

-- End of Section Table of Contents --

SECTION 02821N

CHAIN LINK FENCES AND GATES
09/99

PART 1 GENERAL

Provide materials and construct chain like fence in accordance with SECTION 806 of the SCDOT STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION, EDITION OF 2000 and contract drawing. When SCDOT specification refers to "Engineer", substitute with "Contracting Officer". Delete Subsections 806.16 Method of Measurement and 806.17 Basis of Payment.

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

SOUTH CAROLINA DEPARTMENT OF TRANSPORTATION (SCDOT)

SECTION 806	SCDOT STANDARD SPECIFICATION FOR HIGHWAY CONSTRUCTION, EDITION OF 2000

1.2 SUBMITTALS

Submit the following in accordance with Section 01330, "Submittal Procedures."

SD-08 Manufacturer's Instructions

Fence

1.3 DELIVERY, STORAGE, AND HANDLING

Deliver materials to site in an undamaged condition. Store materials off the ground to provide protection against oxidation caused by ground contact.

PART 2 PRODUCTS

SECTION 806, Chain Link Fence.

PART 3 EXECUTION

3.1 FENCE INSTALLATION

Install fence in accordance with SECTION 806

3.2 CLEANUP

Remove waste fencing materials and other debris from the station.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 02 - SITE CONSTRUCTION

SECTION 02921A

SEEDING

11/02

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 SOURCE INSPECTION
1.4 DELIVERY, INSPECTION, STORAGE, AND HANDLING
1.4.1 Delivery
1.4.1.1 Delivered Topsoil
1.4.1.2 Soil Amendments
1.4.1.3 Pesticides
1.4.2 Inspection
1.4.3 Storage
1.4.4 Handling
1.4.5 Time Limitation

PART 2 PRODUCTS

2.1 SEED
2.1.1 Seed Classification
2.1.2 Permanent Seed Species and Mixtures
2.1.3 Temporary Seed Species
2.1.4 Quality
2.1.5 Seed Mixing
2.1.6 Substitutions
2.2 TOPSOIL
2.3 SOIL AMENDMENTS
2.3.1 pH Adjuster
2.3.1.1 Limestone
2.3.1.2 Hydrated Lime
2.3.1.3 Burnt Lime
2.3.2 Fertilizer
2.3.3 Nitrogen Carrier Fertilizer
2.3.4 Organic Material
2.3.4.1 Bonemeal
2.3.4.2 Rotted Manure
2.3.4.3 Decomposed Wood Derivatives
2.3.4.4 Worm Castings
2.3.5 Soil Conditioner
2.3.5.1 Sand
2.3.5.2 Super Absorbent Polymers
2.3.5.3 Calcined Clay
2.3.5.4 Gypsum
2.3.5.5 Expanded Shale, Clay, or Slate (ESCS)
2.4 MULCH
2.4.1 Straw
2.4.2 Hay - omitt

2.4.3 Wood Cellulose Fiber
2.4.4 Paper Fiber
2.5 ASPHALT ADHESIVE
2.6 WATER
2.7 PESTICIDE

PART 3 EXECUTION

3.1 INSTALLING SEED TIME AND CONDITIONS
3.1.1 Seeding Time
3.1.2 Seeding Conditions
3.1.3 Equipment Calibration
3.1.4 Soil Test
3.2 SITE PREPARATION
3.2.1 Finished Grade and Topsoil
3.2.2 Application of Soil Amendments
3.2.2.1 Applying pH Adjuster
3.2.2.2 Applying Fertilizer
3.2.2.3 Applying Soil Conditioner
3.2.2.4 Applying Super Absorbent Polymers
3.2.3 Tillage
3.2.4 Prepared Surface
3.2.4.1 Preparation
3.2.4.2 Lawn Area Debris
3.2.4.3 Field Area Debris
3.2.4.4 Protection
3.3 INSTALLATION
3.3.1 Installing Seed
3.3.1.1 Broadcast Seeding
3.3.1.2 Drill Seeding
3.3.1.3 Rolling
3.3.2 Hydroseeding
3.3.3 Mulching
3.3.3.1 Straw Mulch
3.3.3.2 Mechanical Anchor
3.3.3.3 Asphalt Adhesive Tackifier
3.3.3.4 Non-Asphaltic Tackifier
3.3.3.5 Asphalt Adhesive Coated Mulch
3.3.3.6 Wood Cellulose Fiber, Paper Fiber, and Recycled Paper
3.3.4 Watering Seed
3.4 SURFACE EROSION CONTROL
3.4.1 Temporary Seeding
3.4.1.1 Soil Amendments
3.4.1.2 Remaining Soil Amendments
3.5 QUANTITY CHECK
3.6 APPLICATION OF PESTICIDE
3.6.1 Technical Representative
3.6.2 Application
3.7 RESTORATION AND CLEAN UP
3.7.1 Restoration
3.7.2 Clean Up
3.8 PROTECTION OF INSTALLED AREAS
3.9 SEED ESTABLISHMENT PERIOD
3.9.1 Commencement
3.9.2 Satisfactory Stand of Grass Plants
3.9.2.1 Field Area
3.9.3 Maintenance During Establishment Period
3.9.3.1 Mowing
3.9.3.2 Post-Fertilization

3.9.3.3 Pesticide Treatment
3.9.3.4 Repair or Reinstall
3.9.3.5 Maintenance Record

-- End of Section Table of Contents --

SECTION 02921A

SEEDING
11/02

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 602	(1995a) Agricultural Liming Materials
ASTM D 2028	(1976; R 1997) Cutback Asphalt (Rapid-Curing Type)
ASTM D 4972	(1995a) pH of Soils
ASTM D 5268	(1992; R 1996) Topsoil Used for Landscaping Purposes
ASTM D 5883	(1996el) Use of Rotary Kiln Produced Expanded Shale, Clay or Slate (ESCS) as a Mineral Amendment in Topsoil Used for Landscaping and Related Purposes
ASTM D 977	(1998) Emulsified Asphalt

U.S. DEPARTMENT OF AGRICULTURE (USDA)

AMS Seed Act	(1995) Federal Seed Act Regulations Part 201

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Equipment; G, RO
Surface Erosion Control Material; G, RO
Chemical Treatment Material; G, RO

Manufacturer's literature including physical characteristics, application and installation instructions for equipment, surface erosion control material and chemical treatment material.

A listing of equipment to be used for the seeding operation.

Delivery; G, RO

Delivery schedule.

Finished Grade and Topsoil; G, RO

Finished grade status.

Topsoil; G, RO

Availability of topsoil from the stripping and stock piling operation.

Quantity Check;

Bag count or bulk weight measurements of material used compared with area covered to determine the application rate and quantity installed.

Seed Establishment Period; G, RO

Calendar time period for the seed establishment period. When there is more than one seed establishment period, the boundaries of the seeded area covered for each period shall be described.

Maintenance Record; G, RO

Maintenance work performed, area repaired or reinstalled, diagnosis for unsatisfactory stand of grass plants.

Application of Pesticide; G, RO

Pesticide treatment plan with sequence of treatment work with dates and times. The pesticide trade name, EPA registration number, chemical composition, formulation, concentration of original and diluted material, application rate of active ingredients, method of application, area treated, amount applied; and the name and state license number of the state certified applicator shall be included.

SD-04 Samples

Delivered Topsoil; G, RO

Samples taken from several locations at the source.

Soil Amendments; G, RO

A 10 pound sample.

Mulch; G, RO

A 10 pound sample.

SD-06 Test Reports

Equipment Calibration;

Certification of calibration tests conducted on the equipment used in the seeding operation.

Soil Test; G, RO

Certified reports of inspections and laboratory tests, prepared by an independent testing agency, including analysis and interpretation of test results. Each report shall be properly identified. Test methods used and compliance with recognized test standards shall be described.

SD-07 Certificates

Seed; G, RO
Topsoil; G, RO
pH Adjuster; G, RO
Fertilizer; G, RO
Organic Material; G, RO
Soil Conditioner; G, RO
Mulch; G, RO
Asphalt Adhesive; G, RO
Pesticide; G, RO

Prior to the delivery of materials, certificates of compliance attesting that materials meet the specified requirements. Certified copies of the material certificates shall include the following:

a. Seed. Classification, botanical name, common name, percent pure live seed, minimum percent germination and hard seed, maximum percent weed seed content, and date tested.

b. Topsoil. Particle size, pH, organic matter content, textural class, soluble salts, chemical and mechanical analyses.

c. pH Adjuster. Calcium carbonate equivalent and sieve analysis.

d. Fertilizer. Chemical analysis and composition percent.

e. Organic Material: Composition and source.

f. Soil Conditioner: Composition and source.

g. Mulch: Composition and source.

h. Asphalt Adhesive: Composition.

i. Pesticide. EPA registration number and registered uses.

1.3 SOURCE INSPECTION

The source of delivered topsoil shall be subject to inspection.

1.4 DELIVERY, INSPECTION, STORAGE, AND HANDLING

1.4.1 Delivery

A delivery schedule shall be provided at least 10 calendar days prior to the first day of delivery.

1.4.1.1 Delivered Topsoil

Prior to the delivery of any topsoil, its availability shall be verified in paragraph TOPSOIL. A soil test shall be provided for topsoil delivered to the site.

1.4.1.2 Soil Amendments

Soil amendments shall be delivered to the site in the original, unopened containers bearing the manufacturer's chemical analysis. In lieu of containers, soil amendments may be furnished in bulk. A chemical analysis shall be provided for bulk deliveries.

1.4.1.3 Pesticides

Pesticide material shall be delivered to the site in the original, unopened containers bearing legible labels indicating the EPA registration number and the manufacturer's registered uses.

1.4.2 Inspection

Seed shall be inspected upon arrival at the job site for conformity to species and quality. Seed that is wet, moldy, or bears a test date five months or older, shall be rejected. Other materials shall be inspected for compliance with specified requirements. The following shall be rejected: open soil amendment containers or wet soil amendments; topsoil that contains slag, cinders, stones, lumps of soil, sticks, roots, trash or other material over a minimum 1-1/2 inch diameter; and topsoil that contains viable plants and plant parts. Unacceptable materials shall be removed from the job site.

1.4.3 Storage

Materials shall be stored in designated areas. Seed, lime, and fertilizer shall be stored in cool, dry locations away from contaminants. Chemical treatment material shall be stored according to manufacturer's instructions and not with seeding operation materials.

1.4.4 Handling

Except for bulk deliveries, materials shall not be dropped or dumped from vehicles.

1.4.5 Time Limitation

Hydroseeding time limitation for holding seed in the slurry shall be a maximum 24 hours.

PART 2 PRODUCTS

2.1 SEED

2.1.1 Seed Classification

State-approved seed of the latest season's crop shall be provided in original sealed packages bearing the producer's guaranteed analysis for percentages of mixture, purity, germination, hard seed, weed seed content, and inert material. Labels shall be in conformance with AMS Seed Act and applicable state seed laws.

2.1.2 Permanent Seed Species and Mixtures

Permanent seed species and mixtures shall be proportioned by weight as follows:

FIELD SEED
Summer Planting
April 1 to August 31

Botanical Name	Common Name	Pounds Per Acre	Percent Live Seed
Cyndon dactylon	Common Bermuda Hulled	45	83
Panicum ramosum	Brown Top Millet	10	83

FIELD SEED
Winter Planting
September 1 to March 31

Cyndon dactylon	Common Bermuda Un-Hulled	65	83
Lolium perene	Rye (Grain)	10	85

2.1.3 Temporary Seed Species

Temporary seed species for surface erosion control or overseeding shall be as follows:

FIELD SEED
Summer Planting
April 1 to August 31

Botanical Name	Common Name	Pounds Per Acre	Live Seed
Panicum ramosum	Brown Top Millet	60	83

FIELD SEED
Winter Planting
September 1 to March 31

Lolium perene	Rye Grain	60	83

2.1.4 Quality

Weed seed shall be a maximum 1 percent by weight of the total mixture.

2.1.5 Seed Mixing

The mixing of seed may be done by the seed supplier prior to delivery, or on site as directed.

2.1.6 Substitutions

Substitutions will not be allowed without written request and approval from the Contracting Officer.

2.2 TOPSOIL

Topsoil shall be as defined in ASTM D 5268. When available, the topsoil shall be the existing surface soil stripped and stockpiled onsite in accordance with Section 02300A EARTHWORK. When additional topsoil is required beyond the available topsoil from the stripping operation, topsoil shall be delivered and amended as recommended by the soil test for the seed specified. Topsoil shall be free from slag, cinders, stones, lumps of soil, sticks, roots, trash or other material over a minimum 1-1/2 inch diameter. Topsoil shall be free from viable plants and plant parts.

2.3 SOIL AMENDMENTS

Soil amendments shall consist of pH adjuster, fertilizer, organic material and soil conditioners meeting the following requirements. Vermiculite shall not be used.

2.3.1 pH Adjuster

The pH adjuster shall be an agricultural liming material in accordance with ASTM C 602. These materials may be burnt lime, hydrated lime, ground limestone, sulfur, or shells. The pH adjuster shall be used to create a favorable soil pH for the plant material specified.

2.3.1.1 Limestone

Limestone material shall contain a minimum calcium carbonate equivalent of 80 percent. Gradation: A minimum 95 percent shall pass through a No. 8 sieve and a minimum 55 percent shall pass through a No. 60 sieve. To raise soil pH, ground limestone shall be used.

2.3.1.2 Hydrated Lime

Hydrated lime shall contain a minimum calcium carbonate equivalent of 110 percent. Gradation: A minimum 100 percent shall pass through a No. 8 sieve and a minimum 97 percent shall pass through a No. 60 sieve.

2.3.1.3 Burnt Lime

Burnt lime shall contain a minimum calcium carbonate equivalent of 140 percent. Gradation: A minimum 95 percent shall pass through a No. 8 sieve and a minimum 35 percent shall pass through a No. 60 sieve.

2.3.2 Fertilizer

Fertilizer shall be controlled release commercial grade, free flowing, uniform in composition, and consist of a nitrogen-phosphorus-potassium ratio. The fertilizer shall be derived from sulphur coated urea, urea formaldehyde, plastic or polymer coated pills, or isobutylenediurea (IBDU). Fertilizer shall be balanced with the inclusion of trace minerals and micro-nutrients.

2.3.3 Nitrogen Carrier Fertilizer

It shall be as recommended by the soil test. Nitrogen carrier fertilizer shall be commercial grade, free flowing, and uniform in composition. The fertilizer may be a liquid nitrogen solution.

2.3.4 Organic Material

Organic material shall consist of either bonemeal, rotted manure, decomposed wood derivatives, recycled compost, or worm castings.

2.3.4.1 Bonemeal

Bonemeal shall be finely ground, steamed bone product containing from 2 to 4 percent nitrogen and 16 to 40 percent phosphoric acid.

2.3.4.2 Rotted Manure

Rotted manure shall be unleached horse, chicken or cattle manure containing a maximum 25 percent by volume of straw, sawdust, or other bedding materials. It shall contain no chemicals or ingredients harmful to plants. The manure shall be heat treated to kill weed seeds and be free of stones, sticks, and soil.

2.3.4.3 Decomposed Wood Derivatives

Decomposed wood derivatives shall be ground bark, sawdust, yard trimmings, or other wood waste material that is free of stones, sticks, soil, and toxic substances harmful to plants, and is fully composted or stabilized with nitrogen.

2.3.4.4 Worm Castings

Worm castings shall be screened from worms and food source, and shall be commercially packaged.

2.3.5 Soil Conditioner

Soil conditioner shall be sand, super absorbent polymers, calcined clay, or gypsum for use singly or in combination to meet the requirements of the soil test.

2.3.5.1 Sand

Sand shall be clean and free of toxic materials. Gradation: A minimum 95 percent by weight shall pass a No. 10 sieve and a minimum 10 percent by weight shall pass a No. 16 sieve. Greensand shall be balanced with the inclusion of trace minerals and nutrients.

2.3.5.2 Super Absorbent Polymers

To improve water retention in soils, super absorbent polymers shall be sized and applied according to the manufacturer's recommendations. Polymers shall be added as a soil amendment and be cross-linked polyacrylamide, with an absorption capacity of 250-400 times its weight. Polymers shall also be added to the seed and be a starch grafted polyacrylonitrite, with graphite added as a tacky sticker. It shall have an absorption capacity of 100 plus times its weight.

2.3.5.3 Calcined Clay

Calcined clay shall be granular particles produced from montmorillonite clay calcined to a minimum temperature of 1200 degrees F. Gradation: A minimum 90 percent shall pass a No. 8 sieve; a minimum 99 percent shall be retained on a No. 60 sieve; and a maximum 2 percent shall pass a No. 100 sieve. Bulk density: A maximum 40 pounds per cubic foot.

2.3.5.4 Gypsum

Gypsum shall be commercially packaged, free flowing, and a minimum 95 percent calcium sulfate by volume.

2.3.5.5 Expanded Shale, Clay, or Slate (ESCS)

Rotary kiln produced ESCS material shall be in conformance with ASTM D 5883.

2.4 MULCH

Mulch shall be free from weeds, mold, and other deleterious materials. Mulch materials shall be native to the region.

2.4.1 Straw

Straw shall be stalks from oats, wheat, rye, barley, or rice, furnished in air-dry condition and with a consistency for placing with commercial mulch-blowing equipment.

2.4.2 Hay - omitt

2.4.3 Wood Cellulose Fiber

Wood cellulose fiber shall not contain any growth or germination-inhibiting factors and shall be dyed an appropriate color to facilitate placement during application. Composition on air-dry weight basis: 9 to 15 percent moisture, pH range from 4.5 to 6.0.

2.4.4 Paper Fiber

Paper fiber mulch shall be recycled news print that is shredded for the purpose of mulching seed.

2.5 ASPHALT ADHESIVE

Asphalt adhesive shall conform to the following: Emulsified asphalt, conforming to ASTM D 977, Grade SS-1.

2.6 WATER

Water shall be the responsibility of the Contractor, unless otherwise noted. Water shall not contain elements toxic to plant life.

2.7 PESTICIDE

Pesticide shall be insecticide, herbicide, fungicide, nematocide, rodenticide or miticide. For the purpose of this specification, a soil fumigant shall have the same requirements as a pesticide. The pesticide material shall be EPA registered and approved.

PART 3 EXECUTION

3.1 INSTALLING SEED TIME AND CONDITIONS

3.1.1 Seeding Time

Seed shall be installed as specified in Section 2.1.2 Permanent Seed Species and Mixture and 2.1.3 Temporary Seed Species.

3.1.2 Seeding Conditions

Seeding operations shall be performed only during periods when beneficial results can be obtained. When drought, excessive moisture, or other unsatisfactory conditions prevail, the work shall be stopped when directed. When special conditions warrant a variance to the seeding operations, proposed alternate times shall be submitted for approval.

3.1.3 Equipment Calibration

Immediately prior to the commencement of seeding operations, calibration tests shall be conducted on the equipment to be used. These tests shall confirm that the equipment is operating within the manufacturer's specifications and will meet the specified criteria. The equipment shall be calibrated a minimum of once every day during the operation. The calibration test results shall be provided within 1 week of testing.

3.1.4 Soil Test

Delivered topsoil, existing soil in smooth graded areas, and stockpiled topsoil shall be tested in accordance with ASTM D 5268 and ASTM D 4972 for determining the particle size, pH, organic matter content, textural class, chemical analysis, soluble salts analysis, and mechanical analysis. Sample collection on site shall be random over the entire site. Sample collection for stockpiled topsoil shall be at different levels in the stockpile. The soil shall be free from debris, noxious weeds, toxic substances, or other materials harmful to plant growth. The test shall determine the quantities and type of soil amendments required to meet local growing conditions for the seed species specified.

3.2 SITE PREPARATION

3.2.1 Finished Grade and Topsoil

The Contractor shall verify that finished grades are as indicated on drawings, and the placing of topsoil, smooth grading, and compaction requirements have been completed in accordance with Section 02300A EARTHWORK, prior to the commencement of the seeding operation.

3.2.2 Application of Soil Amendments

3.2.2.1 Applying pH Adjuster

The pH adjuster shall be applied as recommended by the soil test or 3000 lbs of limestone per acre. The pH adjuster shall be incorporated into the soil to a maximum 4 inch depth or may be incorporated as part of the tillage operation.

3.2.2.2 Applying Fertilizer

The fertilizer shall be applied as recommended by the soil test or in lieu of a soil test at a rate of 1000 lbs per acre of 10-10-10. Fertilizer shall be incorporated into the soil to a maximum 4 inch depth or may be incorporated as part of the tillage or hydroseeding operation.

3.2.2.3 Applying Soil Conditioner

The soil conditioner shall be as recommended by the soil test. The soil conditioner shall be spread uniformly over the soil a minimum 1 inch depth and thoroughly incorporated by tillage into the soil to a maximum 4 inch depth.

3.2.2.4 Applying Super Absorbent Polymers

Polymers shall be spread uniformly over the soil as recommended by the manufacturer and thoroughly incorporated by tillage into the soil to a maximum 4 inch depth.

3.2.3 Tillage

Soil on slopes up to a maximum 3-horizontal-to-1-vertical shall be tilled to a minimum 4 inch depth. On slopes between 3-horizontal-to-1-vertical and 1-horizontal-to-1 vertical, the soil shall be tilled to a minimum 2 inch depth by scarifying with heavy rakes, or other method. Rototillers shall be used where soil conditions and length of slope permit. On slopes 1-horizontal-to-1 vertical and steeper, no tillage is required. Drainage patterns shall

be maintained as indicated on drawings. Areas compacted by construction operations shall be completely pulverized by tillage. Soil used for repair of surface erosion or grade deficiencies shall conform to topsoil requirements. The pH adjuster, fertilizer, and soil conditioner may be applied during this procedure.

3.2.4 Prepared Surface

3.2.4.1 Preparation

The prepared surface shall be a maximum 1 inch below the adjoining grade of any surfaced area. New surfaces shall be blended to existing areas. The prepared surface shall be completed with a light raking to remove debris.

3.2.4.2 Lawn Area Debris

Debris and stones over a minimum 5/8 inch in any dimension shall be removed from the surface.

3.2.4.3 Field Area Debris

Debris and stones over a minimum 3 inch in any dimension shall be removed from the surface.

3.2.4.4 Protection

Areas with the prepared surface shall be protected from compaction or damage by vehicular or pedestrian traffic and surface erosion.

3.3 INSTALLATION

Prior to installing seed, any previously prepared surface compacted or damaged shall be reworked to meet the requirements of paragraph SITE PREPARATION. Seeding operations shall not take place when the wind velocity will prevent uniform seed distribution.

3.3.1 Installing Seed

Seeding method shall be Broadcast Seeding, Drill Seeding or Hydroseeding. Seeding procedure shall ensure even coverage. Gravity feed applicators, which drop seed directly from a hopper onto the prepared soil, shall not be used because of the difficulty in achieving even coverage, unless otherwise approved. Absorbent polymer powder shall be mixed with the dry seed at the rate recommended by the manufacturer.

3.3.1.1 Broadcast Seeding

Seed shall be uniformly broadcast at the rate specified in paragraph 2.1.2 Permanent Species and Mixtures and 2.1.3 Temporary Seed Species. Half the total rate of seed application shall be broadcast in 1 direction, with the remainder of the seed rate broadcast at 90 degrees from the first direction. Seed shall be covered a maximum 1/4 inch depth by disk harrow, steel mat drag, cultipacker, or other approved device.

3.3.1.2 Drill Seeding

Seed shall be uniformly drilled to a maximum 1/2 inch depth and at the rate specified in paragraph 2.1.2 Permanent Species and Mixtures and 2.1.3 Temporary Seed Species, using equipment having drills a maximum 7 inches distance apart. Row markers shall be used with the drill seeder. Half the total rate of seed application shall be drilled in 1 direction, with the remainder of the seed rate drilled at 90 degrees from the first direction. The drilling equipment shall be maintained with half full seed boxes during the seeding operations.

3.3.1.3 Rolling

The entire area shall be firmed with a roller not exceeding 90 pounds per foot roller width. Slopes over a maximum 3-horizontal-to-1 vertical shall not be rolled. Areas seeded with seed drills equipped with rollers shall not be rolled.

3.3.2 Hydroseeding

Seed shall be mixed to ensure broadcast at the rate of specified in paragraph 2.1.2 Permanent Species and Mixtures and 2.1.3 Temporary Seed Species. Seed and fertilizer shall be added to water and thoroughly mixed to meet the rates specified. The time period for the seed to be held in the slurry shall be a maximum 24 hours. Wood cellulose fiber mulch and tackifier shall be added at the rates recommended by the manufacturer after the seed, fertilizer, and water have been thoroughly mixed to produce a homogeneous slurry. Slurry shall be uniformly applied under pressure over the entire area. The hydroseeded area shall not be rolled.

3.3.3 Mulching

3.3.3.1 Straw Mulch

Straw mulch shall be spread uniformly at the rate of 2 tons per acre. Mulch shall be spread by hand, blower-type mulch spreader, or other approved method. Mulching shall be started on the windward side of relatively flat areas or on the upper part of steep slopes, and continued uniformly until the area is covered. The mulch shall not be bunched or clumped. Sunlight shall not be completely excluded from penetrating to the ground surface. All areas installed with seed shall be mulched on the same day as the seeding. Mulch shall be anchored immediately following spreading.

3.3.3.2 Mechanical Anchor

Mechanical anchor shall be a V-type-wheel land packer; a scalloped-disk land packer designed to force mulch into the soil surface; or other suitable equipment.

3.3.3.3 Asphalt Adhesive Tackifier

Asphalt adhesive tackifier shall be sprayed at a rate between 10 to 13 gallons per 1000 square feet. Sunlight shall not be completely excluded from penetrating to the ground surface.

3.3.3.4 Non-Asphaltic Tackifier

Hydrophilic colloid shall be applied at the rate recommended by the manufacturer, using hydraulic equipment suitable for thoroughly mixing with water. A uniform mixture shall be applied over the area.

3.3.3.5 Asphalt Adhesive Coated Mulch

Straw mulch may be spread simultaneously with asphalt adhesive applied at a rate between 10 to 13 gallons per 1000 square feet, using power mulch equipment which shall be equipped with suitable asphalt pump and nozzle. The adhesive-coated mulch shall be applied evenly over the surface. Sunlight shall not be completely excluded from penetrating to the ground surface.

3.3.3.6 Wood Cellulose Fiber, Paper Fiber, and Recycled Paper

Wood cellulose fiber, paper fiber, or recycled paper shall be applied as part of the hydroseeding operation. Wood cellulose fiber shall be mixed and applied at a rate of 1,500 lbs per acre on slopes that are 1 vetical to 4 horizontal or less and 2,000 lbs per acre on slopes that are greater than 1 vertical to 4 horizontal. Paper fiber and recycled paper shall be applied in accordance with the manufacturer's recommendations.

3.3.4 Watering Seed

Watering shall be started immediately after completing the seeding of an area. Water shall be applied to supplement rainfall at a rate sufficient to ensure moist soil conditions to a minimum 1 inch depth. Run-off and puddling shall be prevented. Watering trucks shall not be driven over turf areas, unless otherwise directed. Watering of other adjacent areas or plant material shall be prevented.

3.4 SURFACE EROSION CONTROL

3.4.1 Temporary Seeding

The application rate shall be applied as specified in paragraph 2.1.3 Temporary Seed Species. When directed during contract delays affecting the seeding operation or when a quick cover is required to prevent surface erosion, the areas designated shall be seeded in accordance with temporary seed species listed under Paragraph SEED.

3.4.1.1 Soil Amendments

When soil amendments have not been applied to the area, the quantity of 1/2 of the required soil amendments shall be applied and the area tilled in accordance with paragraph SITE PREPARATION. The area shall be watered in accordance with paragraph Watering Seed.

3.4.1.2 Remaining Soil Amendments

The remaining soil amendments shall be applied in accordance with the paragraph Tillage when the surface is prepared for installing seed.

3.5 QUANTITY CHECK

For materials provided in bags, the empty bags shall be retained for recording the amount used. For materials provided in bulk, the weight

certificates shall be retained as a record of the amount used. The amount of material used shall be compared with the total area covered to determine the rate of application used. Differences between the quantity applied and the quantity specified shall be adjusted as directed.

3.6 APPLICATION OF PESTICIDE

When application of a pesticide becomes necessary to remove a pest or disease, a pesticide treatment plan shall be submitted and coordinated with the installation pest management program.

3.6.1 Technical Representative

The certified installation pest management coordinator shall be the technical representative, and shall be present at all meetings concerning treatment measures for pest or disease control. They may be present during treatment application.

3.6.2 Application

A state certified applicator shall apply required pesticides in accordance with EPA label restrictions and recommendations. Clothing and personal protective equipment shall be used as specified on the pesticide label. A closed system is recommended as it prevents the pesticide from coming into contact with the applicator or other persons. Water for formulating shall only come from designated locations. Filling hoses shall be fitted with a backflow preventer meeting local plumbing codes or standards. Overflow shall be prevented during the filling operation. Prior to each day of use, the equipment used for applying pesticide shall be inspected for leaks, clogging, wear, or damage. Any repairs are to be performed immediately. A pesticide plan shall be submitted.

3.7 RESTORATION AND CLEAN UP

3.7.1 Restoration

Existing turf areas, pavements, and facilities that have been damaged from the seeding operation shall be restored to original condition at Contractor's expense.

3.7.2 Clean Up

Excess and waste material shall be removed from the seeded areas and shall be disposed offsite. Adjacent paved areas shall be cleaned.

3.8 PROTECTION OF INSTALLED AREAS

Immediately upon completion of the seeding operation in an area, the area shall be protected against traffic or other use by erecting barricades and providing signage as required, or as directed.

3.9 SEED ESTABLISHMENT PERIOD

3.9.1 Commencement

The seed establishment period to obtain a healthy stand of grass plants shall begin on the first day of seeding work under this contract and shall

continue through the remaining life of the contract and end 3 months after the last day of the seeding operation required by this contract. Written calendar time period shall be furnished for the seed establishment period. When there is more than 1 seed establishment period, the boundaries of the seeded area covered for each period shall be described. The seed establishment period shall be modified for inclement weather, shut down periods, or for separate completion dates of areas.

3.9.2 Satisfactory Stand of Grass Plants

Grass plants shall be evaluated for species and health when the grass plants are a minimum 1 inch high.

3.9.2.1 Field Area

A satisfactory stand of grass plants from the seeding operation for a field area shall be a minimum 100 grass plants per square foot. The total bare spots shall not exceed 2 percent of the total seeded area.

3.9.3 Maintenance During Establishment Period

Maintenance of the seeded areas shall include eradicating weeds, insects and diseases; protecting embankments and ditches from surface erosion; maintaining erosion control materials and mulch; protecting installed areas from traffic; mowing; watering; and post-fertilization.

3.9.3.1 Mowing

Field Areas: Field areas shall be mowed once during the season to a minimum 3 inch height. Clippings shall be removed when the amount cut prevents sunlight from reaching the ground surface.

3.9.3.2 Post-Fertilization

The fertilizer shall be applied as recommended by the soil test. A maximum 1/2 pound per 1000 square feet of actual available nitrogen shall be provided to the grass plants. The application shall be timed prior to the advent of winter dormancy and shall be made without burning the installed grass plants.

3.9.3.3 Pesticide Treatment

Treatment for disease or pest shall be in accordance with paragraph APPLICATION OF PESTICIDE.

3.9.3.4 Repair or Reinstall

Unsatisfactory stand of grass plants and mulch shall be repaired or reinstalled, and eroded areas shall be repaired in accordance with paragraph SITE PREPARATION.

3.9.3.5 Maintenance Record

A record of each site visit shall be furnished, describing the maintenance work performed; areas repaired or reinstalled; and diagnosis for unsatisfactory stand of grass plants.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 03 - CONCRETE

SECTION 03307

CONCRETE FOR MINOR STRUCTURES

08/04

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.4 DESIGN AND PERFORMANCE REQUIREMENTS
1.2 Strength
1.3 Construction Tolerances
1.4.3 Concrete Mixture Proportions

PART 2 PRODUCTS

2.1 MATERIALS
2.1.1 Cementitious Materials
2.1.1.1 Portland Cement
2.1.1.1 Pozzolan
2.1.2 Aggregates
2.1.3 Admixtures
2.1.3.1 Air-Entraining Admixture
2.1.3.1 Water-Reducing or Retarding Admixture
2.1.4 Water
2.1.5 Reinforcing Steel
2.1.6 Expansion Joint Filler Strips, Premolded
2.1.7 Two Component Cold-Applied Sealing Compound
2.1.7 Sealant, Joint, Jet fuel Resistant, Hot-Applied
2.1.7 Formwork
2.1.8 Form Coatings
2.1.9 Vapor Barrier
2.1.10 Curing Materials
2.1.10.1 Impervious Sheet Materials
2.1.10.2 Membrane-Forming Curing Compound

PART 3 EXECUTION

3.1 PREPARATION
3.1.1 General
3.1.2 Embedded Items
3.1.3 Formwork Installation
3.1.4 Vapor Barrier Installation
3.1.5 Production of Concrete
3.1.5 Ready-Mixed Concrete
3.1.6 Concrete Made by Volumetric Batching and Continuous Mixing
3.1.5.3 Batching and Mixing Equipment
3.2 CONVEYING AND PLACING CONCRETE
3.2.1 General
3.2.2 Consolidation
3.2.3 Cold-Weather Requirements

3.2.4 Hot-Weather Requirements
3.3 FORM REMOVAL
3.4 FINISHING
3.4.1 General
3.4.2 Finishing Formed Surfaces
3.4.3 Finishing Unformed Surfaces
3.4.3 Float Finish
3.4.4 Trowel Finish
3.4.5 Broom Finish
3.4.3.4 Expansion and Contraction Joints
3.4.3.5 Sealing the Joints
3.5 CURING AND PROTECTION
3.6 TESTS AND INSPECTIONS
3.6.1 General
3.6.2 Inspection Details and Frequency of Testing
3.6.2.1 Preparations for Placing
3.6.2.2 Air Content
3.6.2.3 Slump
3.6.2.4 Consolidation and Protection
3.6.3 Action Required
3.6.3.1 Placing
3.6.3.2 Air Content
3.6.3.3 Slump
3.6.4 Reports

-- End of Section Table of Contents --

SECTION 03307

CONCRETE FOR MINOR STRUCTURES
08/04

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ACI INTERNATIONAL (ACI)

ACI 308R	(2001) Guide to Curing Concrete
ACI 318/318R	(2002) Building Code Requirements for Structural Concrete and Commentary
ACI 347	(2001) Guide to Formwork for Concrete

ASTM INTERNATIONAL (ASTM)

ASTM A 185	(2002) Steel Welded Wire Reinforcement, Plain, for Concrete
ASTM A 615/A 615M	(2003a) Deformed and Plain Billet-Steel Bars for Concrete Reinforcement
ASTM C 143/C 143M	(2003) Slump of Hydraulic Cement Concrete
ASTM C 150	(2002ae1) Portland Cement
ASTM C 171	(2003) Sheet Materials for Curing Concrete
ASTM C 172	(1999) Sampling Freshly Mixed Concrete
ASTM C 231	(2003) Air Content of Freshly Mixed Concrete by the Pressure Method
ASTM C 260	(2001) Air-Entraining Admixtures for Concrete
ASTM C 309	(2003) Liquid Membrane-Forming Compounds for Curing Concrete
ASTM C 31/C 31M	(2003a) Making and Curing Concrete Test Specimens in the Field
ASTM C 33	(2003) Concrete Aggregates
ASTM C 39/C 39M	(2003) Compressive Strength of Cylindrical Concrete Specimens
ASTM C 494	(1999ae1) Chemical Admixtures for Concrete

ASTM C 618	(2003) Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use as a Mineral Admixture in Concrete
ASTM C 685	(2000) Concrete Made by Volumetric Batching and Continuous Mixing
ASTM C 920	(2002) Elastomeric Joint Sealants
ASTM C 94	(2003a) Ready-Mixed Concrete
ASTM D 1752	(1984; R 1996e1) Preformed Sponge Rubber and Cork Expansion Joint Fillers for Concrete Paving and Structural Construction
ASTM D 75	(2003) Sampling Aggregates
ASTM E 96	(2000e1) Water Vapor Transmission of Materials

U.S. ARMY CORPS OF ENGINEERS (USACE)

COE CRD-C 400	(1963) Requirements for Water for Use in Mixing or Curing Concrete

U.S. GENERAL SERVICES ADMINISTRATION (GSA)

FS SS-S-1614 (Rev E; Am1) Sealants, Joint, Jet-Fuel-Resistant, Hot-applied, for Portland Cement and Tar Concrete Pavements

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Air-Entraining Admixture
Water-Reducing or Retarding Admixture
Curing Materials
Reinforcing Steel
Expansion Joint Filler Strips, Premolded
Joint Sealants - Field Molded Sealants

Manufacturer's literature is available from suppliers which demonstrates compliance with applicable specifications for the above materials.

Batching and Mixing Equipment

Batching and mixing equipment will be accepted on the basis of manufacturer's data which demonstrates compliance with the applicable specifications.

Conveying and Placing Concrete

The methods and equipment for transporting, handling, depositing, and consolidating the concrete shall be submitted prior to the first concrete placement.

SD-06 Test Reports

Aggregates

Aggregates will be accepted on the basis of certificates of compliance and test reports that show the material(s) meets the quality and grading requirements of the specifications under which it is furnished.

Concrete Mixture Proportions

Ten days prior to placement of concrete, the contractor shall submit the mixture proportions that will produce concrete of the quality required. Applicable test reports shall be submitted to verify that the concrete mixture proportions selected will produce concrete of the quality specified.

SD-07 Certificates

Cementitious Materials

Certificates of compliance attesting that the concrete materials meet the requirements of the specifications shall be submitted in accordance with the Special Clause "CERTIFICATES OF COMPLIANCE". Cementitious material will be accepted on the basis of a manufacturer's certificate of compliance, accompanied by mill test reports that the material(s) meet the requirements of the specification under which it is furnished.

Aggregates

Aggregates will be accepted on the basis of certificates of compliance and tests reports that show the material(s) meet the quality and grading requirements of the specifications under which it is furnished.

1.4 DESIGN AND PERFORMANCE REQUIREMENTS

The Government will maintain the option to sample and test joint sealer, joint filler material, aggregates and concrete to determine compliance with the specifications. The Contractor shall provide facilities and labor as may be necessary to assist the Government in procurement of representative test samples. Samples of aggregates will be obtained at the point of batching in accordance with ASTM D 75. Concrete will be sampled in accordance with ASTM C 172. Slump and air content will be determined in accordance with ASTM C 143/C 143M and ASTM C 231, respectively, when

cylinders are molded. Compression test specimens will be made, cured, and transported in accordance with ASTM C 31/C 31M. Compression test specimens will be tested in accordance with ASTM C 39/C 39M. Samples for strength tests will be taken not less than once each shift in which concrete is produced. A minimum of three specimens will be made from each sample; two will be tested at 28 days (90 days if pozzolan is used) for acceptance, and one will be tested at 7 days for information.

1.2 STRENGTH

Acceptance test results will be the average strengths of two specimens tested at 28 days (90 days if pozzolan is used). The strength of the concrete will be considered satisfactory so long as the average of three consecutive acceptance test results equal or exceed the specified compressive strength, f'c, and no individual acceptance test result falls below f'c by more than 500 psi.

1.3 CONSTRUCTION TOLERANCES

A Class "C" finish shall apply to all surfaces except those specified to receive a Class "D" finish. A Class "D" finish shall apply to all surfaces which will be permanently concealed after construction. The surface requirements for the classes of finish required shall be as specified in ACI 347.

1.4.3 Concrete Mixture Proportions

Concrete mixture proportions shall be the responsibility of the Contractor. Mixture proportions shall include the dry weights of cementitious material(s); the nominal maximum size of the coarse aggregate; the specific gravities, absorptions, and saturated surface-dry weights of fine and coarse aggregates; the quantities, types, and names of admixtures; and quantity of water per cubic yard of concrete. All materials included in the mixture proportions shall be of the same type and from the same source as will be used on the project. Specified compressive strength f'c shall be 3,000 psi at 28 days (90 days if pozzolan is used). The maximum nominal size coarse aggregate shall be 3/4 inch, in accordance with ACI 318/318R. The air content shall be between 4.5 and 7.5 percent. The slump shall be between 2 and 5 inches. The maximum water cement ratio shall be 0.50.

PART 2 PRODUCTS

2.1 MATERIALS

2.1.1 Cementitious Materials

Cementitious materials shall conform to the appropriate specifications listed:

2.1.1.1 Portland Cement

ASTM C 150, Type I or II.

2.1.1.1 Pozzolan

Pozzolan shall conform to ASTM C 618, Class C or F, including requirements of Tables 1A and 2A.

2.1.2 Aggregates

Aggregates shall meet the quality and grading requirements of ASTM C 33 Class Designations 4M or better.

2.1.3 Admixtures

Admixtures to be used, when required or approved, shall comply with the appropriate specification listed. Chemical admixtures that have been in storage at the project site for longer than 6 months or that have been subjected to freezing shall be retested at the expense of the contractor at the request of the Contracting Officer and shall be rejected if test results are not satisfactory.

2.1.3.1 Air-Entraining Admixture

Air-entraining admixture shall meet the requirements of ASTM C 260.

2.1.3.1 Water-Reducing or Retarding Admixture

Water-reducing or retarding admixture shall meet the requirements of ASTM C 494/C 494M, Type A, B, or D.

2.1.4 Water

Water for mixing and curing shall be fresh, clean, potable, and free from injurious amounts of oil, acid, salt, or alkali, except that unpotable water may be used if it meets the requirements of COE CRD-C 400.

2.1.5 Reinforcing Steel

Reinforcing steel bar shall conform to the requirements of ASTM A 615/A 615M, Grade 60. Welded steel wire fabric shall conform to the requirements of ASTM A 185. Details of reinforcement not shown shall be in accordance with ACI 318/318R, Chapters 7 and 12.

2.1.6 Expansion Joint Filler Strips, Premolded

Expansion joint filler strips, premolded shall be sponge rubber conforming to ASTM D 1752, Type I.

2.1.7 Two Component Cold-Applied Sealing Compound

FS SS-S-200, Type H or M.

2.1.7 Sealant, Joint, Jet fuel Resistant, Hot-Applied

FS SS-S-1614, for portland cement and tar concrete pavements.

2.1.7 Formwork

The design and engineering of the formwork as well as its construction, shall be the responsibility of the Contractor.

2.1.8 Form Coatings

Forms for exposed surfaces shall be coated with a nonstaining form oil, which shall be applied shortly before concrete is placed.

2.1.9 Vapor Barrier

Vapor barrier shall be polyethylene sheeting with a minimum thickness of 6 mils or other equivalent material having a vapor permeance rating not exceeding 0.5 perms as determined in accordance with ASTM E 96.

2.1.10 Curing Materials

Curing materials shall conform to the following requirements.

2.1.10.1 Impervious Sheet Materials

Impervious sheet materials, ASTM C 171, type optional, except polyethylene film, if used, shall be white opaque.

2.1.10.2 Membrane-Forming Curing Compound

ASTM C 309, Type 1-D or 2, Class A.

PART 3 EXECUTION

3.1 PREPARATION

3.1.1 General

Construction joints shall be prepared to expose coarse aggregate, and the surface shall be clean, damp, and free of laitance. Ramps and walkways, as necessary, shall be constructed to allow safe and expeditious access for concrete and workmen. Snow, ice, standing or flowing water, loose particles, debris, and foreign matter shall have been removed. Earth foundations shall be satisfactorily compacted. Spare vibrators shall be available. The entire preparation shall be accepted by the Government prior to placing.

3.1.2 Embedded Items

Reinforcement shall be secured in place; joints, anchors, and other embedded items shall have been positioned. Internal ties shall be arranged so that when the forms are removed the metal part of the tie will be not less than 2 inches from concrete surfaces permanently exposed to view or exposed to water on the finished structures. Embedded items shall be free of oil and other foreign matters such as loose coatings or rust, paint, and scale. The embedding of wood in concrete will be permitted only when specifically authorized or directed. All equipment needed to place, consolidate, protect, and cure the concrete shall be at the placement site and in good operating condition.

3.1.3 Formwork Installation

Forms shall be properly aligned, adequately supported, and mortar-tight. The form surfaces shall be smooth and free from irregularities, dents, sags, or holes when used for permanently exposed faces. All exposed joints and edges shall be chamfered, unless otherwise indicated.

3.1.4 Vapor Barrier Installation

Vapor barriers shall be applied over gravel fill. Edges shall be lapped not less than 6 inches. All joints shall be sealed with pressure-sensitive adhesive not less than 2 inches wide. The vapor barrier shall be protected at all times to prevent injury or displacement prior to and during concrete placement.

3.1.5 Production of Concrete

3.1.5 Ready-Mixed Concrete

Ready-mixed concrete shall conform to ASTM C 94/C 94M except as otherwise specified.

3.1.6 Concrete Made by Volumetric Batching and Continuous Mixing

Concrete made by volumetric batching and continuous mixing shall conform to ASTM C 685.

3.1.5.3 Batching and Mixing Equipment

The contractor shall have the option of using an on-site batching and mixing facility. The facility shall provide sufficient batching and mixing equipment capacity to prevent cold joints. The method of measuring materials, batching operation, and mixer shall be submitted for review.

3.2 CONVEYING AND PLACING CONCRETE

Conveying and placing concrete shall conform to the following requirements.

3.2.1 General

Concrete placement shall not be permitted when weather conditions prevent proper placement and consolidation without approval. When concrete is mixed and/or transported by a truck mixer, the concrete shall be delivered to the site of the work and discharge shall be completed within 1-1/2 hours or 45 minutes when the placing temperature is 85 degrees F or greater unless a retarding admixture is used. Concrete shall be conveyed from the mixer to the forms as rapidly as practicable by methods which prevent segregation or loss of ingredients. Concrete shall be in place and consolidated within 15 minutes after discharge from the mixer. Concrete shall be deposited as close as possible to its final position in the forms and be so regulated that it may be effectively consolidated in horizontal layers 18 inches or less in thickness with a minimum of lateral movement. The placement shall be carried on at such a rate that the formation of cold joints will be prevented.

3.2.2 Consolidation

Each layer of concrete shall be consolidated by internal vibrating equipment. Internal vibration shall be systematically accomplished by inserting the vibrator through the fresh concrete in the layer below at a uniform spacing over the entire area of placement. The distance between insertions shall be approximately 1.5 times the radius of action of the vibrator and overlay the adjacent, just-vibrated area by a few inches. The vibrator shall penetrate rapidly to the bottom of the layer and at least 6

inches into the layer below, if such a layer exists. It shall be held stationary until the concrete is consolidated and then withdrawn slowly at the rate of about 3 inches per second.

3.2.3 Cold-Weather Requirements

No concrete placement shall be made when the ambient temperature is below 35 degrees F or if the ambient temperature is below 40 degrees F and falling. Suitable covering and other means as approved shall be provided for maintaining the concrete at a temperature of at least 50 degrees F for not less than 72 hours after placing and at a temperature above freezing for the remainder of the curing period. Salt, chemicals, or other foreign materials shall not be mixed with the concrete to prevent freezing. Any concrete damaged by freezing shall be removed and replaced at the expense of the contractor.

3.2.4 Hot-Weather Requirements

When the rate of evaporation of surface moisture, as determined by use of Figure 1 of ACI 308R, is expected to exceed 0.2 pound per square foot per hour, provisions for windbreaks, shading, fog spraying, or covering with a light-colored material shall be made in advance of placement, and such protective measures shall be taken as quickly as finishing operations will allow.

3.3 FORM REMOVAL

Forms shall not be removed before the expiration of 24 hours after concrete placement except where otherwise specifically authorized. Supporting forms and shoring shall not be removed until the concrete has cured for at least 5 days. When conditions on the work are such as to justify the requirement, forms will be required to remain in place for longer periods.

3.4 FINISHING

3.4.1 General

No finishing or repair will be done when either the concrete or the ambient temperature is below 50 degrees F.

3.4.2 Finishing Formed Surfaces

All fins and loose materials shall be removed, and surface defects including tie holes shall be filled. All honeycomb areas and other defects shall be repaired. All unsound concrete shall be removed from areas to be repaired. Surface defects greater than 1/2 inch in diameter and holes left by removal of tie rods in all surfaces not to receive additional concrete shall be reamed or chipped and filled with dry-pack mortar. The prepared area shall be brush-coated with an approved epoxy resin or latex bonding compound or with a neat cement grout after dampening and filled with mortar or concrete. The cement used in mortar or concrete for repairs to all surfaces permanently exposed to view shall be a blend of portland cement and white cement so that the final color when cured will be the same as adjacent concrete.

3.4.3 Finishing Unformed Surfaces

All unformed surfaces that are not to be covered by additional concrete or backfill shall be float finished to elevations shown, unless otherwise specified. Surfaces to receive additional concrete or backfill shall be brought to the elevations shown and left as a true and regular surface. Exterior surfaces shall be sloped for drainage unless otherwise shown. Joints shall be carefully made with a jointing tool. Unformed surfaces shall be finished to a tolerance of 3/8 inch for a float finish and 5/16 inch for a trowel finish as determined by a 10 foot straightedge placed on surfaces shown on the plans to be level or having a constant slope. Finishing shall not be performed while there is excess moisture or bleeding water on the surface. No water or cement shall be added to the surface during finishing.

3.4.3 Float Finish

Surfaces to be float finished shall be screeded and darbied or bullfloated to eliminate the ridges and to fill in the voids left by the screed. In addition, the darby or bullfloat shall fill all surface voids and only slightly embed the coarse aggregate below the surface of the fresh concrete. When the water sheen disappears and the concrete will support a person's weight without deep imprint, floating should be completed. Floating should embed large aggregates just beneath the surface, remove slight imperfections, humps, and voids to produce a plane surface, compact the concrete, and consolidate mortar at the surface.

3.4.4 Trowel Finish

A trowel finish shall be applied to all interior floor surfaces. Trowelling shall be done immediately following floating to provide a smooth, even, dense finish free from blemishes including trowel marks. Finished surfaces shall be protected from damage during the construction period.

3.4.5 Broom Finish

A broom finish shall be applied to all exterior floor surfaces. The concrete shall be screeded and floated to required finish plane with no coarse aggregate visible. After surface moisture disappears, the surface shall be broomed or brushed with a broom or fiber bristle brush in a direction transverse to that of the main traffic or as directed.

3.4.3.4 Expansion and Contraction Joints

Expansion and contraction joints shall be made in accordance with the details shown or as otherwise specified. Provide 1/2 inch thick transverse expansion joints where new work abuts an existing concrete. Contraction joints shall be cut at a minimum of 1 inch deep with a jointing tool after the surface has been finished.

3.4.3.5 Sealing the Joints

Use fuel resistant sealant FF SS-S-1614 to fill joints in the Kennel. Do not install joint sealant until joints to be sealed have been inspected and approved. Install bond breaker just prior to pouring sealant. Fill the joints with sealant from bottom up until joints are uniformly filled solid from bottom to top using the specified equipment for the type of sealant required. Fill joints to 1/4 inch below top of slab within tolerances as indicated, and without formation of voids or entrapped air. Except as

otherwise permitted, tool the sealant immediately after applications to provide firm contact with the joint walls and to form the indicated sealant profile below the pavement surface. Remove excess sealant that has been in advertently spilled on the slab surface. Check sealed joints frequently to assure that newly installed sealant is cured to a tack-free condition within 3 hours. Protect new sealant from water and traffic during curing period.

3.5 CURING AND PROTECTION

Beginning immediately after placement and continuing for at least 7 days, all concrete shall be cured and protected from premature drying, extremes in temperature, rapid temperature change, freezing, mechanical damage, and exposure to rain or flowing water. All materials and equipment needed for adequate curing and protection shall be available and at the site of the placement prior to the start of concrete placement. Preservation of moisture for concrete surfaces not in contact with forms shall be accomplished by one of the following methods:

a. Continuous sprinkling or ponding.

b. Application of absorptive mats or fabrics kept continuously wet.

c. Application of sand kept continuously wet.

d. Application of impervious sheet material conforming to ASTM C 171.

e. Application of membrane-forming curing compound conforming to ASTM C 309, Type 1-D, on surfaces permanently exposed to view and Type 2 on other surfaces shall be accomplished in accordance with manufacturer's instructions.

The preservation of moisture for concrete surfaces placed against wooden forms shall be accomplished by keeping the forms continuously wet for 7 days. If forms are removed prior to end of the required curing period, other curing methods shall be used for the balance of the curing period. During the period of protection removal, the temperature of the air in contact with the concrete shall not be allowed to drop more than 25 degrees F within a 24 hour period.

3.6 TESTS AND INSPECTIONS

3.6.1 General

The individuals who sample and test concrete as required in this specification shall have demonstrated a knowledge and ability to perform the necessary test procedures equivalent to the ACI minimum guidelines for certification of Concrete Field Testing Technicians, Grade I.

3.6.2 Inspection Details and Frequency of Testing

3.6.2.1 Preparations for Placing

Foundation or construction joints, forms, and embedded items shall be inspected in sufficient time prior to each concrete placement by the Contractor to certify that it is ready to receive concrete.

3.6.2.2 Air Content

Air content shall be checked at least once during each shift that concrete is placed. Samples shall be obtained in accordance with ASTM C 172 and tested in accordance with ASTM C 231.

3.6.2.3 Slump

Slump shall be checked once during each shift that concrete is produced. Samples shall be obtained in accordance with ASTM C 172 and tested in accordance with ASTM C 143/C 143M.

3.6.2.4 Consolidation and Protection

The Contractor shall ensure that the concrete is properly consolidated, finished, protected, and cured.

3.6.3 Action Required

3.6.3.1 Placing

The placing foreman shall not permit placing to begin until he has verified that an adequate number of acceptable vibrators, which are in working order and have competent operators, are available. Placing shall not be continued if any pile is inadequately consolidated.

3.6.3.2 Air Content

Whenever a test result is outside the specification limits, the concrete shall not be delivered to the forms and an adjustment shall be made to the dosage of the air-entrainment admixture.

3.6.3.3 Slump

Whenever a test result is outside the specification limits, the concrete shall not be delivered to the forms and an adjustment should be made in the batch weights of water and fine aggregate. The adjustments are to be made so that the water-cement ratio does not exceed that specified in the submitted concrete mixture proportion.

3.6.4 Reports

The results of all tests and inspections conducted at the project site shall be reported informally at the end of each shift and in writing weekly and shall be delivered within 3 days after the end of each weekly reporting period. See Section 01451A CONTRACTOR QUALITY CONTROL.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 04 - MASONRY

SECTION 04200

MASONRY

09/03

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.2 DELIVERY, HANDLING, AND STORAGE
1.2.1 Masonry Units
1.2.2 Reinforcement, Anchors, and Ties
1.2.3 Cementitious Materials, Sand and Aggregates
1.3 STRUCTURAL MASONRY
1.4 QUALITY ASSURANCE
1.4.1 Testing
1.4.2 Spare Vibrator
1.4.3 Bracing and Scaffolding

PART 2 PRODUCTS

2.1 GENERAL REQUIREMENTS
2.1 CONCRETE MASONRY UNITS (CMU)
2.1.1 Aggregates
2.4.2 Kinds and Shapes
2.5 PRECAST CONCRETE ITEMS
2.2 Lintels
2.3 Sills and Copings
2.5.3 Splash Blocks
2.4 MORTAR FOR STRUCTURAL MASONRY
2.5 MASONRY MORTAR
2.8.1 Admixtures for Masonry Mortar
2.5.1 Hydrated Lime and Alternates
2.8.4 Cement
2.5.2 Sand and Water
2.6 WATER-REPELLANT ADMIXTURE
2.7 GROUT AND READY-MIXED GROUT
2.7.1 Admixtures for Grout
2.10.2 Grout Barriers
2.8 JOINT REINFORCEMENT AND BAR POSITIONERS
2.11.5 Bar Positioners
2.9 JOINT REINFORCEMENT
2.10 REINFORCING STEEL BARS AND RODS
2.14 CONTROL JOINT KEYS
2.17 FLASHING

PART 3 EXECUTION

3.1 PREPARATION
3.1.1 Hot Weather Installation
3.1.2 Cold Weather Installation

3.1.2.1 Protection
3.1.2.2 Completed Masonry and Masonry Not Being Worked On
3.1.3 Stains
3.1.4 Loads
3.1.5 Surfaces
3.2 LAYING MASONRY UNITS
3.2 Forms and Shores
3.3 Reinforced Concrete Masonry Units Walls
3.2.3 Concrete Masonry Units
3.4 Tolerances
3.5 Cutting and Fitting
3.6 Jointing
3.6.1 Flush Joints
3.6.2 Tooled Joints
3.6.3 Door and Window Frame Joints
3.7 Joint Widths
3.2.8.1 Concrete Masonry Units
3.8 Embedded Items
3.9 Unfinished Work
3.10 Masonry Wall Intersections
3.2.12 Partitions
3.11 MORTAR
3.12 REINFORCING STEEL
3.12.1 Positioning Bars
3.12.2 Splices
3.13 JOINT REINFORCEMENT INSTALLATION
3.14 PLACING GROUT
3.14.1 Vertical Grout Barriers for Fully Grouted Walls
3.14.2 Horizontal Grout Barriers
3.14.3 Grout Holes and Cleanouts
3.14.3.1 Grout Holes
3.9.3.2 Cleanouts for Hollow Unit Masonry Construction
3.14.4 Grouting Equipment
3.14.4.1 Grout Pumps
3.14.4.2 Vibrators
3.14.5 Grout Placement
3.14.5.1 Low-Lift Method
3.14.5.2 High-Lift Method
3.15 BOND BEAMS
3.11 CONTROL JOINTS
3.16 LINTELS
3.16.1 Masonry Lintels
3.14.2 Steel Lintels
3.15 SILLS AND COPINGS
3.17 SPLASH BLOCKS
3.18 POINTING AND CLEANING
3.20.1 Concrete Masonry Unit Surfaces
3.19 BEARING PLATES
3.20 PROTECTION
3.23 TEST REPORTS
3.21 Field Testing of Mortar
3.23.2 Field Testing of Grout

-- End of Section Table of Contents --

SECTION 04200

MASONRY
09/03

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ACI INTERNATIONAL (ACI)

ACI 530/530.1	(2000) Building Code Requirements for Masonry Structures
ACI 318M/318RM	(2002) Building Code Requirements for Structural Concrete and Commentary
ACI SP-66	(1994) ACI Detailing Manual

ASTM INTERNATIONAL (ASTM)

ASTM A 82	(2001) Steel Wire, Plain, for Concrete Reinforcement
ASTM A 153	(2001a) Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A 615	(2001b) Deformed and Plain Billet-Steel Bars for Concrete Reinforcement
ASTM A 641	(1998) Zinc-Coated (Galvanized) Carbon Steel Wire
ASTM C 90	(2002) Loadbearing Concrete Masonry Units
ASTM C 91	(2001) Masonry Cement
ASTM C 94	(2000e2) Ready-Mixed Concrete
ASTM C 140	(2002a) Sampling and Testing Concrete Masonry Units and Related Units
ASTM C 144	(2002) Aggregate for Masonry Mortar
ASTM C 150	(2002a) Portland Cement
ASTM C 207	(1991; R 1997) Hydrated Lime for Masonry Purposes
ASTM C 270	(2002) Mortar for Unit Masonry

ASTM C 476	(2002) Grout for Masonry
ASTM C 494	(1999ae1) Chemical Admixtures for Concrete
ASTM C 641	(1998e1) Staining Materials in Lightweight Concrete Aggregates
ASTM C 744	(1999) Prefaced Concrete and Calcium Silicate Masonry Units
ASTM C 1019	(2002) Sampling and Testing Grout
ASTM C 1072	(2000a) Measurement of Masonry Flexural Bond Strength
ASTM D 2287	(1996; R 2001) Nonrigid Vinyl Chloride Polymer and Copolymer Molding and Extrusion Compounds
ASTM E 514	(2002) Water Penetration and Leakage Through Masonry

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only or as otherwise designated. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-07 Certificates

Concrete Masonry Units (CMU)
Control Joint Keys
Anchors, Ties, and Bar Positioners
Expansion-Joint Materials
Joint Reinforcement
Reinforcing Steel Bars and Rods
Masonry Cement
Insulation
Precast Concrete Items
Admixtures for Masonry Mortar
Admixtures for Grout

Certificates of compliance stating that the materials meet the specified requirements.

SD-08 Manufacturer's Instructions

Masonry Cement

When masonry cement is used, submit the manufacturer's printed instructions on proportions of water and aggregates and on mixing to obtain the type of mortar required.

1.2 DELIVERY, HANDLING, AND STORAGE

Materials shall be delivered, handled, stored, and protected to avoid chipping, breakage, and contact with soil or contaminating material.

1.2.1 Masonry Units

Concrete masonry units shall be covered or protected from inclement weather. Store Type II, concrete masonry units at the site for a minimum of 28 days for air cured units, 10 days for atmospheric steam or water cured units, and 3 days for units cured with steam at a pressure of 120 to 150 psi and at a temperature of 350 to 365 degrees F for at least 5 hours. Protect moisture controlled units (Type I) from rain and ground water. Prefabricated lintels shall be marked on top sides to show either the lintel schedule number or the number and size of top and bottom bars.

1.2.2 Reinforcement, Anchors, and Ties

Steel reinforcing bars, coated anchors, ties, and joint reinforcement shall be stored above the ground. Steel reinforcing bars and uncoated ties shall be free of loose mill scale and rust.

1.2.3 Cementitious Materials, Sand and Aggregates

Cementitious and other packaged materials shall be delivered in unopened containers, plainly marked and labeled with manufacturers' names and brands. Cementitious material shall be stored in dry, weathertight enclosures or be completely covered. Cement shall be handled in a manner that will prevent the inclusion of foreign materials and damage by water or dampness. Sand and aggregates shall be stored in a manner to prevent contamination or segregation.

1.3 STRUCTURAL MASONRY

1.4 QUALITY ASSURANCE

1.4.1 Testing

Masonry strength shall be determined in accordance with ACI 530/530.1; submit test reports on three prisms as specified in ACI 530/530.1. The cost of testing shall be paid by the Contractor.

1.4.2 Spare Vibrator

Maintain at least one spare vibrator on site at all times.

1.4.3 Bracing and Scaffolding

Provide bracing and scaffolding necessary for masonry work. Design bracing to resist wind pressure as required by local code.

PART 2 PRODUCTS

2.1 GENERAL REQUIREMENTS

The source of materials which will affect the appearance of the finished work shall not be changed after the work has started except with Contracting Officer's approval.

2.1 CONCRETE MASONRY UNITS (CMU)

Cement shall have a low alkali content and be of one brand. Units shall be of modular dimensions and air, water, or steam cured. Exposed surfaces of units shall be smooth and of uniform texture. Exterior concrete masonry units shall have water-repellant admixture added during manufacture.

a. Hollow Load-Bearing Units: ASTM C 90, Type I or II, made with or normal weight aggregate. Provide load-bearing units for exterior walls, foundation walls, load-bearing walls, and shear walls.

b. Hollow Non-Load-Bearing Units: Type I or II, made with or normal weight aggregate. Load-bearing units may be provided in lieu of non-load-bearing units.

2.1.1 Aggregates

Aggregates used in producing the units, shall comply with the following requirements when tested for stain-producing iron compounds in accordance with ASTM C 641: by visual classification method, the iron stain deposited on the filter paper shall not exceed the "light stain" classification.

2.4.2 Kinds and Shapes

Units shall be modular in size and shall include closer, jamb, header, lintel, and bond beam units and special shapes and sizes to complete the work as indicated. In exposed interior masonry surfaces, units having a bullnose shall be used for vertical external corners except at door, window, and louver jambs. Radius of the bullnose shall be 1 inch. Units used in exposed masonry surfaces in any one building shall have a uniform fine to medium texture and a uniform color.

2.5 PRECAST CONCRETE ITEMS

Trim, lintels, copings, splashblocks and door sills shall be factory-made units from a plant regularly engaged in producing precast concrete units. Unless otherwise indicated, concrete shall be 4,000 psi minimum conforming to Section 03307 CONCRETE FOR MINOR STRUCTURES using 1/2 inch to No. 4 nominal-size coarse aggregate, and minimum reinforcement shall be the reinforcement required for handling of the units. Clearance of 3/4 inch shall be maintained between reinforcement and faces of units. Unless precast-concrete items have been subjected during manufacture to saturated-steam pressure of at least 120 psi for at least 5 hours, the items, after casting, shall be either damp-cured for 24 hours or steam-cured and shall then be aged under cover for 28 days or longer. Cast-concrete members weighing over 80 pounds shall have built-in loops of galvanized wire or other approved provisions for lifting and anchoring. Units shall have beds and joints at right angles to the face, with sharp true arises and shall be cast with drip grooves on the underside where units overhang walls. Exposed-to-view surfaces shall be free of surface voids, spalls, cracks, and chipped or broken edges. Precast units exposed-to-view shall be of uniform appearance and color. Unless otherwise specified, units shall have a smooth

dense finish. Prior to use, each item shall be wetted and inspected for crazing. Items showing evidence of dusting, spalling, crazing, or having surfaces treated with a protective coating will be rejected.

2.2 LINTELS

Lintels shall conform to ACI 318M/318RM for flexural and shear strength and shall have at least 8 inches bearing at each end. Concrete shall have a minimum 28 day compressive strength of 3000 psi using 1/2 inch to No. 4 nominal-size coarse aggregate. Reinforcement shall conform to ASTM A 615 Grade 60. Limit lintel deflection due to dead plus live load to L/600 or 0.3 inches. Provide top and bottom bars for lintels over 36 inches in length.

2.3 SILLS AND COPINGS

Sills and copings shall be cast with washes. Sills for windows having mullions shall be cast in sections with head joints at mullions and a 1/4 inch allowance for mortar joints. The ends of sills, except a 3/4 inch wide margin at exposed surfaces, shall be roughened for bond. Treads of door sills shall have rounded nosings. Reinforce sills with not less than two No. 4 bars.

2.5.3 Splash Blocks

Splash blocks shall be as per manufacturer's standards.

2.4 MORTAR FOR STRUCTURAL MASONRY

ASTM C 270 TABLE 2 Property Specification Requirements
(For laboratory prepared mortar only)

Mortar	Type	Average Compressive Strength at 28 Days Min. psi	Water Retention Min. Percent	Air Content Max. Percent	Aggregate Ratio (Measured in in Damp, Loose Condition)
Cement-lime	M	2500	75	12	Not less than 2 1/4 and not more than 3 1/2 times the sum of the separate volumes of cementitious materials
	S	1800	75	12	
	N	750	75	14*	
	O	350	75	14*	
Masonry cement	M	2500	75	**	
	S	1800	75	**	
	N	750	75	**	
	O	350	75	**	

* When structural reinforcement is incorporated in cement-lime mortar, the maximum air content shall be 12 percent.

** When structural reinforcement is incorporated in masonry cement mortar, the maximum air content shall be 18 percent.

Type N should be used only for non-load-bearing walls. Approximate the f'm of the unit masonry. Mortars should be slightly weaker than masonry units so that cracking will

occur in joints where easy to repair.

ASTM C 270, Type S. Strength (f'm) 1500 PSI. Use Type I or II portland cement. Use Masonry cement. Do not use admixtures containing chlorides. When structural reinforcement is incorporated, maximum air-content shall be 12 percent in cement-lime mortar and 18 percent in masonry cement mortar.

2.5 MASONRY MORTAR

Mortar Type S shall conform to the proportion specification of ASTM C 270 except Type S cement-lime mortar proportions shall be 1 part cement, 1/2 part lime and 4-1/2 parts aggregate; Type S mortar shall be used for all masonry work. When masonry cement ASTM C 91 is used the maximum air content shall be limited to 12 percent and performance equal to cement-lime mortar shall be verified. Verification of masonry cement performance shall be based on ASTM C 1072. Pointing mortar in showers and kitchens shall contain ammonium stearate, or aluminum tri-stearate, or calcium stearate in an amount equal to 3 percent by weight of cement used. Cement shall have a low alkali content and be of one brand. Aggregates shall be from one source.

2.8.1 Admixtures for Masonry Mortar

In cold weather, a non-chloride based accelerating admixture may be used subject to approval. Accelerating admixture shall be non-corrosive, shall contain less than 0.2 percent chlorides, and shall conform to ASTM C 494, Type C.

2.5.1 Hydrated Lime and Alternates

Hydrated lime shall conform to ASTM C 207, Type S.

2.8.4 Cement

Portland cement shall conform to ASTM C 150, Type I or II. Masonry cement shall conform to ASTM C 91, Type S. Containers shall bear complete instructions for proportioning and mixing to obtain the required types of mortar.

2.5.2 Sand and Water

Sand shall conform to ASTM C 144. Water shall be clean, potable, and free from substances which could adversely affect the mortar.

2.6 WATER-REPELLANT ADMIXTURE

Polymeric type formulated to reduce porosity and water transmission. Construct panels of masonry units conforming to ASTM C 744 and mortar which contain the water-repellant admixture. When tested in accordance with ASTM C 1072, such panels shall have flexural strength not less than that specified or indicated. Panels shall exhibit no water visible on back of test panel and no leaks through the panel after 24 hours, and not more than 25 percent of wall area shall be damp after 72 hours.

2.7 GROUT AND READY-MIXED GROUT

Grout shall conform to ASTM C 476, fine. Cement used in grout shall have a low alkali content. Grout slump shall be between 8 and 10 inches. Minimum

grout strength shall be 2000 psi in 28 days, as tested by ASTM C 1019. Grout shall be used subject to the limitations of Table III. Proportions shall not be changed and materials with different physical or chemical characteristics shall not be used in grout for the work unless additional evidence is furnished that the grout meets the specified requirements. Ready-Mixed grout shall conform to ASTM C 94.

2.7.1 Admixtures for Grout

In cold weather, a non-chloride based accelerating admixture may be used subject to approval; accelerating admixture shall be non-corrosive, shall contain less than 0.2 percent chlorides, and shall conform to ASTM C 494, Type C. In general, air-entrainment, anti-freeze or chloride admixtures shall not be used except as approved by the Contracting Officer.

2.10.2 Grout Barriers

Grout barriers for vertical cores shall consist of fine mesh wire, fiberglass, or expanded metal.

2.8 JOINT REINFORCEMENT AND BAR POSITIONERS

Exposure	Finish	Wt. of Coating in Oz. Per Sq. Foot for 9 ga wire
Joint reinforcement, interior walls	ASTM A 641/A 641M Class 1	.35
Wire ties or anchors in exterior, completely embedded in mortar or grout	ASTM A 641/A 641M Class 3	.90
Wire ties or anchors in exterior walls not completely embedded in mortar or grout	ASTM A 153/A 153M Class B	1.80
Joint reinforcement in exterior walls or interior walls exposed to moist environments (e.g. natatoria and food processing)	ASTM A 641/A 641M Class B	1.80

	Finish	Wt. of Coating (sheets) Oz. Per Sq. Foot
Sheet metal ties or anchors exposed to weather	ASTM A 153/A 153M Class B-2	1.50
[Sheet metal ties or anchors completely embedded in mortar	ASTM A 653/A 653M Class G60]	.60

2.11.5 Bar Positioners

Bar positioners, used to prevent displacement of reinforcing bars during the course of construction, shall be factory fabricated from 9 gauge steel wire or equivalent, and coated with a hot-dip galvanized finish. Not more than one wire shall cross the cell.

2.9 JOINT REINFORCEMENT

	Long. wires	Cross wires
Standard	9 gauge (0.1483 inch)	9 gauge
Heavy Duty	3/16 inch (0.1875 inch)	9 gauge
Extra Heavy Duty	3/16 inch	3/16 inch

Joint reinforcement shall be factory fabricated from steel wire conforming to ASTM A 82, welded construction. Tack welding will not be acceptable in reinforcement used for wall ties. Wire shall have zinc coating, Class B-2. All wires shall be a minimum of 9 gauge. Reinforcement shall be ladder type design, having one longitudinal wire in the mortar bed of each face shell for hollow units and one wire for solid units. Joint reinforcement shall be placed a minimum of 5/8 inch cover from either face. The distance between crosswires shall not exceed 16 inches. Joint reinforcement for straight runs shall be furnished in flat sections not less than 10 feet long. Joint reinforcement shall be provided with factory formed corners and intersections. If approved for use, joint reinforcement may be furnished with adjustable wall tie features.

2.10 REINFORCING STEEL BARS AND RODS

Reinforcing steel bars and rods shall conform to ASTM A 615, Grade 60.

2.14 CONTROL JOINT KEYS

Control joint keys shall be a factory fabricated solid section of natural or synthetic rubber (or combination thereof) conforming to ASTM D 2000or polyvinyl chloride conforming to ASTM D 2287. The material shall be resistant to oils and solvents. The control joint key shall be provided with a solid shear section not less than 5/8 inch thick and 3/8 inch thick flanges, with a tolerance of plus or minus 1/16 inch. The control joint key shall fit neatly, but without forcing, in masonry unit jamb sash grooves. The control joint key shall be flexible at a temperature of minus 30 degrees F after five hours exposure, and shall have a durometer hardness of not less than 70 when tested in accordance with ASTM D 2240.

2.17 FLASHING

Flashing shall be as specified in Section 07600 SHEET METALWORK, GENERAL.

PART 3 EXECUTION

3.1 PREPARATION

3.1.1 Hot Weather Installation

The following precautions shall be taken if masonry is erected when the ambient air temperature is more than 99 degrees F in the shade and the

relative humidity is less than 50 percent or the ambient air temperature exceeds 90 degrees F and the wind velocity is more than 8 mph. All masonry materials shall be shaded from direct sunlight; mortar beds shall be spread no more than 4 feet ahead of masonry; masonry units shall be set within one minute of spreading mortar; and after erection, masonry shall be protected from direct exposure to wind and sun for 48 hours.

3.1.2 Cold Weather Installation

Before erecting masonry when ambient temperature or mean daily air temperature falls below 40 degrees F or temperature of masonry units is below 40 degrees F, a written statement of proposed cold weather construction procedures shall be submitted for approval. The following precautions shall be taken during all cold weather erection.

3.1.2.1 Protection

Ice or snow formed on the masonry bed shall be thawed by the application of heat. Heat shall be applied carefully until the top surface of the masonry is dry to the touch. Sections of masonry deemed frozen and damaged shall be removed before continuing construction of those sections.

a. Air Temperature 40 to 32 Degrees F. Sand or mixing water shall be heated to produce mortar temperatures between 40 and 120 degrees F.

b. Air Temperature 32 to 25 Degrees F. Sand and mixing water shall be heated to produce mortar temperatures between 40 and 120 degrees F. Temperature of mortar on boards shall be maintained above freezing.

c. Air Temperature 25 to 20 Degrees F. Sand and mixing water shall be heated to provide mortar temperatures between 40 and 120 degrees F. Temperature of mortar on boards shall be maintained above freezing. Sources of heat shall be used on both sides of walls under construction. Windbreaks shall be employed when wind is in excess of 15 mph.

d. Air Temperature 20 Degrees F and below. Sand and mixing water shall be heated to provide mortar temperatures between 40 and 120 degrees F. Enclosure and auxiliary heat shall be provided to maintain air temperature above 32 degrees F. Temperature of units when laid shall not be less than 20 degrees F.

3.1.2.2 Completed Masonry and Masonry Not Being Worked On

a. Mean daily air temperature 40 to 32 degrees F. Masonry shall be protected from rain or snow for 24 hours by covering with weather-resistive membrane.

b. Mean daily air temperature 32 to 25 degrees F. Masonry shall be completely covered with weather-resistant membrane for 24 hours.

c. Mean Daily Air Temperature 25 to 20 degrees F. Masonry shall be completely covered with insulating blankets or equally protected for 24 hours.

d. Mean Daily Temperature 20 degrees F and Below. Masonry temperature shall be maintained above 32 degrees F for 24 hours by enclosure and supplementary heat, by electric heating blankets, infrared heat lamps, or other approved methods.

3.1.3 Stains

Protect exposed surfaces from mortar and other stains. When mortar joints are tooled, remove mortar from exposed surfaces with fiber brushes and wooden paddles. Protect base of walls from splash stains by covering adjacent ground with sand, sawdust, or polyethylene.

3.1.4 Loads

Do not apply uniform loads for at least 12 hours or concentrated loads for at least 72 hours after masonry is constructed. Provide temporary bracing as required.

3.1.5 Surfaces

Surfaces on which masonry is to be placed shall be cleaned of laitance, dust, dirt, oil, organic matter, or other foreign materials and shall be slightly roughened to provide a surface texture with a depth of at least 1/8 inch. Sandblasting shall be used, if necessary, to remove laitance from pores and to expose the aggregate.

3.2 LAYING MASONRY UNITS

Coordinate masonry work with the work of other trades to accommodate built-in items and to avoid cutting and patching. Masonry units shall be laid in running bond pattern. Facing courses shall be level with back-up courses, unless the use of adjustable ties has been approved in which case the tolerances shall be plus or minus 1/2 inch. Each unit shall be adjusted to its final position while mortar is still soft and plastic. Units that have been disturbed after the mortar has stiffened shall be removed, cleaned, and relaid with fresh mortar. Air spaces, cavities, chases, expansion joints, and spaces to be grouted shall be kept free from mortar and other debris. Units used in exposed masonry surfaces shall be selected from those having the least amount of chipped edges or other imperfections detracting from the appearance of the finished work. Vertical joints shall be kept plumb. Units being laid and surfaces to receive units shall be free of water film and frost. Solid units shall be laid in a nonfurrowed full bed of mortar. Mortar for veneer wythes shall be beveled and sloped toward the center of the wythe from the cavity side. Units shall be shoved into place so that the vertical joints are tight. Vertical face shells of concrete masonry units, except where indicated at control, expansion, and isolation joints, shall be completely filled with mortar. Mortar will be permitted to protrude up to 1/2 inch into the space or cells to be grouted. Means shall be provided to prevent mortar from dropping into the space below. In double wythe construction, the inner wythe may be brought up not more than 16 inches ahead of the outer wythe. Collar joints shall be filled with mortar or grout during the laying of the facing wythe, and filling shall not lag the laying of the facing wythe by more than 8 inches.

3.2 FORMS AND SHORES

Provide bracing and scaffolding as required. Design bracing to resist wind pressure as required by local codes. Forms and shores shall be sufficiently rigid to prevent deflections which may result in cracking or other damage to supported masonry and sufficiently tight to prevent leakage of mortar and grout. Supporting forms and shores shall not be removed in less than 10 days.

3.3 REINFORCED CONCRETE MASONRY UNITS WALLS

Where vertical reinforcement occurs, fill cores solid with grout. Lay units in such a manner as to preserve the unobstructed vertical continuity of cores to be filled. Embed the adjacent webs in mortar to prevent leakage of grout. Remove mortar fins protruding from joints before placing grout. Minimum clear dimensions of vertical cores shall be 2 by 3 inches. Position reinforcing accurately as indicated before placing grout. As masonry work progresses, secure vertical reinforcing in place at vertical intervals not to exceed 160 bar diameters. Use puddling rod or vibrator to consolidate the grout. Minimum clear distance between masonry and vertical reinforcement shall be not less than 1/2 inch. Unless indicated or specified otherwise, form splices by lapping bars not less than 40 bar diameters and wire tying them together.

3.2.3 Concrete Masonry Units

Starting courses on footings, lintels, and beams, and where cells are to be filled with grout shall be full bedded in mortar under both face shells and webs. Other units shall be full bedded under both face shells. Head joints shall be filled solidly with mortar for a distance in from the face of the unit not less than the thickness of the face shell. Foundation walls below grade shall be grouted solid. Jamb units shall be of the shapes and sizes to conform with wall units. Solid units may be incorporated in the masonry work where necessary to fill out at corners, gable slopes, and elsewhere as approved. Walls and partitions shall be adequately reinforced for support of wall-mounted plumbing fixtures and equipment.

3.4 TOLERANCES

Masonry shall be laid plumb, true to line, with courses level. Bond pattern shall be kept plumb throughout. Corners shall be square unless noted otherwise. Except for walls constructed of prefaced concrete masonry units, masonry shall be laid within the following tolerances (plus or minus unless otherwise noted):

TABLE II

TOLERANCES

Variation from the plumb in the lines and surfaces of columns, walls and arises	
In adjacent masonry units	1/8 inch
In 10 feet	1/4 inch
In 20 feet	3/8 inch
In 40 feet or more	1/2 inch

Variations from the plumb for external corners,

expansion joints, and other conspicuous lines	
In 20 feet	1/4 inch
In 40 feet or more	1/2 inch
Variations from the level for exposed lintels, sills, parapets, horizontal grooves, and other conspicuous lines	
In 20 feet	1/4 inch
In 40 feet or more	1/2 inch
Variation from level for bed joints and top surfaces of bearing walls	
In 10 feet	1/4 inch
In 40 feet or more	1/2 inch
Variations from horizontal lines	
In 10 feet	1/4 inch
In 20 feet	3/8 inch
In 40 feet or more	1/2 inch
Variations in cross sectional dimensions of columns and in thickness of walls	
Minus	1/4 inch
Plus	1/2 inch

3.5 CUTTING AND FITTING

Full units of the proper size shall be used wherever possible, in lieu of cut units. Cutting and fitting, including that required to accommodate the work of others, shall be done by masonry mechanics using power masonry saws. Concrete masonry units may be wet or dry cut. Wet cut units, before being placed in the work, shall be dried to the same surface-dry appearance as uncut units being laid in the wall. Cut edges shall be clean, true and sharp. Openings in the masonry shall be made carefully so that wall plates, cover plates or escutcheons required by the installation will completely conceal the openings and will have bottoms parallel with the masonry bed joints. Reinforced masonry lintels shall be provided above openings over 12 inches wide for pipes, ducts, cable trays, and other wall penetrations, unless steel sleeves are used.

3.6 JOINTING

Joints shall be tooled when the mortar is thumbprint hard. Horizontal joints shall be tooled last. Joints shall be brushed to remove all loose and excess mortar. Mortar joints shall be finished as follows:

3.6.1 Flush Joints

Joints in concealed masonry surfaces and joints at electrical outlet boxes in wet areas shall be flush cut. Flush cut joints shall be made by cutting off the mortar flush with the face of the wall. Joints in unparged masonry walls below grade shall be pointed tight. Flush joints for architectural units, such as fluted units, shall completely fill both the head and bed joints.

3.6.2 Tooled Joints

Joints in exposed exterior and interior masonry surfaces shall be tooled slightly concave. Joints shall be tooled with a jointer slightly larger than the joint width so that complete contact is made along the edges of the unit. Tooling shall be performed so that the mortar is compressed and the joint surface is sealed. Jointer of sufficient length shall be used to obtain a straight and true mortar joint.

3.6.3 Door and Window Frame Joints

On the exposed interior side of exterior frames, joints between frames and abutting masonry walls shall be raked to a depth of 3/8 inch. On the exterior side of exterior frames, joints between frames and abutting masonry walls shall be raked to a depth of 3/8 inch.

3.7 JOINT WIDTHS

Joint widths shall be as follows:

3.2.8.1 Concrete Masonry Units

Concrete masonry units shall have 3/8 inch joints, except for prefaced concrete masonry units.

3.8 EMBEDDED ITEMS

Spaces around built-in items shall be filled with mortar. Openings around flush-mount electrical outlet boxes in wet locations shall be pointed with mortar. Anchors, ties, wall plugs, accessories, flashing, pipe sleeves and other items required to be built-in shall be embedded as the masonry work progresses. Anchors, ties and joint reinforcement shall be fully embedded in the mortar. Cells receiving anchor bolts and cells of the first course below bearing plates shall be filled with grout.

3.9 UNFINISHED WORK

Unfinished work shall be stepped back for joining with new work. Toothing may be resorted to only when specifically approved. Loose mortar shall be removed and the exposed joints shall be thoroughly cleaned before laying new work.

3.10 MASONRY WALL INTERSECTIONS

Each course shall be masonry bonded at corners and elsewhere as shown. Masonry walls shall be anchored or tied together at corners and intersections with bond beam reinforcement and prefabricated corner or tee pieces of joint reinforcement as shown.

3.2.12 Partitions

Partitions shall be continuous from floor to underside of floor or roof deck where shown. Openings in firewalls around joists or other structural members shall be filled as indicated or approved. Where suspended ceilings on both sides of partitions are indicated, the partitions other than those shown to be continuous may be stopped approximately 4 inches above the ceiling level. An isolation joint shall be placed in the intersection between partitions and structural or exterior walls as shown. Interior partitions having 4 inch nominal thick units shall be tied to intersecting partitions of 4 inch units, 5 inches into partitions of 6 inch units, and 7 inches into partitions of 8 inch or thicker units. Cells within vertical plane of ties shall be filled solid with grout for full height of partition or solid masonry units may be used. Interior partitions having masonry walls over 4 inches thick shall be tied together with joint reinforcement. Partitions containing joint reinforcement shall be provided with prefabricated pieces at corners and intersections or partitions.

3.11 MORTAR

Mortar shall be mixed in a mechanically operated mortar mixer for at least 3 minutes, but not more than 5 minutes. Measurement of ingredients for mortar shall be by volume. Ingredients not in containers, such as sand, shall be accurately measured by the use of measuring boxes. Water shall be mixed with the dry ingredients in sufficient amount to provide a workable mixture which will adhere to the vertical surfaces of masonry units. Mortar that has stiffened because of loss of water through evaporation shall be retempered by adding water to restore the proper consistency and workability. Mortar that has reached its initial set or that has not been used within 2-1/2 hours after mixing shall be discarded.

3.12 REINFORCING STEEL

Reinforcement shall be cleaned of loose, flaky rust, scale, grease, mortar, grout, or other coating which might destroy or reduce its bond prior to placing grout. Bars with kinks or bends not shown on the drawings shall not be used. Reinforcement shall be placed prior to grouting. Unless otherwise indicated, vertical wall reinforcement shall extend to within 2 inches of tops of walls.

3.12.1 Positioning Bars

Vertical bars shall be accurately placed within the cells at the positions indicated on the drawings. A minimum clearance of 1/2 inch shall be maintained between the bars and masonry units. Minimum clearance between parallel bars shall be one diameter of the reinforcement. Vertical reinforcing may be held in place using bar positioners located near the ends of each bar and at intermediate intervals of not more than 192 diameters of the reinforcement. Column and pilaster ties shall be wired in position around the vertical steel. Ties shall be in contact with the vertical reinforcement and shall not be placed in horizontal bed joints.

3.12.2 Splices

Bars shall be lapped a minimum of 48 diameters of the reinforcement. Welded or mechanical connections shall develop at least 125 percent of the specified yield strength of the reinforcement.

3.13 JOINT REINFORCEMENT INSTALLATION

Joint reinforcement shall be installed at 16 inches on center or as indicated. Reinforcement shall be lapped not less than 6 inches. Prefabricated sections shall be installed at corners and wall intersections. The longitudinal wires of joint reinforcement shall be placed to provide not less than 5/8 inch cover to either face of the unit.

3.14 PLACING GROUT

Cells containing reinforcing bars shall be filled with grout. Hollow masonry units in walls or partitions supporting plumbing, heating, or other mechanical fixtures, voids at door and window jambs, and other indicated spaces shall be filled solid with grout. Cells under lintel bearings on each side of openings shall be filled solid with grout for full height of openings. Walls below grade, lintels, and bond beams shall be filled solid with grout. Units other than open end units may require grouting each course to preclude voids in the units. Grout not in place within 1-1/2 hours after water is first added to the batch shall be discarded. Sufficient time shall be allowed between grout lifts to preclude displacement or cracking of face shells of masonry units. If blowouts, flowouts, misalignment, or cracking of face shells should occur during construction, the wall shall be torn down and rebuilt.

3.14.1 Vertical Grout Barriers for Fully Grouted Walls

Grout barriers shall be provided not more than 30 feet apart, or as required, to limit the horizontal flow of grout for each pour.

3.14.2 Horizontal Grout Barriers

Grout barriers shall be embedded in mortar below cells of hollow units receiving grout.

3.14.3 Grout Holes and Cleanouts

3.14.3.1 Grout Holes

Grouting holes shall be provided in in-place overhead construction. Holes shall be located over vertical reinforcing bars or as required to facilitate grout fill in bond beams. Additional openings spaced not more than 16 inches on centers shall be provided where grouting of all hollow unit masonry is indicated. Openings shall not be less than 4 inches in diameter or 3 by 4 inches in horizontal dimensions. Upon completion of grouting operations, grouting holes shall be plugged and finished to match surrounding surfaces.

3.9.3.2 Cleanouts for Hollow Unit Masonry Construction

Cleanout holes shall be provided at the bottom of every pour in cores containing vertical reinforcement when the height of the grout pour exceeds 5 feet. Where all cells are to be grouted, cleanout courses shall be constructed using bond beam units in an inverted position to permit cleaning of all cells. Cleanout holes shall be provided at a maximum spacing of 32

inches where all cells are to be filled with grout. A new series of cleanouts shall be established if grouting operations are stopped for more than 4 hours. Cleanouts shall not be less than 3 by 4 inch openings cut from one face shell. Manufacturer's standard cutout units may be used at the Contractor's option. Cleanout holes shall not be closed until masonry work, reinforcement, and final cleaning of the grout spaces have been completed and inspected. For walls which will be exposed to view, cleanout holes shall be closed in an approved manner to match surrounding masonry.

3.14.4 Grouting Equipment

3.14.4.1 Grout Pumps

Pumping through aluminum tubes will not be permitted. Pumps shall be operated to produce a continuous stream of grout without air pockets, segregation, or contamination. Upon completion of each day's pumping, waste materials and debris shall be removed from the equipment, and disposed of outside the masonry.

3.14.4.2 Vibrators

Internal vibrators shall maintain a speed of not less than 5,000 impulses per minute when submerged in the grout. At least one spare vibrator shall be maintained at the site at all times. Vibrators shall be applied at uniformly spaced points not further apart than the visible effectiveness of the machine. Duration of vibration shall be limited to time necessary to produce satisfactory consolidation without causing segregation.

3.14.5 Grout Placement

Masonry shall be laid to the top of a pour before placing grout. Grout shall not be placed in hollow unit masonry until mortar joints have set for at least 24 hours. Grout shall be placed using a hand bucket, concrete hopper, or grout pump to completely fill the grout spaces without segregation of the aggregates. Vibrators shall not be inserted into lower pours that are in a semi-solidified state. The height of grout pours and type of grout used shall be limited by the dimensions of grout spaces as indicated in Table III. Low-lift grout methods may be used on pours up to and including 5 feet in height. High-lift grout methods shall be used on pours exceeding 5 feet in height.

3.14.5.1 Low-Lift Method

Grout shall be placed at a rate that will not cause displacement of the masonry due to hydrostatic pressure of the grout. Mortar protruding more than 1/2 inch into the grout space shall be removed before beginning the grouting operation. Grout pours 12 inches or less in height shall be consolidated by mechanical vibration or by puddling. Grout pours over 12 inches in height shall be consolidated by mechanical vibration and reconsolidated by mechanical vibration after initial water loss and settlement has occurred. Vibrators shall not be inserted into lower pours that are in a semi-solidified state. Low-lift grout shall be used subject to the limitations of Table III.

3.14.5.2 High-Lift Method

Mortar droppings shall be cleaned from the bottom of the grout space and from reinforcing steel. Mortar protruding more than 1/4 inch into the grout space shall be removed by dislodging the projections with a rod or stick as the work progresses. Reinforcing, bolts, and embedded connections shall be rigidly held in position before grouting is started. CMU units shall not be pre-wetted. Grout, from the mixer to the point of deposit in the grout space shall be placed as rapidly as practical by pumping and placing methods which will prevent segregation of the mix and cause a minimum of grout splatter on reinforcing and masonry surfaces not being immediately encased in the grout lift. The individual lifts of grout shall be limited to 4 feet in height. The first lift of grout shall be placed to a uniform height within the pour section and vibrated thoroughly to fill all voids. This first vibration shall follow immediately behind the pouring of the grout using an approved mechanical vibrator. After a waiting period sufficient to permit the grout to become plastic, but before it has taken any set, the succeeding lift shall be poured and vibrated 12 to 18 inches into the preceding lift. If the placing of the succeeding lift is going to be delayed beyond the period of workability of the preceding, each lift shall be reconsolidated by reworking with a second vibrator as soon as the grout has taken its settlement shrinkage. The waiting, pouring, and reconsolidation steps shall be repeated until the top of the pour is reached. The top lift shall be reconsolidated after the required waiting period. The high-lift grouting of any section of wall between vertical grout barriers shall be completed to the top of a pour in one working day unless a new series of cleanout holes is established and the resulting horizontal construction joint cleaned. High-lift grout shall be used subject to the limitations in Table III.

TABLE III

POUR HEIGHT AND TYPE OF GROUT FOR VARIOUS GROUT SPACE DIMENSIONS

Maximum Grout Pour Height (feet) (4)	Grout Type	Grouting Procedure	Minimum Dimensions of the Total Clear Areas Within Grout Spaces and Cells (in.) (1,2) Multiwythe Masonry (3)	Hollow-unit Masonry
1	Fine	Low Lift	3/4	1-1/2 x 2
5	Fine	Low Lift	2	2 x 3
8	Fine	High Lift	2	2 x 3
12	Fine	High Lift	2-1/2	2-1/2 x 3
24	Fine	High Lift	3	3 x 3
1	Coarse	Low Lift	1-1/2	1-1/2 x 3
5	Coarse	Low Lift	2	2-1/2 x 3
8	Coarse	High Lift	2	3 x 3
12	Coarse	High Lift	2-1/2	3 x 3
24	Coarse	High Lift	3	3 x 4

Notes:

(1) The actual grout space or cell dimension must be larger than the sum of the following items:

a) The required minimum dimensions of total clear areas given in the table above;

b) The width of any mortar projections within the space;

c) The horizontal projections of the diameters of the horizontal reinforcing bars within a cross section of the grout space or cell.

(2) The minimum dimensions of the total clear areas shall be made up of one or more open areas, with at least one area being 3/4 inch or greater in width.

(3) For grouting spaces between masonry wythes.

(4) Where only cells of hollow masonry units containing reinforcement are grouted, the maximum height of the pour shall not exceed the distance between horizontal bond beams.

3.15 BOND BEAMS

Bond beams shall be filled with grout and reinforced as indicated on the drawings. Grout barriers shall be installed under bond beam units to retain the grout as required. Reinforcement shall be continuous, including around corners, except through control joints or expansion joints, unless otherwise indicated on the drawings. Where splices are required for continuity, reinforcement shall be lapped 48 bar diameters. A minimum clearance of 1/2 inch shall be maintained between reinforcement and interior faces of units.

3.11 CONTROL JOINTS

Control joints shall be provided as indicated and shall be constructed by using special control-joint units. The vertical mortar joint at control joint locations shall be continuous, including through all bond beams. This shall be accomplished by utilizing half blocks in alternating courses on each side of the joint. The control joint key shall be interrupted in courses containing continuous bond beam steel. In single wythe exterior masonry walls, the exterior control joints shall be raked to a depth of 3/4 inch; backer rod and sealant shall be installed in accordance with Section 07920 JOINT SEALANTS. Exposed interior control joints shall be raked to a depth of 1/4 inch. Concealed control joints shall be flush cut.

3.16 LINTELS

3.16.1 Masonry Lintels

Masonry lintels shall be constructed with lintel units filled solid with grout in all courses and reinforced with a minimum of two No. 4 bars in the bottom course unless otherwise indicated on the drawings. Lintel reinforcement shall extend beyond each side of masonry opening 40 bar diameters or 24 inches, whichever is greater. Reinforcing bars shall be supported in place prior to grouting and shall be located 1/2 inch above the bottom inside surface of the lintel unit.

3.14.2 Steel Lintels

Steel lintels shall be as shown on the drawings. Lintels shall be set in a full bed of mortar with faces plumb and true. Steel and precast lintels shall have a minimum bearing length of 8 inches unless otherwise indicated on the drawings.

3.15 SILLS AND COPINGS

Sills and copings shall be set in a full bed of mortar with faces plumb and true.

3.17 SPLASH BLOCKS

Splash blocks shall be located as shown.

3.18 POINTING AND CLEANING

After mortar joints have attained their initial set, but prior to hardening, mortar and grout daubs or splashings shall be completely removed from masonry-unit surfaces that will be exposed or painted. Before completion of the work, defects in joints of masonry to be exposed or painted shall be raked out as necessary, filled with mortar, and tooled to match existing joints. Immediately after grout work is completed, scum and stains which have percolated through the masonry work shall be removed using a high pressure stream of water and a stiff bristled brush. Masonry surfaces shall not be cleaned, other than removing excess surface mortar, until mortar in joints has hardened. Masonry surfaces shall be left clean, free of mortar daubs, dirt, stain, and discoloration, including scum from cleaning operations, and with tight mortar joints throughout. Metal tools and metal brushes shall not be used for cleaning.

3.20.1 Concrete Masonry Unit Surfaces

Exposed concrete masonry unit surfaces shall be dry-brushed at the end of each day's work and after any required pointing, using stiff-fiber bristled brushes.

3.19 BEARING PLATES

Bearing plates for beams, joists, joist girders and similar structural members shall be set to the proper line and elevation with damp-pack bedding mortar, except where non-shrink grout is indicated. Bedding mortar and non-shrink grout shall be as specified in Section 03307 CONCRETE FOR MINOR STRUCTURES.

3.20 PROTECTION

Facing materials shall be protected against staining. Top of walls shall be covered with nonstaining waterproof covering or membrane when work is not in progress. Covering of the top of the unfinished walls shall continue until the wall is waterproofed with a complete roof or parapet system. Covering shall extend a minimum of 2 feet down on each side of the wall and shall be held securely in place. Before starting or resuming, top surface of masonry in place shall be cleaned of loose mortar and foreign material.

3.23 TEST REPORTS

3.21 FIELD TESTING OF MORTAR

At least three specimens of mortar shall be taken each day. A layer of mortar 1/2 to 5/8 inch thick shall be spread on the masonry units and allowed to stand for one minute. The specimens shall then be prepared and tested for compressive strength.

3.23.2 Field Testing of Grout

Field sampling and testing of grout shall be in accordance with the applicable provisions of ASTM C 1019. A minimum of three specimens of grout per day shall be sampled and tested. Each specimen shall have a minimum ultimate compressive strength of 2000 psi at 28 days.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 05 - METALS

SECTION 05120

STRUCTURAL STEEL

08/03

PART 1 GENERAL

1.1 REFERENCES
1.2 SYSTEM DESCRIPTION
1.3 MODIFICATIONS TO REFERENCES
1.4 SUBMITTALS
1.4 QUALITY ASSURANCE
1.4.1 Drawing Requirements
1.4.2 Certifications
1.4.2.1 Erection Plan
1.4.2.2 Welding Procedures and Qualifications

PART 2 PRODUCTS

2.1 STEEL
2.1.1 Structural Steel
2.1.1 Structural Shapes for Use in Building Framing
2.1.6 Structural Steel Tubing
2.2 BOLTS, NUTS, AND WASHERS
2.2.1 Structural Steel
2.2.1 Bolts
2.2.2 Nuts
2.2.1.3 Washers
2.2.4 Foundation Anchorage
2.2.3 Bolts
2.2.4 Nuts
2.2.4.3 Washers
2.3 STRUCTURAL STEEL ACCESSORIES
2.3.1 Welding Electrodes and Rods
2.3.2 Nonshrink Grout
2.3.3 Welded Shear Stud Connectors
2.4 SHOP PRIMER
2.5 GALVANIZING
2.5 FABRICATION
2.5.1 Markings
2.7.2 Shop Primer
2.5.2 Cleaning
2.7.2.2 Primer
2.5.3 Surface Finishes

PART 3 EXECUTION

3.1 FABRICATION
3.2 INSTALLATION
3.3 ERECTION
3.3.1 STORAGE

3.4 CONNECTIONS
3.4.1 Common Grade Bolts
3.5 WELDING
3.5.1 Removal of Temporary Welds, Run-Off Plates, and Backing Strips
3.6 SHOP PRIMER REPAIR
3.6.1 Field Priming
3.7 GALVANIZING REPAIR
3.8 FIELD QUALITY CONTROL
3.8.1 Welds
3.8 Visual Inspection
3.8.1.2 Nondestructive Testing
3.9 Inspection
3.8.4.3 Testing

-- End of Section Table of Contents --

SECTION 05120

STRUCTURAL STEEL
08/03

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)

AASHTO HB-17	(2002) Standard Specifications for Highway Bridges

AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC)

AISC 303	(2000) Code of Standard Practice for Steel Buildings and Bridges
AISC 316	(1989) ASD Manual of Steel Construction
AISC 317	(1992) ASD Manual of Steel Construction, Vol. II: Connections
AISC 325	(2001) LRFD Manual of Steel Construction
AISC 326	(2002) Detailing for Steel Construction
AISC 335	(1989) Structural Steel Buildings Allowable Stress Design and Plastic Design
AISC 350	(1999) Load and Resistance Factor Design (LRFD) Specification for Structural Steel Buildings
AISC 810	(1997) Design Guide 10: Erection Bracing of Low-Rise Structural Steel Frames/Fisher and West
AISC FCD	(1995a) AISC Quality Certification Program

AMERICAN RAILWAY ENGINEERING AND MAINTENANCE-OF-WAY ASSOCIATION (AREMA)

AREMA Manual	(2003) Manual for Railway Engineering

AMERICAN WELDING SOCIETY (AWS)

AWS A2.4	(1998) Standard Symbols for Welding, Brazing and Nondestructive Examination

AWS D1.1/D1.1M	(2002) Structural Welding Code - Steel

ASME INTERNATIONAL (ASME)

ASME B46.1	(1995) Surface Texture, (Surface Roughness, Waviness and Lay)

ASTM INTERNATIONAL (ASTM)

ASTM A 108	(1999) Steel Bars, Carbon, Cold-Finished, Standard Quality
ASTM A 123/A 123M	(2002) Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A 153/A 153M	(2003) Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A 307	(2002) Carbon Steel Bolts and Studs, 60 000 PSI Tensile Strength
ASTM A 36/A 36M	(2003a) Carbon Structural Steel
ASTM A 500	(2003) Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes
ASTM A 563	(2000) Carbon and Alloy Steel Nuts
ASTM A 6/A 6M	(2003a) General Requirements for Rolled Structural Steel Bars, Plates, Shapes, and Sheet Piling
ASTM A 709/A 709M	(2003a) Carbon and High-Strength Low-Alloy Structural Steel Shapes, Plates, and Bars and Quenched-and-Tempered Alloy Structural Steel Plates for Bridges
ASTM A 780	(2001) Repair of Damaged and Uncoated Areas of Hot-Dipped Galvanized Coatings
ASTM A 992/A 992M	(2002) Steel for Structural Shapes for Use in Building Framing
ASTM B 695	(2000) Coatings of Zinc Mechanically Deposited on Iron and Steel
ASTM C 1107	(2002) Packaged Dry, Hydraulic-Cement Grout (Nonshrink)
ASTM C 827	(2001a) Change in Height at Early Ages of Cylindrical Specimens from Cementitious Mixtures
ASTM F 436	(2003) Hardened Steel Washers
ASTM F 844	(2000) Washers, Steel, Plain (Flat), Unhardened for General Use

THE SOCIETY FOR PROTECTIVE COATINGS (SSPC)

SSPC PA 1	(2000) Shop, Field, and Maintenance Painting
SSPC PS 13.01	(1982; R 2000) Epoxy-Polyamide Painting System
SSPC Paint 25	(1997; R 2000) Zinc Oxide, Alkyd, Linseed Oil Primer for Use Over Hand Cleaned Steel, Type I and Type II
SSPC SP 3	(1982; R 2000) Power Tool Cleaning
SSPC SP 6	(2000) Commercial Blast Cleaning

1.2 SYSTEM DESCRIPTION

Provide the structural steel system, including shop primer or galvanizing, complete and ready for use. Structural steel systems including design, materials, installation, workmanship, fabrication, assembly, erection, inspection, quality control, and testing shall be provided in accordance with AISC 316 and AISC 317 except as modified in this contract.

1.3 MODIFICATIONS TO REFERENCES

In AISC 316, AISC 317, AISC 335, AISC 303, AISC 348, and AISC S340, except as modified in this section, shall be considered a part of AISC 316 and AISC 317 and is referred to in this section as AISC 316 and AISC 317.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Erection Plan, including description of temporary supports; G,

Fabrication drawings including description of connections; G,

SD-03 Product Data

Shop primer

Include test report for Class B primer.

SD-06 Test Reports

Class B coating

Bolts, nuts, and washers

Supply the certified manufacturer's mill reports which clearly show the applicable ASTM mechanical and chemical requirements together with the actual test results for the supplied fasteners.

SD-07 Certificates

Steel

Bolts, nuts, and washers

Shop primer

Welding electrodes and rods

Nonshrink grout

Galvanizing

Welding procedures and qualifications

1.4 QUALITY ASSURANCE

1.4.1 Drawing Requirements

Submit fabrication drawings for approval prior to fabrication. Prepare in accordance with AISC 326, AISC 316 and AISC 317. Drawings shall not be reproductions of contract drawings. Include complete information for the fabrication and erection of the structure's components, including the location, type, and size of bolts, welds, member sizes and lengths, connection details, blocks, copes, and cuts. Use AWS A2.4 standard welding symbols.

1.4.2 Certifications

1.4.2.1 Erection Plan

Submit for record purposes. Indicate the sequence of erection, temporary shoring and bracing, and a detailed sequence of welding, including each welding procedure required.

1.4.2.2 Welding Procedures and Qualifications

Prior to welding, submit certification for each welder stating the type of welding and positions qualified for, the code and procedure qualified under, date qualified, and the firm and individual certifying the qualification tests. If the qualification date of the welding operator is more than one-year old, the welding operator's qualification certificate shall be accompanied by a current certificate by the welder attesting to the fact that he has been engaged in welding since the date of certification, with no break in welding service greater than 6 months.

PART 2 PRODUCTS

2.1 STEEL

2.1.1 Structural Steel

ASTM A 36/A 36M.

2.1.1 Structural Shapes for Use in Building Framing

Wide flange shapes, ASTM A 992/A 992M.

2.1.6 Structural Steel Tubing

ASTM A 500, Grade B.

2.2 BOLTS, NUTS, AND WASHERS

Provide the following unless indicated otherwise.

2.2.1 Structural Steel

2.2.1 Bolts

ASTM A 307, Grade A.

2.2.2 Nuts

ASTM A 563, Grade and Style for applicable ASTM bolt standard recommended.

2.2.1.3 Washers

ASTM F 844 washers for ASTM A 307 bolts.

2.2.4 Foundation Anchorage

2.2.3 Bolts

ASTM A 307.

2.2.4 Nuts

ASTM A 563, Grade A, hex style.

2.2.4.3 Washers

ASTM F 844.

2.3 STRUCTURAL STEEL ACCESSORIES

2.3.1 Welding Electrodes and Rods

AWS D1.1/D1.1M.

2.3.2 Nonshrink Grout

ASTM C 1107, with no ASTM C 827 shrinkage.

2.3.3 Welded Shear Stud Connectors

AWS D1.1/D1.1M.

2.4 SHOP PRIMER

SSPC Paint 25, (alkyd primer) or SSPC PS 13.01 epoxy-polyamide, green primer (Form 150) type 1. Primer shall conform to Federal, State, and local VOC regulations. If flash rusting occurs, re-clean the surface prior to application of primer.

2.5 GALVANIZING

ASTM A 123/A 123M or ASTM A 153/A 153M, as applicable, unless specified otherwise galvanize after fabrication where practicable.

2.5 FABRICATION

2.5.1 Markings

Prior to erection, members shall be identified by a painted erection mark. Connecting parts assembled in the shop for reaming holes in field connections shall be match marked with scratch and notch marks. Do not locate erection markings on areas to be welded or on surfaces of weathering steels that will be exposed in the completed structure. Do not locate match markings in areas that will decrease member strength or cause stress concentrations.

2.7.2 Shop Primer

Shop prime structural steel, except as modified herein, in accordance with SSPC PA 1. Do not prime steel surfaces embedded in concrete, galvanized surfaces, or surfaces within 0.5 inch of the toe of the welds prior to welding (except surfaces on which metal decking is to be welded). Prior to assembly, prime surfaces which will be concealed or inaccessible after assembly. Do not apply primer in foggy or rainy weather; when the ambient temperature is below 45 degrees F or over 95 degrees F; or when the primer may be exposed to temperatures below 40 degrees F within 48 hours after application, unless approved otherwise by the Contracting Officer.

2.5.2 Cleaning

SSPC SP 6, except steel exposed in spaces above ceilings, attic spaces, furred spaces, and chases that will be hidden to view in finished construction may be cleaned to SSPC SP 3 when recommended by the shop primer manufacturer. Maintain steel surfaces free from rust, dirt, oil, grease, and other contaminants through final assembly.

2.7.2.2 Primer

Apply primer to a minimum dry film thickness of 2.0 mil except provide the Class B coating for slip critical joints in accordance with the coating manufacturer's recommendations. Repair damaged primed surfaces with an additional coat of primer.

2.5.3 Surface Finishes

ASME B46.1 maximum surface roughness of 125 for pin, pinholes, and sliding bearings, unless indicated otherwise.

PART 3 EXECUTION

3.1 FABRICATION

Fabrication shall be in accordance with the applicable provisions of AISC 316. Fabrication and assembly shall be done in the shop to the greatest extent possible. Compression joints depending on contact bearing shall have a surface roughness not in excess of 500 micro inches as determined by ASME B46.1, and ends shall be square within the tolerances for milled ends specified in ASTM A 6/A 6M. Structural steelwork, except surfaces of steel to be encased in concrete and surfaces to be field welded, shall be prepared for painting in accordance with endorsement "P" of AISC FCD and primed with the specified paint.

3.2 INSTALLATION

3.3 ERECTION

a: Erection of structural steel, except as indicated in item b. below, shall be in accordance with the applicable provisions of AISC 316. Erection plan shall be reviewed, stamped and sealed by a licensed structural engineer.

b. For low-rise structural steel buildings (60 feet tall or less and a maximum of 2 stories), the erection plan shall conform to AISC 303 and the structure shall be erected in accordance with AISC 810.

Provide for drainage in structural steel. After final positioning of steel members, provide full bearing under base plates and bearing plates using nonshrink grout. Place nonshrink grout in accordance with the manufacturer's instructions.

3.3.1 STORAGE

Material shall be stored out of contact with the ground in such manner and location as will minimize deterioration.

3.4 CONNECTIONS

Except as modified in this section, connections not detailed shall be designed in accordance with AISC 335. Build connections into existing work. Do not tighten anchor bolts set in concrete with impact torque wrenches. Punch, subpunch and ream, or drill bolt and pin holes. Bolts, nuts, and washers shall be clean of dirt and rust, and lubricated immediately prior to installation.

3.4.1 Common Grade Bolts

ASTM A 307 bolts shall be tightened to a "snug tight" fit. "Snug tight" is the tightness that exists when plies in a joint are in firm contact. If firm contact of joint plies cannot be obtained with a few impacts of an impact wrench, or the full effort of a man using a spud wrench, contact the Contracting Officer for further instructions.

3.5 WELDING

AWS D1.1/D1.1M, except use only shielded metal arc welding and low hydrogen electrodes for ASTM A 514/A 514M steel. Provide AWS D1.1/D1.1M qualified welders, welding operators, and tackers.

The contractor shall develop and submit the Welding Procedure Specifications (WPS) for all welding, including welding done using prequalified procedures. Prequalified procedures may be submitted for information only; however, procedures that are not prequalified shall be submitted for approval.

3.5.1 Removal of Temporary Welds, Run-Off Plates, and Backing Strips

Remove only from finished areas.

3.6 SHOP PRIMER REPAIR

Repair shop primer in accordance with the paint manufacturer's recommendation for surfaces damaged by handling, transporting, cutting, welding, or bolting.

3.6.1 Field Priming

Field priming of steel exposed to the weather, or located in building areas without HVAC for control of relative humidity. After erection, the field bolt heads and nuts, field welds, and any abrasions in the shop coat shall be cleaned and primed with paint of the same quality as that used for the shop coat.

3.7 GALVANIZING REPAIR

Provide as indicated or specified. Galvanize after fabrication where practicable. Repair damage to galvanized coatings using ASTM A 780 zinc rich paint for galvanizing damaged by handling, transporting, cutting, welding, or bolting. Do not heat surfaces to which repair paint has been applied.

3.8 FIELD QUALITY CONTROL

Perform field tests, and provide labor, equipment, and incidentals required for testing, except that electric power for field tests will be furnished as set forth in Division 1. The Contracting Officer shall be notified in writing of defective welds, bolts, nuts, and washers within 7 working days of the date of weld inspection.

3.8.1 Welds

3.8 VISUAL INSPECTION

AWS D1.1/D1.1M. Furnish the services of AWS-certified welding inspectors for fabrication and erection inspection and testing and verification inspections. Welding inspectors shall visually inspect and mark welds, including fillet weld end returns.

3.8.1.2 Nondestructive Testing

AWS D1.1/D1.1M. Test locations shall be selected by the Contracting Officer. If more than 10 percent of welds made by a welder contain defects

identified by testing, then all welds made by that welder shall be tested by radiographic or ultrasonic testing, as approved by the Contracting Officer. When all welds made by an individual welder are required to be tested, magnetic particle testing shall be used only in areas inaccessible to either radiographic or ultrasonic testing. Retest defective areas after repair.

a. Testing frequency: Provide the following types and number of tests:

Test Type	Number of Tests
Magnetic Particle	10

3.9 INSPECTION

Confirm and report to the Contracting Officer that the materials meet the project specification and that they are properly stored. Confirm that the faying surfaces have been properly prepared before the connections are assembled. Observe the specified job site testing and calibration, and confirm that the procedure to be used provides the required tension. Monitor the work to ensure the testing procedures are routinely followed on joints that are specified to be fully tensioned.

3.8.4.3 Testing

The Government has the option to perform nondestructive tests on 5 percent of the installed bolts to verify compliance with pre-load bolt tension requirements. The nondestructive testing will be done in-place using an ultrasonic measuring device or any other device capable of determining in-place pre-load bolt tension. The test locations shall be selected by the Contracting Officer. If more than 10 percent of the bolts tested contain defects identified by testing, then all bolts used from the batch from which the tested bolts were taken, shall be tested. Retest new bolts after installation.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 05 - METALS

SECTION 05400

COLD-FORMED METAL FRAMING

10/03

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 DELIVERY, STORAGE, AND HANDLING
1.4 COLD-FORMED METAL FRAMING
1.5 MAXIMUM DEFLECTION
1.6 QUALITY ASSURANCE
1.6.1 Drawing Requirements
1.6.2 Design Data Required

PART 2 PRODUCTS

2.1 STEEL STUDS, TRACKS, BRACING, BRIDGING AND ACCESSORIES
2.1.1 Studs of 16 Gage (0.0598 Inch) and Heavier
2.1.2 Studs of 18 Gage (0.0478 Inch) and Lighter
2.2 MARKINGS
2.3 CONNECTIONS
2.3 PLASTIC GROMMETS

PART 3 EXECUTION

3.1 FASTENING
3.1.1 Welds
3.1.2 Screws
3.1.3 Anchors
3.2 INSTALLATION
3.2.1 Tracks
3.2.2 Studs
3.2.3 Trusses
3.2.4 Erection Tolerances

-- End of Section Table of Contents --

SECTION 05400

COLD-FORMED METAL FRAMING
10/03

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC)

AISI SG02-1	(2001) North American Specification for the Design of Cold-Formed Steel Structural Members

AMERICAN IRON AND STEEL INSTITUTE (AISI)

AISI SG-973	(1996) Cold-Formed Steel Design Manual

AMERICAN WELDING SOCIETY (AWS)

AWS D1.3	(1998) Structural Welding Code - Sheet Steel

ASTM INTERNATIONAL (ASTM)

ASTM A 1008/A 1008M	(2003) Steel Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy and High-Strength Low-Alloy with Improved Formability
ASTM A 1011/A 1011M	(2003a) Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High Strength Low-Alloy and High-Strength Low-Alloy With Improved Formability
ASTM A 370	(2003a) Mechanical Testing of Steel Products
ASTM A 653/A 653M	(2003) Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM B 633	(1998e1) Electrodeposited Coatings of Zinc on Iron and Steel
ASTM C 955	(2003) Load-Bearing (Transverse and Axial) Steel Studs, Runners (Tracks), and Bracing or Bridging for Screw Application of Gypsum Panel Products and Metal Plaster Bases
ASTM E 329	(2002) Agencies Engaged in the Testing and/or Inspection of Materials Used in Construction

SOCIETY OF AUTOMOTIVE ENGINEERS INTERNATIONAL (SAE)

SAE J78 (1998) Steel Self Drilling Tapping Screws

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Framing Components including Roof Trusses; G,

a. Cross sections, plans, and/or elevations showing component types and locations for each framing application; including shop coatings and material thicknesses for each framing component.

b. Connection details showing fastener type, quantity, location, and other information to assure proper installation.

c. Drawings depicting panel configuration, dimensions, components, locations, and construction sequence if the Contractor elects to install prefabricated/prefinished frames.

d. Erection plan truss details and calculations sealed by a SC Registered Professional Engineer shall be submitted for approval prior to fabrication.

SD-03 Product Data

Steel studs, joists, tracks, bracing, bridging and accessories

SD-05 Design Data

Metal framing calculations; G,

SD-07 Certificates

Cold-formed metal framing

Mill certificates or test reports from independent testing agency, qualified in accordance with ASTM E 329, showing that the steel sheet used in the manufacture of each cold-formed component complies with the minimum yield strengths and uncoated steel thickness specified. Test reports shall be based on the results of three coupon tests in accordance with ASTM A 370.

Welds

Certified copies of welder qualifications test records showing qualification in accordance with AWS D1.3.

1.3 DELIVERY, STORAGE, AND HANDLING

Deliver materials to job site and store in adequately ventilated, dry locations. Storage area shall permit easy access for inspection and handling. If necessary to store materials outside, stack off the ground, support on a level platform, and protect from the weather as approved. Handle materials to prevent damage. Finish of the framing members shall be maintained at all times, using an approved high zinc dust content, galvanizing repair paint whenever necessary to prevent the formation of rust. Replace damaged items with new, as directed by the Contracting Officer.

1.4 COLD-FORMED METAL FRAMING

Include top and bottom tracks, bracing, fastenings, and other accessories necessary for complete installation. Framing members shall have the structural properties indicated. Where physical structural properties are not indicated, they shall be as necessary to withstand all imposed loads. Design framing in accordance with AISI SG-973.

1.5 MAXIMUM DEFLECTION

a. Studs:

Deflection Criteria	Exterior Finish
L/240	Gypsum Board

Wall deflections shall be computed on the basis that studs withstand all lateral forces independent of any composite action from sheathing materials. Studs abutting windows or louvers shall also be designed not to exceed 1/4 inch maximum deflection.

b. Roof Trusses:

L/240 - Live load only

1.6 QUALITY ASSURANCE

1.6.1 Drawing Requirements

Submit framing components to show sizes, thicknesses, layout, material designations, methods of installation, and accessories.

1.6.2 Design Data Required

Submit metal framing calculations to verify sizes, gages, and spacing of members and connections. Show methods and practices used in installation.

PART 2 PRODUCTS

2.1 STEEL STUDS, TRACKS, BRACING, BRIDGING AND ACCESSORIES

Framing components shall comply with ASTM C 955 and the following.

2.1.1 Studs of 16 Gage (0.0598 Inch) and Heavier

Galvanized steel, ASTM A 653/A 653M, SS Grade 50, Z180.

2.1.2 Studs of 18 Gage (0.0478 Inch) and Lighter

Studs 18 Gage (0.0478 Inch) and Lighter, Track, and Accessories (All Gages): Galvanized steel, ASTM A 653/A 653M, SS, Grade 50 33,000 psi.

2.2 MARKINGS

Studs and track shall have product markings stamped on the web of the section. The markings shall be repeated throughout the length of the member at a maximum spacing of 4 feet on center and shall be legible and easily read. The product marking shall include the following:

a. An ICBO number.

b. Manufacturer’s identification.

c. Minimum delivered uncoated steel thickness.

d. Protective coating designator.

e. Minimum yield strength.

2.3 CONNECTIONS

Screws for steel-to-steel connections shall be self-drilling tapping in compliance with SAE J78 of the type, size, and location as shown on manufacturer’s standard details. Electroplated screws shall have a Type II coating in accordance with ASTM B 633. Screws, bolts, and anchors shall be hot-dipped galvanized in accordance with ASTM A 123/A 123M or ASTM A 153/A 153M as appropriate.

2.3 PLASTIC GROMMETS

Supply plastic grommets, recommended by stud manufacturer, to protect electrical wires. Prevent metal to metal contact for plumbing pipes.

PART 3 EXECUTION

3.1 FASTENING

Fasten framing members together by welding or by using self-drilling or self-tapping screws. Electrodes and screw connections shall be as required and indicated in the design calculations.

3.1.1 Welds

All welding shall be performed in accordance with AWS D1.3, as modified by AISI SG02-1. All welders, welding operations, and welding procedures shall be qualified according to AWS D1.3. All welds shall be cleaned and coated with rust inhibitive galvanizing paint. Do not field weld materials lighter than 18 gage.

3.1.2 Screws

Screws shall be self-drilling self-tapping type, size, and location shown on manufacturer’s standard details. Screw penetration through joined materials shall not be less than three exposed threads. Minimum spacing’s and edge

distances for screws shall be as specified in AISI SG02-1. Screws covered by sheathing materials shall have low profile heads.

3.1.3 Anchors

Anchors shall be of the type, size, and location shown on the drawings.

3.2 INSTALLATION

3.2.1 Tracks

Provide accurately aligned runners at top and bottom of partitions. Anchor tracks as indicated in design calculations. Butt weld joints in tracks or splice with stud inserts. Fasteners shall be at least 3 inches from the edge of concrete slabs.

3.2.2 Studs

Cut studs square and set with firm bearing against webs of top and bottom tracks. Position studs vertically in tracks and space as indicated in design. Do not splice studs. Provide at least two studs at jambs of doors and other openings 2 feet wide or larger. Provide jack studs over openings, as necessary, to maintain indicated stud spacing. Provide tripled studs at corners, positioned to receive interior and exterior finishes. Fasten studs to top and bottom tracks by welding or screwing both flanges to the tracks. Framed wall openings shall include headers and supporting components as shown on manufacturer’s standard details. Headers shall be installed in all openings that are larger than the stud spacing in a wall. Provide horizontal bracing in accordance with the design calculations and AISI SG-973, consisting of, as a minimum, runner channel cut to fit between and welded to the studs or hot- or cold-rolled steel channels inserted through cutouts in web of each stud and secured to studs with welded clip angles. Bracing shall be not less than the following:

LOAD	HEIGHT	BRACING
Axial load	Up to 10 feet	Two rows at 1/3 points

3.2.3 Trusses

Truss shall be designed by manufacturer for loads indicated on the drawing. Submit truss shop drawings and design calculations scaled by a SC registered professional engineer for approval prior to fabrication. Design shall include details for temporary and permanent sway bracing.

Temporary bracing shall be provided and remain in place until work is permanently stabilized.

3.2.4 Erection Tolerances

a. Framing members which will be covered by finishes such as wallboard, plaster, or ceramic tile set in a mortar setting bed, shall be within the following limits:

(1) Layout of walls and partitions: 1/4 inch from intended position;

(2) Plates and runners: 1/4 inch in 8 feet from a straight line;

(3) Studs: 1/4 inch in 8 feet out of plumb, not cumulative; and

(4) Face of framing members: 1/4 inch in 8 feet from a true plane.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 05 - METALS

SECTION 05500A

MISCELLANEOUS METAL

01/02

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 GENERAL REQUIREMENTS
1.4 DISSIMILAR MATERIALS
1.5 WORKMANSHIP
1.6 ANCHORAGE
1.7 ALUMINUM FINISHES
1.8 SHOP PAINTING

PART 2 PRODUCTS

2.0 FLOOR GRATINGS AND FRAMES
2.1 MIRROR FRAMES
2.19 MISCELLANEOUS

PART 3 EXECUTION

3.1 GENERAL INSTALLATION REQUIREMENTS
3.2 TRENCH FRAMES AND COVERS

-- End of Section Table of Contents --

SECTION 05500A

MISCELLANEOUS METAL
01/02

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

ALUMINUM ASSOCIATION (AA)

AA DAF-45	(1997) Designation System for Aluminum Finishes

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 123	(2001) Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A 283	(2000) Low and Intermediate Tensile Strength Carbon Steel Plates
ASTM A 36	(2000a) Carbon Structural Steel
ASTM A 467	(1998) Machine and Coil Chain
ASTM A 475	(1998) Zinc-Coated Steel Wire Strand
ASTM A 500	(1999) Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes
ASTM A 53	(2001) Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A 653	(2000) Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM A 924	(1999) General Requirements for Steel Sheet, Metallic-Coated by the Hot-Dip Process
ASTM B 221	(2000) Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes
ASTM B 221M	(2000) Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric)
ASTM B 26	(1999) Aluminum-Alloy Sand Castings

ASTM B 429	(2000) Aluminum-Alloy Extruded Structural Pipe and Tube
ASTM D 2047	(1999) Static Coefficient of Friction of Polish-Coated Floor Surfaces as Measured by the James Machine
ASTM E 814	(2000) Fire Tests of Through-Penetration Fire Stops
ASTM F 1267	(1991; R 1997) Metal, Expanded, Steel

AMERICAN SOCIETY OF CIVIL ENGINEERS (ASCE)

ASCE 7	(1998) Minimum Design Loads for Buildings and Other Structures

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1	(2000) Structural Welding Code - Steel

NATIONAL ASSOCIATION OF ARCHITECTURAL METAL MANUFACTURERS (NAAMM)

NAAMM MBG 531	(1994) Metal Bar Grating Manual
NAAMM MBG 532	(1994) Heavy Duty Metal Bar Grating Manual

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 10	(1998; Errata 10-98-1) Portable Fire Extinguishers

U.S. GENERAL SERVICES ADMINISTRATION (GSA)

CID A-A-344	(Rev B) Lacquer, Clear Gloss, Exterior, Interior

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Miscellaneous Metal Items;

Detail drawings indicating material thickness, type, grade, and class; dimensions; and construction details. Drawings shall include catalog cuts, erection details, manufacturer's descriptive data and installation instructions, and templates.

SD-04 Samples

Miscellaneous Metal Items;

Samples of the following items: Floor grates. Samples shall be full size, taken from manufacturer's stock, and shall be complete as required for installation in the structure. Samples may be installed in the work, provided each sample is clearly identified and its location recorded.

1.3 GENERAL REQUIREMENTS

The Contractor shall verify all measurements and shall take all field measurements necessary before fabrication. Welding to or on structural steel shall be in accordance with AWS D1.1. Items specified to be galvanized, when practicable and not indicated otherwise, shall be hot-dip galvanized after fabrication. Galvanizing shall be in accordance with ASTM A 123, ASTM A 653, or ASTM A 924, as applicable. Exposed fastenings shall be compatible materials, shall generally match in color and finish, and shall harmonize with the material to which fastenings are applied. Materials and parts necessary to complete each item, even though such work is not definitely shown or specified, shall be included. Poor matching of holes for fasteners shall be cause for rejection. Fastenings shall be concealed where practicable. Thickness of metal and details of assembly and supports shall provide strength and stiffness. Joints exposed to the weather shall be formed to exclude water.

1.4 DISSIMILAR MATERIALS

Where dissimilar metals are in contact, or where aluminum is in contact with concrete, mortar, masonry, wet or pressure-treated wood, or absorptive materials subject to wetting, the surfaces shall be protected with a coat of bituminous paint or asphalt varnish.

1.5 WORKMANSHIP

Miscellaneous metalwork shall be well formed to shape and size, with sharp lines and angles and true curves. Drilling and punching shall produce clean true lines and surfaces. Welding shall be continuous along the entire area of contact except where tack welding is permitted. Exposed connections of work in place shall not be tack welded. Exposed welds shall be ground smooth. Exposed surfaces of work in place shall have a smooth finish, and unless otherwise approved, exposed riveting shall be flush. Where tight fits are required, joints shall be milled. Corner joints shall be coped or mitered, well formed, and in true alignment. Work shall be accurately set to established lines and elevations and securely fastened in place. Installation shall be in accordance with manufacturer's installation instructions and approved drawings, cuts, and details.

1.6 ANCHORAGE

Anchorage shall be provided where necessary for fastening miscellaneous metal items securely in place. Anchorage not otherwise specified or indicated shall include slotted inserts made to engage with the anchors, expansion shields, and power-driven fasteners when approved for concrete; toggle bolts and through bolts for masonry; machine and carriage bolts for steel; and lag bolts and screws for wood.

1.7 ALUMINUM FINISHES

Unless otherwise specified, aluminum items shall have standard mill finish. The thickness of the coating shall be not less than that specified for protective and decorative type finishes for items used in interior locations or architectural Class I type finish for items used in exterior locations in AA DAF-45. Items to be anodized shall receive a polished satin finish. Aluminum surfaces to be in contact with plaster or concrete during construction shall be protected with a field coat conforming to CID A-A-344.

1.8 SHOP PAINTING

Surfaces of ferrous metal except galvanized surfaces, shall be cleaned and shop coated with the manufacturer's standard protective coating unless otherwise specified. Surfaces of items to be embedded in concrete shall not be painted. Items to be finish painted shall be prepared according to manufacturer's recommendations or as specified.

PART 2 PRODUCTS

2.0 FLOOR GRATINGS AND FRAMES

Cast iron grating and frame as indicated on plumbing drawings.

2.1 MIRROR FRAMES

Frames for plate glass mirrors larger than 18 by 30 inches shall be fabricated from corrosion-resisting steel with satin finish. Frames shall be provided with concealed fittings and tamperproof mountings.

2.19 MISCELLANEOUS

Miscellaneous plates and shapes for items that do not form a part of the structural steel framework, such as lintels, sill angles, miscellaneous mountings, and frames, shall be provided to complete the work.

PART 3 EXECUTION

3.1 GENERAL INSTALLATION REQUIREMENTS

All items shall be installed at the locations shown and according to the manufacturer's recommendations. Items listed below require additional procedures as specified.

3.2 TRENCH FRAMES AND COVERS

Trench frames and covers shall finish flush with the floor.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

SECTION 07110A

BITUMINOUS DAMPPROOFING

09/98

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 QUALIFICATIONS
1.4 DELIVERY, STORAGE AND HANDLING

PART 2 PRODUCTS

2.1 EMULSION-BASED ASPHALT DAMPPROOFING
2.1.1 Fibrated Emulsion-Based Asphalt
2.1.2 Non-Fibrated Emulsion-Based Asphalt
2.2 SOLVENT-BASED ASPHALT DAMPPROOFING
2.2.1 Asphaltic Primer
2.2.2 Fibrated Asphalt

PART 3 EXECUTION

3.1 SURFACE PREPARATION
3.1.1 Protection of Surrounding Areas
3.1.2 Masonry Surfaces
3.1.3 Concrete Surfaces
3.1.4 Metal Surfaces
3.2 APPLICATION OF BITUMINOUS DAMPPROOFING
3.2.1 Emulsion-Based Asphalt
3.2.2 Solvent-Based Asphalt
3.3 CLEAN-UP
3.4 PROTECTION

-- End of Section Table of Contents --

SECTION 07110A

BITUMINOUS DAMPPROOFING
09/98

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 41	(1994) Asphalt Primer Used in Roofing, Dampproofing, and Waterproofing
ASTM D 1187	(1997) Asphalt-Base Emulsions for Use as Protective Coatings for Metal
ASTM D 1227	(1995) Emulsified Asphalt Used as a Protective Coating for Roofing
ASTM D 4479	(1993) Asphalt Roof Coatings - Asbestos Free

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-07 Certificates

Materials;

Certificates attesting that the materials meet the requirements specified.

1.3 QUALIFICATIONS

Work shall be performed by skilled laborers thoroughly experienced in the type of bituminous dampproofing work specified to meet the requirements of the contract.

1.4 DELIVERY, STORAGE AND HANDLING

Dampproofing materials shall be delivered to the project site in the original sealed containers bearing the name of manufacturer, contents and brand name, and stored in a weathertight enclosure to prevent moisture damage and absorption. Dampproofing materials shall be protected from freezing. Asphalt shall be stored off the ground on pallets, and covered on top and all sides with breathable-type canvas tarpaulins. Plastic sheets

cause condensation buildup; and therefore, shall not be used to cover dampproofing materials. Care shall be taken during storage to avoid separation or settlement of the emulsion components. Damaged or deteriorated materials shall be removed from the project site.

PART 2 PRODUCTS

2.1 EMULSION-BASED ASPHALT DAMPPROOFING

2.1.1 Fibrated Emulsion-Based Asphalt

Fibrated emulsion-based asphalt dampproofing shall be cold-applied type conforming to ASTM D 1227 Type IV, asbestos-free, manufactured of refined asphalt, emulsifiers and selected clay, fibrated with mineral fibers. For spray or brush application, emulsion shall contain a minimum of 59 percent solids by weight, 56 percent solids by volume. For trowel application, emulsion shall contain a minimum of 58 percent solids by weight, 55 percent solids by volume.

2.1.2 Non-Fibrated Emulsion-Based Asphalt

Non-fibrated emulsion-based asphalt dampproofing shall be cold-applied type conforming to ASTM D 1187 Type II or ASTM D 1227 Type III, manufactured of refined asphalt, emulsifiers and selected clay. Asphalt shall contain a minimum 58 percent solids by weight, 55 percent solids by volume.

2.2 SOLVENT-BASED ASPHALT DAMPPROOFING

2.2.1 Asphaltic Primer

Primer for cold-applied solvent-based asphalt dampproofing shall conform to ASTM D 41, asbestos-free, non-fibrated, manufactured with highly ductile soft asphalts and selected hydrocarbons.

2.2.2 Fibrated Asphalt

Fibrated solvent-based asphalt dampproofing shall be cold-applied type conforming to ASTM D 4479 Type I, asbestos-free, manufactured with selected asphalts, stabilizers, mineral spirits and fibrated with mineral fibers. Solvent-based asphalt shall contain 72 percent solids by weight, 65 percent solids by volume.

PART 3 EXECUTION

3.1 SURFACE PREPARATION

Surfaces scheduled for bituminous dampproofing shall be prepared in accordance with dampproofing manufacturer's recommendations. Surface preparation shall be approved prior to dampproofing application.

3.1.1 Protection of Surrounding Areas

Before starting the dampproofing work, the surrounding areas and surfaces shall be protected from spillage and migration of asphalt onto other work. Drains and conductors shall be protected from clogging with asphalt.

3.1.2 Masonry Surfaces

Surfaces shall be free of oil, grease, dirt, laitance, loose material, frost, debris and other contaminants. Mortar joints shall be flush and free of extraneous mortar and chipped or broken masonry.

3.1.3 Concrete Surfaces

Surfaces shall be properly cured, free of form release agents, oil, grease, dirt, laitance, loose material, frost, debris and other contaminants. Form ties shall be cut flush with surface. Sharp protrusions and form match lines shall be removed. Holes, voids, spalled areas and cracks which can damage the dampproofing materials and impair performance shall be repaired. Rough surfaces shall be parged with a well-adhering coat of cement mortar.

3.1.4 Metal Surfaces

Metal surfaces shall be dry and be free of rust, scale, loose paint, oil, grease, dirt, frost and debris.

3.2 APPLICATION OF BITUMINOUS DAMPPROOFING

3.2.1 Emulsion-Based Asphalt

Emulsion-based asphalt dampproofing work shall not be performed in temperatures below 40 degrees F. Emulsions shall have a smooth and uniform consistency at time of application. Dampproofing materials shall be applied in accordance with manufacturer's published instructions to produce a smooth uniform dry film of not less than 12 mils thick without voids or defects. Dull or porous spots shall be recoated. Dampproofing materials shall seal tightly around pipes and other items projecting through dampproofing. Rates of application shall be as follows:

a. Primer: 1/2 gallon per 100 square feet, cold-applied.

b. Fibrated Dampproofing: 2 gallons per 100 square feet, cold-applied with spray, brush or trowel.

c. Non-fibrated Dampproofing: 2 gallons per 100 square feet, cold-applied with spray, brush or trowel.

3.2.2 Solvent-Based Asphalt

Solvent-based asphalt dampproofing work shall not be performed in temperatures below 40 degrees F. Dampproofing materials shall be applied in accordance with manufacturer's published instructions to produce a smooth uniform dry film not less than 12 mils thick without voids or defects. Dull or porous spots shall be recoated. Dampproofing materials shall seal tightly around pipes and other items projecting through dampproofing. Rates of application shall be as follows:

a. Primer: 1/2 gallon per 200 square feet, cold-applied.

b. Dampproofing Coat: 2 gallons per 100 square feet, cold-applied with spray, brush or trowel.

3.3 CLEAN-UP

Surfaces of other work which are stained with dampproofing materials shall be cleaned with a cleaner recommended by dampproofing manufacturer.

3.4 PROTECTION

The completed dampproofing work shall be protected from damage during and after construction.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

SECTION 07220

ROOF AND DECK INSULATION

02/03

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 MANUFACTURER'S CERTIFICATE
1.4 QUALITY ASSURANCE
1.4.1 Insulation on Steel Decks
1.4.2 Foam Board on Steel Decks
1.5 DELIVERY, STORAGE, AND HANDLING
1.5.1 Delivery
1.5.2 Storage and Handling
1.6 ENVIRONMENTAL CONDITIONS

PART 2 PRODUCTS

2.1 INSULATION
2.1 Insulation Types
2.2 Mineral-Fiber Insulation Board
2.3 Insulation Thickness
2.4 Tapered Roof Insulation
2.1.5 Cants and Tapered Edge Strips
2.2 PROTECTION BOARD
2.5 Glass Mat Gypsum Roof Board
2.3 FASTENERS
2.3.1 Fasteners for Steel Decks

PART 3 EXECUTION

3.1 EXAMINATION AND PREPARATION
3.1.1 Surface Inspection
3.1.2 Surface Preparation
3.2 INSTALLATION OF VAPOR RETARDER
3.2.1 Vapor Retarder on Steel Decks
3.2 INSULATION INSTALLATION
3.3.1 Installation Using Only Mechanical Fasteners
3.3.2 Cant Strips
3.2.1 Tapered Edge Strips
3.3 PROTECTION
3.3.1 Protection of Applied Insulation
3.3.2 Damaged Work and Materials
3.4 INSPECTION

-- End of Section Table of Contents --

SECTION 07220

ROOF AND DECK INSULATION
02/03

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 208	(1995); (R 2001) Cellulosic Fiber Insulating Board
ASTM C 552	(2000) Cellular Glass Thermal Insulation
ASTM C 578	(2001) Rigid, Cellular Polystyrene Thermal Insulation
ASTM C 726	(2000, Rev A) Mineral Fiber Roof Insulation Board
ASTM C 1177/C 1177M	(2001) Glass Mat Gypsum Substrate for Use as Sheathing
ASTM C 1289	(2000) Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board
ASTM E 84	(2001) Surface Burning Characteristics of Building Materials

UNDERWRITERS LABORATORIES (UL)

UL Bld Mat Dir	(2001) Building Materials Directory

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only or as otherwise designated. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Tapered roof insulation system; G

Show a complete description of the procedures for the installation of each phase of the system indicating the type of materials, thicknesses, identity codes, sequence of laying insulation, location of ridges and valleys, special methods for cutting and

fitting of insulation, and special precautions. The drawings shall be based on field measurements.

SD-03 Product Data

Fasteners; G

Insulation; G

Include minimum thickness of insulation for steel and concrete decks and fastener pattern for insulation on steel decks.

SD-06 Test Reports

Flame spread and smoke developed ratings

Submit in accordance with ASTM E 84.

SD-07 Certificates

Installer qualifications

SD-08 Manufacturer's Instructions

Nails and fasteners

Roof insulation, including field of roof and perimeter attachment requirements.

1.3 MANUFACTURER'S CERTIFICATE

Submit certificate from the insulation manufacturer attesting that the installer has the proper qualifications for installing tapered roof insulation systems.

Certificate attesting that the expanded perlite or polyisocyanurate insulation contains recovered material and showing estimated percent of recovered material. Certificates of compliance for felt materials.

1.4 QUALITY ASSURANCE

1.4.1 Insulation on Steel Decks

Roof insulation shall have a flame spread rating not greater than 75 and a smoke developed rating not greater than 150, exclusive of covering, when tested in accordance with ASTM E 84. Insulation bearing the UL label and listed in the UL Bld Mat Dir as meeting the flame spread and smoke developed ratings will be accepted in lieu of copies of test reports. Compliance with flame spread and smoke developed ratings will not be required when insulation has been tested as part of a roof construction assembly of the type used for this project and the construction is listed as fire-classified in the UL Bld Mat Dir or listed as Class I roof deck construction in the FM P7825. Insulation tested as part of a roof construction assembly shall bear UL or FM labels attesting to the ratings specified herein.

1.4.2 Foam Board on Steel Decks

Separate polyurethane insulation from a steel deck with a thermal barrier of glass mat gypsum roof board or roof insulation in accordance with the requirements of the UL Bld Mat Dir or the FM P7825.

1.5 DELIVERY, STORAGE, AND HANDLING

1.5.1 Delivery

Deliver materials to site in manufacturer's unopened and undamaged standard commercial containers bearing the following legible information:

a. Name of manufacturer;

b. Brand designation;

c. Specification number, type, and class, as applicable, where materials are covered by a referenced specification; and

Deliver materials in sufficient quantity to allow continuity of the work.

1.5.2 Storage and Handling

Store and handle materials in a manner to protect from damage, exposure to open flame or other ignition sources, and from wetting, condensation or moisture absorption. Store in an enclosed building or trailer that provides a dry, adequately ventilated environment. Store felt rolls on ends. For the 24 hours immediately before application of felts, store felts in an area maintained at a temperature no lower than 50 degrees F above grade and having ventilation around all sides. Replace damaged material with new material.

1.6 ENVIRONMENTAL CONDITIONS

Do not install roof insulation during inclement weather or when air temperature is below 40 degrees F and interior humidity is 45 percent or greater, or when there is visible ice, frost, or moisture on the roof deck.

PART 2 PRODUCTS

2.1 INSULATION

2.1 INSULATION TYPES

Roof insulation shall be one or an assembly of a maximum of three of the following materials and compatible with attachment methods for the specified insulation and roof membrane:

a. Expanded Perlite Board: ASTM C 728. Minimum 3/4 inch thick when both top and bottom surfaces will be in contact with asphalt.

b. Composite Boards: ASTM C 1289, Type III, perlite insulation board faced one side, fibrous felt or glass fiber mat membrane on other side.

c. Cellular Glass Boards: ASTM C 552, Type IV.

d. Polystyrene Board: Shall be in accordance with ASTM C 578, Type II, IV, or X.

e. Wood Fiberboard: ASTM C 208, high density, except 4 by 4 feet maximum board size.

ASTM C 208 Type II, Grade 1 or 2, roof insulating board, treated with sizing, wax or bituminous impregnation. Bituminous impregnation shall be limited to 4 percent by weight when used over steel decks. Maximum board size: 4 feet by 4 feet.

2.2 MINERAL-FIBER INSULATION BOARD

ASTM C 726.

2.3 INSULATION THICKNESS

As necessary to provide a thermal resistance (R value) of 30 or more for average thickness of tapered system. Thickness shall be based on the "R" value for aged insulation. Insulation over steel decks shall satisfy both specified R value and minimum thickness for width of rib opening recommended in insulation manufacturer's published literature.

2.4 TAPERED ROOF INSULATION

One layer of the tapered roof insulation assembly shall be factory tapered to a slope of not less than 1/2 inch per foot. Provide starter and filler blocks as required to provide the total thickness of insulation necessary to meet the specified slope and thermal conductance. Mitered joints shall be factory fabricated and shall consist of two diagonally cut boards or one board shaped to provide the required slopes. Identify each piece of tapered insulation board by color or other identity coding system, allowing the identification of different sizes of tapered insulation board required to complete the roof insulation system.

2.1.5 Cants and Tapered Edge Strips

Provide preformed cants and tapered edge strips of the same material as the roof insulation; or, when roof insulation material is unavailable, provide pressure-preservative treated wood, wood fiberboard, or rigid perlite board cants and edge strips as recommended by the roofing manufacturer, unless otherwise indicated. Face of cant strips shall have incline of 45 degrees and vertical height of 4 inches. Taper edge strips at a rate of one to 1 1/2 inch per foot down to approximately 1/8 inch thick.

2.2 PROTECTION BOARD

For use as a thermal barrier (underlayment), fire barrier (overlayment), or protection board for hot-mopped, torched-down, or adhesively-applied roofing membrane over roof insulation.

2.5 GLASS MAT GYPSUM ROOF BOARD

ASTM C 1177/C 1177M, 0 Flame Spread and 0 Smoke Developed when tested in accordance with ASTM E 84, 500 psi, Class A, non-combustible, 5/8 inch thick, 4 by 8 feet board size.

2.3 FASTENERS

Flush-driven through flat round or hexagonal steel or plastic plates. Steel plates shall be zinc-coated, flat round not less than 1 3/8 inch diameter or hexagonal not less than 28 gage. Plastic plates shall be high-density, molded thermoplastic with smooth top surface, reinforcing ribs and not less than 3 inches in diameter. Fastener head shall recess fully into the plastic plate after it is driven. Plates shall be formed to prevent dishing. Do not use bell-or cup-shaped plates. Fasteners shall conform to insulation manufacturer's recommendations except that holding power, when driven, shall be not less than 40 pounds each in steel deck. Fasteners for steel or concrete decks shall conform to FM P7825c for Class I roof deck construction, and shall be spaced to withstand an uplift pressure of 90 pounds per square foot.

2.3.1 Fasteners for Steel Decks

Approved hardened penetrating fasteners or screws conforming to FM AS 4470 and listed in FM P7825c for Class I roof deck construction. Quantity and placement to withstand a minimum uplift pressure of 90 psf conforming to FM P7825.

PART 3 EXECUTION

3.1 EXAMINATION AND PREPARATION

3.1.1 Surface Inspection

Surfaces shall be clean, smooth, and dry. Check roof deck surfaces, including surfaces sloped to roof drains and outlets, for defects before starting work. The Contracting Officer will inspect and approve the surfaces immediately before starting installation. Prior to installing insulation, perform the following:

a. Examine steel decks to ensure that panels are properly secured to structural members and to each other and that surfaces of top flanges are flat or slightly convex.

c. Examine precast concrete decks to ensure that joints between precast units are properly grouted and leveled to provide suitable surfaces for installation of vapor retarder and insulation.

3.1.2 Surface Preparation

Correct defects and inaccuracies in roof deck surface to eliminate poor drainage and hollow or low spots and perform the following:

a. Install wood nailers the same thickness as insulation at eaves, edges, curbs, walls, and roof openings for securing cant strips, gravel stops, gutters, and flashing flanges. Space nailers in accordance with approved shop drawings.

b. Cover steel decks with a layer of insulation board of sufficient thickness to span the width of a deck rib opening, and conforming to fire safety requirements. Secure with piercing or self-drilling, self-tapping fasteners of quantity and placement

conforming to FM P7825. Insulation joints parallel to ribs of deck shall occur on solid bearing surfaces only, not over open ribs.

3.2 INSTALLATION OF VAPOR RETARDER

Install vapor retarder in direct contact with roof deck surface. Vapor retarder shall consist of either two plies of No. 15 asphalt-saturated felt, two plies of asphalt-coated glass felt. Lay vapor retarder at right angles to direction of slope. Install first ply of felt or base sheet as specified herein for the specific deck. Apply second ply of 2-ply vapor retarder system using asphalt at rate of 20 to 35 lbs per 100 square feet, applied within plus or minus 25 degrees F of EVT. Do not heat asphalt above asphalt's FBT or 525 degrees F, whichever is less. Use thermometers to check temperatures during heating and application. Side and end laps shall be completely sealed. Asphalt shall be visible beyond all edges of each ply as it is being installed. Plies shall be laid free of wrinkles, buckles, creases or fishmouths. Workers shall not walk on mopped surfaces when the asphalt is sticky. Press out air bubbles to obtain complete adhesion between surfaces. At walls, eaves and rakes, and other vertical surfaces, the vapor retarder organic felts shall be extended 9 inches, or separate organic felt plies shall be extended 9 inches, with not less than 9 inches on the substrate, and the extended portion turned back and mopped in over the top of the insulation. At roof penetrations other than walls, eaves and rakes, and vertical surfaces, the vapor retarder or separate plies shall be extended 9 inches to form a lap which shall later be folded back over the edge of the insulation. Asphalt roof cement shall be used under the vapor retarder for at least 9 inches from walls, eaves, rakes and other penetrations.

3.2.1 Vapor Retarder on Steel Decks

Solidly mop the mechanically secured insulation surface with asphalt before installing vapor retarder. For a 2 ply vapor retarder, install each sheet lapping 19 inches over the preceding sheet. Lap ends not less than 4 inches. Stagger the laps a minimum of 12 inches. Cement felts together with solid mopping of asphalt. Apply asphalt moppings at rate of 20 to 35 lbs per 100 square feet. For a vapor retarder consisting of one layer of asphalt base sheet, lap each sheet 4 inches over preceding sheet. Lap ends not less than 4 inches, and stagger laps a minimum of 12 inches. Cement base sheets together with solid mopping of asphalt.

3.2 INSULATION INSTALLATION

Apply insulation in two layers with staggered joints when total required thickness of insulation exceeds 1/2 inch. Lay insulation so that continuous longitudinal joints are perpendicular to direction of roofing, and end joints of each course are staggered with those of adjoining courses. When using multiple layers of insulation, joints of each succeeding layer shall be parallel and offset in both directions with respect to layer below. Keep insulation 1/2 inch clear of vertical surfaces penetrating and projecting from roof surface.

3.3.1 Installation Using Only Mechanical Fasteners

Secure total thickness of insulation with penetrating type fasteners.

3.3.2 Cant Strips

Where indicated, provide cant strips at intersections of roof with walls, parapets, and curbs extending above roof. Wood cant strips shall bear on and be anchored to wood blocking. Fit cant strips flush against vertical surfaces. Where possible, nail cant strips to adjoining surfaces. Where cant strips are installed against non-nailable materials, install in an approved adhesive.

3.2.1 Tapered Edge Strips

Where indicated, provide edge strips in the right angle formed by junction of roof and wood nailing strips that extend above level of roof. Install edge strips flush against vertical surfaces of wood nailing strips. Where possible, nail edge strips to adjoining surfaces. Where installed against non-nailable materials, install in an approved adhesive.

3.3 PROTECTION

3.3.1 Protection of Applied Insulation

Completely cover each day's installation of insulation with the finished roofing on same day. Do not permit phased construction. Protect open spaces between insulation and parapets or other walls and spaces at curbs, scuttles, and expansion joints, until permanent roofing and flashing are applied. Do not permit storing, walking, wheeling, or trucking directly on insulation or on roofed surfaces. Provide smooth, clean board or plank walkways, runways, and platforms near supports, as necessary, to distribute weight to conform to indicated live load limits of roof construction. Exposed edges of the insulation shall be protected by cutoffs at the end of each work day or whenever precipitation is imminent. Cutoffs shall be 2 layers of bituminous-saturated felt set in plastic bituminous cement or single ply or EPDM membrane set in roof cement. Fill all profile voids in cut-offs to prevent entrapping of moisture into the area below the membrane. Cutoffs shall be removed when work is resumed.

3.3.2 Damaged Work and Materials

Restore work and materials that become damaged during construction to original condition or replace with new materials.

3.4 INSPECTION

The Contractor shall establish and maintain an inspection procedure to assure compliance of the installed roof insulation with the contract requirements. Any work found not to be in compliance with the contract shall be promptly removed and replaced or corrected in an approved manner. Quality control shall include, but not be limited to, the following:

a. Observation of environmental conditions; number and skill level of insulation workers; start and end time of work.

b. Verification of certification, listing or label compliance with FM P9513.

c. Verification of proper storage and handling of insulation and vapor retarder materials before, during, and after installation.

d. Inspection of vapor retarder application, including edge envelopes and mechanical fastening.

e. Inspection of mechanical fasteners; type, number, length, and spacing.

f. Coordination with other materials, cants, sleepers, and nailing strips.

g. Inspection of insulation joint orientation and laps between layers, joint width and bearing of edges of insulation on deck.

h. Installation of cutoffs and proper joining of work on subsequent days.

i. Continuation of complete roofing system installation to cover insulation installed same day.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

SECTION 07416A

STRUCTURAL STANDING SEAM METAL ROOF (SSSMR) SYSTEM

11/01

PART 1 GENERAL

1.1 REFERENCES
1.2 GENERAL REQUIREMENTS
1.2.1 Structural Standing Seam Metal Roof (SSSMR) System
1.2.2 Manufacturer
1.2.3 Installer
1.3 DESIGN REQUIREMENTS
1.3.1 Design Criteria
1.3.2 Dead Loads
1.3.3 Live Loads
1.3.3.1 Concentrated Loads
1.3.3.2 Uniform Loads
1.3.4 Roof Snow Loads
1.3.5 Wind Loads
1.3.6 Thermal Loads
1.3.7 Framing Members Supporting the SSSMR System
1.3.8 Roof Panels Design
1.3.9 Accessories and Their Fasteners
1.4 PERFORMANCE REQUIREMENTS
1.5 SUBMITTALS
1.6 DELIVERY AND STORAGE
1.7 WARRANTIES
1.7.1 Contractor's Weathertightness Warranty
1.7.2 Manufacturer's Material Warranties.
1.8 COORDINATION MEETING

PART 2 PRODUCTS

2.1 ROOF PANELS
2.1.1 Aluminum Panels
2.2 CONCEALED ANCHOR CLIPS
2.3 ACCESSORIES
2.4 FASTENERS
2.4.1 Screws
2.4.2 Bolts
2.4.3 Structural Blind Fasteners
2.5 SUBPURLINS
2.6 FACTORY COLOR FINISH
2.6.1 Salt Spray Test
2.6.2 Formability Test
2.6.3 Accelerated Weathering, Chalking Resistance and Color Change
2.6.4 Humidity Test
2.6.5 Impact Resistance
2.6.6 Abrasion Resistance Test
2.6.7 Specular Gloss

2.6.8 Pollution Resistance
2.7 INSULATION
2.7.2 Blanket Insulation
2.8 INSULATION RETAINERS
2.9 SEALANT
2.10 GASKETS AND INSULATING COMPOUNDS
2.11 VAPOR RETARDER
2.11.1 Vapor Retarders as Integral Facing
2.11.2 Vapor Retarders Separate from Insulation
2.11.3 Slip Sheet for Use With Vapor Retarder
2.12 EPDM RUBBER BOOTS

PART 3 EXECUTION

3.1 INSTALLATION
3.1.1 Subpurlins
3.1.2 Roof Panel Installation
3.1.3 Concealed Anchor Clips
3.2 INSULATION INSTALLATION
3.2.1 Blanket Insulation
3.3 PROTECTION OF VAPOR RETARDER FROM ROOF DECK
3.4 VAPOR RETARDER INSTALLATION
3.4.1 Polyethylene Vapor Retarder
3.5 SLIP SHEET INSTALLATION
3.6 CLEANING AND TOUCH-UP

-- End of Section Table of Contents --

SECTION 07416A

STRUCTURAL STANDING SEAM METAL ROOF (SSSMR) SYSTEM
11/01

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

ALUMINUM ASSOCIATION (AA)

AA ADM	(2000) Aluminum Design Manual: Specification & Guidelines for Aluminum Structures

AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC)

AISC 335	(1989) Specification for Structural Steel Buildings - Allowable Stress Design, Plastic Design

AMERICAN IRON AND STEEL INSTITUTE (AISI)

AISI SG-973	(1996) Cold-Formed Steel Design Manual

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 463/A 463M	(2000) Steel Sheet, Aluminum-Coated, by the Hot-Dip Process
ASTM A 653/A 653M	(2000) Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM A 792/A 792M	(1999) Steel Sheet, 55% Aluminum-Zinc Alloy-Coated by the Hot-Dip Process
ASTM B 209	(2000) Aluminum and Aluminum-Alloy Sheet and Plate
ASTM C 1177/C 1177M	(1999) Glass Mat Gypsum Substrate for Use as Sheathing
ASTM C 1289	(1998) Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board
ASTM C 518	(1998) Steady-State Heat Flux Measurements and Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus
ASTM C 991	(1998) Flexible Glass Fiber Insulation for Pre-Engineered Metal Buildings

ASTM D 1308	(1987; R 1998) Effect of Household Chemicals on Clear and Pigmented Organic Finishes
ASTM D 1654	(1992) Evaluation of Painted or Coated Specimens Subjected to Corrosive Environments
ASTM D 2244	(1995) Calculation of Color Differences from Instrumentally Measured Color Coordinates
ASTM D 2247	(1999) Testing Water Resistance of Coatings in 100% Relative Humidity
ASTM D 2794	(1993; R 1999el) Resistance of Organic Coatings to the Effects of Rapid Deformation (Impact)
ASTM D 3359	(1997) Measuring Adhesion by Tape Test
ASTM D 4214	(1998) Evaluating Degree of Chalking of Exterior Paint Films
ASTM D 4397	(1996) Polyethylene Sheeting for Construction, Industrial, and Agricultural Applications
ASTM D 522	(1993a) Mandrel Bend Test of Attached Organic Coatings
ASTM D 523	(1989; R 1999) Specular Gloss
ASTM D 5894	(1996) Standard Practice for Cyclic Salt Fog/UV Exposure of Painted Metal, (Alternating Exposures in a Fog/Dry Cabinet and a UV/Condensation Cabinet)
ASTM D 610	(1995) Evaluating Degree of Rusting on Painted Steel Surfaces
ASTM D 714	(1987; R 1994el) Evaluating Degree of Blistering of Paints
ASTM D 968	(1993) Abrasion Resistance of Organic Coatings by Falling Abrasive
ASTM E 1592	(1998) Structural Performance of Sheet Metal Roof and Siding Systems by Uniform Static Air Pressure Difference
ASTM E 84	(2000a) Surface Burning Characteristics of Building Materials
ASTM E 96	(2000) Water Vapor Transmission of Materials
ASTM G 154	(2000ael) Standard Practice for Operating Fluorescent Light Apparatus for UV Exposure of Nonmetallic Materials

AMERICAN SOCIETY OF CIVIL ENGINEERS (ASCE)

ASCE 7	(1998) Minimum Design Loads for Buildings and Other Structures

STEEL JOIST INSTITUTE (SJI)

SJI Specs & Tables	(1994) Standard Specifications Load Tables and Weight Tables for Steel Joists and Joist Girders

1.2 GENERAL REQUIREMENTS

The Contractor shall furnish a commercially available roofing system which satisfies all requirements contained herein and has been verified by load testing and independent design analyses to meet the specified design requirements.

1.2.1 Structural Standing Seam Metal Roof (SSSMR) System

The SSSMR system covered under this specification shall include the entire roofing system; the standing seam metal roof panels, fasteners, connectors, roof securement components, and assemblies tested and approved in accordance with ASTM E 1592. In addition, the system shall consist of panel finishes, slip sheet, insulation, vapor retarder, all accessories, components, and trim and all connections with roof panels. This includes roof penetration items such as vents, curbs, skylights; interior or exterior gutters and downspouts; eaves, ridge, hip, valley, rake, gable, wall, or other roof system flashings installed and any other components specified within this contract to provide a weathertight roof system.

1.2.2 Manufacturer

The SSSMR system shall be the product of a manufacturer who has been in the practice of manufacturing and designing SSSMR systems for a period of not less than 3 years and has been involved in at least five projects similar in size and complexity to this project.

1.2.3 Installer

The installer shall be certified by the SSSMR system manufacturer to have experience in installing at least three projects that are of comparable size, scope and complexity as this project for the particular roof system furnished. The installer may be either employed by the manufacturer or be an independent installer.

1.3 DESIGN REQUIREMENTS

The design of the SSSMR system shall be provided by the Contractor as a complete system. Members and connections not indicated on the drawings shall be designed by the Contractor. Roof panels, components, transitions, accessories, and assemblies shall be supplied by the same roofing system manufacturer.

1.3.1 Design Criteria

Design criteria shall be in accordance with ASCE 7.

1.3.2 Dead Loads

The dead load shall be the weight of the SSSMR system. Collateral loads such as sprinklers, mechanical and electrical systems, and ceilings shall not be attached to the panels.

1.3.3 Live Loads

1.3.3.1 Concentrated Loads

The panels and anchor clips shall be capable of supporting a 300 pound concentrated load. The concentrated load shall be applied at the panel midspan and will be resisted by a single standing seam metal roof panel assumed to be acting as a beam. The undeformed shape of the panel shall be used to determine the section properties.

1.3.3.2 Uniform Loads

The panels and concealed anchor clips shall be capable of supporting a minimum uniform live load of 20 psf.

1.3.4 Roof Snow Loads

The design roof snow loads shall be as shown on the contract drawings.

1.3.5 Wind Loads

The design wind uplift pressure for the roof system shall be as shown on the contract drawings. The design uplift force for each connection assembly shall be that pressure given for the area under consideration, multiplied by the tributary load area of the connection assembly. The safety factor listed below shall be applied to the design force and compared against the ultimate capacity. Prying shall be considered when figuring fastener design loads.

a. Single fastener in each connection.....3.0

b. Two or more fasteners in each connection...2.25

1.3.6 Thermal Loads

Roof panels shall be free to move in response to the expansion and contraction forces resulting from a total temperature range of 120 degrees F during the life of the structure.

1.3.7 Framing Members Supporting the SSSMR System

Any additions/revisions to framing members supporting the SSSMR system to accommodate the manufacturer/fabricator's design shall be the Contractor's responsibility and shall be submitted for review and approval. New or revised framing members and their connections shall be designed in accordance with AISC 335, AISI SG-973, SJI Specs & Tables. Maximum

deflection under applied live load, snow, or wind load shall not exceed 1/180 of the span length.

1.3.8 Roof Panels Design

Steel panels shall be designed in accordance with AISI SG-973. The structural section properties used in the design of the panels shall be determined using the unloaded shape of the roof panels. The calculated panel deflection from concentrated loads shall not exceed 1/180 of the span length. The calculated panel deflection under applied live load, snow, or wind load shall not exceed 1/180 times the span length. Deflections shall be based on panels being continuous across three or more supports. Deflection shall be calculated and measured along the major ribs of the panels.

1.3.9 Accessories and Their Fasteners

Accessories and their fasteners shall be capable of resisting the specified design wind uplift forces and shall allow for thermal movement of the roof panel system. Exposed fasteners shall not restrict free movement of the roof panel system resulting from thermal forces. There shall be a minimum of two fasteners per clip. Single fasteners with a minimum diameter of 3/8 inch will be allowed when the supporting structural members are prepunched or predrilled.

1.4 PERFORMANCE REQUIREMENTS

The SSSMR shall be tested for wind uplift resistance in accordance with ASTM E 1592; SSSMR systems previously tested and approved by the Corps of Engineers' STANDARD TEST METHOD FOR STRUCTURAL PERFORMANCE OF SSMRS BY UNIFORM STATIC AIR PRESSURE DIFFERENCE may be acceptable. Two tests shall be performed. Test 1 shall simulate the edge condition with one end having crosswise restraint and other end free of crosswise restraint. The maximum span length for the edge condition shall be 30 inches. Test 2 shall simulate the interior condition with both ends free of crosswise restraint. The maximum span length for the interior condition shall be 5.0 feet. External reinforcement, such as clamps on the ribs, may be installed to improve uplift resistance. Bolts through seams shall not be installed.

1.5 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Structural Standing Seam Metal Roof System; G,

Metal roofing drawings and specifications and erection drawings; shop coating and finishing specifications; and other data as necessary to clearly describe design, materials, sizes, layouts, standing seam configuration, construction details, provisions for thermal movement, line of panel fixity, fastener sizes and spacings, sealants and erection procedures. Drawings shall reflect

the intent of the architectural detailing using the manufacturer's proprietary products and fabricated items as required. The SSSMR system shop drawings shall be provided by the metal roofing manufacturer.

SD-03 Product Data

Design Analysis; G,

Design analysis signed by a Registered Professional Engineer employed by the SSSMR manufacturer. The design analysis shall include a list of the design loads, and complete calculations for the support system (when provided by the Contractor), roofing system and its components; valley designs, gutter/downspout calculations, screw pullout test results, and shall indicate how expected thermal movements are accommodated.

Qualifications;

Qualifications of the manufacturer and installer.

SD-04 Samples

Accessories;

One sample of each type of flashing, trim, closure, thermal spacer block, cap and similar items. Size shall be sufficient to show construction and configuration.

Roof Panels;

One piece of each type to be used, 9 inches long, full width.

Factory Color Finish;

Three 3 by 5 inches samples of each type and color.

Fasteners;

Two samples of each type to be used, with statement regarding intended use. If so requested, random samples of bolts, nuts, and washers as delivered to the job site shall be taken in the presence of the Contracting Officer and provided to the Contracting Officer for testing to establish compliance with specified requirements.

Insulation;

One piece, 12 by 12 inches, of each type and thickness to be used, with a label indicating the rated permeance (if faced) and R-values. The flame spread, and smoke developed rating shall be shown on the label or provided in a letter of certification.

Gaskets and Insulating Compounds;

Two samples of each type to be used and descriptive data.

Sealant;

One sample, approximately 1 pound, and descriptive data.

Concealed Anchor Clips;

Two samples of each type used.

Subpurlins;

One piece, 9 inches long.

EPDM Rubber Boots;

One piece of each type.

SD-06 Test Reports

Test Report for Uplift Resistance of the SSSMR; G,

The report shall include the following information:

a. Details of the SSSMR system showing the roof panel cross-section with dimensions and thickness.

b. Details of the anchor clip, dimensions, and thickness.

c. Type of fasteners, size, and the number required for each connection.

d. Purlins/subpurlins size and spacing used in the test.

e. Description of the seaming operation including equipment used.

f. Maximum allowable uplift pressures. These pressures are determined from the ultimate load divided by a factor of safety equal to 1.65.

g. Any additional information required to identify the SSSMR system tested.

h. Signature and seal of an independent registered engineer who witnessed the test.

SD-07 Certificates

Structural Standing Seam Metal Roof System;

a. Certification that the actual thickness of uncoated sheets used in SSSMRS components including roofing panels, subpurlins, and concealed anchor clips complies with specified requirements.

b. Certification that materials used in the installation are mill certified.

c. Previous certification of SSSMR system tested under the Corps of Engineers' Standard Test Method in lieu of ASTM E 1592 testing.

d. Certification that the sheets to be furnished are produced under a continuing quality control program and that a representative sample consisting of not less than three pieces has been tested and has met the quality standards specified for factory color finish.

e. Certification of installer. Installer certification shall be furnished.

f. Warranty certificate. At the completion of the project the Contractor shall furnish signed copies of the 5-year Warranty for Structural Standing Seam Metal Roof (SSSMR) System, a sample copy of which is attached to this section, and the 20-year Manufacturer's Material Warranties, and the manufacturer's 20-year system weathertightness warranty.

1.6 DELIVERY AND STORAGE

Materials shall be delivered to the site in a dry and undamaged condition and stored out of contact with the ground. Materials shall be covered with weathertight coverings and kept dry. Storage conditions shall provide good air circulation and protection from surface staining.

1.7 WARRANTIES

The SSSMR system shall be warranted as outlined below. Any emergency temporary repairs conducted by the owner shall not negate the warranties.

1.7.1 Contractor's Weathertightness Warranty

The SSSMR system shall be warranted by the Contractor on a no penal sum basis for a period of five years against material and workmanship deficiencies; system deterioration caused by exposure to the elements and/or inadequate resistance to specified service design loads, water leaks, and wind uplift damage. The SSSMR system covered under this warranty shall include the entire roofing system including, but not limited to, the standing seam metal roof panels, fasteners, connectors, roof securement components, and assemblies tested and approved in accordance with ASTM E 1592. In addition, the system shall consist of panel finishes, slip sheet, insulation, vapor retarder, all accessories, components, and trim and all connections with roof panels. This includes roof penetration items such as vents, curbs, and skylights; interior or exterior gutters and downspouts; eaves, ridge, hip, valley, rake, gable, wall, or other roof system flashings installed and any other components specified within this contract to provide a weathertight roof system; and items specified in other sections of these specifications that are part of the SSSMR system. All material and workmanship deficiencies, system deterioration caused by exposure to the elements and/or inadequate resistance to specified design loads, water leaks and wind uplift damage shall be repaired as approved by the Contracting Officer. See the attached Contractor's required warranty for issue resolution of warrantable defects. This warranty shall warrant and cover the entire cost of repair or replacement, including all material, labor, and related markups. The Contractor shall supplement this warranty with written

warranties from the installer and system manufacturer, which shall be submitted along with Contractor's warranty; however, the Contractor shall be ultimately responsible for this warranty. The Contractor's written warranty shall be as outlined in attached WARRANTY FOR STRUCTURAL STANDING SEAM METAL ROOF (SSSMR) SYSTEM, and shall start upon final acceptance of the facility. It is required that the Contractor provide a separate bond in an amount equal to the installed total roofing system cost in favor of the owner (Government) covering the Contractor's warranty responsibilities effective throughout the five year Contractor's warranty period for the entire SSSMR system as outlined above.

1.7.2 Manufacturer's Material Warranties.

The Contractor shall furnish, in writing, the following manufacturer's material warranties which cover all SSSMR system components such as roof panels, anchor clips and fasteners, flashing, accessories, and trim, fabricated from coil material:

a. A manufacturer's 20 year material warranty warranting that the aluminum, zinc-coated steel, aluminum-zinc alloy coated steel or aluminum-coated steel as specified herein will not rupture, structurally fail, fracture, deteriorate, or become perforated under normal design atmospheric conditions and service design loads. Liability under this warranty shall be limited exclusively to the cost of either repairing or replacing nonconforming, ruptured, perforated, or structurally failed coil material.

b. A manufacturer's 20 year exterior material finish warranty on the factory colored finish warranting that the finish, under normal atmospheric conditions at the site, will not crack, peel, or delaminate; chalk in excess of a numerical rating of eight, as determined by ASTM D 4214 test procedures; or change color in excess of five CIE or Hunter Lab color difference (delta E) units in accordance with ASTM D 2244. Liability under this warranty is exclusively limited to refinishing with an air-drying version of the specified finish or replacing the defective coated material.

c. A roofing system manufacturer's 20 year, non-prorated, system weathertightness warranty.

1.8 COORDINATION MEETING

A coordination meeting shall be held 30 days prior to the first submittal, for mutual understanding of the Structural Standing Seam Metal Roof (SSSMR) System contract requirements. This meeting shall take place at the building site and shall include representatives from the Contractor, the roof system manufacturer, the roofing supplier, the erector, the SSSMR design engineer of record, and the Contracting Officer. All items required by paragraph SUBMITTALS shall be discussed, including applicable standard manufacturer shop drawings, and the approval process. The Contractor shall coordinate time and arrangements for the meeting.

PART 2 PRODUCTS

2.1 ROOF PANELS

Panels shall be aluminum and shall have a factory color finish. Length of sheets shall be sufficient to cover the entire length of any unbroken roof slope for slope lengths that do not exceed 30 feet. When length of run

exceeds 30 feet and panel laps are provided, each sheet in the run shall extend over three or more supports. Sheets longer than 100 feet may be furnished if approved by the Contracting Officer. Width of sheets shall provide not more than 24 inches of coverage in place. SSSMR system with roofing panels greater than 12 inches in width shall have standing seams rolled during installation by an electrically driven seaming machine. Height of standing seams shall be not less than 1-1/2 inches.

2.1.1 Aluminum Panels

Alloy conforming to ASTM B 209, temper as required for the forming operation, minimum 0.032 inch thick.

2.2 CONCEALED ANCHOR CLIPS

Concealed anchor clips shall be the same as the tested roofing system. Clip bases shall have factory punched or drilled holes for attachment. Clips shall be made from multiple pieces with the allowance for the total thermal movement required to take place within the clip. Single piece clips may be acceptable when the manufacturer can substantiate that the system can accommodate the thermal cyclic movement under sustained live or snow loads.

2.3 ACCESSORIES

Flashing, trim, metal closure strips, caps and similar metal accessories shall be the manufacturer's standard products. Exposed metal accessories shall be finished to match the panels furnished. Molded closure strips shall be bituminous-saturated fiber, closed-cell or solid-cell synthetic rubber or neoprene, or polyvinyl chloride premolded to match configuration of the panels and shall not absorb or retain water. The use of a continuous angle butted to the panel ends to form a closure will not be allowed.

2.4 FASTENERS

Fasteners for aluminum roof panels shall be aluminum. Fasteners for structural connections shall provide both tensile and shear ultimate strengths of not less than 750 pounds per fastener. Fasteners for accessories shall be the manufacturer's standard. Exposed roof fasteners shall be sealed or have sealed washers on the exterior side of the roof to waterproof the fastener penetration. Washer material shall be compatible with the roofing; have a minimum diameter of 3/8 inch for structural connections; and gasketed portion of fasteners or washers shall be neoprene or other equally durable elastomeric material approximately 1/8 inch thick. Exposed fasteners for factory color finished panels shall be factory finished to match the color of the panels.

2.4.1 Screws

Screws for attaching anchor devices shall be not less than No. 14. Actual screw pull out test results shall be performed for the actual material gage and yield strength of the structural purlins or subpurlins to which the clip is to be anchored/attached. Other screws shall be as recommended by the manufacturer to meet the strength design requirements of the panels.

2.4.2 Bolts

Bolts shall be not less than 1/4 inch diameter, shouldered or plain shank as required, with locking washers and nuts.

2.4.3 Structural Blind Fasteners

Blind screw-type expandable fasteners shall be not less than 1/4 inch diameter. Blind (pop) rivets shall be not less than 9/32 inch minimum diameter.

2.5 SUBPURLINS

Cold formed supporting structural members/subpurlins shall have a minimum thickness of 0.059 inches and a minimum tensile yield strength of 50000 psi. Hot rolled structural members shall have a minimum thickness of 0.25 inches and a minimum tensile yield strength of 36000 psi. Subpurlins shall be galvanized.

2.6 FACTORY COLOR FINISH

Panels shall have a factory applied polyvinylidene fluoride finish on the exposed side. The exterior finish shall consist of a baked-on topcoat with an appropriate prime coat. Color shall match the color indicated on the drawings. The exterior coating shall be a nominal 1 mil thickness consisting of a topcoat of not less than 0.7 mil dry film thickness and the paint manufacturer's recommended primer of not less than 0.2 mil thickness. The interior color finish shall consist of the same coating and dry film thickness as the exterior a nominal 1 mil thick PVF2 finish otherwise the same as the exterior a backer coat with a dry film thickness of 0.5 mil a 0.2 mil thick prime coat. The exterior color finish shall meet the test requirements specified below.

2.6.1 Salt Spray Test

A sample of the sheets shall withstand a cyclic corrosion test for a minimum of 2016 hours in accordance with ASTM D 5894, including the scribe requirement in the test. Immediately upon removal of the panel from the test, the coating shall receive a rating of not less than 10, no blistering, as determined by ASTM D 714; 10, no rusting, as determined by ASTM D 610; and a rating of 6, over 1/16 to 1/8 inch failure at scribe, as determined by ASTM D 1654.

2.6.2 Formability Test

When subjected to testing in accordance with ASTM D 522 Method B, 1/8 inch diameter mandrel, the coating film shall show no evidence of cracking to the naked eye.

2.6.3 Accelerated Weathering, Chalking Resistance and Color Change

A sample of the sheets shall be tested in accordance with ASTM G 154, test condition UVA-340 lamp, 8h UV at 60 degrees C followed by 4h CON at 45 degrees C for 5000 total hours. The coating shall withstand the weathering test without cracking, peeling, blistering, loss of adhesion of the protective coating, or corrosion of the base metal. Protective coating with an adhesion rating less than 4B when tested in accordance with ASTM D 3359, Test Method B, shall be considered as an area indicating loss of adhesion. Following the accelerated weathering test, the coating shall have a chalk

rating not less than No. 8 in accordance with ASTM D 4214 test procedures, and the color change shall not exceed 5 CIE or Hunter Lab color difference (delta E) units in accordance with ASTM D 2244. For sheets required to have a low gloss finish, the chalk rating shall be not less than No. 6 and the color difference shall be not greater than 7 units.

2.6.4 Humidity Test

When subjected to a humidity cabinet test in accordance with ASTM D 2247 for 1000 hours, a scored panel shall show no signs of blistering, cracking, creepage or corrosion.

2.6.5 Impact Resistance

Factory-painted sheet shall withstand direct and reverse impact in accordance with ASTM D 2794 0.500 inch diameter hemispherical head indenter, equal to 1.5 times the metal thickness in mils, expressed in inch-pounds, with no cracking.

2.6.6 Abrasion Resistance Test

When subjected to the falling sand test in accordance with ASTM D 968, Method A, the coating system shall withstand a minimum of 50 liters of sand before the appearance of the base metal. The term "appearance of base metal" refers to the metallic coating on steel or the aluminum base metal.

2.6.7 Specular Gloss

Finished roof surfaces for 30 plus or minus 5 at 60 degrees when measured in accordance with ASTM D 523.

2.6.8 Pollution Resistance

Coating shall show no visual effects when covered spot tested in a 10 percent hydrochloric acid solution for 24 hours in accordance with ASTM D 1308.

2.7 INSULATION

Thermal resistance of insulation shall be not less than the R-values shown on the contract drawings. R-values shall be determined at a mean temperature of 75 degrees F in accordance with ASTM C 518. Insulation shall be a standard product with the insulation manufacturer, factory marked or identified with insulation manufacturer's name or trademark and R-value. Identification shall be on individual pieces or individual packages. Blanket insulation shall have a facing as specified in paragraph VAPOR RETARDER. Insulation, including facings, shall have a flame spread not in excess of 25 and a smoke developed rating not in excess of 450 when tested in accordance with ASTM E 84. The stated R-value of the insulation shall be certified by an independent Registered Professional Engineer if tests are conducted in the insulation manufacturer's laboratory.

2.7.2 Blanket Insulation

Blanket insulation shall conform to ASTM C 991.

2.8 INSULATION RETAINERS

Insulation retainers shall be type, size, and design necessary to adequately hold the insulation and to provide a neat appearance. Metallic retaining members shall be nonferrous or have a nonferrous coating. Nonmetallic retaining members, including adhesives used in conjunction with mechanical retainers or at insulation seams, shall have a fire resistance classification not less than that permitted for the insulation.

2.9 SEALANT

Sealants shall be elastomeric type containing no oil or asphalt. Exposed sealant shall be colored to match the applicable building color and shall cure to a rubberlike consistency. Sealant placed in the roof panel standing seam ribs shall be provided in accordance with the manufacturer's recommendations.

2.10 GASKETS AND INSULATING COMPOUNDS

Gaskets and insulating compounds shall be nonabsorptive and suitable for insulating contact points of incompatible materials. Insulating compounds shall be nonrunning after drying.

2.11 VAPOR RETARDER

2.11.1 Vapor Retarders as Integral Facing

Insulation facing shall have a permeability of 1 perm or less when tested in accordance with ASTM E 96. Facing shall be white reinforced polypropylene kraft laminate (PSK). Facings and finishes shall be factory applied.

2.11.2 Vapor Retarders Separate from Insulation

Vapor retarder material shall be polyethylene sheeting conforming to ASTM D 4397. A single ply of 10 mil polyethylene sheet; or, at the Contractor's option, a double ply of 6 mil polyethylene sheet shall be used. A fully compatible polyethylene tape which has equal or better water vapor control characteristics than the vapor retarder material shall be provided. A cloth industrial duct tape in a utility grade shall also be provided to use as needed to protect the vapor retarder from puncturing.

2.11.3 Slip Sheet for Use With Vapor Retarder

Slip sheet for use with vapor retarder shall be a 5 lb. per 100 square feet rosin-sized, unsaturated building paper.

2.12 EPDM RUBBER BOOTS

Flashing devices around pipe penetrations shall be flexible, one-piece devices molded from weather-resistant EPDM rubber. Rubber boot material shall be as recommended by the manufacturer. The boots shall have base rings made of aluminum or corrosion resisting steel that conform to the contours of the roof panel to form a weather-tight seal.

PART 3 EXECUTION

3.1 INSTALLATION

Installation shall be in accordance with the manufacturer's erection instructions and drawings. Dissimilar materials which are not compatible when contacting each other shall be insulated by means of gaskets or insulating compounds. Molded closure strips shall be installed wherever roofing sheets terminate in open-end configurations, exclusive of flashings. The closure strip installation shall be weather-tight and sealed. Screws shall be installed with a clutching screw gun, to assure screws are not stripped. Field test shall be conducted on each gun prior to starting installation and periodically thereafter to assure it is adjusted properly to install particular type and size of screw as recommended by manufacturer's literature. Improper or mislocated drill holes shall be plugged with an oversize screw fastener and gasketed washer; however, sheets with an excess of such holes or with such holes in critical locations shall not be used. Exposed surfaces and edges shall be kept clean and free from sealant, metal cuttings, hazardous burrs, and other foreign material. Stained, discolored, or damaged sheets shall be removed from the site.

3.1.1 Subpurlins

Unless otherwise shown, subpurlins shall be anchored to the purlins or other structural framing members with bolts or screws. Attachment to the substrate (when provided) or to the panels is not permitted. The subpurlin spacing shall not exceed 30 inches on centers at the corner, edge and ridge zones, and 5 foot maximum on centers for the remainder of the roof. Corner, edge, and ridge zones are as defined in ASCE 7.

3.1.2 Roof Panel Installation

Roof panels shall be installed with the standing seams in the direction of the roof slope. The side seam connections for installed panels shall be completed at the end of each day's work. Method of applying joint sealant shall conform to the manufacturer's recommendation to achieve a complete weather-tight installation. End laps of panels shall be provided in accordance with the manufacturer's instructions. Closures, flashings, EPDM rubber boots, roof curbs, and related accessories shall be installed according to the manufacturer's drawings. Fasteners shall not puncture roofing sheets except as provided for in the manufacturer's instructions for erection and installation. Expansion joints for the standing seam roof system shall be installed at locations indicated on the contract drawings and other locations indicated on the manufacturer's drawings.

3.1.3 Concealed Anchor Clips

Concealed anchor clips shall be fastened directly to the structural framing members. Attachment to the substrate (when provided) or to the metal deck is not permitted. The maximum distance, parallel to the seams, between clips shall be 30 inches on center at the corner, edge, and ridge zones, and 5 feet maximum on centers for the remainder of the roof.

3.2 INSULATION INSTALLATION

Insulation shall be continuous over entire roof surface. Where expansion joints, terminations, and other connections are made, the cavity shall be filled with batt insulation with vapor retarder providing equivalent R-value

and perm rating as remaining insulation. Insulation shall be installed as indicated and in accordance with manufacturer's instructions.

3.2.1 Blanket Insulation

Blanket insulation shall be installed between and parallel to the purlins with tabs of a facer lapping on the top face of the purlins. Thermal blocks shall be provided over purlins, between clips. A second layer of unfaced insulation shall be added between purlins to provide full R-value. Blanket insulation shall be supported by an integral facing or other commercially available support system.

3.3 PROTECTION OF VAPOR RETARDER FROM ROOF DECK

A cloth industrial duct tape shall be applied over the seams of metal roof decks, at penetration edges, and at surface areas exhibiting sharp burrs or similar protrusions. For other types of roof decks, cloth industrial duct tape shall be applied over irregularities which could potentially puncture polyethylene membrane.

3.4 VAPOR RETARDER INSTALLATION

3.4.1 Polyethylene Vapor Retarder

The polyethylene vapor retarder membrane shall be installed over the entire surface. A fully compatible polyethylene tape shall be used to seal the edges of the sheets to provide a vapor tight membrane. Sheet edges shall be lapped not less than 6 inches. Sufficient material shall be provided to avoid inducing stresses in the sheets due to stretching or binding. All tears or punctures that are visible in the finished surface at any time during the construction process shall be sealed with polyethylene tape.

3.5 SLIP SHEET INSTALLATION

A slip sheet shall be laid over the blanket insulation facing to prevent the vinyl facing from adhering to the metal roofing.

3.6 CLEANING AND TOUCH-UP

Exposed SSSMR systems shall be cleaned at completion of installation. Debris that could cause discoloration and harm to the panels, flashings, closures and other accessories shall be removed. Grease and oil films, excess sealants, and handling marks shall be removed and the work shall be scrubbed clean. Exposed metal surfaces shall be free of dents, creases, waves, scratch marks, and solder or weld marks. Immediately upon detection, abraded or corroded spots on shop-painted surfaces shall be wire brushed and touched up with the same material used for the shop coat. Factory color finished surfaces shall be touched up with the manufacturer's recommended touch up paint.

CONTRACTOR'S FIVE (5) YEAR NO PENAL SUM WARRANTY
FOR
STRUCTURAL STANDING SEAM METAL ROOF (SSSMR) SYSTEM

FACILITY DESCRIPTION_____

BUILDING NUMBER:_____

CORPS OF ENGINEERS CONTRACT NUMBER:_____

CONTRACTOR

CONTRACTOR:_____

ADDRESS:_____

POINT OF CONTACT:_____

TELEPHONE NUMBER:_____

OWNER

OWNER:_____

ADDRESS:_____

POINT OF CONTACT:_____

TELEPHONE NUMBER:_____

CONSTRUCTION AGENT

CONSTRUCTION AGENT:_____

ADDRESS:_____

POINT OF CONTACT:_____

TELEPHONE NUMBER:_____

CONTRACTOR'S FIVE (5) YEAR NO PENAL SUM WARRANTY
FOR
STRUCTURAL STANDING SEAM METAL ROOF (SSSMR) SYSTEM
(continued)

THE SSSMR SYSTEM INSTALLED ON THE ABOVE NAMED BUILDING IS WARRANTED BY _____ FOR A PERIOD OF FIVE (5) YEARS AGAINST WORKMANSHIP AND MATERIAL DEFICIENCES, WIND DAMAGE, STRUCTURAL FAILURE, AND LEAKAGE. THE SSSMR SYSTEM COVERED UNDER THIS WARRANTY SHALL INCLUDE, BUT SHALL NOT BE LIMITED TO, THE FOLLOWING: THE ENTIRE ROOFING SYSTEM, MANUFACTURER SUPPLIED FRAMING AND STRUCTURAL MEMBERS, METAL ROOF PANELS, FASTENERS, CONNECTORS, ROOF SECUREMENT COMPONENTS, AND ASSEMBLIES TESTED AND APPROVED IN ACCORDANCE WITH ASTM E 1592. IN ADDITION, THE SYSTEM PANEL FINISHES, SLIP SHEET, INSULATION, VAPOR RETARDER, ALL ACCESSORIES, COMPONENTS, AND TRIM AND ALL CONNECTIONS ARE INCLUDED. THIS INCLUDES ROOF PENETRATION ITEMS SUCH AS VENTS, CURBS, SKYLIGHTS; INTERIOR OR EXTERIOR GUTTERS AND DOWNSPOUTS; EAVES, RIDGE, HIP, VALLEY, RAKE, GABLE, WALL, OR OTHER ROOF SYSTEM FLASHINGS INSTALLED AND ANY OTHER COMPONENTS SPECIFIED WITHIN THIS CONTRACT TO PROVIDE A WEATHERTIGHT ROOF SYSTEM; AND ITEMS SPECIFIED IN OTHER SECTIONS OF THE SPECIFICATIONS THAT ARE PART OF THE SSSMR SYSTEM.

ALL MATERIAL DEFICIENCIES, WIND DAMAGE, STRUCTURAL FAILURE, AND LEAKAGE ASSOCIATED WITH THE SSSMR SYSTEM COVERED UNDER THIS WARRANTY SHALL BE REPAIRED AS APPROVED BY THE CONTRACTING OFFICER. THIS WARRANTY SHALL COVER THE ENTIRE COST OF REPAIR OR REPLACEMENT, INCLUDING ALL MATERIAL, LABOR, AND RELATED MARKUPS. THE ABOVE REFERENCED WARRANTY COMMENCED ON THE DATE OF FINAL ACCEPTANCE ON _____ AND WILL REMAIN IN EFFECT FOR STATED DURATION FROM THIS DATE.

SIGNED, DATED, AND NOTARIZED (BY COMPANY PRESIDENT)

_____

(Company President) (Date)

CONTRACTOR'S FIVE (5) YEAR NO PENAL SUM WARRANTY
FOR
STRUCTURAL STANDING SEAM METAL ROOF (SSSMR) SYSTEM
(continued)

THE CONTRACTOR SHALL SUPPLEMENT THIS WARRANTY WITH WRITTEN WARRANTIES FROM THE MANUFACTURER AND/OR INSTALLER OF THE SSSMR SYSTEM, WHICH SHALL BE SUBMITTED ALONG WITH THE CONTRACTOR'S WARRANTY. HOWEVER, THE CONTRACTOR WILL BE ULTIMATELY RESPONSIBLE FOR THIS WARRANTY AS OUTLINED IN THE SPECIFICATIONS AND AS INDICATED IN THIS WARRANTY EXAMPLE.

EXCLUSIONS FROM COVERAGE

1. NATURAL DISASTERS, ACTS OF GOD (LIGHTNING, FIRE, EXPLOSIONS, SUSTAINED WIND FORCES IN EXCESS OF THE DESIGN CRITERIA, EARTHQUAKES, AND HAIL).

2. ACTS OF NEGLIGENCE OR ABUSE OR MISUSE BY GOVERNMENT OR OTHER PERSONNEL, INCLUDING ACCIDENTS, VANDALISM, CIVIL DISOBEDIENCE, WAR, OR DAMAGE CAUSED BY FALLING OBJECTS.

3. DAMAGE BY STRUCTURAL FAILURE, SETTLEMENT, MOVEMENT, DISTORTION, WARPAGE, OR DISPLACEMENT OF THE BUILDING STRUCTURE OR ALTERATIONS MADE TO THE BUILDING.

4. CORROSION CAUSED BY EXPOSURE TO CORROSIVE CHEMICALS, ASH OR FUMES GENERATED OR RELEASED INSIDE OR OUTSIDE THE BUILDING FROM CHEMICAL PLANTS, FOUNDRIES, PLATING WORKS, KILNS, FERTILIZER FACTORIES, PAPER PLANTS, AND THE LIKE.

5. FAILURE OF ANY PART OF THE SSSMR SYSTEM DUE TO ACTIONS BY THE OWNER TO INHIBIT FREE DRAINAGE OF WATER FROM THE ROOF AND GUTTERS AND DOWNSPOUTS OR ALLOW PONDING WATER TO COLLECT ON THE ROOF SURFACE. CONTRACTOR'S DESIGN SHALL INSURE FREE DRAINAGE FROM THE ROOF AND NOT ALLOW PONDING WATER.

6. THIS WARRANTY APPLIES TO THE SSSMR SYSTEM. IT DOES NOT INCLUDE ANY CONSEQUENTIAL DAMAGE TO THE BUILDING INTERIOR OR CONTENTS WHICH IS COVERED BY THE WARRANTY OF CONSTRUCTION CLAUSE INCLUDED IN THIS CONTRACT.

7. THIS WARRANTY CANNOT BE TRANSFERRED TO ANOTHER OWNER WITHOUT WRITTEN CONSENT OF THE CONTRACTOR; AND THIS WARRANTY AND THE CONTRACT PROVISIONS WILL TAKE PRECEDENCE OVER ANY CONFLICTS WITH STATE STATUTES.

**

CONTRACTOR'S FIVE (5) YEAR NO PENAL SUM WARRANTY
FOR
STRUCTURAL STANDING SEAM METAL ROOF (SSSMR) SYSTEM
(continued)

**REPORTS OF LEAKS AND SSSMR SYSTEM DEFICIENCIES SHALL BE RESPONDED TO WITHIN 48 HOURS OF RECEIPT OF NOTICE, BY TELEPHONE OR IN WRITING, FROM EITHER THE OWNER OR CONTRACTING OFFICER. EMERGENCY REPAIRS TO PREVENT FURTHER ROOF

LEAKS SHALL BE INITIATED IMMEDIATELY; A WRITTEN PLAN SHALL BE SUBMITTED FOR APPROVAL TO REPAIR OR REPLACE THIS SSSMR SYSTEM WITHIN SEVEN (7) CALENDAR DAYS. ACTUAL WORK FOR PERMANENT REPAIRS OR REPLACEMENT SHALL BE STARTED WITHIN 30 DAYS AFTER RECEIPT OF NOTICE, AND COMPLETED WITHIN A REASONABLE TIME FRAME. IF THE CONTRACTOR FAILS TO ADEQUATELY RESPOND TO THE WARRANTY PROVISIONS, AS STATED IN THE CONTRACT AND AS CONTAINED HEREIN, THE CONTRACTING OFFICER MAY HAVE THE SSSMR SYSTEM REPAIRED OR REPLACED BY OTHERS AND CHARGE THE COST TO THE CONTRACTOR.

IN THE EVENT THE CONTRACTOR DISPUTES THE EXISTENCE OF A WARRANTABLE DEFECT, THE CONTRACTOR MAY CHALLENGE THE OWNER'S DEMAND FOR REPAIRS AND/OR REPLACEMENT DIRECTED BY THE OWNER OR CONTRACTING OFFICER EITHER BY REQUESTING A CONTRACTING OFFICER'S DECISION UNDER THE CONTRACT DISPUTES ACT, OR BY REQUESTING THAT AN ARBITRATOR RESOLVE THE ISSUE. THE REQUEST FOR AN ARBITRATOR MUST BE MADE WITHIN 48 HOURS OF BEING NOTIFIED OF THE DISPUTED DEFECTS. UPON BEING INVOKED, THE PARTIES SHALL, WITHIN TEN (10) DAYS, JOINTLY REQUEST A LIST OF FIVE (5) ARBITRATORS FROM THE FEDERAL MEDIATION AND CONCILIATION SERVICE. THE PARTIES SHALL CONFER WITHIN TEN (10) DAYS AFTER RECEIPT OF THE LIST TO SEEK AGREEMENT ON AN ARBITRATOR. IF THE PARTIES CANNOT AGREE ON AN ARBITRATOR, THE CONTRACTING OFFICER AND THE PRESIDENT OF THE CONTRACTOR'S COMPANY WILL STRIKE ONE (1) NAME FROM THE LIST ALTERNATIVELY UNTIL ONE (1) NAME REMAINS. THE REMAINING PERSON SHALL BE THE DULY SELECTED ARBITRATOR. THE COSTS OF THE ARBITRATION, INCLUDING THE ARBITRATOR'S FEE AND EXPENSES, COURT REPORTER, COURTROOM OR SITE SELECTED, ETC., SHALL BE BORNE EQUALLY BETWEEN THE PARTIES. EITHER PARTY DESIRING A COPY OF THE TRANSCRIPT SHALL PAY FOR THE TRANSCRIPT. A HEARING WILL BE HELD AS SOON AS THE PARTIES CAN MUTUALLY AGREE. A WRITTEN ARBITRATOR'S DECISION WILL BE REQUESTED NOT LATER THAN 30 DAYS FOLLOWING THE HEARING. THE DECISION OF THE ARBITRATOR WILL NOT BE BINDING; HOWEVER, IT WILL BE ADMISSIBLE IN ANY SUBSEQUENT APPEAL UNDER THE CONTRACT DISPUTES ACT.

A FRAMED COPY OF THIS WARRANTY SHALL BE POSTED IN THE MECHANICAL ROOM OR OTHER APPROVED LOCATION DURING THE ENTIRE WARRANTY PERIOD.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

SECTION 07600

FLASHING AND SHEET METAL

02/03

PART 1 GENERAL

1.1 REFERENCES
1.2 General Requirements
1.3 SUBMITTALS
1.4 DELIVERY, HANDLING, AND STORAGE

PART 2 PRODUCTS

2.1 MATERIALS
2.1.1 Exposed Sheet Metal Items
2.1.2 Aluminum Alloy Sheet and Plate
2.1.2.1 Finish
2.1.3 Fasteners

PART 3 EXECUTION

3.1 INSTALLATION
3.1.1 Metal Roofing
3.1.1.2 Standing-seam Method
3.1.2 Workmanship
3.1.3 Seams
3.1.2 Standing Seams
3.1.3 Soldering
3.1.3.1 Edges
3.1.4 Welding and Mechanical Fastening
3.1.5 Protection from Contact with Dissimilar Materials
3.1.5.1 Aluminum
3.1.5.2 Metal Surfaces
3.1.5.3 Wood or Other Absorptive Materials
3.1.6 Expansion and Contraction
3.1.11 Base Flashing
3.1.7 Gutters
3.1.8 Downspouts
3.1.9 Flashing for Roof Drains
3.1.10 Splash Pans
3.1.11 Expansion Joints
3.1.12 Flashing at Roof Penetrations
3.2 CLEANING
3.3 REPAIRS TO FINISH
3.4 FIELD QUALITY CONTROL
3.4.1 Procedure

-- End of Section Table of Contents --

SECTION 07600

FLASHING AND SHEET METAL
02/03

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B 69	(2001, Rev A) Rolled Zinc
ASTM B 209	(2001) Aluminum and Aluminum Alloy Sheet and Plate
ASTM B 221	(2000) Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes

1.2 GENERAL REQUIREMENTS

Sheet metalwork shall be accomplished to form weathertight construction without waves, warps, buckles, fastening stresses or distortion, and shall allow for expansion and contraction. Cutting, fitting, drilling, and other operations in connection with sheet metal required to accommodate the work of other trades shall be performed by sheet metal mechanics. Installation of sheet metal items used in conjunction with roofing shall be coordinated with roofing work to permit continuous roofing operations.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only or as otherwise designated. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Covering on flat, sloped, or curved surfaces; G

Gutters; G

Downspouts; G

Flashing at roof penetrations; G

Indicate thicknesses, dimensions, fastenings and anchoring methods, expansion joints, and other provisions necessary for thermal expansion and contraction. Scaled manufacturer's catalog data may be submitted for factory fabricated items.

SD-11 Closeout Submittals

Quality Control Plan

Submit for sheet metal work in accordance with paragraph entitled "Field Quality Control."

1.4 DELIVERY, HANDLING, AND STORAGE

Package and protect materials during shipment. Uncrate and inspect materials for damage, dampness, and wet-storage stains upon delivery to the job site. Remove from the site and replace damaged materials that cannot be restored to like-new condition. Handle sheet metal items to avoid damage to surfaces, edges, and ends. Store materials in dry, weather-tight, ventilated areas until immediately before installation.

PART 2 PRODUCTS

2.1 MATERIALS

Furnish sheet metal items in 8 to 10 foot lengths. Single pieces less than 8 feet long may be used to connect to factory-fabricated inside and outside corners, and at ends of runs. Factory fabricate corner pieces with minimum 12 inch legs. Provide accessories and other items essential to complete the sheet metal installation. These accessories shall be made of the same materials as the items to which they are applied. Fabricate sheet metal items of the materials specified below and to the gage, thickness, or weight shown in Table I at the end of this section. Sheet metal items shall have mill finish unless specified otherwise. Where more than one material is listed for a particular item in Table I, each is acceptable and may be used except as follows:

2.1.1 Exposed Sheet Metal Items

Shall be of the same material. The following items shall be considered as exposed sheet metal: gutters, including hangers; downspouts.

2.1.2 Aluminum Alloy Sheet and Plate

ASTM B 209, color to match roof form alloy, and temper appropriate for use.

2.1.2.1 Finish

Exposed exterior sheet metal items of aluminum shall have a baked-on, factory-applied color coating of polyvinylidene fluoride (PVF2) or other equivalent fluorocarbon coating applied after metal substrates have been cleaned and pretreated. Finish coating dry-film thickness shall be 0.8 to 1.3 mils, and color shall be Dark Bronze.

2.1.3 Fasteners

Use the same metal or a metal compatible with the item fastened. Use stainless steel fasteners to fasten dissimilar materials.

PART 3 EXECUTION

3.1 INSTALLATION

3.1.1 Metal Roofing

3.1.1.2 Standing-seam Method

Make standing seams parallel with slope of roof. Fabricate sheets into long lengths at shop by locking short dimensions together and thoroughly soldering joints thus formed. In applying metal, turn up one edge of course at each side seam at right angles 1.5 inches. Then install 2 by 3 inch cleats spaced 12 inches apart by fastening one end of each cleat to roof with two one inch long nails and folding roof end back over nail heads. Turn end adjoining turned-up side seam up over upstanding edge of course. Turn up adjoining edge of next course 1.75 inches and abutting upstanding edges locked, turned over, and flattened against one side of standing seam. Make standing seams straight, rounded neatly at the top edges, and stand about one inch above roof deck. All sheets shall be same length, except as required to complete run or maintain pattern. Locate transverse joints of each panel half way between joints in adjacent sheets. Align joints of alternate sheets horizontally to produce uniform pattern, as shown in SMACNA Arch. Manual.

3.1.2 Workmanship

Make lines, arrises, and angles sharp and true. Free exposed surfaces from visible wave, warp, and buckle, and tool marks. Fold back exposed edges neatly to form a 1/2 inch hem on the concealed side. Make sheet metal exposed to the weather watertight with provisions for expansion and contraction.

Make surfaces to receive sheet metal plumb and true, clean, even, smooth, dry, and free of defects and projections which might affect the application. For installation of items not shown in detail or not covered by specifications conform to the applicable requirements of SMACNA Arch. Manual, Architectural Sheet Metal Manual. Provide sheet metal flashing in the angles formed where roof decks abut walls, curbs, ventilators, pipes, or other vertical surfaces and wherever indicated and necessary to make the work watertight. Join sheet metal items together as shown in Table II.

3.1.3 Seams

Straight and uniform in width and height with no solder showing on the face.

3.1.2 Standing Seams

Not less than one inch high, double locked without solder.

3.1.3 Soldering

Where soldering is specified, it shall apply to copper, terne-coated stainless steel, zinc-coated steel, and stainless steel items. Edges of sheet metal shall be pretinned before soldering is begun. Seal the joints in aluminum sheets of 0.040 inch or less in thickness with specified sealants. Do not solder aluminum.

3.1.3.1 Edges

Scrape or wire-brush the edges of lead-coated material to be soldered to produce a bright surface. Flux brush the seams in before soldering. Treat with soldering acid flux the edges of stainless steel to be pretinned. Seal

the joints in aluminum sheets of 0.040 inch or less in thickness with specified sealants. Do not solder aluminum.

3.1.4 Welding and Mechanical Fastening

Use welding for aluminum of thickness greater than 0.040 inch. Aluminum 0.040 inch or less in thickness shall be butted and the space backed with formed flashing plate; or lock joined, mechanically fastened, and filled with sealant as recommended by the aluminum manufacturer.

3.1.5 Protection from Contact with Dissimilar Materials

3.1.5.1 Aluminum

Aluminum surfaces shall not directly contact other metals except stainless steel, zinc, or zinc coating. Where aluminum contacts another metal, paint the dissimilar metal with a primer followed by two coats of aluminum paint. Where drainage from a dissimilar metal passes over aluminum, paint the dissimilar metal with a non-lead pigmented paint.

3.1.5.2 Metal Surfaces

Paint surfaces in contact with mortar, concrete, or other masonry materials with alkali-resistant coatings such as heavy-bodied bituminous paint.

3.1.5.3 Wood or Other Absorptive Materials

Paint surfaces that may become repeatedly wet and in contact with metal with two coats of aluminum paint or a coat of heavy-bodied bituminous paint.

3.1.6 Expansion and Contraction

Provide expansion and contraction joints at not more than 32 foot intervals for aluminum and at not more than 40 foot intervals for other metals. Where the distance between the last expansion joint and the end of the continuous run is more than half the required interval, an additional joint shall be provided. Space joints evenly. Join extruded aluminum gravel stops and fascias by expansion and contraction joints spaced not more than 12 feet apart.

3.1.11 Base Flashing

Extend up vertical surfaces of the flashing not less than 8 inches and not less than 4 inches under the roof covering. Where finish wall coverings form a counterflashing, extend the vertical leg of the flashing up behind the applied wall covering not less than 6 inches. Overlap the flashing strips with the previously laid flashing not less than 3 inches. Fasten the strips at their upper edge to the deck. Horizontal flashing at vertical surfaces must extend vertically above the roof surface and fastened at their upper edge to the deck a minimum of 6 inches o.c. with large headed aluminum roofing nails a minimum of 2-inch lap of any surface. Solder end laps and provide for expansion and contraction. Extend the metal flashing over crickets at the up-slope side of and similar vertical surfaces extending through sloping roofs, the metal flashings. Extend the metal flashings onto the roof covering not less than 4.5 inches at the lower side of and similar vertical surfaces extending through the roof decks. Install and fit the flashings so as to be completely weathertight. Base flashing for interior

and exterior corners shall be factory-fabricated. Metal base flashing shall not be used on built-up roofing.

3.1.7 Gutters

The hung type of shape indicated and supported on underside by brackets that permit free thermal movement of the gutter. Provide gutters in sizes indicated complete with mitered corners, end caps, outlets, brackets, and other accessories necessary for installation. Bead with hemmed edge or reinforce the outer edge of gutter with a stiffening bar not less than 3/4 by 3/16 inch of material compatible with gutter. Fabricate gutters in sections not less than 8 feet. Lap the sections a minimum of one inch in the direction of flow or provide with concealed splice plate 6 inches minimum. Join the gutters, other than aluminum, by riveted and soldered joints. Aluminum gutters shall be joined with riveted sealed joints. Provide expansion-type slip joints midway between outlets. Install gutters below slope line of the roof so that snow and ice can slide clear. Support gutters on adjustable hangers spaced not more than 30 inches on center. Adjust gutters to slope uniformly to outlets, with high points occurring midway between outlets. Fabricate hangers and fastenings from metals compatible with the gutters.

3.1.8 Downspouts

Supports for downspouts shall be spaced according to the manufacturer's recommendation for the steel substrate. Types, shapes and sizes are indicated. Provide complete including elbows and offsets. Provide downspouts in approximately 10 foot lengths. Provide end joints to telescope not less than 1/2 inch and lock longitudinal joints. Provide gutter outlets with wire ball strainers for each outlet. Provide strainers to fit tightly into outlets and be of the same material used for gutters. Keep downspouts not less than one inch away from walls. Fasten to the walls at top, bottom, and at an intermediate point not to exceed 5 feet on centers with leader straps or concealed rack-and-pin type fasteners. Form straps and fasteners of metal compatible with the downspouts.

3.1.9 Flashing for Roof Drains

Provide a 30 inch square sheet indicated. Taper insulation to drain from 24 inches out. Set flashing on finished felts in a full bed of asphalt roof cement, ASTM D 4586. Apply strip flashing to the drain flashing in accordance with paragraph entitled "Roof Drain Flashing." Heavily coat the drain flashing ring with asphalt roof cement. Clamp the roof membrane, flashing sheet, and stripping felt in the drain clamping ring. Secure clamps so that felts and drain flashing are free of wrinkles and folds.

3.1.10 Splash Pans

Install splash pans where downspouts discharge on roof surfaces and at other locations as indicated. Unless otherwise shown, provide pans not less than 24 inches long by 18 inches wide with metal ribs across the bottom of the pan. Form the sides of the pan with vertical baffles not less than one inch high in the front, and 4 inches high in the back doubled over and formed continuous with horizontal roof flanges not less than 4 inches wide. Bend the rear flange of the pan to contour of cant strip and extend up 6 inches under the side wall covering or to height of base flashing under counterflashing. Bed the pans and roof flanges in plastic bituminous cement and strip-flash as specified in Roofing Section.

3.1.11 Expansion Joints

Joints shall be evenly spaced. An additional joint shall be provided where the distance between the last expansion joint and the end of the continuous run is more than half the required interval spacing. Conform to the requirements of Table I.

3.1.12 Flashing at Roof Penetrations

Provide metal flashing for all pipes, ducts, and conduits projecting through the roof surface, guy wire anchors, and similar items supported by or attached to the roof deck.

3.2 CLEANING

Clean exposed sheet metal work at completion of installation. Remove grease and oil films, handling marks, contamination from steel wool, fittings and drilling debris, and scrub-clean. Free the exposed metal surfaces of dents, creases, waves, scratch marks, and solder or weld marks.

3.3 REPAIRS TO FINISH

Scratches, abrasions, and minor surface defects of finish may be repaired in accordance with the manufacturer's printed instructions and as approved. Repair damaged surfaces caused by scratches, blemishes, and variations of color and surface texture. Replace items which cannot be repaired.

3.4 FIELD QUALITY CONTROL

Establish and maintain a Quality Control Plan for sheet metal used in conjunction with roofing to assure compliance of the installed sheet metalwork with the contract requirements. Work not in compliance with the contract shall be promptly removed and replaced or corrected. Quality control shall include, but not be limited to, the following:

a. Observation of environmental conditions; number and skill level of sheet metal workers; condition of substrate.

b. Verification that specified material is provided and installed.

c. Inspection of sheet metalwork, for proper size(s) and thickness (es), fastening and joining, and proper installation.

3.4.1 Procedure

Submit for approval prior to start of roofing work. Include a checklist of points to be observed. Document the actual quality control observations and inspections. Furnish a copy of the documentation to the Contracting Officer at the end of each day.

TABLE I. SHEET METAL WEIGHTS, THICKNESSES, AND GAGES

Sheet Metal Items	Aluminum, Inch

Building Expansion Joints	
Downspouts and leaders.....	.032
Downspout clips and anchors.....	.040 clip .125 anchor
Downspout straps, 2-inch.....	.060
Flashings:	
Base.....	.040
Eave.....	-
Valley.....	.032
Roof drain.....	
Pipe vent sleeve (d)	
Gravel stops and fascias:	
Extrusions.....	.075
Sheets, smooth.....	.050
Edge strip.....	.050
Gutters:	
Gutter section.....	.032
Continuous cleat.....	.032
Hangers, dimensions.....	1 inch x 1/8 inch (*)

(*) May be polyvinyl chloride.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

SECTION 07920

JOINT SEALANTS

10/03

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 ENVIRONMENTAL CONDITIONS
1.4 DELIVERY AND STORAGE

PART 2 PRODUCTS

2.1 SEALANTS
2.1.1 Interior Sealant
2.1.2 Exterior Sealant
2.1.3 Floor Joint Sealant
2.1.4 Kennel Floor Sealant
2.2 PRIMERS
2.3 BOND BREAKERS
2.4 BACKSTOPS
2.4 CLEANING SOLVENTS

PART 3 EXECUTION

3.1 SURFACE PREPARATION
3.1.1 Steel Surfaces
3.1.2 Aluminum or Bronze Surfaces
3.1.3 Concrete and Masonry Surfaces
3.1.4 Wood Surfaces
3.2 SEALANT PREPARATION
3.3 APPLICATION
3.3.1 Joint Width-To-Depth Ratios
3.3.1 Backstops
3.3.2 Primer
3.3.3 Bond Breaker
3.3.4 Sealants
3.4 PROTECTION AND CLEANING
3.4.1 Protection
3.4.2 Final Cleaning

-- End of Section Table of Contents --

SECTION 07920

JOINT SEALANTS
10/03

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM C 509	(2000) Elastomeric Cellular Preformed Gasket and Sealing Material
ASTM C 570	(2000) Oil- and Resin-Base Caulking Compound for Building Construction
ASTM C 734	(2001) Low-Temperature Flexibility of Latex Sealants After Artificial Weathering
ASTM C 834	(2000) Latex Sealants
ASTM C 919	(2002) Use of Sealants in Acoustical Applications
ASTM C 920	(2000) Elastomeric Joint Sealants
ASTM D 217	(1997) Cone Penetration of Lubricating Grease
ASTM D 1056	(2000) Flexible Cellular Materials - Sponge or Expanded Rubber
ASTM D 1667	(1997) Flexible Cellular Materials - Vinyl Chloride Polymers and Copolymers (Closed-Cell Foam) **
ASTM E 84	(2001) Surface Burning Characteristics of Building Materials

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only or as otherwise designated. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Sealants

Primers

Bond breakers

Backstops

Manufacturer's descriptive data including storage requirements, shelf life, curing time, instructions for mixing and application, and primer data (if required). A copy of the Material Safety Data Sheet shall be provided for each solvent, primer or sealant material.

SD-07 Certificates

Sealant

Certificates of compliance stating that the materials conform to the specified requirements.

1.3 ENVIRONMENTAL CONDITIONS

The ambient temperature shall be within the limits of 40 and 90 degrees F when sealant is applied.

1.4 DELIVERY AND STORAGE

Deliver materials to the job site in unopened manufacturers' external shipping containers, with brand names, date of manufacture, color, and material designation clearly marked thereon. Elastomeric sealant containers shall be labeled to identify type, class, grade, and use. Carefully handle and store materials to prevent inclusion of foreign materials or subjection to sustained temperatures exceeding 90 degrees F or less than 0 degrees F.

PART 2 PRODUCTS

2.1 SEALANTS

Provide sealant that has been tested and found suitable for the substrates to which it will be applied.

2.1.1 Interior Sealant

ASTM C 920, Type S or M, Grade NS, Class 12.5, Use NT. Location(s) and color(s) of sealant shall be as follows:

LOCATION	COLOR
a. Small voids between walls or partitions and adjacent lockers, casework, shelving, door frames, built-in or surface-mounted equipment and fixtures, and similar items.	*Color as close to color of lightest adjacent material.
b. Perimeter of frames at doors, windows, and access panels which adjoin exposed interior concrete and masonry surfaces.	*
c. Joints of interior masonry walls and partitions which adjoin columns, pilasters,	*

concrete walls, and exterior walls unless otherwise detailed.

d. Joints between edge members for acoustical tile and adjoining vertical surfaces. *

e. Interior locations, not otherwise indicated or specified, where small voids exist between materials specified to be painted. *

f. Joints between ceramic tile; joints between shower receptors and ceramic tile; joints formed where nonplaner tile surfaces meet. *

g. Joints formed between tile floors and tile base cove; joints between tile and dissimilar materials; joints occurring where substrates change. *

h. Behind escutcheon plates at valve pipe penetrations and showerheads in showers. *

2.1.2 Exterior Sealant

For joints in vertical surfaces, provide ASTM C 920, Type S or M, Grade NS, Class 25, Use NT. For joints in horizontal surfaces, provide ASTM C 920, Type S or M, Grade P, Class 25, Use T. Location(s) and color(s) of sealant shall be as follows:

	LOCATION	COLOR
a.	Joints and recesses formed where frames and subsills of windows, doors, louvers, and vents adjoin masonry, concrete, or metal frames. Use sealant at both exterior and interior surfaces of exterior wall penetrations.	**Color as close to color of darkest adjacent material
b.	Joints between new and existing exterior masonry walls.	**
c.	Masonry joints where shelf angles occur.	**
d.	Joints in wash surfaces of stonework.	**
e.	Expansion and control joints.	**
f.	Interior face of expansion joints in exterior concrete or masonry walls where metal expansion joint covers are not required.	**
g.	Voids where items pass through exterior walls.	**
h.	Metal reglets, where flashing is inserted into masonry joints, and where flashing is penetrated by coping dowels.	**

i.	Metal-to-metal joints where sealant is indicated or specified.	**
j.	Joints between ends of gravel stops, fascias, copings, and adjacent walls.	**

2.1.3 Floor Joint Sealant

ASTM C 920, Type S or M, Grade P, Class 25, Use T. Location(s) and color(s) of sealant shall be as follows:

	LOCATION	COLOR
a.	Seats of metal thresholds for exterior doors.	**As for exterior sealant
b.	Control and expansion joints in floors, slabs, ceramic tile, and walkways.	**
c.	Control joints in Kennel floors, slabs and walkways.	**

2.1.4 Kennel Floor Sealant

Epoxy coating shall be Epoxy Shield Premium from Home Depot or approved equal for the entire Kennel building floor & walls. The color shall be chosen and approved by the Contracting Officer.

2.2 PRIMERS

Provide a nonstaining, quick-drying type and consistency recommended by the sealant manufacturer for the particular application.

2.3 BOND BREAKERS

Provide the type and consistency recommended by the sealant manufacturer to prevent adhesion of the sealant to backing or to bottom of the joint.

2.4 BACKSTOPS

Provide glass fiber roving or neoprene, butyl, polyurethane, or polyethylene foams free from oil or other staining elements as recommended by sealant manufacturer. Backing shall be 25 to 33 percent oversize for closed cell and 40 to 50 percent oversize for open cell material, unless otherwise indicated. Backstop material shall be compatible with sealant. Do not use oakum and other types of absorptive materials as backstops.

2.4 CLEANING SOLVENTS

Provide type(s) recommended by the sealant manufacturer except for aluminum and bronze surfaces that will be in contact with sealant.

PART 3 EXECUTION

3.1 SURFACE PREPARATION

Surfaces shall be clean, dry to the touch, and free from dirt frost, moisture, grease, oil, wax, lacquer, paint, or other foreign matter that would tend to destroy or impair adhesion. Oil and grease shall be removed with solvent and surfaces shall be wiped dry with clean cloths. When resealing an existing joint, remove existing calk or sealant prior to applying new sealant. For surface types not listed below, the sealant manufacturer shall be contacted for specific recommendations.

3.1.1 Steel Surfaces

Remove loose mill scale by sandblasting or, if sandblasting is impractical or would damage finish work, scraping and wire brushing. Remove protective coatings by sandblasting or using a residue-free solvent.

3.1.2 Aluminum or Bronze Surfaces

Remove temporary protective coatings from surfaces that will be in contact with sealant. When masking tape is used as a protective coating, remove tape and any residual adhesive just prior to sealant application. For removing protective coatings and final cleaning, use nonstaining solvents recommended by the manufacturer of the item(s) containing aluminum or bronze surfaces.

3.1.3 Concrete and Masonry Surfaces

Where surfaces have been treated with curing compounds, oil, or other such materials, the materials shall be removed by sandblasting or wire brushing. Laitance, efflorescence and loose mortar shall be removed from the joint cavity.

3.1.4 Wood Surfaces

Wood surfaces to be in contact with sealants shall be free of splinters and sawdust or other loose particles.

3.2 SEALANT PREPARATION

Do not add liquids, solvents, or powders to the sealant. Mix multicomponent elastomeric sealants in accordance with manufacturer's instructions.

3.3 APPLICATION

3.3.1 Joint Width-To-Depth Ratios

a. Acceptable Ratios:

JOINT WIDTH	JOINT DEPTH Minimum	JOINT DEPTH Maximum
For metal, glass, or other nonporous surfaces:		
1/4 inch (minimum)	1/4 inch	1/4 inch
over 1/4 inch	1/2 of width	Equal to width
For concrete and masonry:		

1/4 inch (minimum)	1/4 inch	1/4 inch
Over 1/4 inch to 1/2 inch	1/4 inch	Equal to width
Over 1/2 inch to 2 inches	1/2 inch	5/8 inch
Over 2 inches	(As recommended by sealant manufacturer)	

b. Unacceptable Ratios: Where joints of acceptable width-to-depth ratios have not been provided, clean out joints to acceptable depths and grind or cut to acceptable widths without damage to the adjoining work. Grinding shall not be required on metal surfaces.

3.3.1 Backstops

Install backstops dry and free of tears or holes. Tightly pack the back or bottom of joint cavities with backstop material to provide a joint of the depth specified. Install backstops in the following locations:

a. Where indicated.

b. Where backstop is not indicated but joint cavities exceed the acceptable maximum depths specified in paragraph entitled, "Joint Width-to-Depth Ratios."

3.3.2 Primer

Immediately prior to application of the sealant, clean out loose particles from joints. Where recommended by sealant manufacturer, apply primer to joints in concrete masonry units, wood, and other porous surfaces in accordance with sealant manufacturer's instructions. Do not apply primer to exposed finish surfaces.

3.3.3 Bond Breaker

Provide bond breakers to the back or bottom of joint cavities, as recommended by the sealant manufacturer for each type of joint and sealant used, to prevent sealant from adhering to these surfaces. Carefully apply the bond breaker to avoid contamination of adjoining surfaces or breaking bond with surfaces other than those covered by the bond breaker.

3.3.4 Sealants

Provide a sealant compatible with the material(s) to which it is applied. Do not use a sealant that has exceeded shelf life or has jelled and can not be discharged in a continuous flow from the gun. Apply the sealant in accordance with the manufacturer's instructions with a gun having a nozzle that fits the joint width. Force sealant into joints to fill the joints solidly without air pockets. Tool sealant after application to ensure adhesion. Sealant shall be uniformly smooth and free of wrinkles. Upon completion of sealant application, roughen partially filled or unfilled joints, apply sealant, and tool smooth as specified. Sealer shall be applied over the sealant when and as specified by the sealant manufacturer.

3.4 PROTECTION AND CLEANING

3.4.1 Protection

Protect areas adjacent to joints from sealant smears. Masking tape may be used for this purpose if removed 5 to 10 minutes after the joint is filled.

3.4.2 Final Cleaning

Upon completion of sealant application, remove remaining smears and stains and leave the work in a clean and neat condition.

a. Masonry and Other Porous Surfaces: Immediately scrape off fresh sealant that has been smeared on masonry and rub clean with a solvent as recommended by the sealant manufacturer. Allow excess sealant to cure for 24 hour then remove by wire brushing or sanding.

b. Metal and Other Non-Porous Surfaces: Remove excess sealant with a solvent-moistened cloth.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 08 - DOORS AND WINDOWS

SECTION 08120

ALUMINUM DOORS AND FRAMES

09/99

PART 1 GENERAL

1.1 REFERENCES
1.2 PERFORMANCE REQUIREMENTS
1.2.1 Structural
1.2.2 Air Infiltration
1.2.3 Water Penetration
1.3 SUBMITTALS
1.4 DELIVERY, STORAGE, AND HANDLING

PART 2 PRODUCTS

2.1 DOORS AND FRAMES
2.2 MATERIALS
2.2.1 Anchors
2.2.2 Weatherstripping
2.2.3 Aluminum Alloy for Doors and Frames
2.2.4 Fasteners
2.2.5 Structural Steel
2.2.6 Aluminum Paint
2.3 FABRICATION
2.3.1 Aluminum Frames
2.3.2 Aluminum Doors
2.3.2.1 Full Glazed Stile and Rail Doors
2.3.3 Welding and Fastening
2.3.4 Weatherstripping
2.3.5 Anchors
2.3.6 Provisions for Hardware
2.3.7 Provisions for Glazing
2.3.8 Finishes
2.3.8.1 Anodic Coating

PART 3 EXECUTION

3.1 INSTALLATION
3.2 PROTECTION FROM DISSIMILAR MATERIALS
3.2.1 Dissimilar Metals
3.2.2 Drainage from Dissimilar Metals
3.2.3 Masonry and Concrete
3.2.4 Wood or Other Absorptive Materials
3.3 CLEANING
3.4 PROTECTION

-- End of Section Table of Contents --

SECTION 08120

ALUMINUM DOORS AND FRAMES
09/99

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

ALUMINUM ASSOCIATION (AA)

AA DAF-45	(1980) Aluminum Finishes

AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION (AAMA)

AAMA 2603	(1992; Addendum 1993) Pigmented Organic Coatings on Extruded Aluminum
AAMA 2604	(1992; Addendum 1995) High Performance Organic Coatings on Architectural Extrusions and Panels

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 36/A 36M	(1997; Rev. A) Carbon Structural Steel
ASTM B 209M	(1995) Aluminum and Aluminum-Alloy Sheet and Plate (Metric)
ASTM B 209	(1996) Aluminum and Aluminum-Alloy Sheet and Plate
ASTM B 221M	(1996) Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric)
ASTM B 221	(1996) Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes
ASTM E 283	(1991) Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen
ASTM E 331	(1996) Water Penetration of Exterior Windows, Curtain Walls, and Doors by Uniform Static Air Pressure Difference

1.2 PERFORMANCE REQUIREMENTS

1.2.1 Structural

Shapes and thicknesses of framing members shall be sufficient to withstand a design wind load of not less than 30 pounds per square foot of supported area with a deflection of not more than 1/175 times the length of the member and a safety factor of not less than 1.65. Provide glazing beads, moldings, and trim of not less than 0.050 inch nominal thickness.

1.2.2 Air Infiltration

When tested in accordance with ASTM E 283, air infiltration shall not exceed 0.06 cubic feet per minute per square foot of fixed area at a test pressure of 6.24 pounds per square foot (50 mile per hour wind).

1.2.3 Water Penetration

When tested in accordance with ASTM E 331, there shall be no water penetration at a pressure of 8 pounds per square foot of fixed area.

1.3 SUBMITTALS

Submit the following in accordance with Section 01330, "Submittal Procedures."

SD-02 Shop Drawings

Doors and frames; G

Show elevations of each door type, size of doors and frames, metal gages, details of door and frame construction, methods of anchorage, glazing details, weatherstripping, provisions for and location of hardware, and details of installation.

SD-08 Manufacturer's Instructions

Doors and frames

Submit detail specifications and instructions for installation, adjustments, cleaning, and maintenance.

1.4 DELIVERY, STORAGE, AND HANDLING

Inspect materials delivered to the site for damage. Unload and store with minimum handling. Provide storage space in dry location with adequate ventilation, free from dust or water, and easily accessible for inspection and handling. Stack materials on nonabsorptive strips or wood platforms. Do not cover doors and frames with tarps, polyethylene film, or similar coverings. Protect finished surfaces during shipping and handling using manufacturer's standard method, except that no coatings or lacquers shall be applied to surfaces to which calking and glazing compounds must adhere.

PART 2 PRODUCTS

2.1 DOORS AND FRAMES

Swing-type aluminum doors and frames of size, design, and location indicated. Provide doors complete with frames, framing members, subframes, transoms, adjoining sidelights, adjoining window wall, trim, and accessories.

2.2 MATERIALS

2.2.1 Anchors

Stainless steel.

2.2.2 Weatherstripping

Continuous wool pile, silicone treated, or type recommended by door manufacturer.

2.2.3 Aluminum Alloy for Doors and Frames

ASTM B 221, Alloy 6063-T5 for extrusions. ASTM B 209, alloy and temper best suited for aluminum sheets and strips.

2.2.4 Fasteners

Hard aluminum or stainless steel.

2.2.5 Structural Steel

ASTM A 36/A 36M.

2.2.6 Aluminum Paint

Type as recommended by aluminum door manufacturer.

2.3 FABRICATION

2.3.1 Aluminum Frames

Extruded aluminum shapes with contours approximately as indicated. Provide removable glass stops and glazing beads for frames accommodating fixed glass. Use countersunk stainless steel Phillips screws for exposed fastenings, and space not more than 12 inches o.c. Mill joints in frame members to a hairline fit, reinforce, and secure mechanically.

2.3.2 Aluminum Doors

Of type, size, and design indicated and not less than 1 3/4 inches thick. Minimum wall thickness, 0.125 inch, except beads and trim, 0.050 inch. Door sizes shown are nominal and shall include standard clearances as follows: 0.093 inch at hinge and lock stiles, 0.125 inch between meeting stiles, 0.125 inch at top rails, 0.187 inch between bottom and threshold, and 0.687 inch between bottom and floor. Bevel single-acting doors 0.063 or 0.125 inch at lock, hinge, and meeting stile edges.

2.3.2.1 Full Glazed Stile and Rail Doors

Doors shall have narrow stiles and rails as indicated. Fabricate from extruded aluminum hollow seamless tubes or from a combination of open-shaped members interlocked or welded together. Fasten top and bottom rail together by means of welding or by 3/8 or 1/2 inch diameter cadmium-plated tensioned steel tie rods. Provide an adjustable mechanism of jack screws or other

methods in the top rail to allow for minor clearance adjustments after installation.

2.3.3 Welding and Fastening

Where possible, locate welds on unexposed surfaces. Dress welds on exposed surfaces smoothly. Select welding rods, filler wire, and flux to produce a uniform texture and color in finished work. Remove flux and spatter from surfaces immediately after welding. Exposed screws or bolts will be permitted only in inconspicuous locations, and shall have countersunk heads. Weld concealed reinforcements for hardware in place.

2.3.4 Weatherstripping

Provide on stiles and rails of exterior doors. Fit into slots which are integral with doors or frames. Weatherstripping shall be replaceable without special tools, and adjustable at meeting rails of pairs of doors. Installation shall allow doors to swing freely and close positively. Air leakage of a single leaf weatherstripped door shall not exceed 0.5 cubic feet per minute of air per square foot of door area when tested in accordance with ASTM E 283.

2.3.5 Anchors

On the backs of subframes, provide anchors of the sizes and shapes indicated for securing subframes to adjacent construction. Anchor transom bars at ends and mullions at head and sill. Where indicated, reinforce vertical mullions with structural steel members of sufficient length to extend up to the overhead structural slab or framing and secure thereto. Reinforce and anchor freestanding door frames to floor construction as indicated on approved shop drawings and in accordance with manufacturer's recommendation. Place anchors near top and bottom of each jamb and at intermediate points not more than 25 inches apart.

2.3.6 Provisions for Hardware

Hardware is specified in Section 08710, "Door Hardware." Deliver hardware templates and hardware (except field-applied hardware) to the door manufacturer for use in fabrication of aluminum doors and frames. Cut, reinforce, drill, and tap doors and frames at the factory to receive template hardware. Provide doors to receive surface-applied hardware, except push plates, kick plates, and mop plates, with reinforcing only; drill and tap in the field. Provide hardware reinforcements of stainless steel or steel with hot-dipped galvanized finish, and secure with stainless steel screws.

2.3.7 Provisions for Glazing

Provide extruded aluminum snap-in glazing beads on interior side of doors. Provide extruded aluminum, theft-proof, snap-in glazing beads or fixed glazing beads on exterior or security side of doors. Glazing beads shall have vinyl insert glazing gaskets. Design glazing beads to receive glass of thickness indicated or specified. Glazing is specified in Section 08800N, "Glazing."

2.3.8 Finishes

Provide exposed aluminum surfaces with factory finish of anodic coating or organic coating.

2.3.8.1 Anodic Coating

Clean exposed aluminum surfaces and provide an anodized finish conforming to AA DAF-45. Finish shall be electrolytically deposited color-anodized, designation AA-M10-C22-A44, Architectural Class I 0.7 mil or thicker. Color shall be as indicated.

PART 3 EXECUTION

3.1 INSTALLATION

Plumb, square, level, and align frames and framing members to receive doors, transoms, adjoining sidelights, and, adjoining window walls. Anchor frames to adjacent construction as indicated and in accordance with manufacturer's printed instructions. Anchor bottom of each frame to rough floor construction with 3/32 inch thick stainless steel angle clips secured to back of each jamb and to floor construction; use stainless steel bolts and expansion rivets for fastening clip anchors. Seal metal-to-metal joints between framing members as specified in Section 07920N, "Joint Sealants." Hang doors to produce clearances specified in paragraph entitled "Aluminum Doors," of this section. After erection and glazing, adjust doors and hardware to operate properly.

3.2 PROTECTION FROM DISSIMILAR MATERIALS

3.2.1 Dissimilar Metals

Where aluminum surfaces come in contact with metals other than stainless steel, zinc, or small areas of white bronze, protect from direct contact by one or a combination of the following methods:

a. Paint the dissimilar metal with one coat of heavy-bodied bituminous paint.

b. Apply a good quality elastomeric sealant between the aluminum and the dissimilar metal.

c. Paint the dissimilar metal with one coat of primer and one coat of aluminum paint.

d. Use a nonabsorptive tape or gasket in permanently dry locations.

3.2.2 Drainage from Dissimilar Metals

In locations where drainage from dissimilar metals has direct contact with aluminum, provide protective paint, to prevent aluminum discoloration.

3.2.3 Masonry and Concrete

Provide aluminum surfaces in contact with mortar, concrete, or other masonry materials with one coat of heavy-bodied bituminous paint.

3.2.4 Wood or Other Absorptive Materials

Provide aluminum surfaces in contact with absorptive materials subject to frequent moisture, and aluminum surfaces in contact with treated wood, with two coats of aluminum paint or one coat of heavy-bodied bituminous paint. In lieu of painting the aluminum, the Contractor shall have the option of painting the wood or other absorptive surface with two coats of aluminum paint and sealing the joints with elastomeric sealant.

3.3 CLEANING

Upon completion of installation, clean door and frame surfaces in accordance with door manufacturer's recommended procedure. Do not use abrasive, caustic, or acid cleaning agents.

3.4 PROTECTION

Protect doors and frames from damage and from contamination by other materials such as cement mortar. Prior to completion and acceptance of the work, restore damaged doors and frames to original condition, or replace with new ones.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 08 - DOORS AND WINDOWS

SECTION 08520A

ALUMINUM AND ENVIRONMENTAL CONTROL ALUMINUM WINDOWS

09/04

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 WINDOW PERFORMANCE
1.3.1 Structural Performance
1.3.2 Air Infiltration
1.3.3 Water Penetration
1.3.4 Thermal Performance
1.3.5 Condensation Index Rating
1.3.6 Life Safety Criteria
1.3.7 Sound Attenuation
1.4 QUALIFICATION
1.5 MOCK-UPS
1.6 DELIVERY AND STORAGE
1.7 WARRANTY

PART 2 PRODUCTS

2.1 ALUMINUM WINDOW TYPES
2.1.4 Fixed Windows
2.2 WEATHERSTRIPPING
2.2 ACCESSORIES
2.2.1 Fasteners
2.2.2 Hardware
2.4.3 Window Anchors
2.3 GLASS AND GLAZING
2.4 FINISH
2.6.1 Anodized Aluminum Finish
2.4.1 Color

PART 3 EXECUTION

3.1 INSTALLATION
3.2 ADJUSTMENTS AND CLEANING
3.2.1 Hardware Adjustments
3.2.2 Cleaning

-- End of Section Table of Contents --

SECTION 08520A

ALUMINUM AND ENVIRONMENTAL CONTROL ALUMINUM WINDOWS
09/04

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ALUMINUM ASSOCIATION (AA)

AA DAF-45	(2003) Designation System for Aluminum Finishes

AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION (AAMA)

AAMA 101	(1993) Voluntary Specifications for Aluminum and Poly (Vinyl Chloride) (PVC) Prime Windows and Glass Doors
AAMA 2603	(1998) Voluntary Specification, Performance Requirements and Test Procedures for Pigmented Organic Coatings on Aluminum Extrusions and Panels
AAMA 2604	(2002) Voluntary Specification, Performance Requirements and Test Procedures for High Performance Organic Coatings on Aluminum Extrusions and Panels

ASTM INTERNATIONAL (ASTM)

ASTM A 276	(2003) Stainless Steel Bars and Shapes
ASTM D 3656	(1997) Insect Screening and Louver Cloth Woven from Vinyl-Coated Glass Yarns
ASTM E 283	(1991; R 1999) Determining the Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen
ASTM E 330	(2002) Structural Performance of Exterior Windows, Doors, Skylights and Curtain Walls by Uniform Static Air Pressure Difference
ASTM E 331	(2000) Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Uniform Static Air Pressure Difference
ASTM E 413	(1987; R 1999) Rating Sound Insulation

ASTM E 547	(2000) Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Cyclic Static Air Pressure Difference
ASTM E 90	(2002) Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements

INSECT SCREENING WEAVERS ASSOCIATION (ISWA)

ISWA IWS 089	(1990) Recommended Standards and Specifications for Insect Wire Screening (Wire Fabric)

NATIONAL FENESTRATION RATING COUNCIL (NFRC)

NFRC 100	(2001) Procedure for Determining Fenestration Product U-Factors
NFRC 200	(2001) Procedure for Determining Fenestration Product Solar Heat Gain Coefficient and Visible Transmittance at Normal Incidence

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 101	(2003) Life Safety Code

SCREEN MANUFACTURERS ASSOCIATION (SMA)

SMA 1004	(1987; R 1998) Aluminum Tubular Frame Screens for Windows

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Aluminum Windows

Drawings indicating elevations of window, rough-opening dimensions for each type and size of window, full-size sections, thicknesses of metal, fastenings, methods of installation and anchorage, connections with other work, type of wall construction, size and spacing of anchors, method of glazing, types and locations of operating hardware, mullion details, weatherstripping details, and window schedules showing locations of each window type.

SD-03 Product Data

Aluminum Windows

Manufacturer's descriptive data and catalog cut sheets. Manufacturer's preprinted installation instructions and cleaning instructions.

SD-04 Samples

Aluminum Windows

Submit standard color samples of the specified finishes.

SD-06 Test Reports

Aluminum Windows

Reports for each type of aluminum window attesting that identical windows have been tested and meet all performance requirements established under paragraph WINDOW PERFORMANCE.

SD-07 Certificates

Aluminum Windows

Certificates stating that the aluminum windows are AAMA certified conforming to requirements of this section. Labels or markings permanently affixed to the window will be accepted in lieu of certificates. Product ratings determined using NFRC 100 and NFRC 200 shall be authorized for certification and properly labeled by the manufacturer.

1.3 WINDOW PERFORMANCE

Aluminum windows shall meet the following performance requirements. Testing requirements shall be performed by an independent testing laboratory or agency.

1.3.1 Structural Performance

Structural test pressures on window units shall be for positive load (inward) and negative load (outward) in accordance with ASTM E 330. After testing, there shall be no glass breakage, permanent damage to fasteners, hardware parts, support arms or actuating mechanisms or any other damage which could cause window to be inoperable. There shall be no permanent deformation of any main frame, sash or ventilator member in excess of the requirements established by AAMA 101 for the window types and classification specified in this section.

1.3.2 Air Infiltration

Air infiltration shall not exceed the amount established by AAMA 101 for each window type when tested in accordance with ASTM E 283.

1.3.3 Water Penetration

Water penetration shall not exceed the amount established by AAMA 101 for each window type when tested in accordance with ASTM E 331.

1.3.4 Thermal Performance

Thermal transmittance for thermally broken aluminum windows with insulating glass shall not exceed a U-factor of 0.75 Btu/hr-ft2-F determined according to NFRC 100, and a solar heat gain coefficient (SHGC) of 0.40 Btu/hr-ft2-F determined according to NFRC 200. Window units shall comply with the U.S. Department of Energy, Energy Star Window Program for the Southern Climate Zone.

1.3.5 Condensation Index Rating

The condensation index rating shall be 85 as determined using NFRC approved software THERM.

1.3.6 Life Safety Criteria

Windows shall conform to NFPA 101 Life Safety Code when rescue and/or second means of escape are indicated.

1.3.7 Sound Attenuation

The window unit shall have a minimum STC of 34 with the window glazed with 1/2 inch air space between two pieces of 1/4 inch thick glass when tested in accordance with ASTM E 90 and ASTM E 413.

1.4 QUALIFICATION

Window manufacturer shall specialize in designing and manufacturing the type of aluminum windows specified in this section, and shall have a minimum of 5 years of documented successful experience. Manufacturer shall have the facilities capable of meeting contract requirements, single-source responsibility and warranty.

1.5 MOCK-UPS

Before fabrication, full-size mock-up of each type of aluminum window complete with glass and AAMA certification label for structural purposes and NFRC Temporary and Permanent Label for certification of thermal performance rating will be required for review of window construction and quality of hardware operation.

1.6 DELIVERY AND STORAGE

Aluminum windows shall be delivered to project site and stored in accordance with manufacturer's recommendations. Damaged windows shall be replaced with new windows.

1.7 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a 1 year period shall be provided.

PART 2 PRODUCTS

2.1 ALUMINUM WINDOW TYPES

OPTIONAL PERFORMANCE CLASSES ENGLISH

Optional Performance Class	Applicable Product Designation	*A Design Pressure lb/ft sq.	*B Structural Test Pressure lb/ft sq.	Water Resistance Test Pressure lb/ft sq. R, C, HC	AW
20	R	20.0	30.0	3.00	
25	R	25.0	37.5	3.75	
30	R,LC	30.0	45.0	4.50	
35	R,LC,C	35.0	52.5	5.25	
40	R,LC,C	40.0	60.0	6.00	
45	R,LC,C,HC,AW	45.0	67.5	6.75	
50	R,LC,C,HC,AW	50.0	75.0	7.50	
55	R,LC,C,HC,AW	55.0	82.5	8.25	11.0
60	R,LC,C,HC,AW	60.0	90.0	9.00	12.0
65	R,LC,C,HC,AW	65.0	97.5	9.75	12.0
70	R,LC,C,HC,AW	70.0	105.0	10.50	12.0
75	R,LC,C,HC,AW	75.0	112.5	11.25	12.0
80	R,LC,C,HC,AW	80.0	120.0	12.00	12.0
85	R,LC,C,HC,AW	85.0	127.5	12.00	12.0
90	R,LC,C,HC,AW	90.0	135.0	12.00	12.0

*A. Design pressure = Performance Class

*B. Structural test pressures shown are for both positive and negative loads.

Aluminum windows shall consist of complete units including sash, glass, frame, weatherstripping, and hardware. Windows shall conform to AAMA 101. Windows shall be single-glazed. Thermal barrier shall be neoprene, rigid vinyl, or polyurethane and shall be resistant to weather. Window members shall be heli-arc welded or angle-reinforced and mechanically joined and sealed. Exposed welded joints shall be dressed and finished. Joints shall be permanent and weathertight. Frames shall be constructed to provide a minimum 1/4 inch thermal break between the exterior and interior frame surfaces. Sash corners shall be internally sealed to prevent air and water leaks. Inner sash shall be key-controlled to swing to the interior to allow maintenance and replacement of the glass. Not less than 3 control keys shall be furnished. Operable windows shall permit cleaning the outside glass from inside the building.

2.1.4 Fixed Windows

Aluminum fixed (F) windows shall conform to AAMA 101 F-C30 type, non-operable glazed frame, complete with provisions for reglazing in the field.

2.2 WEATHERSTRIPPING

Weatherstripping for ventilating sections shall be of type designed to meet water penetration and air infiltration requirements specified in this section in accordance with AAMA 101, and shall be manufactured of material compatible with aluminum and resistant to weather. Weatherstrips shall be factory-applied and easily replaced in the field. Neoprene or polyvinylchloride weatherstripping are not acceptable where exposed to direct sunlight.

2.2 ACCESSORIES

2.2.1 Fasteners

Fastening devices shall be window manufacturer's standard design made from aluminum, stainless steel, cadmium-plated steel, nickel/chrome-plated steel in compliance with AAMA 101. Self-tapping sheet metal screws will not be acceptable for material thicker than 1/16 inch.

2.2.2 Hardware

Hardware shall be as specified for each window type and shall be fabricated of aluminum, stainless steel, cadmium-plated steel, zinc-plated steel or nickel/chrome-plated steel in accordance with requirements established by AAMA 101.

2.4.3 Window Anchors

Anchoring devices for installing windows shall be made of aluminum, cadmium-plated steel, stainless steel, or zinc-plated steel conforming to AAMA 101.

2.3 GLASS AND GLAZING

Aluminum windows shall be designed for inside glazing, field glazing, and for glass types scheduled on drawings and specified in Section 08800 GLAZING. Units shall be complete with glass and glazing provisions to meet AAMA 101. Glazing material shall be compatible with aluminum, and shall not require painting.

2.4 FINISH

2.6.1 Anodized Aluminum Finish

Exposed surfaces of aluminum windows shall be finished with anodic coating conforming to AA DAF-45: Architectural Class I, AA-M10-C22-A44, color anodic coating, 0.7 mil or thicker. Finish shall be free of scratches and other blemishes.

2.4.1 Color

Color shall be in anodized bronze.

PART 3 EXECUTION

3.1 INSTALLATION

Aluminum windows shall be installed in accordance with approved shop drawings and manufacturer's published instructions. Aluminum surfaces in contact with masonry, concrete, wood and dissimilar metals other than stainless steel, zinc, cadmium or small areas of white bronze, shall be protected from direct contact using protective materials recommended by AAMA 101. The completed window installation shall be watertight in accordance with Section 07920 JOINT SEALANTS. Glass and glazing shall be installed in accordance with requirements of this section and Section 08800 GLAZING.

3.2 ADJUSTMENTS AND CLEANING

3.2.1 Hardware Adjustments

Final operating adjustments shall be made after glazing work is complete. Operating sash or ventilators shall operate smoothly and shall be weathertight when in locked position.

3.2.2 Cleaning

Aluminum window finish and glass shall be cleaned on exterior and interior sides in accordance with window manufacturer's recommendations. Alkaline or abrasive agents shall not be used. Precautions shall be taken to avoid scratching or marring window finish and glass surfaces.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 08 - DOORS AND WINDOWS

SECTION 08710

DOOR HARDWARE

02/02

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 HARDWARE SCHEDULE
1.4 KEY BITTING CHART REQUIREMENTS
1.5 QUALITY ASSURANCE
1.5.1 Hardware Manufacturers and Modifications
1.6 DELIVERY, STORAGE, AND HANDLING

PART 2 PRODUCTS

2.1 TEMPLATE HARDWARE
2.2 HARDWARE FOR EXIT DOORS
2.3 HARDWARE ITEMS
2.3.1 Hinges
2.3.2 Pivots
2.3.3 Spring Hinges
2.3.4 Locks and Latches
2.3.4.1 Mortise Locks and Latches
2.3.4.2 Bored Locks and Latches
2.3.4.4 Interconnected Locks and Latches
2.3.4.2 Auxiliary Locks
2.3.4.3 Combination Locks
2.3.5 Exit Devices
2.3.5 Cylinders and Cores
2.3.6 Keying System
2.3.7 Lock Trim
2.3.7.1 Knobs and Roses
2.3.7.2 Lever Handles
2.3.7.3 Texture
2.3.8 Keys
2.3.9 Door Bolts
2.3.10 Closers
2.3.10.1 Identification Marking
2.3.11 Overhead Holders
2.3.14 Closer Holder-Release Devices
2.3.17 Door Stops and Silencers
2.3.12 Thresholds
2.3.20 Weather Stripping Gasketing
2.3.20.1 Extruded Aluminum Retainers
2.3.13 Rain Drips
2.3.13.1 Door Rain Drips
2.3.13.2 Overhead Rain Drips
2.3.14 Special Tools
2.4 FASTENERS

2.5 FINISHES
2.6 KEY CABINET AND CONTROL SYSTEM

PART 3 EXECUTION

3.1 INSTALLATION
3.1.1 Weather Stripping Installation
3.1.1.1 Stop-Applied Weather Stripping
3.1.1 Threshold Installation
3.2 EXIT DOORS
3.3 HARDWARE LOCATIONS
3.4 KEY CABINET AND CONTROL SYSTEM
3.5 FIELD QUALITY CONTROL
3.6 HARDWARE SETS

-- End of Section Table of Contents --

SECTION 08710

DOOR HARDWARE
02/02

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM E 283	(1991) Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen
ASTM F 883	(1990) Padlocks

BUILDERS HARDWARE MANUFACTURERS ASSOCIATION (BHMA)

BHMA A156.1	(1997) Butts and Hinges (BHMA 101)
BHMA A156.2	(1996) Bored and Preassembled Locks and Latches (BHMA 601)
BHMA A156.3	(1994) Exit Devices (BHMA 701)
BHMA A156.4	(1992) Door Controls - Closers (BHMA 301)
BHMA A156.5	(1992) Auxiliary Locks & Associated Products (BHMA 501)
BHMA A156.6	(1994) Architectural Door Trim (BHMA 1001)
BHMA A156.7	(1988) Template Hinge Dimensions
BHMA A156.8	(1994) Door Controls - Overhead Holders (BHMA 311)
BHMA A156.12	(1992) Interconnected Locks & Latches (BHMA 611)
BHMA A156.13	(1994) Mortise Locks & Latches (BHMA 621)
BHMA A156.15	(1995) Closer Holder Release Devices
BHMA A156.16	(1997) Auxiliary Hardware
BHMA A156.17	(1993) Self Closing Hinges & Pivots
BHMA A156.18	(1993) Materials and Finishes (BHMA 1301)
BHMA A156.21	(1996) Thresholds

BHMA A156.22 (1996) Door Gasketing Systems

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 80 (1999) Fire Doors and Fire Windows

NFPA 101 (1997) Life Safety Code

STEEL DOOR INSTITUTE (SDOI)

SDI 100 (1991) Standard Steel Doors and Frames

UNDERWRITERS LABORATORIES (UL)

UL Bld Mat Dir (1999) Building Materials Directory

UL 14C (1999) Swinging Hardware for Standard Tin-Clad Fire Doors Mounted Singly and in Pairs

1.2 SUBMITTALS

Submit the following in accordance with Section 01330, "Submittal Procedures."

SD-02 Shop Drawings

Hardware schedule; G

Keying system

SD-03 Product Data

Hardware items; G

SD-08 Manufacturer's Instructions

Installation

SD-10 Operation and Maintenance Data

Hardware Schedule items, Data Package 1; G

Submit data package in accordance with Section 01781, "Operation and Maintenance Data."

SD-11 Closeout Submittals

Key bitting

1.3 HARDWARE SCHEDULE

Prepare and submit hardware schedule in the following form:

Reference Publi-	Mfr. Name	Key	UL Mark (If fire	BHMA

Hard-ware Item	Quan-tity	Size	cation Type No.	Finish	and Catalog No.	Con-trol Symbols	rated and listed)	Finish Designa-tion

1.4 KEY BITTING CHART REQUIREMENTS

Submit key bitting charts to the Contracting Officer prior to completion of the work. Include:

a. Complete listing of all keys (AA1, AA2, etc.).

b. Complete listing of all key cuts (AA1-123456, AA2-123458).

c. Tabulation showing which key fits which door.

d. Copy of floor plan showing doors and door numbers.

e. Listing of 20 percent more key cuts than are presently required in each master system.

1.5 QUALITY ASSURANCE

1.5.1 Hardware Manufacturers and Modifications

Provide, as far as feasible, locks, hinges, and closers of one lock, hinge, or closer manufacturer's make. Modify hardware as necessary to provide features indicated or specified.

1.6 DELIVERY, STORAGE, AND HANDLING

Deliver hardware in original individual containers, complete with necessary appurtenances including fasteners and instructions. Mark each individual container with item number as shown in hardware schedule. Deliver permanent keys and removable cores to the Contracting Officer, either directly or by certified mail. Deliver construction master keys with the locks.

PART 2 PRODUCTS

2.1 TEMPLATE HARDWARE

Hardware to be applied to metal or to prefinished doors shall be made to template. Promptly furnish template information or templates to door and frame manufacturers. Template hinges shall conform to BHMA A156.7. Coordinate hardware items to prevent interference with other hardware.

2.2 HARDWARE FOR EXIT DOORS

Provide all hardware necessary to meet the requirements of NFPA 101 for exit doors, as well as to other requirements specified, even if such hardware is not specifically mentioned under paragraph entitled "Hardware Schedule." Such hardware shall bear the label of Underwriters Laboratories, Inc., and be listed in UL Bld Mat Dir or labeled and listed by another testing laboratory acceptable to the Contracting Officer.

2.3 HARDWARE ITEMS

Hinges, locks, latches, exit devices, bolts, and closers shall be clearly and permanently marked with the manufacturer's name or trademark where it will be visible after the item is installed. For closers with covers, the name or trademark may be beneath the cover.

2.3.1 Hinges

Hinge Sizes Chart

Thickness of Doors in Inches	Width of Doors in Inches	Height of Hinge (Length of Joint) in Inches
7/8 to 1 1/8 screen	To 36	3
1 3/8	To 32	3 1/2
1 3/8	Over 32 to 37	4
1 3/4	To 36	4 1/2
1 3/4	Over 36 to 48	5 Heavy Weight
1 3/4	Over 48	6 Heavy Weight
2, 2 1/4 and 2 1/2	To 42	5 Heavy Weight
2, 2 1/4 and 2 1/2	Over 42	6 Heavy Weight

BHMA A156.1, 4 1/2 by 4 1/2 inches unless otherwise specified. Construct loose pin hinges for exterior doors and reverse-bevel interior doors so that pins will be nonremovable when door is closed. Other antifriction bearing hinges may be provided in lieu of ball-bearing hinges.

2.3.2 Pivots

BHMA A156.4.

2.3.3 Spring Hinges

BHMA A156.17.

2.3.4 Locks and Latches

2.3.4.1 Mortise Locks and Latches

BHMA A156.13, Series 1000, Operational Grade 1, Security Grade 2. Knobs and roses of mortise locks shall have screwless shanks and no exposed screws.

2.3.4.2 Bored Locks and Latches

BHMA A156.2, Series 4000, Grade 1.

2.3.4.4 Interconnected Locks and Latches

BHMA A156.12. Provide F96 or F97, unless otherwise specified.

2.3.4.2 Auxiliary Locks

BHMA A156.5, Grade 1.

2.3.4.3 Combination Locks

Heavy-duty, mechanical combination lockset with five pushbuttons, standard-sized knobs, 3/4 inch deadlocking latch, 2 3/4 inch backset. Lock shall be operated by pressing two or more of the buttons in unison or individually in the proper sequence. Inside knob shall always operate the latch. Provide a keyed cylinder on the interior to permit setting the combination. Provide a keyed removable-core cylinder on the exterior to permit bypassing the combination. Provide a thumb turn on the interior to activate passage set function, so that outside knob operates latch without using the combination.

2.3.5 Exit Devices

BHMA A156.3, Grade 1. Provide adjustable strikes for rim type and vertical rod devices. Provide open back strikes for pairs of doors with mortise and vertical rod devices. Touch bars may be provided in lieu of conventional crossbars and arms. Provide escutcheons, not less than 7 by 2 1/4 inches.

2.3.5 Cylinders and Cores

Provide cylinders and cores for new locks, including locks provided under other sections of this specification. Cylinders and cores shall have six pin tumblers. Cylinders shall be interchangeable and fully compatible with products from Best Lock Corp., Arrow Lock Corp., or Falcon Lock which are removable by special control keys. Stamp each interchangeable core with a key control symbol in a concealed place on the core.

2.3.6 Keying System

Provide a great master keying system. Provide a construction master keying system. Provide key cabinet as specified.

2.3.7 Lock Trim

Cast, forged, or heavy wrought construction and commercial plain design.

2.3.7.1 Knobs and Roses

In addition to meeting test requirements of BHMA A156.2 and BHMA A156.13, knobs, roses, and escutcheons shall be 0.050 inch thick if unreinforced. If reinforced, outer shell shall be 0.035 inch thick and combined thickness shall be 0.070 inch, except knob shanks shall be 0.060 inch thick.

2.3.7.2 Lever Handles

Provide lever handles in lieu of knobs where specified in paragraph entitled "Hardware Schedule". Lever handles for exit devices shall meet the test requirements of BHMA A156.13 for mortise locks. Lever handle locks shall have a breakaway feature (such as a weakened spindle or a shear key) to prevent irreparable damage to the lock when a force in excess of that specified in BHMA A156.13 is applied to the lever handle. Lever handles shall return to within 1/2 inch of the door face.

2.3.7.3 Texture

Provide knurled or abrasive coated knobs or lever handles for doors which are accessible to blind persons and which lead to dangerous areas.

2.3.8 Keys

Furnish one file key, one duplicate key, and one working key for each key change and for each master keying system. Furnish one additional working key for each lock of each keyed-alike group. Furnish a quantity of key blanks equal to 20 percent of the total number of file keys. Stamp each key with appropriate key control symbol and "U.S. property - Do not duplicate." Do not place room number on keys.

2.3.9 Door Bolts

BHMA A156.16. Provide dustproof strikes for bottom bolts, except for doors having metal thresholds. Automatic latching flush bolts: BHMA A156.3, Type 25.

2.3.10 Closers

BHMA A156.4, Series C02000, Grade 1, with PT 4C. Provide with brackets, arms, mounting devices, fasteners, full size covers, except at storefront mounting, cement cases, and other features necessary for the particular application. Size closers in accordance with manufacturer's recommendations, or provide multi-size closers, Sizes 1 through 6, and list sizes in the Hardware Schedule. Provide manufacturer's 10 year warranty.

2.3.10.1 Identification Marking

Engrave each closer with manufacturer's name or trademark, date of manufacture, and manufacturer's size designation located to be visible after installation.

2.3.11 Overhead Holders

BHMA A156.8.

2.3.14 Closer Holder-Release Devices

BHMA A156.15.

2.3.17 Door Stops and Silencers

BHMA A156.16. Silencers Type L03011. Provide three silencers for each single door, two for each pair.

2.3.12 Thresholds

BHMA A156.21. Use J35100, with vinyl or silicone rubber insert in face of raised stops w/weather seals, for exterior doors opening out, unless specified otherwise.

2.3.20 Weather Stripping Gasketing

BHMA A156.22. Provide the type and function designation where specified in paragraph entitled "Hardware Schedule". A set shall include head and jamb seals, sweep strips, and, for pairs of doors, astragals. Air leakage of weather stripped doors shall not exceed 0.5 cubic feet per minute of air per square foot of door area when tested in accordance with ASTM E 283. Weather stripping shall be one of the following:

2.3.20.1 Extruded Aluminum Retainers

Extruded aluminum retainers not less than 0.050 inch wall thickness with vinyl, neoprene, silicone rubber, or polyurethane inserts. Aluminum shall be bronze anodized.

2.3.13 Rain Drips

Extruded aluminum, not less than 0.08 inch thick, bronze anodized. Set drips in sealant conforming to Section 07920N, "Joint Sealants," and fasten with stainless steel screws.

2.3.13.1 Door Rain Drips

Approximately 1 1/2 inches high by 5/8 inch projection. Align bottom with bottom edge of door.

2.3.13.2 Overhead Rain Drips

Approximately 1 1/2 inches high by 2 1/2 inches projection, with length equal to overall width of door frame. Align bottom with door frame rabbet.

2.3.14 Special Tools

Provide special tools, such as spanner and socket wrenches and dogging keys, required to service and adjust hardware items.

2.4 FASTENERS

Provide fasteners of proper type, quality, size, quantity, and finish with hardware. Fasteners exposed to weather shall be of nonferrous metal or stainless steel. Provide fasteners of type necessary to accomplish a permanent installation.

2.5 FINISHES

BHMA A156.18. Hardware shall have BHMA 630 finish (satin stainless steel), unless specified otherwise. Provide items not manufactured in stainless steel in BHMA 626 finish (satin chromium plated) over brass or bronze, except surface door closers which shall have aluminum paint finish, and except steel hinges which shall have BHMA 652 finish (satin chromium plated). Hinges for exterior doors shall be stainless steel with BHMA 630 finish or chromium plated brass or bronze with BHMA 626 finish. Exit devices may be provided in BHMA 626 finish in lieu of BHMA 630 finish. Exposed parts of concealed closers shall have finish to match lock and door trim. Hardware for aluminum doors shall be finished to match the doors.

2.6 KEY CABINET AND CONTROL SYSTEM

BHMA A156.5, Type E8331 (25 hooks). Key cabinet shall be 12 X 12 located in the control room.

PART 3 EXECUTION

3.1 INSTALLATION

Install hardware in accordance with manufacturers' printed instructions. Fasten hardware to wood surfaces with full-threaded wood screws or sheet metal screws. Provide machine screws set in expansion shields for fastening hardware to solid concrete and masonry surfaces. Provide toggle bolts where required for fastening to hollow core construction. Provide through bolts where necessary for satisfactory installation.

3.1.1 Weather Stripping Installation

Handle and install weather stripping so as to prevent damage. Provide full contact, weather-tight seals. Doors shall operate without binding.

3.1.1.1 Stop-Applied Weather Stripping

Fasten in place with color-matched sheet metal screws not more than 9 inches o.c. after doors and frames have been finish painted.

3.1.1 Threshold Installation

Extend thresholds the full width of the opening and notch end for jamb stops. Set thresholds in a full bed of sealant and anchor to floor with cadmium-plated, countersunk, steel screws in expansion sleeves.

3.2 EXIT DOORS

Install hardware in accordance with NFPA 101 for exit doors.

3.3 HARDWARE LOCATIONS

SDI 100, unless indicated or specified otherwise.

a. Kick and Armor Plates: Push side of single-acting doors. Both sides of double-acting doors.

3.4 KEY CABINET AND CONTROL SYSTEM

Locate where directed. Tag one set of file keys and one set of duplicate keys. Place other keys in appropriately marked envelopes, or tag each key. Furnish complete instructions for setup and use of key control system. On tags and envelopes, indicate door and room numbers or master or grand master key.

3.5 FIELD QUALITY CONTROL

After installation, protect hardware from paint, stains, blemishes, and other damage until acceptance of work. Submit notice of testing 15 days before scheduled, so that testing can be witnessed by the Contracting Officer. Adjust hinges, locks, latches, bolts, holders, closers, and other items to operate properly. Demonstrate that permanent keys operate respective locks, and give keys to the Contracting Officer. Correct, repair, and finish, as directed, errors in cutting and fitting and damage to adjoining work.

3.6 HARDWARE SETS

Hardware for aluminum doors shall be provided under this section. Deliver Hardware templates and hardware, except field-applied hardware to the

aluminum door and frame manufacturer for use in fabricating the doors and frames.

Hardware Set 1 - Store Front

1 - Exit Devices with Thumblatch Entry
1 - Threshold
1 - Weatherstripping
1 - Rain Drip
Hinges
Closers
Bolt Locks

Hardware Set 2 - Exterior Single Exit FRP

1 - Exit Device with Thumblatch Entry
1 - Threshold
1 - Weatherstripping
1 - Rain Drip
Hinges
Closers
Bolt Locks

Hardware Set 3 - Exterior Double Exit FRP

2 - Exit Devices with Thumblatch Entry
2 - Thresholds
2 - Weatherstripping
2 - Rain Drip
Hinges
Closers
Bolt Locks

Hardware Set 4 - Interior 1 1/2 FRP

Hinges
Door Bolt
Closer
Locks with Lever Handles

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 09 - FINISHES

SECTION 09250

GYPSUM BOARD

11/01

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 DELIVERY, STORAGE, AND HANDLING
1.3.1 Delivery
1.3.2 Storage
1.3.3 Handling
1.4 ENVIRONMENTAL CONDITIONS
1.4.1 Temperature
1.4.2 Exposure to Weather
1.5 QUALIFICATIONS

PART 2 PRODUCTS

2.1 MATERIALS
2.1.1 Gypsum Board
2.1.1.1 Regular
2.1.2 Gypsum Backing Board
2.1.2.1 Regular
2.1.2 Joint Treatment Materials
2.1.2.1 Embedding Compound
2.1.2.2 Finishing or Topping Compound
2.1.2.3 All-Purpose Compound
2.1.2.4 Setting or Hardening Type Compound
2.1.2.5 Joint Tape
2.1.3 Fasteners
2.1.3.1 Nails
2.1.10.2 Screws
2.1.11 Adhesives
2.1.11.1 Adhesive for Fastening Gypsum Board to Metal Framing
2.1.14 Accessories
2.1.4 Water

PART 3 EXECUTION

3.1 EXAMINATION
3.1.1 Framing and Furring
3.1.2 Gypsum Board and Framing
3.1.3 Masonry Walls
3.2 APPLICATION OF GYPSUM BOARD
3.2.7 Application of Gypsum Board to Steel Framing and Furring
3.2.13 Control Joints
3.2 FINISHING OF GYPSUM BOARD
3.4.1 Uniform Surface
3.5 SEALING

3.7 PATCHING

-- End of Section Table of Contents --

SECTION 09250

GYPSUM BOARD
11/01

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI A108.11	(1992) Interior Installation of Cementitious Backer Units
ANSI A108.1	(1992) Cementitious Backer Units

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 36/C 36M	(1999) Gypsum Wallboard
ASTM C 79/C 79M	(2001) Standard Specification for Treated Core and Nontreated Core Gypsum Sheathing Board
ASTM C 442/C 442M	(1999; Rev. A) Gypsum Backing Board and Coreboard
ASTM C 475	(1994) Joint Compound and Joint Tape for Finishing Gypsum Board
ASTM C 514	(1996) Nails for the Application of Gypsum Board
ASTM C 557	(1999) Adhesives for Fastening Gypsum Wallboard to Wood Framing
ASTM C 630/C 630M	(2001) Water-Resistant Gypsum Backing Board
ASTM C 840	(2001) Application and Finishing of Gypsum Board
ASTM C 954	(2000) Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Studs from 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness
ASTM C 960/C 960M	(1997) Predecorated Gypsum Board
ASTM C 1002	(2000) Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases

ASTM C 1047	(1999) Accessories for Gypsum Wallboard and Gypsum Veneer Base
ASTM C 1177/C 1177M	(1999) Standard Specification for Glass Mat Gypsum Substrate for use as Sheathing
ASTM C 1178/C 1178M	(1999) Glass Mat Water-Resistant Gypsum Backing Board
ASTM C 1396/C 1396M	(2000) Standard Specification for Gypsum Board
ASTM D 226	(1997) Standard Specification for Asphalt-Saturated Organic Felt Used in Roofing and Waterproofing
ASTM D 412	(1998) Standard Test Methods for Vulcanized Rubber and Thermoplastic Rubbers and Thermoplastic Elastomers-Tension
ASTM D 624	(2000) Standard Test Method for Tear Strength of Conventional Vulcanized Rubber and Thermoplastic Elastomers
ASTM D 1037	(1999) Standard Test Methods for Evaluating Properties of Wood-Base Fiber and Particle Panel Materials
ASTM D 1149	(1999) Standard Test Method for Rubber Deterioration-Surface Ozone Cracking in a Chamber
ASTM D 2394	(1999) Standard Method for Simulated Service Testing of Wood and Wood-Base Finish Flooring
ASTM D 5420	(1998) Standard Test Method for Impact Resistance of Flat, Rigid Plastic Specimen by Means of a Striker Impacted by a Falling Weight (Gardner Impact)
ASTM E 84	(2001) Surface Burning Characteristics of Building Materials
ASTM E 695	(1997) Standard Method for Measure Relative Resistance of Wall, Floor and Roof Construction to Impact Loads

GYPSUM ASSOCIATION (GA)

GA 214	(1996) Recommended Levels of Gypsum Board Finish
GA 216	(2000) Application and Finishing of Gypsum Board

GA 224	(1997) Installation of Predecorated Gypsum Board
GA 253	(1999) Application of Gypsum Sheathing
GA 600	(2000) Fire Resistance and Sound Control Design Manual

UNDERWRITERS LABORATORIES (UL)

UL Fire Resist Dir	(2000) Fire Resistance Directory

1.2 SUBMITTALS

Submit the following in accordance with Section 01330, "Submittal Procedures."

SD-03 Product Data

Cementitious backer units

Glass Mat Water-Resistant Gypsum Tile Backing Board

Water-Resistant Gypsum Backing Board

Glass Mat Covered or Reinforced Gypsum Sheathing

Glass Mat Covered or Reinforced Gypsum Sheathing Sealant

Impact Resistant Gypsum Board

Accessories

Submit for each type of gypsum board and for cementitious backer units.

SD-04 Samples

Predecorated gypsum board; G

Submit for each color and pattern of predecorated gypsum board. Where colors are not indicated, submit color selection samples of not less than eight of the manufacturer's standard colors.

SD-07 Certificates

Asbestos Free Materials; G

Certify that gypsum board types, gypsum backing board types, cementitious backer units, and joint treating materials do not contain asbestos.

1.3 DELIVERY, STORAGE, AND HANDLING

1.3.1 Delivery

Deliver materials in the original packages, containers, or bundles with each bearing the brand name, applicable standard designation, and name of manufacturer, or supplier.

1.3.2 Storage

Keep materials dry by storing inside a sheltered building. Where necessary to store gypsum board and cementitious backer units outside, store off the ground, properly supported on a level platform, and protected from direct exposure to rain, snow, sunlight, and other extreme weather conditions. Provide adequate ventilation to prevent condensation.

1.3.3 Handling

Neatly stack gypsum board and cementitious backer units flat to prevent sagging or damage to the edges, ends, and surfaces.

1.4 ENVIRONMENTAL CONDITIONS

1.4.1 Temperature

Maintain a uniform temperature of not less than 50 degrees F in the structure for at least 48 hours prior to, during, and following the application of gypsum board, cementitious backer units, and joint treatment materials, or the bonding of adhesives.

1.4.2 Exposure to Weather

Protect gypsum board and cementitious backer unit products from direct exposure to rain, snow, sunlight, and other extreme weather conditions.

1.5 QUALIFICATIONS

Manufacturer shall specialize in manufacturing the types of material specified and shall have a minimum of 5 years of documented successful experience. Installer shall specialize in the type of gypsum board work required and shall have a minimum of 3 years of documented successful experience.

PART 2 PRODUCTS

2.1 MATERIALS

Conform to specifications, standards and requirements specified herein. Provide gypsum board types, gypsum backing board types, cementitious backing units, and joint treating materials manufactured from asbestos free materials only.

2.1.1 Gypsum Board

ASTM C 36/C 36M and ASTM C 1396/C 1396M.

2.1.1.1 Regular

48 inches wide, 5/8 inch thick, tapered.

2.1.2 Gypsum Backing Board

ASTM C 442/C 442M, gypsum backing board shall be used as a base in a multilayer system.

2.1.2.1 Regular

48 inches wide, 5/8 inch thick, square edges.

2.1.2 Joint Treatment Materials

ASTM C 475.

2.1.2.1 Embedding Compound

Specifically formulated and manufactured for use in embedding tape at gypsum board joints and compatible with tape, substrate and fasteners.

2.1.2.2 Finishing or Topping Compound

Specifically formulated and manufactured for use as a finishing compound.

2.1.2.3 All-Purpose Compound

Specifically formulated and manufactured to serve as both a taping and a finishing compound and compatible with tape, substrate and fasteners.

2.1.2.4 Setting or Hardening Type Compound

Specifically formulated and manufactured for use with fiber glass mesh tape.

2.1.2.5 Joint Tape

Cross-laminated, tapered edge, reinforced paper, or fiber glass mesh tape recommended by the manufacturer.

2.1.3 Fasteners

2.1.3.1 Nails

ASTM C 514.

2.1.10.2 Screws

ASTM C 1002, Type "G" or Type "S" steel drill screws for fastening gypsum board to gypsum board, and steel framing members less than 0.033 inch thick. ASTM C 954 steel drill screws for fastening gypsum board to steel framing members 0.033 to 0.112 inch thick. Provide cementitious backer unit screws with a polymer coating.

2.1.11 Adhesives

Do not use adhesive containing benzene, carbon tetrachloride, or trichloroethylene.

2.1.11.1 Adhesive for Fastening Gypsum Board to Metal Framing

Type recommended by gypsum board manufacturer.

2.1.14 Accessories

ASTM C 1047. Fabricate from corrosion protected steel or plastic designed for intended use. Accessories manufactured with paper flanges are not acceptable. Flanges shall be free of dirt, grease, and other materials that may adversely affect bond of joint treatment.

2.1.4 Water

Clean, fresh, and potable.

PART 3 EXECUTION

3.1 EXAMINATION

3.1.1 Framing and Furring

Verify that framing and furring are securely attached and of sizes and spacing to provide a suitable substrate to receive gypsum board and cementitious backer units. Verify that all blocking, headers and supports are in place to support plumbing fixtures and to receive soap dishes, grab bars, towel racks, and similar items. Do not proceed with work until framing and furring are acceptable for application of gypsum board and cementitious backer units.

3.1.2 Gypsum Board and Framing

Verify that surfaces of gypsum board and framing to be bonded with an adhesive are free of dust, dirt, grease, and any other foreign matter. Do not proceed with work until surfaces are acceptable for application of gypsum board with adhesive.

3.1.3 Masonry Walls

Verify that surfaces of masonry walls to receive gypsum board applied with adhesive are dry, free of dust, oil, form release agents, protrusions and voids, and any other foreign matter. Do not proceed with work until surfaces are acceptable for application of gypsum board with adhesive.

3.2 APPLICATION OF GYPSUM BOARD

Apply gypsum board to framing and furring members in accordance with ASTM C 840 or GA 216 and the requirements specified herein. Apply gypsum board with separate panels in moderate contact; do not force in place. Stagger end joints of adjoining panels. Neatly fit abutting end and edge joints. Use gypsum board of maximum practical length. Cut out gypsum board as required to make neat close joints around openings. In vertical application of gypsum board, provide panels in lengths required to reach full height of vertical surfaces in one continuous piece. Surfaces of gypsum board and substrate members may be bonded together with an adhesive, except where prohibited by fire rating(s). Treat edges of cutouts for plumbing pipes, screwheads, and joints with water-resistant compound as recommended by the gypsum board manufacturer. Provide type of gypsum board for use in each system specified herein as indicated.

3.2.7 Application of Gypsum Board to Steel Framing and Furring

Apply in accordance with ASTM C 840, System VIII or GA 216.

3.2.13 Control Joints

Install expansion and contraction joints in ceilings and walls in accordance with ASTM C 840, System XIII or GA 216, unless indicated otherwise. Control joints between studs in fire-rated construction shall be filled with firesafing insulation to match the fire-rating of construction.

3.2 FINISHING OF GYPSUM BOARD

Tape and finish gypsum board in accordance with ASTM C 840, GA 214 and GA 216. Plenum areas above ceilings shall be finished to Level 1 in accordance with GA 214. Water resistant gypsum backing board, ASTM C 630/C 630M, to receive ceramic tile shall be finished to Level 2 in accordance with GA 214. Walls and ceilings to receive a heavy-grade wall covering or heave textured finish before painting shall be finished to Level 3 in accordance with GA 214. Walls and ceilings without critical lighting to receive flat paints, light textures, or wall coverings shall be finished to Level 4 in accordance with GA 214. Unless otherwise specified, all gypsum board walls shall be finished to Level 5 in accordance with GA 214. Provide joint, fastener depression, and corner treatment. Do not use fiber glass mesh tape with conventional drying type joint compounds; use setting or hardening type compounds only. Provide treatment for water-resistant gypsum board as recommended by the gypsum board manufacturer.

3.4.1 Uniform Surface

Wherever gypsum board is to receive eggshell, semigloss or gloss paint finish, or where severe, up or down lighting conditions occur, finish gypsum wall surface in accordance to GA 214 Level 5. In accordance with GA 214 Level 5, apply a thin skim coat of joint compound to the entire gypsum board surface, after the two-coat joint and fastener treatment is complete and dry.

3.5 SEALING

Seal openings around pipes, fixtures, and other items projecting through gypsum board and cementitious backer units as specified in Section 07900a "Joint Sealing." Apply material with exposed surface flush with gypsum board or cementitious backer units.

3.7 PATCHING

Patch surface defects in gypsum board to a smooth, uniform appearance, ready to receive finish as specified.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 09 - FINISHES

SECTION 09310

CERAMIC TILE

8/02

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 DELIVERY AND STORAGE
1.4 ENVIRONMENTAL REQUIREMENTS
1.5 WARRANTY
1.6 EXTRA STOCK

PART 2 PRODUCTS

2.1 TILE
2.1.1 Glazed Wall Tile
2.1.2 Accessories
2.2 SETTING-BED
2.2.1 Aggregate for Concrete Fill
2.2.2 Portland Cement
2.2.3 Sand
2.2.4 Hydrated Lime
2.2.4 Reinforcing Wire Fabric
2.3 WATER
2.4 MORTAR, GROUT, AND ADHESIVE
2.4.1 Dry-Set Portland Cement Mortar
2.4 Latex-Portland Cement Mortar
2.5 Ceramic Tile Grout
2.6 Organic Adhesive
2.4.6 Epoxy Resin Grout

PART 3 EXECUTION

3.1 PREPARATORY WORK AND WORKMANSHIP
3.2 GENERAL INSTALLATION REQUIREMENTS
3.3 INSTALLATION OF WALL TILE
3.3.1 Workable or Cured Mortar Bed
3.3.2 Dry-Set Mortar and Latex-Portland Cement Mortar
3.3.3 Organic Adhesive
3.4 INSTALLATION OF FLOOR TILE
3.4 Workable or Cured Mortar Bed
3.5 Latex-Portland Cement
3.6 Resinous Grout
3.4.4 Ceramic Tile Grout
3.7 EXPANSION JOINTS
3.7.1 Walls
3.7.2 Floors
3.8 CLEANING AND PROTECTING

-- End of Section Table of Contents --

SECTION 09310

CERAMIC TILE
8/02

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI A108.1	(1999) Installation of Ceramic Tile; including A108.1A-C, 108.4-.13, 118.1-.10, A136.1
ANSI A137.1	(1988) Ceramic Tile

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 185	(1997) Steel Welded Wire Fabric, Plain, for Concrete Reinforcement
ASTM C 33	(1999ael) Concrete Aggregates
ASTM C 144	(1999) Aggregate for Masonry Mortar
ASTM C 150	(1999a) Portland Cement
ASTM C 206	(1984; R 1997) Finishing Hydrated Lime
ASTM C 207	(1991; R 1997) Hydrated Lime for Masonry Purposes
ASTM C 241	(1997) Abrasion Resistance of Stone Subjected to Foot Traffic
ASTM C 373	(1988; R 1994) Water Absorption, Bulk Density, Apparent Porosity, and Apparent Specific Gravity of Fired Whiteware Products
ASTM C 482	(1981; R 1996) Bond Strength of Ceramic Tile to Portland Cement
ASTM C 501	(1984; R 1996) Relative Resistance to Wear of Unglazed Ceramic Tile by the Taber Abraser
ASTM C 648	(1998) Breaking Strength of Ceramic Tile
ASTM C 847	(1995) Metal Lath

ASTM C 1026	(1987; R 1996) Measuring the Resistance of Ceramic Tile to Freeze-Thaw Cycling
ASTM C 1027	(1999) Determining Visible Abrasion Resistance of Glazed Ceramic Tile
ASTM C 1028	(1996) Determining the Static Coefficient of Friction of Ceramic Tile and Other Like Surfaces by the Horizontal Dynamometer Pull-Meter Method
ASTM C 1178/C 1178M	(1999) Glass Mat Water-Resistant Gypsum Backing Panel
ASTM F 446	(1985; R 1993) Grab Bars and Accessories Installed in Bathing Area

MARBLE INSTITUTE OF AMERICA (MIA)

MIA Design Manual	(1991) Design Manual IV Dimensional Stone

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 99	(1999) Health Care Facilities

TILE COUNCIL OF AMERICA (TCA)

TCA Hdbk	(1997) Handbook for Ceramic Tile Installation

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

36 CFR 1191	Americans with Disabilities Act (ADA) Accessibility Guidelines for Buildings and Facilities

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only or as otherwise designated. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Tile
Setting-Bed
Mortar, Grout, and Adhesive

Manufacturer's catalog data and preprinted installation and cleaning instructions.

SD-04 Samples

Tile

Accessories

Samples of sufficient size to show color range, pattern, type and joints.

SD-06 Test Reports

Testing

Copy of results for electrical resistance tests.

SD-07 Certificates

Tile
Mortar, Grout, and Adhesive

Certificates indicating conformance with specified requirements. A master grade certificate shall be furnished for tile.

1.3 DELIVERY AND STORAGE

Materials shall be delivered to the project site in manufacturer's original unopened containers with seals unbroken and labels and hallmarks intact. Materials shall be kept dry, protected from weather, and stored under cover in accordance with manufacturer's instructions.

1.4 ENVIRONMENTAL REQUIREMENTS

Ceramic tile work shall not be performed unless the substrate and ambient temperature is at least 50 degrees F and rising. Temperature shall be maintained above 50 degrees F while the work is being performed and for at least 7 days after completion of the work. When temporary heaters are used they shall be vented to the outside to avoid carbon dioxide damage to new tilework.

1.5 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a 1-year period shall be provided.

1.6 EXTRA STOCK

Supply an extra two percent of each type tile used in clean and marked cartons.

PART 2 PRODUCTS

2.1 TILE

Tile shall be standard grade conforming to ANSI A137.1. Containers shall be grade sealed. Seals shall be marked to correspond with the marks on the signed master grade certificate. Tile shall be impact resistant with a minimum breaking strength for wall tile of 90 lbs and 250 lbs for floor tile in accordance with ASTM C 648. Tile for cold climate projects shall be rated frost resistant by the manufacturer as determined by ASTM C 1026. Water absorption shall be 0.50 maximum percent in accordance with ASTM C 373. Floor tile shall have a minimum coefficient of friction of 0.50 wet

and dry in accordance with ASTM C 1028. Floor tile shall be Class IV-Heavy Traffic, durability classification as rated by the manufacturer when tested in accordance with ASTM C 1027 for abrasion resistance as related to foot traffic.

2.1.1 Glazed Wall Tile

Glazed wall tile and trim shall be cushion edged with bright glaze. Tile shall be 4-1/4 x 4-1/4 inches.

2.1.2 Accessories

Accessories shall be provided as indicated on sheet A9.

2.2 SETTING-BED

The setting-bed shall be composed of the following:

2.2.1 Aggregate for Concrete Fill

Aggregate shall conform to ASTM C 33. Maximum size of coarse aggregate shall not be greater than one-half the thickness of concrete fill.

2.2.2 Portland Cement

Cement shall conform to ASTM C 150, Type I, white for wall mortar and gray for other uses.

2.2.3 Sand

Sand shall conform to ASTM C 144.

2.2.4 Hydrated Lime

Hydrated lime shall conform to ASTM C 206, Type S or ASTM C 207, Type S.

2.2.4 Reinforcing Wire Fabric

Wire fabric shall conform to ASTM A 185. Wire shall be either 2 x 2 inch mesh, 16/16 wire or 1-1/2 x 2 inch mesh, 16/13 wire.

2.3 WATER

Water shall be potable.

2.4 MORTAR, GROUT, AND ADHESIVE

Mortar, grout, and adhesive shall conform to the following:

2.4.1 Dry-Set Portland Cement Mortar

ANSI A108.1.

2.4 LATEX-PORTLAND CEMENT MORTAR

ANSI A108.1.

2.5 CERAMIC TILE GROUT

ANSI A108.1; latex-portland cement grout.

2.6 ORGANIC ADHESIVE

ANSI A108.1, Type I.

2.4.6 Epoxy Resin Grout

ANSI A108.1.

PART 3 EXECUTION

3.1 PREPARATORY WORK AND WORKMANSHIP

Surface to receive tile shall be inspected and shall conform to the requirements of ANSI A108.1 for surface conditions for the type setting bed specified and for workmanship. Variations of surface to be tiled shall fall within maximum values shown below:

TYPE	WALLS	FLOORS
Dry-Set Mortar	1/8 inch in 8 ft.	1/8 inch in 10 ft.
Organic Adhesives	1/8 inch in 8 ft.	1/16 inch in 3 ft.
Latex portland cement mortar	1/8 inch in 8 ft.	1/8 inch in 10 ft.
Epoxy	1/8 inch in 8 ft.	1/8 inch in 10 ft.

3.2 GENERAL INSTALLATION REQUIREMENTS

Tile work shall not be started until roughing in for mechanical and electrical work has been completed and tested, and built-in items requiring membrane waterproofing have been installed and tested. Floor tile installation shall not be started in spaces requiring wall tile until after wall tile has been installed. Tile in colors and patterns indicated shall be applied in the area shown on the drawings. Tile shall be installed with the respective surfaces in true even planes to the elevations and grades shown. Special shapes shall be provided as required for jambs, recesses, offsets, external corners, and other conditions to provide a complete and neatly finished installation. Tile bases, coves, and surface bullnose shall be solidly backed with mortar.

3.3 INSTALLATION OF WALL TILE

Wall tile shall be installed in accordance with the TCA Hdbk.

3.3.1 Workable or Cured Mortar Bed

Tile shall be installed over a workable mortar bed or a cured mortar bed at the option of the Contractor. A 4 mil polyethylene membrane, metal lath, and scratch coat shall also be installed. Workable mortar bed, materials, and installation of tile shall conform to ANSI A108.1. Cured mortar bed and materials shall conform to ANSI A108.1.

3.3.2 Dry-Set Mortar and Latex-Portland Cement Mortar

Latex-portland cement shall be used to install tile in accordance with ANSI A108.1. Latex portland cement shall be used when installing porcelain ceramic tile.

3.3.3 Organic Adhesive

Organic adhesive installation of ceramic tile shall conform to ANSI A108.1.

3.4 INSTALLATION OF FLOOR TILE

Floor tile shall be installed in accordance with TCA Hdbk.

3.4 WORKABLE OR CURED MORTAR BED

Floor tile shall be installed over a workable mortar bed or a cured mortar bed at the option of the Contractor. Workable mortar bed materials and installation shall conform to ANSI A108.1. Cured mortar bed and materials shall conform to ANSI A108.1. Joints between quarry tile shall be between 1/4 inch and 3/8 inch in width and shall be uniform in width.

3.5 LATEX-PORTLAND CEMENT

Latex-portland cement mortar shall be used to install tile directly over properly cured, plane, clean concrete slabs in accordance with ANSI A108.1. Latex portland cement shall be used when installing porcelain ceramic tile.

3.6 RESINOUS GROUT

When resinous grout is indicated, quarry tile shall be grouted with either furan or epoxy resin grout. Joints shall be raked and cleaned to the full depth of the tile and neutralized when recommended by the resin manufacturer. Epoxy resin grout shall be installed in conformance with ANSI A108.1. Recommended temperature shall be maintained in the area and on the surface to be grouted. After grouting, tile shall be left free of grout stain.

3.4.4 Ceramic Tile Grout

Ceramic Tile grout shall be prepared and installed in accordance with ANSI A108.1.

3.7 EXPANSION JOINTS

Joints shall be formed as indicated and sealed as specified in Section 07920JOINT SEALANTS.

3.7.1 Walls

Expansion joints shall be provided at control joints in backing material. Wherever backing material changes, an expansion joint shall be installed to separate the different materials.

3.7.2 Floors

Expansion joints shall be provided over construction joints, control joints, and expansion joints in concrete slabs. Expansion joints shall be provided where tile abuts restraining surfaces such as perimeter walls, curbs and

columns and at intervals of 24 to 36 feet each way in large interior floor areas and 12 to 16 feet each way in large exterior areas or areas exposed to direct sunlight or moisture. Expansion joints shall extend through setting-beds and fill.

3.8 CLEANING AND PROTECTING

Upon completion, tile surfaces shall be thoroughly cleaned in accordance with manufacturer's approved cleaning instructions. Acid shall not be used for cleaning glazed tile. Floor tile with resinous grout or with factory mixed grout shall be cleaned in accordance with instructions of the grout manufacturer. After the grout has set, tile wall surfaces shall be given a protective coat of a noncorrosive soap or other approved method of protection. Tiled floor areas shall be covered with building paper before foot traffic is permitted over the finished tile floors. Board walkways shall be laid on tiled floors that are to be continuously used as passageways by workmen. Damaged or defective tiles shall be replaced.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 09 - FINISHES

SECTION 09510

ACOUSTICAL CEILINGS

07/02

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 GENERAL REQUIREMENTS
1.4 DELIVERY AND STORAGE
1.5 ENVIRONMENTAL REQUIREMENTS
1.6 SCHEDULING
1.7 WARRANTY
1.8 EXTRA MATERIALS

PART 2 PRODUCTS

2.1 ACOUSTICAL UNITS
2.1.1 Units for Exposed-Grid System
2.2 SUSPENSION SYSTEM
2.3 HANGERS
2.3.1 Wires
2.3 ADHESIVE
2.4 FINISHES
2.5 COLORS AND PATTERNS
2.6 ACOUSTICAL SEALANT

PART 3 EXECUTION

3.1 INSTALLATION
3.1 Suspension System
3.1.1 Plumb Hangers
3.1.2 Splayed Hangers
3.2 Wall Molding
3.1.3 Acoustical Units
3.3 CLEANING

-- End of Section Table of Contents --

SECTION 09510

ACOUSTICAL CEILINGS
07/02

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 167	(1999) Stainless and Heat-Resisting Chromium-Nickel Steel Plates, Sheet and Strip
ASTM A 366/A 366M	(1997e1) Steel, Sheet, Carbon, Cold-Rolled, Commercial Quality
ASTM A 580/A 580M	(1998) Stainless Steel Wire
ASTM A 641/A 641M	(1998) Zinc-Coated (Galvanized) Carbon Steel Wire
ASTM A 653/A 653M	(2001a) Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM B 633	(1998e1) Electrodeposited Coatings of Zinc on Iron and Steel
ASTM C 423	(2001) Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
ASTM C 635	(2000) Manufacture, Performance, and Testing of Metal Suspension Systems for Acoustical Tile and Lay-In Panel Ceilings
ASTM C 636	(1996) Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-In Panels
ASTM C 834	(2000e1) Latex Sealants
ASTM E 84	(2001) Surface Burning Characteristics of Building Materials
ASTM E 119	(2000a) Fire Tests of Building Construction and Materials
ASTM E 580	(2000) Application of Ceiling Suspension Systems for Acoustical Tile and Lay-In Panels in Areas Requiring Moderate Seismic Restraint

ASTM E 795	(2000) Mounting Test Specimens During Sound Absorption Tests
ASTM E 1264	(1998) Acoustical Ceiling Products
ASTM E 1414	(2000a) Airborne Sound Attenuation Between Rooms Sharing a Common Ceiling Plenum
ASTM E 1477	(1998a) Luminous Reflectance Factor of Acoustical Materials by Use of Integrating-Sphere Reflectometers

U.S. ARMY CORPS OF ENGINEERS (USACE)

TI 809-04	(1998) Seismic Design for Buildings

UNDERWRITERS LABORATORIES (UL)

UL Fire Resist Dir	(1999) Fire Resistance Directory (2 Vol.)

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only or as otherwise designated. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Approved Detail Drawings

Drawings showing suspension system, method of anchoring and fastening, details, and reflected ceiling plan.

SD-03 Product Data

Acoustical Ceiling Systems

Manufacturer's descriptive data, catalog cuts, and installation instructions. Submittals which do not provide adequate data for the product evaluation will be rejected.

SD-04 Samples

Acoustical Units

Two samples of each type of acoustical unit and each type of suspension grid tee section showing texture, finish, and color.

SD-07 Certificates

Acoustical Units

Certificate attesting that the mineral based acoustical units furnished for the project contain recycled material and showing an estimated percent of such material.

1.3 GENERAL REQUIREMENTS

Acoustical treatment shall consist of sound controlling units mechanically mounted on a ceiling suspension system. The unit size, texture, finish, and color shall be as specified. The Contractor has the option to substitute inch-pound (I-P) Recessed Light Fixtures (RLF) for metric RLF. If the Contractor opts to furnish I-P RLF, other ceiling elements like acoustical ceiling tiles, air diffusers, air registers and grills, shall also be I-P products. The Contractor shall coordinate the whole ceiling system with other details, like the location of access panels and ceiling penetrations, etc., shown on the drawings. If I-P products are used, the Contractor shall be responsible for all associated labor and materials and for the final assembly and performance of the specified work and products. The location and extent of acoustical treatment shall be as shown on the approved detail drawings. Reclamation of mineral fiber acoustical ceiling panels to be removed from the job site shall be in accordance with paragraph RECLAMATION PROCEDURES.

1.4 DELIVERY AND STORAGE

Materials shall be delivered to the site in the manufacturer's original unopened containers with brand name and type clearly marked. Materials shall be carefully handled and stored in dry, watertight enclosures. Immediately before installation, acoustical units shall be stored for not less than 24 hours at the same temperature and relative humidity as the space where they will be installed in order to assure proper temperature and moisture acclimation.

1.5 ENVIRONMENTAL REQUIREMENTS

A uniform temperature of not less than 60 degrees F nor more than 85 degrees F and a relative humidity of not more than 70 percent shall be maintained for 24 hours before, during, and 24 hours after installation of acoustical units.

1.6 SCHEDULING

Interior finish work such as plastering, concrete and terrazzo work shall be complete and dry before installation. Mechanical, electrical, and other work above the ceiling line shall be completed and heating, ventilating, and air conditioning systems shall be installed and operating in order to maintain temperature and humidity requirements.

1.7 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a one year period shall be provided. Standard performance guarantee or warranty shall contain an agreement to repair or replace acoustical panels that fail within the warranty period. Failures include, but are not limited to, sagging and warping of panels; rusting and manufacturers defects of grid system.

1.8 EXTRA MATERIALS

Spare tiles of each color shall be furnished at the rate of 10 tiles for each 1000 tiles installed. Tiles shall be from the same lot as those installed.

PART 2 PRODUCTS

2.1 ACOUSTICAL UNITS

Acoustical units shall conform to ASTM E 1264, Class A, and the following requirements:

2.1.1 Units for Exposed-Grid System

Type: IV (non-asbestos mineral fiber with membrane-faced overlay).

Minimum NRC: 0.75 in open office areas; in all other rooms and areas when tested on mounting Type E-400 of ASTM E 795.

Nominal size: 24 by 24 inches.

Edge detail: Square.

Finish: Factory-applied standard finish.

Minimum LR coefficient: LR-1, 0.75 or greater.

Minimum CAC: 40.

Flame Spread: Class A, 25 or less

2.2 SUSPENSION SYSTEM

Classification	lb/Linear Foot of Main Runner		
	Direct Hung	Indirect Hung	Furring Bar
Light Duty	5.0	2.0	4.5
Intermediate Duty	12.0	3.5	6.5
Heavy Duty	16.0	8.0	-

Suspension system shall be standard exposed-grid width flange, and shall conform to ASTM C 635 for intermediate-duty systems. Surfaces exposed to view shall be aluminum with a factory-applied white color baked-enamel finish. Wall molding shall have a flange of not less than 15/16 inch. Inside and outside corner caps standard corners shall be provided. Suspended ceiling framing system shall have the capability to support the finished ceiling, light fixtures, air diffusers, and accessories, as shown. The suspension system shall have a maximum deflection of 1/360 of span length. Seismic details shall conform to the guidance in TI 809-04 and ASTM E 580.

2.3 HANGERS

Hangers and attachment shall support a minimum 300 pound ultimate vertical load without failure of supporting material or attachment.

2.3.1 Wires

Wires shall conform to ASTM A 580/A 580M, composition 302 or 304, condition annealed stainless steel, 0.1055 inches in diameter.

2.3 ADHESIVE

Adhesive shall be as recommended by tile manufacturer.

2.4 FINISHES

Acoustical units and suspension system members shall have manufacturer's standard textures, patterns and finishes as specified. Ceiling suspension system components shall be treated to inhibit corrosion.

2.5 COLORS AND PATTERNS

Colors and patterns for acoustical units and suspension system components shall be selected by the Government.

2.6 ACOUSTICAL SEALANT

Acoustical sealant shall conform to ASTM C 834, nonstaining.

PART 3 EXECUTION

3.1 INSTALLATION

Examine surfaces to receive directly attached acoustical units for uneveness, irregularities, and dampness that would affect quality and execution of the work. Areas where acoustical units will be cemented shall be free of oils, form residue, or other materials that reduce bonding capabilities of the adhesive. Interior finish work such as plastering, concrete, and terrazzo work shall be completed and dry before installation. Mechanical, electrical, and other work above the ceiling line shall be completed and approved prior to the start of acoustical ceiling installation. Acoustical work shall be provided complete with necessary fastenings, clips, and other accessories required for a complete installation. Mechanical fastenings shall not be exposed in the finished work. Hangers shall be laid out for each individual room or space. Hangers shall be placed to support framing around beams, ducts, columns, grilles, and other penetrations through ceilings. Main runners and carrying channels shall be kept clear of abutting walls and partitions. At least two main runners shall be provided for each ceiling span. Wherever required to bypass an object with the hanger wires, a subsuspension system shall be installed, so that all hanger wires will be plumb.

3.1 SUSPENSION SYSTEM

Suspension system shall be installed in accordance with ASTM C 636 and as specified herein. There shall be no hanger wires or other loads suspended from underside of steel decking.

3.1.1 Plumb Hangers

Hangers shall be plumb and shall not press against insulation covering ducts and pipes. Where lighting fixtures are supported from the suspended ceiling system, hangers shall be provided at a minimum of four hangers per fixture and located not more than 6 inches from each corner of each fixture.

3.1.2 Splayed Hangers

Where hangers must be splayed (sloped or slanted) around obstructions, the resulting horizontal force shall be offset by bracing, countersplaying, or other acceptable means.

3.2 WALL MOLDING

Wall molding shall be provided where ceilings abut vertical surfaces. Miter corners where wall moldings intersect or install corner caps. Wall molding shall be secured not more than 3 inches from ends of each length and not more than 16 inches on centers between end fastenings. Wall molding springs shall be provided at each acoustical unit in semi-exposed or concealed systems.

3.1.3 Acoustical Units

Acoustical units shall be installed in accordance with the approved installation instructions of the manufacturer. Edges of acoustical units shall be in close contact with metal supports, with each other, and in true alignment. Acoustical units shall be arranged so that units less than one-half width are minimized. Units in exposed-grid system shall be held in place with manufacturer's standard hold-down clips, if units weigh less than 1 psf or if required for fire resistance rating.

3.3 CLEANING

Following installation, dirty or discolored surfaces of acoustical units shall be cleaned and left free from defects. Units that are damaged or improperly installed shall be removed and new units provided as directed.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 09 - FINISHES

SECTION 09650

RESILIENT FLOORING

08/02

PART 1 GENERAL

1.1 REFERENCES
1.2 FIRE RESISTANCE REQUIREMENTS
1.3 SUBMITTALS
1.4 DELIVERY AND STORAGE
1.5 ENVIRONMENTAL REQUIREMENTS
1.6 SCHEDULING
1.7 WARRANTY
1.8 EXTRA MATERIALS

PART 2 PRODUCTS

2.1 UNDERLAYMENT
2.2 TILE FLOORING
2.2.1 Vinyl-Composition Style
2.2 Adhesive for Vinyl Composition Tile
2.2.7 Adhesive for Wall Base
2.3.4.3 Wall Base
2.3 Primer for Concrete Floor Surfaces
2.4 Floor Crack Filler
2.5 Mastic Underlay for Concrete Floor Surfaces
2.6 Cleaner and Polish
2.7 STRIPS
2.4.1 Edge
2.7.1 Transition
2.8 WALL BASE
2.9 POLISH/FINISH
2.10 CAULKING AND SEALANTS
2.11 MANUFACTURER'S COLOR AND TEXTURE

PART 3 EXECUTION

3.1 EXAMINATION/VERIFICATION OF CONDITIONS
3.1.1 Subfloor Requirements
3.1.2 Surface Examination
3.2 SURFACE PREPARATION
3.2.1 Concrete Floor
3.2.1 Plywood Underlayment
3.2.2 Final Cleaning of Substrate
3.3 MOISTURE TEST
3.4 GENERAL APPLICATION REQUIREMENTS
3.5 INSTALLATION OF VINYL-COMPOSITION TILE
3.9 INSTALLATION OF WALL BASE
3.5 CLEANING
3.6 PROTECTION

-- End of Section Table of Contents --

SECTION 09650

RESILIENT FLOORING
08/02

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 2240	(2002) Rubber Property - Durometer Hardness
ASTM D 4078	(1992; R 1996) Water Emulsion Floor Polish
ASTM E 648	(2000) Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source
ASTM E 662	(2001) Specific Optical Density of Smoke Generated by Solid Materials
ASTM F 510	(1993; R 1999) Resistance to Abrasion of Resilient Floor Coverings Using an Abrader with a Grit Feed Method
ASTM F 1066	(1999) Vinyl Composition Floor Tile
ASTM F 1303	(1999) Sheet Vinyl Floor Covering with Backing
ASTM F 1344	(2000) Rubber Floor Tile
ASTM F 1700	(1999) Solid Vinyl Floor Tile
ASTM F 1913	(1998) Vinyl Sheet Floor Covering Without Backing

1.2 FIRE RESISTANCE REQUIREMENTS

Flooring in corridors and exits shall have a minimum average critical radiant flux of 0.45 watts per square centimeter when tested in accordance with ASTM E 648. The smoke density rating shall be less than 450 when tested in accordance with ASTM E 662.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only or as otherwise designated. When used, a designation following the "G" designation identifies the office that will review the submittal for the

Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Tile Flooring;

Drawings indicating location of seams, integral cove, including details of outside corner and cap, and edge strips.

SD-03 Product Data

Tile Flooring;
Accessories for Sheet Vinyl;
Integral Coved Base;
Adhesive for Vinyl Composition Tile;
Adhesive for Wall Base;

Manufacturer's descriptive data and installation instructions including cleaning and maintenance instructions.

SD-04 Samples

Tile Flooring;
Seaming Bead;
Wall Base;

Three samples of each indicated color and type of flooring and base. Sample size shall be minimum 2-1/2 x 4 inches.

SD-06 Test Reports

Moisture Test;

Copies of test reports showing that representative product samples of the flooring proposed for use have been tested by an independent testing laboratory within the past three years or when formulation change occurred and conforms to the requirements specified.

SD-08 Manufacturer's Instructions

Tile Flooring;

Copies of flooring manufacturer's recommended installation procedures.

SD-10 Operation and Maintenance Data

Data Package 1;

Data Package in accordance with Section 01781 OPERATION AND MAINTENANCE DATA.

1.4 DELIVERY AND STORAGE

Materials shall be delivered to the building site in original unopened containers bearing the manufacturer's name, brands, stock names, production run, project identification, and handling instructions. Materials shall be stored in a clean dry area with temperature maintained above 70 degrees F for 2 days prior to installation, and shall be stacked according to manufacturer's recommendations. Materials shall be protected from the direct flow of heat from hot-air registers, radiators and other heating fixtures and appliances. Do not open containers until materials are to be used, except for inspection to verify compliance with requirements.

1.5 ENVIRONMENTAL REQUIREMENTS

a. Areas to receive resilient flooring shall be maintained at a temperature above 70 degrees F and below 100 degrees F for 2 days before application, during application and 2 days after application. A minimum temperature of 55 degrees F shall be maintained thereafter.

b. Provide adequate ventilation to remove moisture from area and to comply with regulations limiting concentrations of hazardous vapors.

1.6 SCHEDULING

Resilient flooring application shall be scheduled after the completion of other work which would damage the finished surface of the flooring.

1.7 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a one year period shall be provided.

1.8 EXTRA MATERIALS

Extra flooring material and butt-to base of each color and pattern shall be furnished at the rate of 5 tiles for each 1000 tiles installed. Extra materials shall be from the same lot as those installed. Extra base material composed of 20 linear feet of each color shall be furnished. All extra materials shall be packaged in original containers, properly marked.

PART 2 PRODUCTS

	A	B	C
Medical operating rooms	yes	yes	no
Delivery rooms	yes	yes	no
Cast rooms	yes	yes	no
Emergency rooms	yes	yes	no
Isolation rooms	yes	yes	yes
Other medical areas	no	no	no
Dental operatories	yes	yes	no
Clean corridors	yes	yes	yes
High-traffic corridors	yes	yes	no
Laboratories/research areas	yes	yes	yes
Public areas where smoking is allowed	no	no	no
Food preparation and serving areas	no	no	no

2.1 UNDERLAYMENT

Underlayment shall be latex type, as recommended by flooring manufacturer.

2.2 TILE FLOORING

2.2.1 Vinyl-Composition Style

Vinyl-composition tile shall conform to ASTM F 1066, Class 2, (through pattern tile), Composition 1, asbestos-free, and shall be 12 inches square and 1/8 inch thick. Tile shall have the color and pattern uniformly distributed throughout the thickness of the tile. Flooring in any one continuous area shall be from the same lot and shall have the same shade and pattern.

2.2 ADHESIVE FOR VINYL COMPOSITION TILE

Cutback adhesive for installation of tile over concrete above, on or above grade. Moisture and alkali resistant. Non-asbestos formulated or a latex adhesive recommended by flooring manufacturer.

2.2.7 Adhesive for Wall Base

Adhesive for wall base shall be emulsified acrylic latex; non-flamable.

2.3.4.3 Wall Base

As recommended by wall base manufacturer.

2.3 PRIMER FOR CONCRETE FLOOR SURFACES

As recommended by flooring manufacturer for locations indicated.

2.4 FLOOR CRACK FILLER

Nonshrinking latex portland cement-based compound.

2.5 MASTIC UNDERLAY FOR CONCRETE FLOOR SURFACES

Latex or polyvinyl acetate resin base, as recommended by flooring manufacturer.

2.6 CLEANER AND POLISH

As recommended in flooring manufacturer's printed maintenance instructions.

2.7 STRIPS

2.4.1 Edge

Provide tile reducer of vinyl and approved by flooring manufacturer. Limit vertical lips in edge strips to 1/4 inch; limit total rise to 1/2 inch.

2.7.1 Transition

A vinyl transition strip tapered to meet abutting material shall be provided.

2.8 WALL BASE

Base shall be manufacturers standard vinyl, coved style (installed with resilient flooring). Base shall be 4 inches high and a minimum 1/8 inch thick, in approved color, and in matte finish. Job Formed corners shall be furnished. Use flexible base to conform to irregularities in walls, partitions, and floors. Provide premolded corners in matching size, shape, and color for all right-angle inside and outside corners.

2.9 POLISH/FINISH

Polish shall conform to ASTM D 4078. Use flooring manufacturer's standard high-solids finish for shine without buffing; non-flamable; compatible with factory-applied finish; may be buffed or burnished for maximum gloss.

2.10 CAULKING AND SEALANTS

Caulking and sealants shall be in accordance with Section 07920 JOINT SEALANTS.

2.11 MANUFACTURER'S COLOR AND TEXTURE

Color and distinct pattern shall be uniformly distributed throughout thickness of tile. Color and texture shall be an approved. Flooring in continuous area or replacement of damaged flooring in continuous area shall be from same production run with same shade and pattern,

PART 3 EXECUTION

3.1 EXAMINATION/VERIFICATION OF CONDITIONS

The Contractor shall examine and verify that site conditions are in agreement with the design package and shall report all conditions that will prevent a proper installation. The Contractor shall not take any corrective action without written permission from the Government.

3.1.1 Subfloor Requirements

Provide subfloor and underlayment.

3.1.2 Surface Examination

Examine surfaces to receive sheet vinyl flooring. Correct conditions which will impair proper installation, including:

a. Variation in surface level greater than 1/8 inch in 10 feet.

b. Trowel marks, pits, dents, protrusions.

c. 1/16 inch wide or wider cracks.

d. Chalk and dust.

e. Oil, paint, wax, and other deleterious substances.

f. Moisture.

3.2 SURFACE PREPARATION

Flooring shall be in a smooth, true, level plane, except where indicated as sloped. Before any work under this section is begun, all defects such as rough or scaling concrete, low spots, high spots, and uneven surfaces shall have been corrected, and all damaged portions of concrete slabs shall have been repaired as recommended by the flooring manufacturer. Concrete curing compounds, other than the type that does not adversely affect adhesion, shall be entirely removed from the slabs. Paint, varnish, oils, release agents, sealers, waxers, and adhesives shall be removed, as recommended by the flooring manufacturer.

3.2.1 Concrete Floor

Grind ridges and other uneven surfaces smooth. Cut out and fill cracks 1/16 inch or wider with crack filler. Provide mastic underlayment to fill remaining holes, cracks, and depressions and for smoothing, leveling, or creating a feather edge in accordance with instructions of mastic manufacturer. After cleaning and removal of loose particles, prime chalky or dusty surfaces with primer recommended by flooring manufacturer.

3.2.1 Plywood Underlayment

Set nail heads flush. Sand joints smooth. Avoid oversanding. Fill gouges, chipped areas, and open joints with crack filler. Leave joints slightly open to allow for expansion. Allow filler to dry; then sand smooth.

3.2.2 Final Cleaning of Substrate

Clean substrate with broom or vacuum immediately prior to the installation of flooring.

3.3 MOISTURE TEST

The suitability of the concrete subfloor for receiving the resilient flooring with regard to moisture content shall be determined by a moisture test as recommended by the flooring manufacturer. If latex-based underlayment has been used, test patches shall include areas covered with underlayment. If the set adhesive can be scraped easily from floor surfaces, floor is not sufficiently dry. Repeat test until adhesive adheres properly. When adhesive adheres tightly to floor surface, proceed with installation.

3.4 GENERAL APPLICATION REQUIREMENTS

To avoid damage, install flooring after other work in same area has been completed. Apply flooring and accessories in accordance with manufacturer's directions, using experienced workers. Detailed requirements follow:

a. Adhesives: Do not allow smoking, open flames or other sources of ignition in area where solvent-containing adhesives are being used or spread, after posting conspicuous signs reading "NO SMOKING OR OPEN FLAME".

b. Flooring: Apply in patterns indicated. Start in center of room or area, and work toward edges. Keep tile lines and joints square, symmetrical, tight, and even. Keep each floor in true, level plane, except where slope is indicated. Vary width of edge tiles as necessary to maintain full-size tiles in field, but no edge tile shall be less than one-half full size, except where irregular-shape makes it impossible.

c. Cutting: Cut flooring edges and scribe to walls and partitions after field flooring has been applied.

d. Edge Strips: Provide edging strips where flooring terminates at points higher than contiguous finished flooring, except where thresholds are provided.

3.5 INSTALLATION OF VINYL-COMPOSITION TILE

Tile flooring shall be installed with adhesive in accordance with the manufacturer's installation instructions. Tile lines and joints shall be kept square, symmetrical, tight, and even. Edge width shall vary as necessary to maintain full-size tiles in the field, but no edge tile shall be less than one-half the field tile size, except where irregular shaped rooms make it impossible. Flooring shall be cut to, and fitted around, all permanent fixtures, built-in furniture and cabinets, pipes, and outlets. Edge tile shall be cut, fitted, and scribed to walls and partitions after field flooring has been applied.

3.9 INSTALLATION OF WALL BASE

Wall base shall be installed with adhesive in accordance with the manufacturer's written instructions. Base joints shall be tight and base shall be even with adjacent resilient flooring. Voids along the top edge of base at masonry walls shall be filled with caulk. Roll entire vertical surface of base with hand roller, and press toe of base with a straight piece of wood to ensure proper alignment. Avoid excess adhesive in corners.

3.5 CLEANING

Immediately upon completion of installation of tile in a room or an area, flooring and adjacent surfaces shall be dry-cleaned to remove all surplus adhesive. No sooner than 5 days after installation, flooring shall be washed with a nonalkaline cleaning solution, rinsed thoroughly with clear cold water, and, except for raised pattern rubber flooring, rubber tile and sheet rubber flooring, rubber stair treads, and static control vinyl tile, given two coats of polish in accordance with manufacturers written instructions. Raised pattern rubber flooring, rubber tile and sheet rubber flooring, rubber stair treads, and static control vinyl tile shall be cleaned and maintained as recommended by the manufacturer.

a. Vinyl flooring shall be buffed to an even sheen without polish coat with an electric polishing machine, using a lamb's wool pad when dry buffing.

3.6 PROTECTION

From the time of laying until acceptance, flooring shall be protected from damage as recommended by the flooring manufacturer. Flooring which becomes

damaged, loose, broken, curled, and cove base which is not tight to backing fillet shall be removed and replaced.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 09 - FINISHES

SECTION 09900

PAINTS AND COATINGS

02/02

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 QUALITY ASSURANCE
1.3.1 Field Samples and Tests
1.4 REGULATORY REQUIREMENTS
1.4.1 Environmental Protection
1.4.2 Lead Content
1.4.3 Chromate Content
1.4.4 Asbestos Content
1.4.5 Mercury Content
1.4.6 Silica
1.4.7 Human Carcinogens
1.5 PACKAGING, LABELING, AND STORAGE
1.6 SAFETY AND HEALTH
1.6.1 Safety Methods Used During Coating Application
1.6.2 Toxic Materials
1.7 ENVIRONMENTAL CONDITIONS
1.7.1 Coatings
1.8 COLOR SELECTION
1.9 LOCATION AND SURFACE TYPE TO BE PAINTED
1.9.1 Painting Included
1.9.1.1 Exterior Painting
1.9.1.2 Interior Painting
1.9.2 Painting Excluded
1.9.3 Mechanical and Electrical Painting
1.9.6 Definitions and Abbreviations
1.9.6.1 Qualification Testing
1.9.6.2 Batch Quality Conformance Testing
1.9.6.3 Coating
1.9.6.4 DFT or dft
1.9.6.5 DSD
1.9.6.6 EPP
1.9.6.7 EXT
1.9.6.8 INT
1.9.6.9 micron / microns
1.9.6.10 mil / mils
1.9.6.11 mm
1.9.6.12 MPI Gloss Levels
1.9.6.13 MPI System Number
1.9.6.14 Paint
1.9.6.15 REX
1.9.6.16 RIN

PART 2 PRODUCTS

2.1 MATERIALS

PART 3 EXECUTION

3.1 PROTECTION OF AREAS AND SPACES NOT TO BE PAINTED
3.2 REPUTTYING AND REGLAZING
3.3 SURFACE PREPARATION
3.4 PREPARATION OF METAL SURFACES
3.4.1 New Ferrous Surfaces
3.4.2 Final Ferrous Surface Condition:
3.4.3 Galvanized Surfaces
3.4.4 Non-Ferrous Metallic Surfaces
3.5.5 Terne-Coated Metal Surfaces
3.6 PREPARATION OF CONCRETE AND CEMENTITIOUS SURFACE
3.5 Concrete and Masonry
3.6.2 Gypsum Board and Plaster
3.6 APPLICATION
3.6.1 Coating Application
3.8.2 Mixing and Thinning of Paints
3.6.2 Coating Systems
3.9 COATING SYSTEMS FOR METAL
3.7 PIPING IDENTIFICATION
3.8 INSPECTION AND ACCEPTANCE
3.9 PAINT TABLES
3.9.1 EXTERIOR PAINT TABLES
3.9.2 INTERIOR PAINT TABLES

-- End of Section Table of Contents --

SECTION 09900

PAINTS AND COATINGS
02/02

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN CONFERENCE OF GOVERNMENTAL INDUSTRIAL HYGIENISTS (ACGIH)

ACGIH 0100Doc	(2001) Documentation of the Threshold Limit Values and Biological Exposure Indices

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI A13.1	Scheme for Identification of Piping Systems

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 235	Standard Specification for Mineral Spirits (Petroleum Spirits) (Hydrocarbon Dry Cleaning Solvent)
ASTM D 523	(1999) Standard Test Method for Specular Gloss
ASTM C 669	(1995) Glazing Compounds for Back Bedding and Face Glazing of Metal Sash
ASTM C 920	(1998) Elastomeric Joint Sealants
ASTM D 2092	(1995) Preparation of Zinc-Coated (Galvanized) Steel Surfaces for Painting
ASTM D 2824	(1994) Aluminum-Pigmented Asphalt Roof Coatings, Non-Fibered, Asbestos Fibered, and Fibered Without Asbestos
ASTM D 4214	(1998) Evaluating the Degree of Chalking of Exterior Paint Films
ASTM D 4263	(1983; R 1999) Indicating Moisture in Concrete by the Plastic Sheet Method
ASTM D 4444	(1998) Standard Test Methods for Use and Calibration of Hand-Held Moisture Meters
ASTM F 1869	(1998) Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride

CODE OF FEDERAL REGULATIONS (CFR)

29 CFR 1910.1000	Air Contaminants
29 CFR 1910.1001	Asbestos, Tremolite, Anthophyllite, and Actinolite
29 CFR 1910.1025	Lead
29 CFR 1926.62	Lead Exposure in Construction

FEDERAL AVIATION ADMINISTRATION (FAA)

FAA AC 70/7460-1	(Rev J) Obstruction Marking and Lighting

FEDERAL STANDARDS (FED-STD)

FED-STD-313	(Rev. C) Material Safety Data, Transportation Data and Disposal Data for Hazardous Materials Furnished to Government Activities
FED-STD-595	(1989 Rev B) Color

MASTER PAINTERS INSTITUTE (MPI)

MPI 1	(2001) Aluminum Paint
MPI 2	(2001) Aluminum Heat Resistant Enamel (up to 427 C and 800 F)
MPI 4	(2001) Interior/Exterior Latex Block Filler
MPI 5	(2001) Exterior Alkyd Wood Primer
MPI 6	(2001) Exterior Latex Wood Primer
MPI 7	(2001) Exterior Oil Wood Primer
MPI 8	(2001) Exterior Alkyd, Flat
MPI 9	(2001) Exterior Alkyd Enamel
MPI 10	(2001) Exterior Latex, Flat
MPI 11	(2001) Exterior Latex, Semi-Gloss
MPI 13	(2001) Exterior Semi-Transparent Stain (Solvent Based)
MPI 16	(2001) Exterior Solid Color Latex Stain
MPI 19	(2001) Inorganic Zinc Primer
MPI 21	(2001)Heat Resistant Enamel, Gloss, (Up to 205 C or 400 F)
MPI 22	(2001) High Heat Resistant Coating

MPI 23	(2001) Surface Tolerant Metal Primer
MPI 26	(2001) Cementitious Galvanized Metal Primer
MPI 27	(2001) Exterior / Interior Alkyd Floor Enamel, Gloss
MPI 31	(2001) Polyurethane, Moisture Cured, Clear Gloss
MPI 42	(2001) Latex Stucco and Masonry Textured Coating
MPI 44	Interior Latex, Gloss Level 2
MPI 45	(2001) Interior Primer Sealer
MPI 46	(2001) Interior Enamel Undercoat
MPI 47	(2001) Interior Alkyd, Semi-Gloss
MPI 48	(2001) Interior Alkyd, Gloss
MPI 49	(2001) Interior Alkyd, Flat
MPI 50	(2001) Interior Latex Primer Sealer
MPI 51	(2001) Interior Alkyd, Eggshell
MPI 52	(2001) Interior Latex, Gloss Level 3
MPI 54	(2001) Interior Latex, Semi-Gloss
MPI 56	(2001) Interior Alkyd Dry Fog/Fall
MPI 57	(2001) Interior Oil Modified Clear Urethane, Satin
MPI 59	(2001) Interior/Exterior Alkyd Porch & Floor Enamel, Low Gloss
MPI 60	(2001) Interior/Exterior Latex Porch & Floor Paint, Low Gloss
MPI 68	(2001) Interior/Exterior Latex Porch & Floor Paint, Gloss
MPI 71	(2001) Polyurethane, Moisture Cured, Clear, Flat
MPI 72	(2001) Polyurethane, Two Component, Pigmented, Gloss
MPI 77	(2001) Epoxy Cold Cured, Gloss
MPI 79	(2001) Marine Alkyd Metal Primer

MPI 90	(2001) Interior Wood Stain, Semi-Transparent
MPI 94	(2001) Exterior Alkyd, Semi-Gloss
MPI 95	(2001) Fast Drying Metal Primer
MPI 101	(2001) Cold Curing Epoxy Primer
MPI 107	(2001) Rust Inhibitive Primer (Water-Based)
MPI 108	(2001) High Build Epoxy Marine Coating
MPI 110	(2001) Interior/Exterior High Performance Acrylic
MPI 113	(2001) Elastomeric Coating
MPI 116	(2001) Epoxy Block Filler
MPI 119	(2001) Exterior Latex, High Gloss (acrylic)
MPI 134	(2001) Waterborne Galvanized Primer
MPI 138	(2001) High Performance Latex, White and Tints - MPI Gloss Level 2
MPI 139	(2001) High Performance Latex, White and Tints - MPI Gloss Level 3
MPI 140	(2001) High Performance Architectural Latex - Gloss Level 4
MPI 141	(2001) High Performance Semigloss Latex, White and Tints - Gloss Level 5
MPI 144	(2001) Institutional Low Odor / VOC Interior Latex, Gloss Level 2
MPI 145	(2001) Institutional Low Odor / VOC Interior Latex, Gloss Level 3
MPI 146	Institutional Low Odor/VOC Interior Latex - Gloss Level 4 (a 'satin-like' finish)
MPI 147	(2001) Institutional Low Odor / VOC Interior Latex, Gloss Level 5

COMMERCIAL ITEM DESCRIPTION (CID)

CID A-A-2904	Thinner, Paint, Mineral Spirits, Regular and Odorless

U.S. DEPARTMENT OF DEFENSE (DOD)

MIL-STD-101	(Rev. B) Color Code for Pipelines and for Compressed Gas Cylinders

SCIENTIFIC CERTIFICATION SYSTEMS (SCS)

SCS SP01-01	(2001) Environmentally Preferable Product Specification for Architectural and Anti-Corrosive Paints

STEEL STRUCTURES PAINTING COUNCIL (SSPC)

SSPC Guide 6	(1997) Containing Debris Generated During Paint Removal Operations
SSPC Guide 7	(1995) Disposal of Lead-Contaminated Surface Preparation Debris
SSPC QP 1	(1989) Evaluating Qualifications of Painting Contractors (Field Application to Complex Structures)
SSPC PA 1	(2000) Shop, Field, and Maintenance Painting
SSPC Guide 3	(1995) Safety in Paint Application
SSPC VIS 1	(1989) Visual Standard for Abrasive Blast Cleaned Steel (Standard Reference Photographs)
SSPC VIS 3	(1993) Visual Standard for Power- and Hand-Tool Cleaned Steel (Standard Reference Photographs)
SSPC VIS 4	(2001) Guide and Reference Photographs for Steel Surfaces Prepared by Waterjetting
SSPC SP 1	(1982) Solvent Cleaning
SSPC SP 2	(1995) Hand Tool Cleaning
SSPC SP 3	(1995) Power Tool Cleaning
SSPC SP 6	(1994) Commercial Blast Cleaning
SSPC SP 7	(1994) Brush-Off Blast Cleaning
SSPC SP 10	(1994) Near-White Blast Cleaning
SSPC SP 12	(1995) Surface Preparation and Cleaning of Steel and Other Hard Materials by High-and Ultra high-Pressure Water Jetting Prior to Recoating
SSPC Paint 18	(1991) Chlorinated Rubber Intermediate Coat Paint

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only or as

otherwise designated. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

The current MPI, "Approved Product List" which lists paint by brand, label, product name and product code as of the date of contract award, will be used to determine compliance with the submittal requirements of this specification. The Contractor may choose to use a subsequent MPI "Approved Product List", however, only one list may be used for the entire contract and each coating system is to be from a single manufacturer. All coats on a particular substrate must be from a single manufacturer. No variation from the MPI Approved Products List is acceptable.

SD-02 Shop Drawings

Piping identification

Submit color stencil codes

SD-03 Product Data

Coating; G,

Manufacturer's Technical Data Sheets

Sealant

SD-04 Samples

Color; G

Submit manufacturer's samples of paint colors. Cross reference color samples to color scheme as indicated.

SD-07 Certificates

Applicator's qualifications

Qualification Testing laboratory for coatings

SD-08 Manufacturer's Instructions

Application instructions

Mixing

Detailed mixing instructions, minimum and maximum application temperature and humidity, potlife, and curing and drying times between coats.

Manufacturer's Material Safety Data Sheets

Submit manufacturer's Material Safety Data Sheets for coatings, solvents, and other potentially hazardous materials, as defined in FED-STD-313.

SD-10 Operation and Maintenance Data

Coatings

Preprinted cleaning and maintenance instructions for all coating systems shall be provided.

1.3 QUALITY ASSURANCE

1.3.1 Field Samples and Tests

The Contracting Officer may choose up to two coatings that have been delivered to the site to be tested at no cost to the Government. Take samples of each chosen product as specified in the paragraph "Sampling Procedures." Test each chosen product as specified in the paragraph "Testing Procedure." Products which do not conform, shall be removed from the job site and replaced with new products that conform to the referenced specification. Testing of replacement products that failed initial testing shall be at no cost to the Government.

1.4 REGULATORY REQUIREMENTS

1.4.1 Environmental Protection

In addition to requirements specified elsewhere for environmental protection, provide coating materials that conform to the restrictions of the local Air Pollution Control District and regional jurisdiction. Notify Contracting Officer of any paint specified herein which fails to conform.

1.4.2 Lead Content

Do not use coatings having a lead content over 0.06 percent by weight of nonvolatile content.

1.4.3 Chromate Content

Do not use coatings containing zinc-chromate or strontium-chromate.

1.4.4 Asbestos Content

Materials shall not contain asbestos.

1.4.5 Mercury Content

Materials shall not contain mercury or mercury compounds.

1.4.6 Silica

Abrasive blast media shall not contain free crystilline silica.

1.4.7 Human Carcinogens

Materials shall not contain ACGIH 0100Doc and ACGIH 0100Doc confirmed human carcinogens (A1) or suspected human carcinogens (A2).

1.5 PACKAGING, LABELING, AND STORAGE

Paints shall be in sealed containers that legibly show the contract specification number, designation name, formula or specification number, batch number, color, quantity, date of manufacture, manufacturer's formulation number, manufacturer's directions including any warnings and special precautions, and name and address of manufacturer. Pigmented paints shall be furnished in containers not larger than 5 gallons. Paints and thinners shall be stored in accordance with the manufacturer's written directions, and as a minimum, stored off the ground, under cover, with sufficient ventilation to prevent the buildup of flammable vapors, and at temperatures between 40 to 95 degrees F.

1.6 SAFETY AND HEALTH

Apply coating materials using safety methods and equipment in accordance with the following:

Work shall comply with applicable Federal, State, and local laws and regulations, and with the ACCIDENT PREVENTION PLAN, including the Activity Hazard Analysis as specified in Section 01525,"Safety Requirements" and in Appendix A of EM 385-1-1. The Activity Hazard Analysis shall include analyses of the potential impact of painting operations on painting personnel and on others involved in and adjacent to the work zone.

1.6.1 Safety Methods Used During Coating Application

Comply with the requirements of SSPC Guide 3.

1.6.2 Toxic Materials

To protect personnel from overexposure to toxic materials, conform to the most stringent guidance of:

a. The applicable manufacturer's Material Safety Data Sheets (MSDS) or local regulation.

b. 29 CFR 1910.1000.

c. ACGIH 0100Doc, threshold limit values.

d. The appropriate OSHA standard in 29 CFR 1910.1025 and 29 CFR 1926.62 for surface preparation on painted surfaces containing lead.

1.7 ENVIRONMENTAL CONDITIONS

1.7.1 Coatings

Do not apply coating when air or substrate conditions are:

a. Less than 5 degrees F above dew point;

b. Below 50 degrees F or over 95 degrees F, unless specifically pre-approved by the Contracting Officer and the product manufacturer. Under no circumstances shall application conditions exceed manufacturer recommendations.

1.8 COLOR SELECTION

Color Coding for Shore-to-Ship
Utility Connections

Service	Color	FED-STD-595 No.
Potable Water*	Blue	15044
Water Provided for Fire Protection**	Red	11105
Chilled Water	Striped Blue/White	15044/17886
Oily Waste Water	Striped Yellow/Black	13538/17038
Sewer	Gold	17043
Steam	White	17886
High Pressure Air	Gray	16081
Low Pressure Air	Tan	10324
Fuel	Yellow	13655

* This includes connections serving domestic functions.

** This includes non-potable salt water or, at some locations, fresh water connections provided for fire protection (may also include flushing and cooling requirements). Note: This does not include waterfront fire hydrants.

Colors of finish coats shall be as indicated or specified. Where not indicated or specified, colors shall be selected by the Contracting Officer. Manufacturers' names and color identification are used for the purpose of color identification only. Named products are acceptable for use only if they conform to specified requirements. Products of other manufacturers are acceptable if the colors approximate colors indicated and the product conforms to specified requirements.

Tint each coat progressively darker to enable confirmation of the number of coats.

1.9 LOCATION AND SURFACE TYPE TO BE PAINTED

1.9.1 Painting Included

Where a space or surface is indicated to be painted, include the following unless indicated otherwise.

a. Surfaces behind portable objects and surface mounted articles readily detachable by removal of fasteners, such as screws and bolts.

b. New factory finished surfaces that require identification or color coding and factory finished surfaces that are damaged during performance of the work.

1.9.1.1 Exterior Painting

Includes new surfaces of the buildings and appurtenances as indicated.

1.9.1.2 Interior Painting

Includes new surfaces of the buildings and appurtenances as indicated. Where a space or surface is indicated to be painted, include the following items, unless indicated otherwise.

a. Exposed columns, girders, beams, joists, and metal deck; and

b. Other contiguous surfaces.

1.9.2 Painting Excluded

Do not paint the following unless indicated otherwise.

a. Surfaces concealed and made inaccessible by panelboards, fixed ductwork, machinery, and equipment fixed in place.

b. Surfaces in concealed spaces. Concealed spaces are defined as enclosed spaces above suspended ceilings, furred spaces, attic spaces, and chases.

c. Steel to be embedded in concrete.

d. Copper, stainless steel, aluminum, brass.

e. Hardware, fittings, and other factory finished items.

1.9.3 Mechanical and Electrical Painting

Includes field coating of interior and exterior new surfaces.

a. Where a space or surface is indicated to be painted, include the following items unless indicated otherwise.

(1) Exposed piping, conduit, and ductwork;

(2) Supports, hangers, air grilles, and registers;

(3) Miscellaneous metalwork and insulation coverings.

b. Do not paint the following, unless indicated otherwise:

(1) New zinc-coated, aluminum, and copper surfaces under insulation;

(2) New aluminum jacket on piping;

(3) New interior ferrous piping under insulation.

1.9.6 Definitions and Abbreviations

1.9.6.1 Qualification Testing

Qualification testing is the performance of all test requirements listed in the product specification. This testing is accomplished by MPI to qualify each product for the MPI Approved Product List, and may also be accomplished by Contractor's third party testing lab if an alternative to Batch Quality Conformance Testing by MPI is desired.

1.9.6.2 Batch Quality Conformance Testing

Batch quality conformance testing determines that the product provided is the same as the product qualified to the appropriate product specification. This testing shall only be accomplished by MPI testing lab.

1.9.6.3 Coating

A film or thin layer applied to a base material called a substrate. A coating may be a metal, alloy, paint, or solid/liquid suspensions on various substrates (metals, plastics, wood, paper, leather, cloth, etc.). They may be applied by electrolysis, vapor deposition, vacuum, or mechanical means such as brushing, spraying, calendering, and roller coating. A coating may be applied for aesthetic or protective purposes or both. The term "coating" as used herein includes emulsions, enamels, stains, varnishes, sealers, epoxies, and other coatings, whether used as primer, intermediate, or finish coat. The terms paint and coating are used interchangeably.

1.9.6.4 DFT or dft

Dry film thickness, the film thickness of the fully cured, dry paint or coating.

1.9.6.5 DSD

Degree of Surface Degradation, the MPI system of defining degree of surface degradation. Five (5) levels are generically defined under the Assessment sections in the MPI Maintenance Repainting Manual.

1.9.6.6 EPP

Environmentally Preferred Products, a standard for determining environmental preferability in support of Executive Order 13101.

1.9.6.7 EXT

MPI short term designation for an exterior coating system.

1.9.6.8 INT

MPI short term designation for an interior coating system.

1.9.6.9 micron / microns

The metric measurement for 0.001 mm or one/one-thousandth of a millimeter.

1.9.6.10 mil / mils

The English measurement for 0.001 in or one/one-thousandth of an inch, equal to 25.4 microns or 0.0254 mm.

1.9.6.11 mm

The metric measurement for millimeter, 0.001 meter or one/one-thousandth of a meter.

1.9.6.12 MPI Gloss Levels

MPI system of defining gloss. Seven (7) gloss levels (G1 to G7) are generically defined under the Evaluation sections of the MPI Manuals. Traditionally, Flat refers to G1/G2, Eggshell refers to G3, Semigloss refers to G5, and Gloss refers to G6.

Gloss levels are defined by MPI as follows:

Gloss Level	Description	Units @ 60 degrees	Units @ 85 degrees
G1	Matte or Flat	0 to 5	10 max
G2	Velvet	0 to 10	10 to 35
G3	Eggshell	10 to 25	10 to 35
G4	Satin	20 to 35	35 min
G5	Semi-Gloss	35 to 70	
G6	Gloss	70 to 85	
G7	High Gloss		

Gloss is tested in accordance with ASTM D 523. Historically, the Government has used Flat (G1 / G2), Eggshell (G3), Semi-Gloss (G5), and Gloss (G6).

1.9.6.13 MPI System Number

The MPI coating system number in each Division found in either the MPI Architectural Painting Specification Manual or the Maintenance Repainting Manual and defined as an exterior (EXT/REX) or interior system (INT/RIN). The Division number follows the CSI Master Format.

1.9.6.14 Paint

See Coating definition.

1.9.6.15 REX

MPI short term designation for an exterior coating system used in repainting projects or over existing coating systems.

1.9.6.16 RIN

MPI short term designation for an interior coating system used in repainting projects or over existing coating systems.

PART 2 PRODUCTS

2.1 MATERIALS

Conform to the coating specifications and standards referenced in PART 3.

PART 3 EXECUTION

3.1 PROTECTION OF AREAS AND SPACES NOT TO BE PAINTED

Prior to surface preparation and coating applications, remove, mask, or otherwise protect, hardware, hardware accessories, machined surfaces, radiator covers, plates, lighting fixtures, public and private property, and other such items not to be coated that are in contact with surfaces to be coated. Following completion of painting, workmen skilled in the trades involved shall reinstall removed items. Restore surfaces contaminated by coating materials, to original condition and repair damaged items.

3.2 REPUTTYING AND REGLAZING

Remove cracked, loose, and defective putty or glazing compound on glazed sash and provide new putty or glazing compound. Where defective putty or glazing compound constitutes 30 percent or more of the putty at any one light, remove the glass and putty or glazing compound and reset the glass. Remove putty or glazing compound without damaging sash or glass. Clean rabbets to bare wood or metal and prime prior to reglazing. Putty for wood sash shall be a linseed oil putty. Glazing compound for metal sash shall conform to ASTM C 669. Patch surfaces to provide smooth transition between existing and new surfaces. Finish putty or glazing compound to a neat and true bead. Allow glazing compound time to cure, in accordance with manufacturer's recommendation, prior to coating application. Allow putty to set one week prior to coating application.

3.3 SURFACE PREPARATION

Remove dirt, splinters, loose particles, grease, oil, disintegrated coatings, and other foreign matter and substances deleterious to coating performance as specified for each substrate before application of paint or surface treatments. Oil and grease shall be removed prior to mechanical cleaning. Cleaning shall be programmed so that dust and other contaminants will not fall on wet, newly painted surfaces. Exposed ferrous metals such as nail heads on or in contact with surfaces to be painted with water-thinned paints, shall be spot-primed with a suitable corrosion-inhibitive primer capable of preventing flash rusting and compatible with the coating specified for the adjacent areas.

3.4 PREPARATION OF METAL SURFACES

3.4.1 New Ferrous Surfaces

Ferrous Surface Preparation

SSPC Blasting/Cleaning Levels - Primer Types/Exposures

Exposure<SPS>b</SPS>		
Mild	Moderate	Severe<SPS>c</SPS>

Primer Type	alkyd/oil latex oleoresinous phenolic	alkyd/oil latex oleoresinous phenolic	epoxy silicone inorganic zinc-rich
Surface Condition			
Uncoated			
Oil, grease, dirt	SP 1	for all moderate conditions, select from "mild" or "severe" for intended performance level	SP 10, SP 12 WJ2 or SP 5 SP 12 WJ1
Localized corrosion - mill scale, rust	SP 2, SP 3, or SP 7 SP 12 WJ-4		AS ABOVE
Extensive deterioration	SP 6<SPS>d</SPS> SP 12 WJ-3		AS ABOVE
Shop coated			
Oil, grease, dirt	<SPS>e</SPS>		AS ABOVE
Localized damage to be spot repaired	SP 2, SP 3, or SP 7, SP 12 WJ-4		AS ABOVE
Extensive deterioration	SP 6, SP 12 WJ-3		AS ABOVE
Existing coating			
Oil, grease			SP 1
Chalking, foreign matter other than oil or grease, localized deterioration			
Extensive deterioration	SP 6, SP 12 WJ-3		SP 10, SP 12 WJ2 or SP 5 SP 12 WJ1

If it is not possible to abrasive blast or use water jetting, SP 11 is recommended. It is considered equivalent to SP 6. SP 11 is also preferred wherever SP 2 or SP 3 are shown in the Table.

These are minimum requirements. A high-performing system may be a better choice for longer performance.

For marine, chemical, or immersion service, or application of heat resistant or nonslip floor coatings. SP 10 is preferred for zinc-rich

primers, and for extremely severe environments where long-term performance is desired.

Use water jetting to SP 12 WJ-3, as alternate to SP 6 degree of cleanliness. Use only the steam clean, or non-alkaline detergent solutions of SP 1.

First, remove chalk and dirt with a non-alkaline detergent solution, and follow with power wash at minimum 2000 psi. Second, spot clean, in order of preference by SP 6, SP 11, SP 7, SP 3, or SP 2.

First, remove chalk and dirt with a non-alkaline detergent solution, and follow with power wash at minimum 2000 psi. Second, spot clean, in order of preference, by SP 10, SP 6, or SP 11.

SSPC SP 12 provides four levels of water jetting cleanliness and they reflect the four levels of abrasive blast cleanliness but direct correlation is inaccurate or inappropriate. The four levels are (best to worst): WJ-1, WJ-2, WJ-3, and WJ-4. They are equivalent to the abrasive blast standards SSPC SP 5, SP 10, SP 6, and SP 7. The standard also includes three levels of cleanliness for nonvisual contaminants, SC-1, SC-2, and SC-3. The preferred level of cleanliness is between SC-1 or SC-2.

a. Ferrous Surfaces including Shop-coated Surfaces and Small Areas That Contain Rust, Mill Scale and Other Foreign Substances: Solvent clean or detergent wash in accordance with SSPC SP 1 to remove oil and grease. Where shop coat is missing or damaged, clean according to SSPC SP 3. Brush-off blast remaining surface in accordance with SSPC SP 7; Water jetting to SSPC SP 12 WJ-4 may be used to remove loose coating and other loose materials. Use inhibitor as recommended by coating manufacturer to prevent premature rusting. Shop-coated ferrous surfaces shall be protected from corrosion by treating and touching up corroded areas immediately upon detection.

b. Surfaces With More Than 20 Percent Rust, Mill Scale, and Other Foreign Substances: Clean entire surface in accordance with SSPC SP 10.

3.4.2 Final Ferrous Surface Condition:

Type Coating	Level of Cleaning, SSPC SP ...
a. Latex or Alkyd	2,3,6 or SP 12 WJ-2. (7 and 10, SP 12 WJ-2 or SP 12 WJ-1 may be left in as Contractor options)
b. High Performance (i.e. Epoxy, Urethane, others)	7,10

For tool cleaned surfaces, the requirements are stated in SSPC SP 2 and SSPC SP 3. As a visual reference, cleaned surfaces shall be similar to photographs in SSPC VIS 3.

For abrasive blast cleaned surfaces, the requirements are stated in SSPC SP 7, SSPC SP 6, and SSPC SP 10. As a visual reference, cleaned surfaces shall be similar to photographs in SSPC VIS 1.

For waterjet cleaned surfaces, the requirements are stated in SSPC SP 12. As a visual reference, cleaned surfaces shall be similar to photographs in SSPC VIS 4.

3.4.3 Galvanized Surfaces

a. New Galvanized Surfaces With Only Dirt and Zinc Oxidation Products: Clean with solvent, steam, or non-alkaline detergent solution in accordance with SSPC SP 1. If the galvanized metal has been passivated or stabilized, the coating shall be completely removed by brush-off abrasive blast. New galvanized steel to be coated shall not be "passivated" or "stabilized" If the absence of hexavalent stain inhibitors is not documented, test as described in ASTM D 2092, Appendix X2, and remove by one of the methods described therein.

b. Galvanized with Slight Coating Deterioration or with Little or No Rusting: Water jetting to SSPC SP 12 WJ3 to remove loose coating from surfaces with less than 20 percent coating deterioration and no blistering, peeling, or cracking. Use inhibitor as recommended by the coating manufacturer to prevent rusting.

c. Galvanized With Severe Deteriorated Coating or Severe Rusting: Spot abrasive blast rusted areas as described for steel in SSPC SP 6, and waterjet to SSPC SP 12, WJ3 to remove existing coating.

3.4.4 Non-Ferrous Metallic Surfaces

Aluminum and aluminum-alloy, lead, copper, and other nonferrous metal surfaces.

a. Surface Cleaning: Solvent clean in accordance with SSPC SP 1 and wash with mild non-alkaline detergent to remove dirt and water soluble contaminants.

3.5.5 Terne-Coated Metal Surfaces

Solvent clean surfaces with mineral spirits, ASTM D 235. Wipe dry with clean, dry cloths.

3.6 PREPARATION OF CONCRETE AND CEMENTITIOUS SURFACE

3.5 CONCRETE AND MASONRY

a. Curing: Concrete and masonry surfaces shall be allowed to cure at least 30 days before painting, except concrete slab on grade, which shall be allowed to cure 90 days before painting.

b. Surface Cleaning: Remove the following deleterious substances.

(1) Dirt, Chalking, Grease, and Oil: Wash new surfaces with a solution composed of 1/2 cup trisodium phosphate, 1/4 cup household detergent, and 4 quarts of warm water. Then rinse thoroughly with fresh water. For large areas, water blasting may be used.

(2) Fungus and Mold: Wash new surfaces with a solution composed of 1/2 cup trisodium phosphate, 1/4 cup household detergent, 1 quart 5 percent sodium hypochlorite solution and 3 quarts of warm water. Rinse thoroughly with fresh water.

(3) Paint and Loose Particles: Remove by wire brushing.

(4) Efflorescence: Remove by scraping or wire brushing followed by washing with a 5 to 10 percent by weight aqueous solution of hydrochloric (muriatic) acid. Do not allow acid to remain on the surface for more than five minutes before rinsing with fresh water. Do not acid clean more than 4 square feet of surface, per workman, at one time.

c. Cosmetic Repair of Minor Defects: Repair or fill mortar joints and minor defects, including but not limited to spalls, in accordance with manufacturer's recommendations and prior to coating application.

d. Allowable Moisture Content: Latex coatings may be applied to damp surfaces, but not to surfaces with droplets of water. Do not apply epoxies to damp vertical surfaces as determined by ASTM D 4263 or horizontal surfaces that exceed 3 lbs of moisture per 1000 square feet in 24 hours as determined by ASTM F 1869. In all cases follow manufacturer’s recommendations. Allow surfaces to cure a minimum of 30 days before painting.

3.6.2 Gypsum Board and Plaster

a. Surface Cleaning: Plaster shall be clean and free from loose matter; gypsum board shall be dry. Remove loose dirt and dust by brushing with a soft brush, rubbing with a dry cloth, or vacuum-cleaning prior to application of the first coat material. A damp cloth or sponge may be used if paint will be water-based.

b. Repair of Minor Defects: Prior to painting, repair joints, cracks, holes, surface irregularities, and other minor defects with patching plaster or spackling compound and sand smooth.

c. Allowable Moisture Content: Latex coatings may be applied to damp surfaces, but not surfaces with droplets of water. Do not apply epoxies to damp surfaces as determined by ASTM D 4263. New plaster to be coated shall have a maximum moisture content of 8 percent, when measured in accordance with ASTM D 4444, Method A, unless otherwise authorized. In addition to moisture content requirements, allow new plaster to age a minimum of 30 days before preparation for painting.

3.6 APPLICATION

3.6.1 Coating Application

Painting practices shall comply with applicable federal, state and local laws enacted to insure compliance with Federal Clean Air Standards. Apply coating materials in accordance with SSPC PA 1. SSPC PA 1 methods are applicable to all substrates, except as modified herein.

At the time of application, paint shall show no signs of deterioration. Uniform suspension of pigments shall be maintained during application.

Unless otherwise specified or recommended by the paint manufacturer, paint may be applied by brush, roller, or spray. Rollers for applying paints and enamels shall be of a type designed for the coating to be applied and the surface to be coated.

Paints, except water-thinned types, shall be applied only to surfaces that are completely free of moisture as determined by sight or touch.

Thoroughly work coating materials into joints, crevices, and open spaces. Special attention shall be given to insure that all edges, corners, crevices, welds, and rivets receive a film thickness equal to that of adjacent painted surfaces.

Each coat of paint shall be applied so dry film shall be of uniform thickness and free from runs, drops, ridges, waves, pinholes or other voids, laps, brush marks, and variations in color, texture, and finish. Hiding shall be complete.

Touch up damaged coatings before applying subsequent coats. Interior areas shall be broom clean and dust free before and during the application of coating material.

a. Drying Time: Allow time between coats, as recommended by the coating manufacturer, to permit thorough drying, but not to present topcoat adhesion problems. Provide each coat in specified condition to receive next coat.

b. Primers, and Intermediate Coats: Do not allow primers or intermediate coats to dry more than 30 days, or longer than recommended by manufacturer, before applying subsequent coats. Follow manufacturer's recommendations for surface preparation if primers or intermediate coats are allowed to dry longer than recommended by manufacturers of subsequent coatings. Each coat shall cover surface of preceding coat or surface completely, and there shall be a visually perceptible difference in shades of successive coats.

c. Finished Surfaces: Provide finished surfaces free from runs, drops, ridges, waves, laps, brush marks, and variations in colors.

d. Thermosetting Paints: Topcoats over thermosetting paints (epoxies and urethanes) should be applied within the overcoating window recommended by the manufacturer.

3.8.2 Mixing and Thinning of Paints

Reduce paints to proper consistency by adding fresh paint, except when thinning is mandatory to suit surface, temperature, weather conditions, application methods, or for the type of paint being used. Obtain written

permission from the Contracting Officer to use thinners. The written permission shall include quantities and types of thinners to use.

3.6.2 Coating Systems

a. Systems by Substrates: Apply coatings that conform to the respective specifications listed in the following Tables:

Table

Division 3. Exterior Concrete Paint Table
Division 4. Exterior Concrete Masonry Units Paint Table
Division 5. Exterior Metal, Ferrous and Non-Ferrous Paint Table
Division 3. Interior Concrete Paint Table
Division 4. Interior Concrete Masonry Units Paint Table
Division 5. Interior Metal, Ferrous and Non-Ferrous Paint Table
Division 9: Interior Plaster, Gypsum Board Paint Table

b. Minimum Dry Film Thickness (DFT): Apply paints, primers, varnishes, enamels, undercoats, and other coatings to a minimum dry film thickness of 1.5 mil each coat unless specified otherwise in the Tables. Coating thickness where specified, refers to the minimum dry film thickness.

c. Coatings for Surfaces Not Specified Otherwise: Coat surfaces which have not been specified, the same as surfaces having similar conditions of exposure.

3.9 COATING SYSTEMS FOR METAL

Apply coatings of Tables in Division 5 for Exterior and Interior.

a. Apply specified ferrous metal primer on the same day that surface is cleaned, to surfaces that meet all specified surface preparation requirements at time of application.

b. Inaccessible Surfaces: Prior to erection, use one coat of specified primer on metal surfaces that will be inaccessible after erection.

c. Shop-primed Surfaces: Touch up exposed substrates and damaged coatings to protect from rusting prior to applying field primer.

d. Surface Previously Coated with Epoxy or Urethane: Apply MPI 101, 1.5 mils DFT immediately prior to application of epoxy or urethane coatings.

e. Pipes and Tubing: The semitransparent film applied to some pipes and tubing at the mill is not to be considered a shop coat, but shall be over coated with the specified ferrous-metal primer prior to application of finish coats.

f. Exposed Nails, Screws, Fasteners, and Miscellaneous Ferrous Surfaces. On surfaces to be coated with water thinned coatings, spot prime exposed nails and other ferrous metal with latex primer MPI 107.

3.7 PIPING IDENTIFICATION

Piping Identification, Including Surfaces In Concealed Spaces: Provide in accordance with ANSI A13.1. Place stenciling in clearly visible locations. On piping not covered by ANSI A13.1, stencil approved names or code letters, in letters a minimum of 1/2 inch high for piping and a minimum of 2 inches high elsewhere. Stencil arrow-shaped markings on piping to indicate direction of flow using black stencil paint.

3.8 INSPECTION AND ACCEPTANCE

In addition to meeting previously specified requirements, demonstrate mobility of moving components, including swinging and sliding doors, cabinets, and windows with operable sash, for inspection by the Contracting Officer. Perform this demonstration after appropriate curing and drying times of coatings have elapsed and prior to invoicing for final payment.

3.9 PAINT TABLES

All DFT's are minimum values.

3.9.1 EXTERIOR PAINT TABLES

DIVISION 3: EXTERIOR CONCRETE PAINT TABLE

A. New concrete;
vertical surfaces, including soffits but excluding tops of slabs:

1. Latex
New; MPI EXT 3.1A-G2 (Flat) / Existing; MPI REX 3.1A-G2 (Flat)

Primer:	Intermediate:	Topcoat:
MPI 10	MPI 10	MPI 10

System DFT: 3.5 mils

Primer as recommended by manufacturer. Topcoat: Coating to match adjacent surfaces.

B. New concrete in Kennel runs and Kennel exterior walkway;
elastomeric System:

1. Elastomeric Coating
New; MPI EXT 3.1F / Existing; MPI REX 3.1F

Primer:	Intermediate:	Topcoat:
Per Manufacturer	MPI 113	MPI 113

System DFT: 16 mils

Primer as recommended by manufacturer. Topcoat: Coating to match adjacent surfaces. Surface preparation and number of coats in accordance with manufacturer's instructions.

NOTE: Apply sufficient coats of MPI 113 to achieve a minimum dry film thickness of 16 mils.

DIVISION 4: EXTERIOR CONCRETE MASONRY UNITS PAINT TABLE

A. New concrete masonry on uncoated surface:

1. Latex
   New; MPI EXT 4.2A-G1 (Flat) / Existing; MPI REX 4.2A-G1 (Flat)

Block Filler:	Primer:	Intermediate:	Topcoat:
MPI 4	N/A	MPI 10	MPI 10

   System DFT: 11 mils

   New; MPI EXT 4.2A-G5 (Semigloss) / Existing; MPI REX 4.2A-G5 (Semigloss)

Block Filler:	Primer:	Intermediate:	Topcoat:
MPI 4	N/A	MPI 11	MPI 11

   System DFT: 11 mils

   New; MPI EXT 4.2A-G6 (Gloss) / Existing; MPI REX 4.2A-G6 (Gloss)

Block Filler:	Primer:	Intermediate:	Topcoat:
MPI 4	N/A	MPI 119	MPI 119

   System DFT: 11 mils

   Topcoat: Coating to match adjacent surfaces.

DIVISION 5: EXTERIOR METAL, FERROUS AND NON-FERROUS PAINT TABLE

STEEL / FERROUS SURFACES

A. New Steel that has been hand or power tool cleaned to SSPC SP 2 or SSPC SP 3

1. Alkyd
   New; MPI EXT 5.1Q-G5 (Semigloss) Existing; MPI REX 5.1D-G5

Primer:	Intermediate:	Topcoat:
MPI 23	MPI 94	MPI 94

   System DFT: 5.25 mils

   New; MPI EXT 5.1Q-G6 (Gloss) / Existing; MPI REX 5.1D-G6

Primer:	Intermediate:	Topcoat:
MPI 23	MPI 9	MPI 9

   System DFT: 5.25 mils

B. New Steel that has been blast-cleaned to SSPC SP 6:

2. Alkyd
   New; MPI EXT 5.1D-G5 (Semigloss) / Existing; MPI REX 5.1D-G5

Primer:	Intermediate:	Topcoat:
MPI 79	MPI 94	MPI 94

   System DFT: 5.25 mils

   New; MPI EXT 5.1D-G6 (Gloss) / Existing; MPI REX 5.1D-G6

Primer:	Intermediate:	Topcoat:
MPI 79	MPI 9	MPI 9

   System DFT: 5.25 mils

C. New steel blast cleaned to SSPC SP 10:

1. Waterborne Light Industrial
   MPI EXT 5.1R-G5 (Semigloss)

Primer:	Intermediate:	Topcoat:
MPI 101	MPI 108	MPI 110-G5

   System DFT: 8.5 mils

MPI EXT 5.1R-G6 (Gloss)

Primer:	Intermediate:	Topcoat:
MPI 101	MPI 108	MPI 110-G6

System DFT: 8.5 mils

EXTERIOR GALVANIZED SURFACES

F. New Galvanized surfaces:

1. Cementitious primer / Latex

MPI EXT 5.3A-G1 (Flat)

Primer:	Intermediate:	Topcoat:
MPI 26	MPI 10	MPI 10

System DFT: 4.5 mils

MPI EXT 5.3A-G5 (Semigloss)

Primer:	Intermediate:	Topcoat:
MPI 26	MPI 11	MPI 11

System DFT: 4.5 mils

MPI EXT 5.3A-G6 (Gloss)

Primer:	Intermediate:	Topcoat:
MPI 26	MPI 119	MPI 119

System DFT: 4.5 mils

2. Waterborne Primer / Latex

MPI EXT 5.3H-G1 (Flat)

Primer:	Intermediate:	Topcoat:
MPI 134	MPI 10	MPI 10

System DFT: 4.5 mils

MPI EXT 5.3H-G5 (Semigloss)

Primer:	Intermediate:	Topcoat:
MPI 134	MPI 11	MPI 11

System DFT: 4.5 mils

MPI EXT 5.3H-G6 (Gloss)

Primer:	Intermediate:	Topcoat:
MPI 134	MPI 119	MPI 119

System DFT: 4.5 mils

G. Galvanized surfaces with slight coating deterioration; little or no rusting:

1. Waterborne Light Industrial Coating

MPI REX 5.3J-G5 (Semigloss)

Primer:	Intermediate:	Topcoat:
MPI 134	N/A	MPI 110-G5

System DFT: 4.5 mils

2. Pigmented Polyurethane

MPI REX 5.3D-G6 (Gloss)

Primer:	Intermediate:	Topcoat:
MPI 101	N/A	MPI 72

System DFT: 5 mils

H. Galvanized surfaces with severely deteriorated coating or rusting:

1. Waterborne Light Industrial Coating
   MPI REX 5.3L-G5 (Semigloss)

Primer:	Intermediate:	Topcoat:
MPI 101	MPI 108	MPI 110-G5

   System DFT: 8.5 mils

   MPI REX 5.3L-G6 (Gloss)

Primer:	Intermediate:	Topcoat:
MPI 101	MPI 108	MPI 110-G6

   System DFT: 8.5 mils

2. Pigmented Polyurethane
   MPI REX 5.3K-G6 (Gloss)

Primer:	Intermediate:	Topcoat:
MPI 101	MPI 108	MPI 72

   System DFT: 5 mils

EXTERIOR SURFACES, OTHER METALS (NON-FERROUS)

I. Aluminum, aluminum alloy and other miscellaneous non-ferrous metal items not otherwise specified except hot metal surfaces, roof surfaces, and new prefinished equipment. Match surrounding finish:

1. Alkyd
   MPI EXT 5.4F-G1 (Flat)

Primer:	Intermediate:	Topcoat:
MPI 95	MPI 8	MPI 8

   System DFT: 5 mils

   MPI EXT 5.4F-G5 (Semigloss)

Primer:	Intermediate:	Topcoat:
MPI 95	MPI 94	MPI 94

   System DFT: 5 mils

2. Waterborne Light Industrial Coating
   MPI EXT 5.4G-G3 (Eggshell)

Primer:	Intermediate:	Topcoat:
MPI 95	MPI 110-G3	MPI 110-G3

   System DFT: 5 mils

   MPI EXT 5.4G-G5 (Semigloss)

Primer:	Intermediate:	Topcoat:
MPI 95	MPI 110-G5	MPI 110-G5

   System DFT: 5 mils

J. Surfaces adjacent to painted surfaces; Mechanical, Electrical, and miscellaneous metal items not otherwise specified, hot metal surfaces, and new prefinished equipment. Match surrounding finish:

1. Alkyd
   MPI EXT 5.1D-G1 (Flat)

Primer:	Intermediate:	Topcoat:
MPI 79	MPI 8	MPI 8

   System DFT: 5.25 mils

   MPI EXT 5.1D-G5 (Semigloss)

Primer: Intermediate: Topcoat:
MPI 79 MPI 94 MPI 94
System DFT: 5.25 mils

2. Waterborne Light Industrial Coating
MPI EXT 5.1C-G3 (Eggshell)
Primer: Intermediate: Topcoat:
MPI 79 MPI 110-G3 MPI 110-G3
System DFT: 5 mils

MPI EXT 5.1C-G5 (Semigloss)
Primer: Intermediate: Topcoat:
MPI 79 MPI 110-G5 MPI 110-G5
System DFT: 5 mils

MPI EXT 5.1C-G6 (Gloss)
Primer: Intermediate: Topcoat:
MPI 79 MPI 110-G6 MPI 110-G6
System DFT: 5 mils

L. Ferrous metal subject to high temperature, up to 400 degrees C (750 degrees F):

1. Inorganic Zinc Rich Coating
MPI EXT 5.2C
Primer: Intermediate: Topcoat:
MPI 19 Surface preparation and number of coats per manufacturer's instructions.
System DFT: Per Manufacturer

2. Heat Resistant Aluminum Enamel
MPI EXT 5.2B (Aluminum Finish)
Primer: Intermediate: Topcoat:
MPI 2 Surface preparation and number of coats per manufacturer's instructions.
System DFT: Per Manufacturer

3.9.2 INTERIOR PAINT TABLES

DIVISION 3: INTERIOR CONCRETE PAINT TABLE

A. New Concrete, vertical surfaces, not specified otherwise:

1. Latex

New; MPI INT 3.1A-G3 (Eggshell) / Existing; MPI RIN 3.1A-G3 (Eggshell)
Primer: Intermediate: Topcoat:
MPI 50 MPI 52 MPI 52
System DFT: 4 mils

2. New; MPI INT 3.1C-G3 (Eggshell) / Existing; MPI RIN 3.1J-G3 (Eggshell)
Primer: Intermediate: Topcoat:
MPI 50 MPI 139 MPI 139
System DFT: 4 mils

C. New and uncoated Concrete in areas requiring a high degree of

sanitation concrete in Kennel; elastomeric System:

1. Elastomeric Coating
   New; MPI EXT 3.1F / Existing; MPI REX 3.1F

Primer:	Intermediate:	Topcoat:
Per Manufacturer	MPI 113	MPI 113

   System DFT: 16 mils

   Primer as recommended by manufacturer. Topcoat: Coating to match adjacent surfaces. Surface preparation and number of coats in accordance with manufacturer's instructions.

NOTE: Apply sufficient coats of MPI 113 to achieve a minimum dry film thickness of 16 mils.

DIVISION 4: INTERIOR CONCRETE MASONRY UNITS PAINT TABLE

A. New Concrete masonry:

1. MPI INT 4.2D-G3 (Eggshell)

Filler	Primer:	Intermediate:	Topcoat:
MPI 4	N/A	MPI 139	MPI 139

   System DFT: 11 mils

   Fill all holes in masonry surface

DIVISION 5: INTERIOR METAL, FERROUS AND NON-FERROUS PAINT TABLE

INTERIOR STEEL / FERROUS SURFACES

A. Metal, Mechanical, Electrical, Surfaces adjacent to painted surfaces (Match surrounding finish), exposed copper piping, and miscellaneous metal items not otherwise specified, hot metal surfaces, and new prefinished equipment:

1. MPI INT 5.1R-G3 (Eggshell)

Primer:	Intermediate:	Topcoat:
MPI 79	MPI 139	MPI 139

   System DFT: 5 mils

2. Alkyd
   MPI INT 5.1E-G2 (Flat)

Primer:	Intermediate:	Topcoat:
MPI 79	MPI 49	MPI 49

   System DFT: 5.25 mils

C. Metal in toilets, food-preparation, shower areas, areas requiring a high degree of sanitation, and other high-humidity areas not otherwise specified except floors, hot metal surfaces, and new prefinished equipment:

1. Alkyd
   MPI INT 5.1E-G3 (Eggshell)

Primer:	Intermediate:	Topcoat:
MPI 79	MPI 51	MPI 51

   System DFT: 5.25 mils

2. Alkyd

MPI INT 5.1T-G3 (Eggshell) For hand tool cleaning
Primer: Intermediate: Topcoat:
MPI 23 MPI 51 MPI 51
System DFT: 5.25 mils

D. Ferrous metal in concealed damp spaces or in exposed areas having unpainted adjacent surfaces as follows:

1. Aluminum Paint
MPI INT 5.1M
Primer: Intermediate: Topcoat:
MPI 79 MPI 1 MPI 1
System DFT: 4.25 mils

E. Miscellaneous non-ferrous metal items not otherwise specified except floors, hot metal surfaces, and new prefinished equipment. Match surrounding finish:

1. MPI INT 5.4F-G3 (Eggshell)
Primer: Intermediate: Topcoat:
MPI 95 MPI 139 MPI 139
System DFT: 5 mils

MPI INT 5.4F-G4 (Satin)
Primer: Intermediate: Topcoat:
MPI 95 MPI 140 MPI 140
System DFT: 5 mils

2. MPI INT 5.4J-G3 (Eggshell)
Primer: Intermediate: Topcoat:
MPI 95 MPI 51 MPI 51
System DFT: 5 mils

G. Ferrous metal subject to high temperature, up to 400 degrees C (750 degrees F):

1. Heat Resistant Aluminum Paint
MPI INT 5.2B (Aluminum Finish)
Primer: Intermediate: Topcoat:
MPI 2 Surface preparation and number of coats per manufacturer's instructions.
System DFT: Per Manufacturer

DIVISION 9: INTERIOR PLASTER, GYPSUM BOARD SURFACES PAINT TABLE

A. New Plaster and Wallboard not otherwise specified:

1. Latex
New; MPI INT 9.2A-G2 (Flat) / Existing; RIN 9.2A-G2 (Flat)
Primer: Intermediate: Topcoat:
MPI 50 MPI 44 MPI 44
System DFT: 4 mils

New; MPI INT 9.2A-G3 (Eggshell) / Existing; RIN 9.2A-G3 (Eggshell)
Primer: Intermediate: Topcoat:
MPI 50 MPI 52 MPI 52
System DFT: 4 mils

New; MPI INT 9.2A-G5 (Semigloss) / Existing; RIN 9.2A-G5 (Semigloss)

Primer:	Intermediate:	Topcoat:
MPI 50	MPI 54	MPI 54

System DFT: 4 mils

2. High Performance Architectural Latex - High Traffic Areas

New; MPI INT 9.2B-G2 (Flat) / Existing; MPI RIN 9.2B-G2 (Flat)

Primer:	Intermediate:	Topcoat:
MPI 50	MPI 138	MPI 138

System DFT: 4 mils

New; MPI INT 9.2B-G3 (Eggshell) / Existing; MPI RIN 9.2B-G3 (Eggshell)

Primer:	Intermediate:	Topcoat:
MPI 50	MPI 139	MPI 139

System DFT: 4 mils

New; MPI INT 9.2B-G5 (Semigloss) / Existing; MPI RIN 9.2B-G5 (Semigloss)

Primer:	Intermediate:	Topcoat:
MPI 50	MPI 141	MPI 141

System DFT: 4 mils

B. New Plaster and Wallboard in toilets, food-preparation, shower areas, locker room, areas requiring a high degree of sanitation, not otherwise specified.:

1. Waterborne Light Industrial Coating

New; MPI INT 9.2L-G5(Semigloss) / Existing; MPI RIN 9.2L-G5 (Semigloss)

Primer:	Intermediate:	Topcoat:
MPI 50	MPI 110-G5	MPI 110-G5

System DFT: 4 mils

2. Alkyd

New; MPI INT 9.2C-G5 (Semigloss) / Existing; MPI RIN 9.2C-G5 (Semigloss)

Primer:	Intermediate:	Topcoat:
MPI 50	MPI 47	MPI 47

System DFT: 4 mils

3. Epoxy

New; MPI INT 9.2E-G6 (Gloss) / Existing; MPI RIN 9.2D-G6 (Gloss)

Primer:	Intermediate:	Topcoat:
MPI 50	MPI 77	MPI 77

System DFT: 4 mils

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 10 - SPECIALTIES

SECTION 10201N

METAL WALL AND DOOR LOUVERS

09/99

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 DELIVERY, STORAGE, AND PROTECTION

PART 2 PRODUCTS

2.1 MATERIALS
2.1.1 Galvanized Steel Sheet
2.1.2 Aluminum Sheet
2.1.3 Extruded Aluminum
2.1.4 Cold Rolled Steel Sheet
2.2 METAL WALL LOUVERS
2.2.1 Extruded Aluminum Louvers
2.2.1 Mullions and Mullion Covers
2.2.2 Screens and Frames
2.3 DOOR LOUVERS
2.3.1 Extruded Aluminum Door Louvers
2.3.1 Screens and Frames
2.4 FASTENERS AND ACCESSORIES
2.5 FINISHES
2.5.1 Aluminum
2.5.1.1 Anodic Coating

PART 3 EXECUTION

3.1 INSTALLATION
3.1.1 Wall Louvers
3.1.2 Door Louvers
3.1.3 Screens and Frames
3.2 PROTECTION FROM CONTACT OF DISSIMILAR MATERIALS
3.2.1 Copper or Copper-Bearing Alloys
3.2.2 Aluminum
3.2.3 Metal

-- End of Section Table of Contents --

SECTION 10201N

METAL WALL AND DOOR LOUVERS
09/99

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

ALUMINUM ASSOCIATION (AA)

AA DAF-45	(1980) Aluminum Finishes

AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION (AAMA)

AAMA 2603	(1992; Addendum 1993) Pigmented Organic Coatings on Extruded Aluminum

AIR MOVEMENT AND CONTROL ASSOCIATION (AMCA)

AMCA 500-D	(1991) Louvers, Dampers and Shutters
AMCA 511	(1991) Certified Ratings Program for Air Control Devices

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 167	(1996) Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
ASTM A 366/A 366M	(1997) Commercial Quality (CS) Steel, Carbon (0.15 Maximum Percent), Cold-Rolled
ASTM A 653/A 653M	(1998) Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM B 209M	(1995) Aluminum and Aluminum-Alloy Sheet and Plate (Metric)
ASTM B 209	(1996) Aluminum and Aluminum-Alloy Sheet and Plate
ASTM B 221M	(1996) Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric)
ASTM B 221	(1996) Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes

1.2 SUBMITTALS

Submit the following in accordance with Section 01330, "Submittal Procedures."

SD-02 Shop Drawings

Wall louvers

Show all information necessary for fabrication and installation of louvers. Indicate materials, sizes, thicknesses, fastenings, and profiles.

SD-04 Samples

Wall louvers

Door louvers

Colors of finishes shall closely approximate colors indicated. Where color is not indicated, submit the manufacturer's standard colors to the Contracting Officer for selection.

1.3 DELIVERY, STORAGE, AND PROTECTION

Deliver materials to the site in an undamaged condition. Carefully store materials off the ground to provide proper ventilation, drainage, and protection against dampness. Louvers shall be free from nicks, scratches, and blemishes. Replace defective or damaged materials with new.

PART 2 PRODUCTS

2.1 MATERIALS

2.1.1 Galvanized Steel Sheet

ASTM A 653/A 653M, coating designation G90.

2.1.2 Aluminum Sheet

ASTM B 209, alloy 3003 or 5005 with temper as required for forming.

2.1.3 Extruded Aluminum

ASTM B 221, alloy 6063-T5 or -T52.

2.1.4 Cold Rolled Steel Sheet

ASTM A 366/A 366M, Class 1, with matte finish. Use for interior louvers only.

2.2 METAL WALL LOUVERS

Weather resistant type, with bird screens and made to withstand a wind load of not less than 30 pounds per square foot. Wall louvers shall bear the AMCA certified ratings program seal for air performance and water penetration in accordance with AMCA 500-D and AMCA 511. The rating shall show a water penetration of 0.20 or less ounce per square foot of free area at a free velocity of 800 feet per minute.

2.2.1 Extruded Aluminum Louvers

Fabricated of extruded 6063-T5 or -T52 aluminum with a wall thickness of not less than 0.081 inch.

2.2.1 Mullions and Mullion Covers

Same material and finish as louvers. Provide mullions covers on both faces of joints between louvers.

2.2.2 Screens and Frames

For aluminum louvers, provide 1/2 inch square mesh, 14 or 16 gage aluminum or 1/4 inch square mesh, 16 gage aluminum bird screening. For steel louvers, provide 1/2 inch square mesh, 12 or 16 gage zinc-coated steel; 1/2 inch square mesh, 16 gage copper; or 1/4 inch square mesh, 16 gage zinc-coated steel or copper bird screening. Mount screens in removable, rewirable frames of same material and finish as the louvers.

2.3 DOOR LOUVERS

Inverted "V" sightproof type not less than one inch thick with matching metal trim. Louvers for exterior doors shall be weather resistant type.

2.3.1 Extruded Aluminum Door Louvers

Fabricate of 6063-T5 or -T52 aluminum alloy with a wall thickness of not less than 0.050 inch thick. Frames and trim shall be clamp-in "L" type.

2.3.1 Screens and Frames

For exterior doors, provide aluminum insect screens, 18 by 16 or 18 by 14 mesh. Mount screens in removable, rewirable frames of same material and finish as the louvers.

2.4 FASTENERS AND ACCESSORIES

Provide stainless steel screws and fasteners for aluminum louvers and zinc-coated or stainless steel screws and fasteners for steel louvers. Provide other accessories as required for complete and proper installation.

2.5 FINISHES

2.5.1 Aluminum

Provide factory-applied anodic coating.

2.5.1.1 Anodic Coating

Clean exposed aluminum surfaces and apply an anodized finish conforming to AA DAF-45 Designation System for Aluminum Finishes, clear (natural), M10C22A31, Architectural Class II.

PART 3 EXECUTION

3.1 INSTALLATION

3.1.1 Wall Louvers

Install using stops or moldings, flanges, strap anchors, or jamb fasteners as appropriate for the wall construction and in accordance with manufacturer's recommendations.

3.1.2 Door Louvers

Install louvers in wood doors by using metal "Z" or "L" moldings. Fasten moldings to door with screws.

3.1.3 Screens and Frames

Attach frames to louvers with screws or bolts.

3.2 PROTECTION FROM CONTACT OF DISSIMILAR MATERIALS

3.2.1 Copper or Copper-Bearing Alloys

Paint copper or copper-bearing alloys in contact with dissimilar metal with heavy-bodied bituminous paint or separate with inert membrane.

3.2.2 Aluminum

Where aluminum contacts metal other than zinc, paint the dissimilar metal with a primer and two coats of aluminum paint.

3.2.3 Metal

Paint metal in contact with mortar, concrete, or other masonry materials with alkali-resistant coatings such as heavy-bodied bituminous paint.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 10 - SPECIALTIES

SECTION 10505

STEEL CLOTHING LOCKERS

08/04

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 DELIVERY, HANDLING, AND STORAGE
1.4 FIELD MEASUREMENTS
1.5 QUALITY ASSURANCE
1.5.1 Color Chips

PART 2 PRODUCTS

2.1 TYPES
2.2 MATERIAL
2.2.1 Galvanized Steel Sheet
2.2.2 Chromium Coating
2.2.2 Color
2.3 COMPONENTS
2.3.1 Built-In Locks
2.3.2 Coat Hooks
2.3.3 Hanger Rods
2.3.4 Door Handles
2.3.5 Doors
2.3.5.1 Hinges
2.3.5.2 Latching Mechanisms
2.3.6 Latch Strikes
2.3.7 Silencers
2.3.8 Back and Side Panels, Tops, and Bottoms
2.3.9 Shelves
2.3.10 Base Panels
2.3.11 Legs
2.3.12 Number Plates

PART 3 EXECUTION

3.1 ASSEMBLY AND INSTALLATION
3.2 NUMBERING SYSTEM
3.3 FIELD QUALITY CONTROL
3.3.1 Testing
3.3.2 Repairing
3.3.3 Cleaning

-- End of Section Table of Contents --

SECTION 10505

STEEL CLOTHING LOCKERS
08/04

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM A 366/A 366M	(1997e1) Commercial Steel, Sheet, Carbon, (0.15 Maximum Percent Cold-Rolled**
ASTM A 569/A 569M	(1998) Steel, Carbon (0.15 Maximum Percent), Hot-Rolled Sheet and Strip, Commercial
ASTM A 653/A 653M	(2004a) Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM B 456	(2003) Electrodeposited Coatings of Copper Plus Nickel Plus Chromium and Nickel Plus Chromium
ASTM D 2092	(1995; R 2001e1) Preparation of Zinc-Coated (Galvanized) Steel Surfaces for Painting

U.S. DEPARTMENT OF DEFENSE (DOD)

MIL-C-22750	(Rev F) Coating, Epoxy, High Solids
MIL-P-23377	(Rev H) Primer Coatings: Epoxy, High Solids

U.S. GENERAL SERVICES ADMINISTRATION (GSA)

FS AA-L-00486	(Rev J) Lockers, Clothing, Steel

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for Contractor Quality Control approval. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Types; G

Location; G

Installation

SD-03 Product Data

Material

Finish

Locker components

Assembly instructions

SD-04 Samples

Color chips; G

1.3 DELIVERY, HANDLING, AND STORAGE

Deliver lockers and associated materials in their original packages, containers, or bundles bearing the manufacturer's name and the name of the material. Protect from weather, soil, and damage during delivery, storage, and construction.

1.4 FIELD MEASUREMENTS

To ensure proper fits, make field measurements prior to the preparation of drawings and fabrication.

1.5 QUALITY ASSURANCE

1.5.1 Color Chips

Provide a minimum of three color chips, not less than 3 inches square, of each color.

PART 2 PRODUCTS

2.1 TYPES

FS AA-L-00486. Provide Type I, single-tier Style 1 lockers in the location, quantities and size indicated. Provide locker finish color as specified by Government and approved by User. Provide lockers "set-up" (pre-assembled).

2.2 MATERIAL

2.2.1 Galvanized Steel Sheet

ASTM A 366/A 366M or ASTM A 569/A 569M, commercial quality, minimized spangle material. Prepare material surfaces for baked enamel finishing in accordance with FS AA-L-00486. Minimum uncoated sheet thickness as specified.

2.2.2 Chromium Coating

Nickel and chromium electrodeposited on the specified base metal. Conform to ASTM B 456, SC-3, as applicable to the base metal.

2.2.2 Color

As selected.

2.3 COMPONENTS

2.3.1 Built-In Locks

Provide padlock eye in the door latching mechanism.

2.3.2 Coat Hooks

FS AA-L-00486, chromium plated.

2.3.3 Hanger Rods

FS AA-L-00486.

2.3.4 Door Handles

FS AA-L-00486. Provide zinc alloy or steel handles with a chromium coating.

2.3.5 Doors

FS AA-L-00486, not less than 0.0598 inch thick steel sheet.

2.3.5.1 Hinges

In addition to the requirements of FS AA-L-00486, provide 5-knuckle hinges, minimum 2 inches high. Fabricate knuckle hinges from not less than 0.0747 inch thick steel sheet. A full height piano hinge may be provided if standard with the manufacturer. Weld or bolt hinges to the door frame. Weld, bolt, or rivet hinges to the door.

2.3.5.2 Latching Mechanisms

FS AA-L-00486.

2.3.6 Latch Strikes

FS AA-L-00486. Fabricate from not less than 0.0747 inch thick steel sheet, except latch strike may be continuous from top to bottom and fabricated as part of the door framing.

2.3.7 Silencers

FS AA-L-00486.

2.3.8 Back and Side Panels, Tops, and Bottoms

FS AA-L-00486, not less than 0.0474 inch thick steel sheet.

2.3.9 Shelves

FS AA-L-00486. Fabricate from not less than 0.0598 inch thick steel sheet.

2.3.10 Base Panels

FS AA-L-00486.

2.3.11 Legs

FS AA-L-00486.

2.3.12 Number Plates

Aluminum. Provide consecutive numbers.

Number plates are not required.

PART 3 EXECUTION

3.1 ASSEMBLY AND INSTALLATION

Assemble lockers according to the locker manufacturer's instructions. Align lockers horizontally and vertically. Secure lockers to wall and base with screws as indicated. Bolt adjacent lockers together. Adjust doors to operate freely without sticking or binding and to ensure they close tightly.

3.2 NUMBERING SYSTEM

Install number plates on lockers consecutively as indicated by Contracting Officer.

3.3 FIELD QUALITY CONTROL

3.3.1 Testing

Government may request performance-characteristic tests on assembled lockers in accordance with FS AA-L-00486. Lockers not conforming will be rejected.

3.3.2 Repairing

Remove and replace damaged and unacceptable portions of completed work with new.

3.3.3 Cleaning

Clean surfaces of the work, and adjacent surfaces soiled as a result of the work, in an approved manner. Remove equipment, surplus materials, and rubbish from the site.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 10 - SPECIALTIES

SECTION 10605N

WIRE MESH PARTITIONS

09/99

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 DELIVERY, STORAGE, AND HANDLING
1.4 DESCRIPTION OF WORK

PART 2 PRODUCTS

2.1 MATERIALS
2.1.1 Steel Shapes, Plates, and Bars
2.1.2 Cold-Formed Steel
2.1.3 Wire Mesh
2.1.4 Floor Sockets
2.2 NORMAL DUTY PARTITIONS
2.2.1 Wire Mesh
2.2.2 Vertical Frames
2.2.3 Horizontal Frames
2.2.4 Center Reinforcing Bar
2.2.5 Capping Bar
2.2.6 Corner Posts
2.2.7 Line Posts
2.2.8 Hinged Doors
2.2.9 Sheet Metal Base
2.3 HEAVY DUTY PARTITIONS
2.3 Wire Mesh
2.4 Panel Frames
2.5 Center Reinforcing Bar
2.6 Capping Bar
2.7 Corner Posts
2.8 Line Posts
2.3.7 Hinged Doors
2.9 DOOR OPENING FRAMES
2.6 LOCKS
2.10 FABRICATION
2.10.1 Standard Panels
2.10.2 Sheet Metal Base Panels
2.10.3 Doors
2.10.4 Finish

PART 3 EXECUTION

3.1 INSTALLATION
3.1.1 Wire Mesh Partitions
3.1.2 Doors and Windows
3.1.3 Bracing

3.1.4 Touch-Up

-- End of Section Table of Contents --

SECTION 10605N

WIRE MESH PARTITIONS
09/99

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred within the text by the basic designation only.

AMERICAN IRON AND STEEL INSTITUTE (AISI)

AISI SG-973 (1986) Cold-Formed Steel Design Manual

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 36/A 36M (1996) Carbon Structural Steel

1.2 SUBMITTALS

Submit the following in accordance with Section 01330, "Submittal Procedures."

SD-02 Shop Drawings

Wire mesh partitions

Show layout, details, materials, dimensions, finishes, and all information necessary for fabrication and installation.

SD-03 Product Data

Wire mesh partitions; G

Submit for each type of partition, door, and window.

1.3 DELIVERY, STORAGE, AND HANDLING

Deliver materials in manufacturer's original, unopened containers or packaging with labels intact and legible. Deliver, store, and handle materials so as to prevent damage. Replace damaged or defective materials with new.

1.4 DESCRIPTION OF WORK

Wire mesh partitions shall be all wire type, heavy duty for extra heavy industrial use, and shall be provided complete with fasteners, capping bars, adjustable floor sockets, bracing, doors, hardware, and other items necessary.

PART 2 PRODUCTS

2.1 MATERIALS

2.1.1 Steel Shapes, Plates, and Bars

ASTM A 36/A 36M.

2.1.2 Cold-Formed Steel

AISI SG-973.

2.1.3 Wire Mesh

Carbon steel wire, woven diamond mesh, intermediate crimped.

2.1.4 Floor Sockets

Cast or forged steel or ductile iron, adjustable, approximately 2 1/2 inches high.

2.2 NORMAL DUTY PARTITIONS

2.2.1 Wire Mesh

10 gage wire, 1 1/2 inch mesh.

2.2.2 Vertical Frames

1 1/4 by 5/8 inch cold-rolled C section channels or 1 1/4 by 5/8 by 1/8 inch channels.

2.2.3 Horizontal Frames

One by 5/8 inch channels.

2.2.4 Center Reinforcing Bar

One by 1/2 by 1/8 inch channel with all wires woven through, or two one by 3/8 by 1/8 inch channels bolted together with mesh in between.

2.2.5 Capping Bar

2 1/4 by one by 1/8 inch channel or 2 by 1/4 inch flat bar.

2.2.6 Corner Posts

Structural steel angles, 1 1/4 by 1 1/4 by 1/8 inch.

2.2.7 Line Posts

Unless otherwise indicated, provide partitions more than 12 feet high with flat bar line posts bolted between vertical frame channels. Sizes of posts shall be as follows:

Partition Height	Size of Posts
12 feet to 14 feet 8 inches	1 3/4 by 5/16 inch or 2 by 1/4 inch
14 feet 8 inches to 19 feet 8 inches	2 1/2 by 5/16 inch

19 feet 8 inches to 23 feet 8 inches	3 by 5/16 inch

2.2.8 Hinged Doors

Frames shall be 1 1/4 by 1/2 by 1/8 inch channels with 1 1/4 by 1/8 inch flat bar cover on top and bottom rails and on hinge stile and a 1 3/8 by 3/4 by 1/8 inch angle riveted to the lock stile. Provide 1 1/2 pairs of regular weight, wrought steel, non-removable pin, butt hinges riveted or welded to the door and the door opening frame for each door.

2.2.9 Sheet Metal Base

Hot- or cold-rolled sheet steel, not lighter than 16 gage.

2.3 HEAVY DUTY PARTITIONS

2.3 WIRE MESH

6 gage wire, 2 inch mesh.

2.4 PANEL FRAMES

1 1/2 by 3/4 by 1/8 inch steel channels.

2.5 CENTER REINFORCING BAR

One 1 1/2 by 3/4 by 1/8 inch channel with all wires woven through, or two 1 1/4 by 3/8 by 1/8 inch channels bolted together with mesh in between.

2.6 CAPPING BAR

Structural steel channel, 3 inch by 4.1 pounds.

2.7 CORNER POSTS

Structural steel angles, 1 3/4 by 1 3/4 by 1/8 inch.

2.8 LINE POSTS

Unless otherwise indicated, provide partitions with flat bar line posts bolted between vertical frame channels. Sizes of posts shall be as follows:

Partition Height	Size of Posts
7 feet to 12 feet	2 1/2 by 5/16 inch
12 feet to 16 feet	3 by 5/16 inch or 2 1/2 by 3/8 inch
16 feet to 20 feet	3 1/2 by 5/16 inch

2.3.7 Hinged Doors

Frames shall be 1 1/2 by 3/4 by 1/8 inch channels with 1 1/2 by 1/8 inch flat bar cover on top and bottom rails and on hinge stile and a 1 5/8 by 7/8 by 1/8 inch angle riveted to the lock stile. Provide 1 1/2 pairs of

heavyweight, wrought steel, non-removable pin, butt hinges riveted or welded to the door and the door opening frame for each door.

2.9 DOOR OPENING FRAMES

Provide frames the same size and shape as the vertical frames for the mesh panels.

2.6 LOCKS

Provide each door with a mortise type lock with a six-pin tumbler lock cylinder on the outside and a recessed knob on the inside.

2.10 FABRICATION

2.10.1 Standard Panels

Wire shall be woven into diamond mesh, intermediate crimped, and securely clinched to frames. Joints shall be mortised and tenoned. Wire shall be continuous at center reinforcing bars, either woven through a single channel or bolted between two channels. Panel vertical frames shall have3/8 inch bolt holes 18 inches o.c. for heavy duty partitions.

2.10.2 Sheet Metal Base Panels

Upper portion shall be as specified for standard panels, except that the wire shall be clinched into the center reinforcing bar. Form sheet steel to fit between the panel frames and securely bolt to the frames.

2.10.3 Doors

Construction shall be similar to that specified for panels. Wire mesh shall be the same as that used in the adjacent partition panels.

2.10.4 Finish

Thoroughly clean ferrous metal, treat with phosphate, and paint with gray enamel in the shop.

PART 3 EXECUTION

3.1 INSTALLATION

3.1.1 Wire Mesh Partitions

Install plumb, level, and true to line, within a tolerance of 1/8 inch in 10 feet or the height or run of the partition, if less than 10 feet. Anchor floor sockets to the floor with expansion bolts. Vertical frames and posts shall be bolted together with 3/8 inch bolts 18 inches o.c. for heavy duty partitions. Secure top frames to a continuous capping bar with 1/4 inch diameter U bolts not more than 28 inches o.c.

3.1.2 Doors and Windows

Install in accordance with the manufacturers' recommendations. Adjust as required so that doors, windows, and hardware operate freely and properly.

3.1.3 Bracing

Brace free standing partitions more than 20 feet in length, at intervals not greater than 20 feet with a steel channel brace connected to the capping bar and anchored to the building wall or framing member.

3.1.4 Touch-Up

Clean and paint scratches, abrasions, and other damage to shop painted surfaces to match the shop-applied finish.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 10 - SPECIALTIES

SECTION 10800

TOILET ACCESSORIES

07/02

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 DELIVERY, STORAGE, AND HANDLING
1.4 WARRANTY

PART 2 PRODUCTS

2.1 MANUFACTURED UNITS
2.1.1 Anchors and Fasteners
2.1.2 Finishes
2.2 ACCESSORY ITEMS
2.2.2 Grab Bar (GB)
2.2.4 Mirrors, Glass (MG)
2.2.8 Combination Paper Towel Dispenser/Waste Receptacle Units (PTDWR)
2.2.1 Shower Curtain (SC)
2.2.12 Shower Curtain Rods (SCR)
2.2.2 Soap Holder (SH)
2.2.15 Shelf, Metal, Heavy Duty (SMHD)
2.2.3 Towel Bar (TB)
2.2.4 Towel Pin (TP)
2.2.20 Toilet Tissue Dispenser (TTD)

PART 3 EXECUTION

3.1 INSTALLATION
3.1.1 Recessed Accessories
3.1.2 Surface Mounted Accessories
3.2 CLEANING

-- End of Section Table of Contents --

SECTION 10800

TOILET ACCESSORIES
07/02

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 1036 (1991; R 1997) Flat Glass

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only or as otherwise designated. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Finishes;
Accessory Items;

Manufacturer's descriptive data and catalog cuts indicating materials of construction, fasteners proposed for use for each type of wall construction, mounting instructions, operation instructions, and cleaning instructions.

SD-04 Samples

Finishes;
Accessory Items;

One sample of each accessory proposed for use. Approved samples may be incorporated into the finished work, provided they are identified and their locations noted.

SD-07 Certificates

Accessory Items

Submit for each type of accessory specified, attesting that the items meet the specified requirements.

1.3 DELIVERY, STORAGE, AND HANDLING

Toilet accessories shall be wrapped for shipment and storage, delivered to the jobsite in manufacturer's original packaging, and stored in a clean, dry area protected from construction damage and vandalism.

1.4 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a 1 year period shall be provided.

PART 2 PRODUCTS

2.1 MANUFACTURED UNITS

Toilet accessories shall be provided where indicated in accordance with paragraph SCHEDULE. Porcelain type, tile-wall accessories are specified in Section 09310 CERAMIC TILE. Each accessory item shall be complete with the necessary mounting plates and shall be of sturdy construction with corrosion resistant surface.

2.1.1 Anchors and Fasteners

Anchors and fasteners shall be capable of developing a restraining force commensurate with the strength of the accessory to be mounted and shall be suited for use with the supporting construction. Exposed fasteners shall be of tamperproof design and shall be finished to match the accessory.

2.1.2 Finishes

Except where noted otherwise, finishes on metal shall be provided as follows:

Metal	Finish
Stainless steel	No. 4 satin finish

2.2 ACCESSORY ITEMS

Accessory items shall conform to the requirements specified below.

2.2.2 Grab Bar (GB)

Grab bar shall be 18 gauge, 1-1/4 inches OD Type 304 stainless steel. Grab bar shall be form and length as indicated. Exposed mounting flange shall have mounting holes concealed. Grab bar shall have peened non-slip surface. Installed bars shall be capable of withstanding a 500 pound vertical load without coming loose from the fastenings and without obvious permanent deformation. Space between wall and grab bar shall be 1-1/2 inch.

2.2.4 Mirrors, Glass (MG)

Glass for mirrors shall be Type I transparent flat type, Class 1-clear. Glazing Quality q1 1/4 inch thick conforming to ASTM C 1036. Glass shall be coated on one surface with silver coating, copper protective coating, and mirror backing paint. Silver coating shall be highly adhesive pure silver coating of a thickness which shall provide reflectivity of 83 percent or more of incident light when viewed through 1/4 inch thick glass, and shall

be free of pinholes or other defects. Copper protective coating shall be pure bright reflective copper, homogeneous without sludge, pinholes or other defects, and shall be of proper thickness to prevent "adhesion pull" by mirror backing paint. Mirror backing paint shall consist of two coats of special scratch and abrasion-resistant paint and shall be baked in uniform thickness to provide a protection for silver and copper coatings which will permit normal cutting and edge fabrication.

2.2.8 Combination Paper Towel Dispenser/Waste Receptacle Units (PTDWR)

Dispenser/receptacle shall be semi-recessed and shall have a capacity of 600 sheets of C-fold, single-fold, or quarter-fold towel. Waste receptacle shall be designed to be locked in unit and removable for service. Locking mechanism shall be tumbler key lock. Waste receptacle shall have a capacity of 18 gallons. Unit shall be fabricated of not less than 0.30 inch stainless steel welded construction with all exposed surfaces having a satin finish. Waste receptacle that accepts reusable liner standard for unit manufacturer shall be provided.

2.2.1 Shower Curtain (SC)

Shower curtain shall be a size to suit conditions. Curtain shall be anti-bacterial nylon/vinyl fabric.

2.2.12 Shower Curtain Rods (SCR)

Shower curtain rods shall be Type 304 stainless steel 1-1/4 inch OD by 0.049 inch minimum straight to meet installation conditions.

2.2.2 Soap Holder (SH)

Soap holder shall be surface mounted Type 304 stainless steel. Separate supports shall be stainless steel.

2.2.15 Shelf, Metal, Heavy Duty (SMHD)

Heavy duty metal shelf shall be minimum of 18 gauge stainless steel with hemmed edges. Shelves over 30 inches shall be provided with intermediate supports. Supports shall be minimum of 16 gauge, shall be welded to the shelf, and shall be spaced no more than 30 inches apart.

2.2.3 Towel Bar (TB)

Towel bar shall be stainless steel with a minimum thickness of .015 inch. Bar shall be minimum 3/4 inch diameter, or 5/8 inch square. Finish shall be satin.

2.2.4 Towel Pin (TP)

Towel pin shall have concealed wall fastenings, and a pin integral with or permanently fastened to wall flange. Maximum projection shall be 4 inches. Design shall be consistent with design of other accessory items. Finish shall be satin.

2.2.20 Toilet Tissue Dispenser (TTD)

Toilet tissue holder shall be Type II - surface mounted with two rolls of standard tissue mounted horizontally. Cabinet shall be stainless steel, satin finish.

PART 3 EXECUTION

3.1 INSTALLATION

Surfaces of fastening devices exposed after installation shall have the same finish as the attached accessory. Exposed screw heads shall be oval. Install accessories at the location and height indicated. Protect exposed surfaces of accessories with strippable plastic or by other means until the installation is accepted. After acceptance of accessories, remove and dispose of strippable plastic protection. Coordinate accessory manufacturer's mounting details with other trades as their work progresses. Brackets, plates, anchoring devices and similar items used for mounting accessories in showers shall be bedded in a silicone or polysulphide sealant as they are set to provide a watertight installation. After installation, thoroughly clean exposed surfaces and restore damaged work to its original condition or replace with new work.

3.1.1 Recessed Accessories

Set anchors in mortar in masonry construction. Fasten to metal studs or framing with sheet metal screws in metal construction.

3.1.2 Surface Mounted Accessories

Mount on concealed backplates, unless specified otherwise. Accessories without backplates shall have concealed fasteners. Unless indicated or specified otherwise, install accessories with sheet metal screws or wood screws in lead-lined braided jute, teflon or neoprene sleeves, or lead expansion shields, or with toggle bolts or other approved fasteners as required by the construction. Install backplates in the same manner, or provide with lugs or anchors set in mortar, as required by the construction. Fasten accessories mounted on gypsum board and plaster walls without solid backing into the metal or wood studs or to solid wood blocking secured between wood studs, or to metal backplates secured to metal studs.

3.2 CLEANING

Material shall be cleaned in accordance with manufacturer's recommendations. Alkaline or abrasive agents shall not be used. Precautions shall be taken to avoid scratching or marring of surfaces.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 12 - FURNISHINGS

SECTION 12320A

CABINETS AND COUNTERTOPS

05/98

PART 1 GENERAL

1.1 REFERENCES
1.2 DESIGN
1.3 SUBMITTALS
1.4 DELIVERY AND STORAGE

PART 2 PRODUCTS

2.1 General Description
2.1.1 Items Included
2.2 CABINETS
2.2.1 Frame Type Cabinets
2.2 COUNTERTOPS AND BACKSPLASH
2.2.1 High-Pressure Laminated Plastic Clad Countertops
2.3 Sink/Lavatory Rims
2.4 FINISH
2.4.1 Cabinet Finish
2.4.1 Backer Sheets
2.5 HARDWARE

PART 3 EXECUTION

3.1 INSTALLATION
3.2 CLEANING

-- End of Section Table of Contents --

SECTION 12320A

CABINETS AND COUNTERTOPS
05/98

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI Z124.3	(1995) American National Standard for Plastic Lavatories.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 570	(1995) Water Absorption of Plastics
ASTM D 638	(1997) Tensile Properties of Plastics
ASTM D 2583	(1995) Indentation Hardness of Rigid Plastics by Means of a Barcol Impressor
ASTM E 84	(1997a) Surface Burning Characteristics of Building Materials

BUILDERS HARDWARE MANUFACTURERS ASSOCIATION (BHMA)

BHMA A156.9	(1994) Cabinet Hardware

KITCHEN CABINET MANUFACTURERS ASSOCIATION (KCMA)

KCMA A161.1	(1995) Performance & Construction Standards for Kitchen and Vanity Cabinets

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA LD 3	(1995) High-Pressure Decorative Laminates

1.2 DESIGN

Cabinets shall be wood, factory-fabricated and finished in the manufacturer's standard sizes and finishes of the type, design, and configuration indicated. Cabinets shall be constructed as specified and shall meet the requirements of KCMA A161.1. Wall and base cabinet assemblies shall consist of individual units joined into continuous sections. Fastenings shall be accomplished to permit removal and replacement of individual units without affecting the remainder of the installation. Counters shall be provided with watertight sink rim when indicated. Drawers shall be removable and shall be equipped with position

stops to avoid accidental complete withdrawals. Shelves shall be fixed or adjustable as indicated.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Installation;

Drawings showing each type of cabinet and related item, and clearly indicating the complete plan, location, and elevations of the cabinets and accessories and pertinent details of construction, fabrication, and attachments.

SD-03 Product Data

Cabinets;
Countertops and Backsplash;

Manufacturer's printed data, catalog cuts, installation and cleaning instructions.

SD-04 Samples

Cabinets;
Countertops and Backsplash;

In lieu of individual samples, complete minimum size cabinets may be furnished as samples. Mock-up units are not acceptable. Samples shall be of sufficient size to show color, pattern, and method of assembly.

a. Countertop and backsplash - One section, containing both.

b. Door and drawer front - One of each, with hardware mounted.

c. Countertop color samples approximately 2 x 3 inches size.

d. Stain/color samples approximately 2 x 3 inches size.

SD-06 Test Reports

Cabinets and Countertops;

Test reports certifying that all cabinets comply with the requirements of KCMA A161.1. Tests shall be conducted by independent laboratories approved by KCMA. KCMA certification seals affixed to the cabinets will be accepted in lieu of certified test reports.

1.4 DELIVERY AND STORAGE

Cabinets shall be delivered to the jobsite wrapped in a protective covering. Cabinets shall be stored in accordance with manufacturer's recommendations in an adequately ventilated, dry location that is free of dust, water, or other contaminants and in a manner to permit access for inspection and handling. Cabinets shall be handled carefully to prevent damage to the surfaces. Damaged items that cannot be restored to like-new condition shall be replaced.

PART 2 PRODUCTS

2.1 GENERAL DESCRIPTION

The Contractor shall furnish and install all furniture in the laboratory as shown on the plans and specified herein.

It is the intent of this specification to provide for the Government a quality and functional installation of Exam Room furniture. Minimum standards are set forth herein to comply with this intent. Exam Room furniture bidders are cautioned that only equipment meeting the standards set forth in this specification will be acceptable.

2.1.1 Items Included

Furnishing all cabinets and casework, including tops, ledges, supporting structures and installing all filler panels, knee space panels and scribes as shown.

Furnishing all utility service outlet accessory fittings, electrical receptacles and switches, as listed in these specifications, or as shown on drawings as mounted on the laboratory furniture.

Furnishing all laboratory sinks, drain troughs, overflows and sink outlets with integral or separate tailpieces, which occur above the floor, and where these items are part of the equipment. Integral tailpieces shall be in accordance with the manufacturer's standards, and separate tailpieces shall not exceed 10" in length. All tailpieces shall be furnished less the couplings required to connect them to the drain piping system.

2.2 CABINETS

Wall and base cabinets shall be of the same construction and same outside appearance. Door design shall be solid flush face from vendors standard styles. Corner cabinets shall be equipped with notched shelving as indicated. Shelves shall be fixed or fully adjustable as indicated. Adjustable shelves shall be capable of adjusting on approximately 3 inch increments. Shelves shall be supported by self-locking clips or wood dowels. Dowels shall be approximately 5/16 inch in diameter by 1-9/16 inches long. Dowels shall be inserted into borings for the shelf adjustments. Shelves shall be minimum 1/2 inch thick plywood or minimum 1/2 inch thick 45 pound density particle board.

2.2.1 Frame Type Cabinets

The cabinets shall be constructed with frame fronts and solid ends, or frame construction throughout. Frame members shall be 3/4 inch thick by 1-1/2

inch wide; kiln-dried hardwood, glued together, and shall be either mortised and tenoned, dovetailed or doweled, nailed, stapled or screwed. Top and bottom corners shall be braced with either hardwood blocks that are glued together with water resistant glue and nailed in place, or metal or plastic corner braces. Bottoms of cabinets shall be minimum 3/8 inch thick plywood 45 pound density particle board or good grade plywood and shall be braced with wood members glued in place. Cabinet ends shall be 3/8 inch thick, 45 pound density particle board.

2.2 COUNTERTOPS AND BACKSPLASH

2.2.1 High-Pressure Laminated Plastic Clad Countertops

Clad countertop and backsplash shall be constructed of 3/4 inch thick plywood or 3/4 inch thick, 45 pound density particle board core and shall be post formed cove type or fully formed type with laminated top. Cove type shall be a single unit with self-edging and plastic laminate coved at the juncture of the countertop and backsplash. Fully formed type or square edge shall be a unit with shaped edges using wood nose molding at counter edge and shall include a separate backsplash. Backsplash shall be not less than 3-1/2 inches high. Edging and trim shall consist of plastic laminate cut and fitted to all exposed edges. End splashes constructed of 3/4 inch plywood or 3/4 inch thick, 45 pound density particle board core shall be supplied. Continuous sheets of longest lengths practicable shall be provided. Joints in surface sheeting shall be tight and flush and held to a practicable minimum. When the countertop and backsplash are two separate units, GP50 plastic laminate shall be used. When the countertop and backsplash are one unit, PF42 plastic laminate shall be used. Plastic laminate shall conform to the requirements of NEMA LD 3 and plastic laminate adhesive shall be contact type applied to both surfaces. For fully formed and cove type countertops, the post-forming plastic laminate shall not be bent to a radius smaller than the limit recommended by the plastic manufacturer.

2.3 SINK/LAVATORY RIMS

Sink/lavatory rims shall be of the type as shown, and a standard product of a manufacturer regularly producing this type of equipment.

2.4 FINISH

2.4.1 Cabinet Finish

Cabinets shall be provided with a factory-applied durable finish in accordance with KCMA A161.1 requirements and of a type standard with the manufacturer. Natural finish wood doors, cabinet fronts, and exposed cabinet sides shall be fabricated of wood which will be free of extreme color variations within each panel or between adjacent panels. Exposed exterior surfaces shall be paint-finished wood doors, drawer fronts, cabinet fronts, and exposed cabinet sides fabricated of hardwood or grade C hardwood veneer.

2.4.1 Backer Sheets

Backer Sheets of high pressure plastic laminate, shall conform to NEMA LD 3, Grade BK20 and shall be applied to the underside of all core material.

2.5 HARDWARE

Hardware shall conform to BHMA A156.9, shall be suitable for kitchen cabinet use, and shall include all miscellaneous hardware for a complete installation. Door hinges shall be self-closing type. Drawer runners shall have nylon rollers standard with the manufacturer. Hardware and fastenings for doors and drawers with particle board cores shall be of the through-bolt type.

PART 3 EXECUTION

3.1 INSTALLATION

Cabinets shall be installed level, plumb, and true to line, and shall be attached to the walls or floors with suitable devices to securely anchor each unit. Countertops, accessories, and hardware shall be installed as indicated on the drawings. Installation shall be in accordance with the manufacturer's approved printed instructions. The inner edge of sink cut-outs in laminated plastic tops shall be painted with a coat of semigloss enamel paint and sink flanges shall be set in a bed of sealant. Closer and filler strips and finish moldings shall be provided as required. Prior to final acceptance, doors shall be aligned, and hardware shall be adjusted.

3.2 CLEANING

Cabinet and countertop surfaces shall be cleaned in accordance with manufacturer's instructions.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 15 - MECHANICAL

SECTION 15070A

SEISMIC PROTECTION FOR MECHANICAL EQUIPMENT

01/02

PART 1 GENERAL

1.1 REFERENCES
1.2 SYSTEM DESCRIPTION
1.2.1 General Requirements
1.2.2 Mechanical Equipment
1.2.3 Mechanical Systems
1.2.4 Contractor Designed Bracing
1.2.5 Items Not Covered By This Section
1.2.5.1 Items Requiring No Seismic Restraints
1.3 EQUIPMENT REQUIREMENTS
1.3.1 Rigidly Mounted Equipment
1.4 SUBMITTALS

PART 2 PRODUCTS

2.1 Not Used

PART 3 EXECUTION

3.1 Not Used

-- End of Section Table of Contents --

SECTION 15070A

SEISMIC PROTECTION FOR MECHANICAL EQUIPMENT
01/02

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION (SMACNA)

SMACNA Seismic Restraint Mnl	(1998, 2nd Ed) Seismic Restraint Manual: Guidelines for Mechanical Systems

U.S. ARMY CORPS OF ENGINEERS (USACE)

TI 809-04	(1998) Seismic Design for Buildings

1.2 SYSTEM DESCRIPTION

1.2.1 General Requirements

The requirements for seismic protection measures described in this section shall be applied to the mechanical equipment and systems listed below.

1.2.2 Mechanical Equipment

Mechanical equipment to be seismically protected shall include the following items to the extent required on the drawings or in other sections of these specifications:

Water Heaters
Refrigerant Piping
Ducts
Unit Heaters
Exhaust Fans
Air Handling Units

1.2.3 Mechanical Systems

The following mechanical systems shall be installed as required on the drawings and other sections of these specifications and shall be seismically protected in accordance with this specification:

All Piping Inside the Building.

1.2.4 Contractor Designed Bracing

The Contractor shall design the bracing in accordance with TI 809-04 and additional data furnished by the Contracting Officer. Resistance to lateral forces induced by earthquakes shall be accomplished without consideration of friction resulting from gravity loads. TI 809-04 uses parameters for the building, not for the equipment in the building; therefore, corresponding adjustments to the formulas shall be required. Loadings determined using TI 809-04 are based on strength design; therefore, AISC 325 Specifications shall be used for the design. The bracing for the following mechanical equipment and systems shall be developed by the Contractor:

Water Heater
Air Handling Units
Unit Heaters
Exhaust Fans.

1.2.5 Items Not Covered By This Section

1.2.5.1 Items Requiring No Seismic Restraints

Seismic restraints are not required for the following items:

c. All piping less than 2-1/2inches inside diameter.

d. Rectangular air handling ducts less than 6 square feet in cross sectional area.

e. Round air handling ducts less than 28 inches in diameter.

1.3 EQUIPMENT REQUIREMENTS

1.3.1 Rigidly Mounted Equipment

The following specific items of equipment to be furnished under this contract shall be constructed and assembled to withstand the seismic forces specified in TI 809-04, Chapter 10. Each item of rigid equipment shall be entirely located and rigidly attached on one side only of a building expansion joint. Piping, duct, electrical conduit, etc., which cross the expansion joint shall be provided with flexible joints that are capable of accommodating displacements equal to the full width of the joint in both orthogonal directions.

Water Heater
Unit Heaters
Air-Handling Units
Exhaust Fans

1.4 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for Contractor Quality Control approval. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Contractor Designed Bracing.

Detail drawings along with catalog cuts, templates, and erection and installation details, as appropriate, for the items listed. Submittals shall be complete in detail; shall indicate thickness, type, grade, class of metal, and dimensions; and shall show construction details, reinforcement, anchorage, and installation with relation to the building construction.

SD-03 Product Data

Contractor Designed Bracing.

Copies of the design calculations with the drawings. Calculations shall be approved, certified, stamped and signed by a registered Professional Engineer. Calculations shall verify the capability of structural members to which bracing is attached for carrying the load from the brace.

PART 2 PRODUCTS

2.1 NOT USED

PART 3 EXECUTION

3.1 NOT USED

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 15 - MECHANICAL

SECTION 15080

THERMAL INSULATION FOR MECHANICAL SYSTEMS

10/04

PART 1 GENERAL

1.1 REFERENCES
1.2 SYSTEM DESCRIPTION
1.3 GENERAL QUALITY CONTROL
1.3.1 Standard Products
1.3.2 Installer's Qualifications
1.3.3 Surface Burning Characteristics
1.3.4 Identification of Materials
1.4 SUBMITTALS
1.5 STORAGE
1.6 RECYCLED MATERIALS

PART 2 PRODUCTS

2.1 GENERAL MATERIALS
2.1.1 Adhesives
2.1.1.1 Acoustical Lining Insulation Adhesive
2.1.1.2 Mineral Fiber Insulation Cement
2.1.1.3 Lagging Adhesive
2.1.2 Contact Adhesive
2.1.3 Caulking
2.1.4 Corner Angles
2.1.5 Finishing Cement
2.1.6 Fibrous Glass Cloth and Glass Tape
2.1.7 Staples
2.1.8 Jackets
2.1.8.1 White Vapor Retarder All Service Jacket (ASJ)
2.1.8.2 Aluminum Jackets
2.1.8.3 Polyvinyl Chloride (PVC) Jackets
2.1.9 Vapor Retarder Required
2.1.9.1 Vapor Retarder Mastic Coatings
2.1.9.2 Laminated Film Vapor Retarder
2.1.9.3 Polyvinylidene Chloride (PVDC) Film Vapor Retarder
2.1.9.4 Polyvinylidene Chloride Vapor Retarder Adhesive Tape
2.1.10 Vapor Retarder Not Required
2.1.11 Wire
2.1.12 Insulation Bands
2.1.13 Sealants
2.2 PIPE INSULATION MATERIALS
2.2.1 Aboveground Cold Pipeline (-30 to 60 degrees F)
2.2.2 Aboveground Hot Pipeline (Above 60 degrees F)
2.2.3 Below-ground Pipeline Insulation
2.2.3.1 Cellular Glass
2.2.3.2 Polyisocyanurate
2.3 DUCT SYSTEMS INSULATION

2.3.1 Duct Insulation
2.3.1.1 Rigid Insulation
2.3.1.2 Blanket Insulation
2.3.2 Duct Insulation Jackets
2.3.2.1 All-Purpose Jacket
2.3.2.2 Metal Jackets
2.4 EQUIPMENT INSULATION MATERIALS

PART 3 EXECUTION

3.1 APPLICATION - GENERAL
3.1.1 Installation
3.1.2 Firestopping
3.1.3 Painting and Finishing
3.1.4 Installation of Flexible Elastomeric Cellular Insulation
3.1.5 Welding
3.1.6 Pipes/Ducts/Equipment which Require Insulation
3.2 PIPE INSULATION INSTALLATION
3.2.1 Pipe Insulation
3.2.1.1 General
3.2.1.2 Pipes Passing Through Walls, Roofs, and Floors
3.2.1.3 Pipes Passing Through Hangers
3.2.1.4 Flexible Elastomeric Cellular Pipe Insulation
3.2.1.5 Pipes in high abuse areas.
3.2.1.6 Pipe Insulation Material and Thickness
3.2.2 Aboveground Cold Pipelines
3.2.2.1 Insulation Material and Thickness
3.2.2.2 Jacket for Mineral Fiber, Cellular Glass, Phenolic Foam, and Polyisocyanurate Foam Insulated Pipe
3.2.2.3 Insulation for Straight Runs (Mineral Fiber, Cellular Glass, Phenolic Foam and Polyisocyanurate Foam)
3.2.2.4 Insulation for Fittings and Accessories
3.2.2.5 Optional PVC Fitting Covers
3.2.3 Aboveground Hot Pipelines
3.2.3.1 Jacket for Insulated Hot Pipe, Except Pipe Insulated with Flexible Elastomeric Cellular
3.2.3.2 Insulation for Straight Runs
3.2.3.3 Insulation for Fittings and Accessories
3.2.4 Piping Exposed to Weather
3.2.4.1 Aluminum Jacket
3.2.4.2 Insulation for Fittings
3.2.4.3 PVC Jacket
3.2.5 Below ground Pipe Insulation
3.2.5.1 Type of Insulation
3.2.5.2 Installation of Below ground Pipe Insulation
3.3 DUCTWORK, PLENUMS, CASINGS, AND ACCESSORIES INSULATION INSTALLATION
3.3.1 Duct Insulation Thickness
3.3.2 Insulation and Vapor Retarder for Cold Air Duct
3.3.2.1 Installation on Concealed Duct
3.3.2.2 Installation on Exposed Duct Work
3.3.3 Insulation for Warm Air Duct
3.3.3.1 Installation on Concealed Duct
3.3.3.2 Installation on Exposed Duct
3.3.4 Duct Test Holes
3.3.5 Duct Exposed to Weather
3.3.5.1 Installation
3.3.5.2 Round Duct
3.3.5.3 Fittings
3.3.5.4 Rectangular Ducts

-- End of Section Table of Contents --

SECTION 15080

THERMAL INSULATION FOR MECHANICAL SYSTEMS
10/04

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only. At the discretion of the Government, the manufacturer of any material supplied will be required to furnish test reports pertaining to any of the tests necessary to assure compliance with the standard or standards referenced in this specification.

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 90.1	(2001; various Errata) Energy Standard for Buildings Except Low-Rise Residential Buildings
ASHRAE 90.2	(2001) Energy Efficient Design of New Low-Rise Residential Buildings

ASTM INTERNATIONAL (ASTM)

ASTM A 167	(1999) Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
ASTM A 240/A 240M	(2002c) Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels for General Applications
ASTM A 580/A 580M	(1998) Stainless Steel Wire
ASTM B 209	(2002a) Aluminum and Aluminum-Alloy Sheet and Plate
ASTM B 209M	(2002a) Aluminum and Aluminum-Alloy Sheet and Plate (Metric)
ASTM C 1126	(2000) Faced or Unfaced Rigid Cellular Phenolic Thermal Insulation
ASTM C 1136	(2003) Flexible, Low Permeance Vapor Retarders for Thermal Insulation
ASTM C 1290	(2000e1) Flexible Fibrous Glass Blanket Insulation Used to Externally Insulate HVAC Ducts
ASTM C 195	(2000) Mineral Fiber Thermal Insulating Cement

ASTM C 449/C 449M	(2000) Mineral Fiber Hydraulic-Setting Thermal Insulating and Finishing Cement
ASTM C 533	(1995; R 2001) Calcium Silicate Block and Pipe Thermal Insulation
ASTM C 534	(2003) Preformed Flexible Elastomeric Cellular Thermal Insulation in Sheet and Tubular Form
ASTM C 547	(2003) Mineral Fiber Pipe Insulation
ASTM C 552	(2000e1) Cellular Glass Thermal Insulation
ASTM C 553	(2002) Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications
ASTM C 591	(2001) Unfaced Preformed Rigid Cellular Polyisocyanurate Thermal Insulation
ASTM C 592	(2000) Mineral Fiber Blanket Insulation and Blanket-Type Pipe Insulation (Metal-Mesh Covered) (Industrial Type)
ASTM C 610	(1999) Molded Expanded Perlite Block and Pipe Thermal Insulation
ASTM C 612	(2000a) Mineral Fiber Block and Board Thermal Insulation
ASTM C 647	(1995; R 2000) Properties and Tests of Mastics and Coating Finishes for Thermal Insulation
ASTM C 665	(2001e1) Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing
ASTM C 795	(1992; R 1998el) Thermal Insulation for Use in Contact with Austenitic Stainless Steel
ASTM C 916	(1985; R 1996el) Adhesives for Duct Thermal Insulation
ASTM C 920	(2002) Elastomeric Joint Sealants
ASTM C 921	(2003a) Jackets for Thermal Insulation
ASTM C 1126	(2000) Faced or Unfaced Rigid Cellular Phenolic Thermal Insulation
ASTM D 882	(2002) Tensile Properties of Thin Plastic Sheeting

ASTM E 84	(2003) Surface Burning Characteristics of Building Materials
ASTM E 96	(2000e1) Water Vapor Transmission of Materials
ASTM E 2231	(2002) Specimen Preparation and Mounting of Pipe and Duct Insulation Materials to Assess Surface Burning Characteristics

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY (MSS)

MSS SP-69	(2002) Pipe Hangers and Supports - Selection and Application

MIDWEST INSULATION CONTRACTORS ASSOCIATION (MICA)

MICA Insulation Stds	(1999) National Commercial & Industrial Insulation Standards

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 96	(2001) Ventilation Control and Fire Protection of Commercial Cooking Equipment
NFPA 255	(2000) Method of Test of Surface Burning Characteristics of Building Materials

UNDERWRITERS LABORATORIES (UL)

UL 723	(2003) Test for Surface Burning Characteristics of Building Materials

U.S. DEPARTMENT OF DEFENSE (DOD)

MIL-A-3316	(Rev C; Am 2) Adhesives, Fire-Resistant, Thermal Insulation

1.2 SYSTEM DESCRIPTION

Field-applied insulation and accessories on mechanical systems shall be as specified herein; factory-applied insulation is specified under the piping, duct or equipment to be insulated.

1.3 GENERAL QUALITY CONTROL

1.3.1 Standard Products

Provide field-applied insulation for heating, ventilating, and cooling (HVAC) air distribution systems and piping systems which are located within, on, under, and adjacent to buildings; and for plumbing systems. Materials shall be the standard products of manufacturers regularly engaged in the manufacture of such products and shall essentially duplicate items that have been in satisfactory use for at least 2 years prior to bid opening.

1.3.2 Installer's Qualifications

Qualified installers shall have successfully completed three or more similar type jobs within the last 5 years.

1.3.3 Surface Burning Characteristics

Unless otherwise specified, insulation shall have a flame spread index no higher than 25 and a smoke developed index no higher than 50. Flame spread, and smoke developed indexes, shall be determined by ASTM E 84, NFPA 255 or UL 723. Insulation shall be tested in the same density and installed thickness as the material to be used in the actual construction. Test specimens shall be prepared and mounted according to ASTM E 2231. Insulation materials located exterior to the building perimeter are not required to be fire rated.

1.3.4 Identification of Materials

Packages or standard containers of insulation, jacket material, cements, adhesives, and coatings delivered for use, and samples required for approval shall have manufacturer's stamp or label attached giving the name of the manufacturer and brand, and a description of the material. Insulation packages and containers shall be asbestos free.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for Contractor Quality Control approval. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Mica Plates

After approval of materials and prior to applying insulation, a booklet shall be prepared and submitted for approval. The booklet shall contain marked-up MICA Insulation Stds plates (or detail drawings showing the insulation material and insulating system) for each pipe, duct, or piece of equipment that must be insulated per this specification. The MICA plates shall be marked up showing the materials to be installed in accordance with the requirements of this specification for the specific insulation application. The Contractor shall submit all MICA Plates required to show the entire insulating system, including Plates required to show insulation penetrations, vessel bottom and top heads, legs, and skirt insulation as applicable. If the Contractor elects to submit detailed drawings instead of marked-up MICA Plates, the detail drawings shall show cut-away, section views, and details indicating each component of the insulation system and showing provisions for insulating jacketing, and sealing portions of the equipment. For each type of insulation installation on the drawings, provide a label that identifies each component in the installation (i.e., the duct, insulation, adhesive, vapor retarder, jacketing, tape, mechanical fasteners, etc.) Indicate insulation by type and manufacturer. Three copies of the booklet shall be submitted at the jobsite to the Contracting Officer. One copy of the approved booklet shall remain with the insulation Contractor's display sample and two copies shall be provided for Government use.

SD-03 Product Data

General Materials
Adhesives
Sealants
Duct Insulation
Duct Insulation Jackets
Pipe Insulation Materials
Jackets

A complete list of materials, including manufacturer's descriptive technical literature, performance data, catalog cuts, and installation instructions. The product number, k-value, thickness and furnished accessories for each mechanical system requiring insulation shall be included. Materials furnished under this section of the specification shall be submitted at one time.

SD-04 Samples

Thermal Insulation

After approval of materials, actual sections of installed systems, properly insulated in accordance with the specification requirements, shall be displayed. Such actual sections must remain accessible to inspection throughout the job and will be reviewed from time to time for controlling the quality of the work throughout the construction site. Each material used shall be identified, by indicating on an attached sheet the specification requirement for the material and the material by each manufacturer intended to meet the requirement. The Contracting Officer will inspect display sample sections at the jobsite. Approved display sample sections shall remain on display at the jobsite during the construction period. Upon completion of construction, the display sample sections will be closed and sealed.

Pipe Insulation Display Sections: Display sample sections shall include as a minimum an elbow or tee, a valve, dielectric waterways and flanges, a hanger with protection shield and insulation insert, or dowel as required, at support point, method of fastening and sealing insulation at longitudinal lap, circumferential lap, butt joints at fittings and on pipe runs, and terminating points for each type of pipe insulation used on the job, and for hot pipelines and cold pipelines, both interior and exterior, even when the same type of insulation is used for these services.

Duct Insulation Display Sections: Display sample sections for rigid and flexible duct insulation used on the job. A temporary covering shall be used to enclose and protect display sections for duct insulation exposed to weather.

1.5 STORAGE

Materials shall be delivered in the manufacturer's unopened containers. Materials delivered and placed in storage shall be provided with protection from weather, humidity, dirt, dust and other contaminants. The Contracting

Officer may reject insulation material and supplies that become dirty, dusty, wet, or contaminated by some other means.

1.6 RECYCLED MATERIALS

Provide thermal insulation containing recycled materials to the extent practicable, provided that the materials meet all other requirements of this section. The minimum recycled material content of the following insulation are:

Rock Wool - 75 percent slag of weight
Fiberglass - 20-25 percent glass cullet by weight
Rigid Foam - 9 percent recovered material

PART 2 PRODUCTS

2.1 GENERAL MATERIALS

Insulation material shall conform to Table 1. Insulation thickness shall be as listed in Table 2. Insulation exterior shall be cleanable, grease resistant, non-flaking and non-peeling. Materials shall be compatible and shall not contribute to corrosion, soften, or otherwise attack surfaces to which applied in either wet or dry state. Materials to be used on stainless steel surfaces shall meet ASTM C 795 requirements. Materials shall be asbestos free and conform to the following:

2.1.1 Adhesives

2.1.1.1 Acoustical Lining Insulation Adhesive

Adhesive shall be a nonflammable, fire-resistant adhesive conforming to ASTM C 916, Type I.

2.1.1.2 Mineral Fiber Insulation Cement

Cement shall be in accordance with ASTM C 195.

2.1.1.3 Lagging Adhesive

Lagging is the material used for thermal insulation, especially around a cylindrical object. This may include the insulation as well as the cloth/material covering the insulation. Lagging adhesives shall be nonflammable and fire-resistant and shall have a flame spread rating no higher than 25 and a smoke developed rating no higher than 50 when tested in accordance with ASTM E 84. Adhesive shall be MIL-A-3316, Class 1, pigmented white and be suitable for bonding fibrous glass cloth to faced and unfaced fibrous glass insulation board; for bonding cotton brattice cloth to faced and unfaced fibrous glass insulation board; for sealing edges of and bonding fibrous glass tape to joints of fibrous glass board; for bonding lagging cloth to thermal insulation; or Class 2 for attaching fibrous glass insulation to metal surfaces. Lagging adhesives shall be applied in strict accordance with the manufacturer's recommendations for pipe and duct insulation.

2.1.2 Contact Adhesive

Adhesives may be dispersed in a volatile organic solvent. Adhesives may be any of, but not limited to, the neoprane based, rubber based, or elastomeric type that have a flame spread index no higher than 25 and a smoke developed index no higher than 50 when tested in the dry state in accordance with ASTM E 84. The adhesive shall not adversely affect, initially or in service, the insulation to which it is applied, nor shall it cause any corrosive effect on metal to which it is applied. Any solvent dispersing medium or volatile component of the adhesive shall have no objectionable odor and shall not contain any benzene or carbon tetrachloride. The dried adhesive shall not emit nauseous, irritating, or toxic volatile matters or aerosols when the adhesive is heated to any temperature up to 212 degrees F. The dried adhesive shall be nonflammable and fire resistant. Natural cross-ventilation, local (mechanical) pickup, and/or general area (mechanical) ventilation shall be used to prevent an accumulation of solvent vapors, keeping in mind the ventilation pattern must remove any heavier-than-air solvent vapors from lower levels of the workspaces. Gloves and spectacle-type safety glasses are recommended in accordance with safe installation practices.

2.1.3 Caulking

ASTM C 920, Type S, Grade NS, Class 25, Use A.

2.1.4 Corner Angles

Nominal 0.016 inch aluminum 1 x 1 inch with factory applied kraft backing. Aluminum shall be ASTM B 209, Alloy 3003, 3105, or 5005.

2.1.5 Finishing Cement

ASTM C 449/C 449M: Mineral fiber hydraulic-setting thermal insulating and finishing cement. All cements that may come in contact with Austenitic stainless steel must include testing per ASTM C 795.

2.1.6 Fibrous Glass Cloth and Glass Tape

Fibrous glass cloth, with 20X20 maximum mesh size, and glass tape shall have flame spread and smoke developed ratings of no greater than 25/50 when measured in accordance with ASTM E 84. Tape shall be 4 inch wide rolls. Class 3 tape shall be 4.5 ounces/square yard.

2.1.7 Staples

Outward clinching type monel or ASTM A 167, Type 304 or 316 stainless steel.

2.1.8 Jackets

ASTM C 921, Type I, minimum puncture resistance 50 Beach units on all surfaces except concealed ductwork, where a minimum puncture resistance of 25 Beach units is acceptable. Minimum tensile strength, 35 pounds/inch width. ASTM C 921, Type II, minimum puncture resistance 25 Beach units, tensile strength minimum 20 pounds/inch width. Jackets used on insulation exposed in finished areas shall have white finish suitable for painting without sizing. Based on the application, insulation materials that require factory applied jackets are mineral fiber, cellular glass, and phenolic foam. Insulation materials that do not require jacketing are flexible elastomerics. All non-metallic jackets shall have a maximum flame spread

index of 25 and a maximum smoke developed index of 50 when tested in accordance with ASTM E 84.

2.1.8.1 White Vapor Retarder All Service Jacket (ASJ)

Standard reinforced fire retardant jacket for use on hot/cold pipes, ducts, or equipment. Vapor retarder jackets used on insulation exposed in finished areas shall have white finish suitable for painting without sizing.

2.1.8.2 Aluminum Jackets

Aluminum jackets shall be corrugated, embossed or smooth sheet, 0.016 inch nominal thickness; ASTM B 209, Temper H14, Temper H16, Alloy 3003, 5005, or 3105 with factory applied moisture retarder. Corrugated aluminum jacket shall not be used outdoors. Aluminum jacket securing bands shall be Type 304 stainless steel, 0.015 inch thick, 1/2 inch wide for pipe under 12 inch diameter and 3/4 inch wide for pipe over 12 inch and larger diameter. Aluminum jacket circumferential seam bands shall be 2 x 0.016 inch aluminum matching jacket material. Bands for insulation below ground shall be 3/4 x 0.020 inch thick stainless steel, or fiberglass reinforced tape. The jacket may, at the option of the Contractor, be provided with a factory fabricated Pittsburg or "Z" type longitudinal joint. When the "Z" joint is used, the bands at the circumferential joints shall be designed by the manufacturer to seal the joints and hold the jacket in place.

2.1.8.3 Polyvinyl Chloride (PVC) Jackets

Polyvinyl chloride (PVC) jacket and fitting covers shall have high impact strength, UV resistant rating or treatment and moderate chemical resistance with minimum thickness 0.030 inch.

2.1.9 Vapor Retarder Required

2.1.9.1 Vapor Retarder Mastic Coatings

The vapor retarder coating shall be fire and water resistant and appropriately selected for either outdoor or indoor service. Color shall be white. The water vapor permeance of the compound shall be determined according to procedure B of ASTM E 96 utilizing apparatus described in ASTM E 96. The coating shall be a nonflammable, fire resistant type. All other application and service properties shall be in accordance with ASTM C 647.

2.1.9.2 Laminated Film Vapor Retarder

ASTM C 1136, Type I, maximum moisture vapor transmission 0.02 perms, minimum puncture resistance 50 Beach units on all surfaces except concealed ductwork, where Type II, maximum moisture vapor transmission 0.02 perms, a minimum puncture resistance of 25 Beach units is acceptable. Vapor retarder shall have a maximum flame spread/smoke developed index of 25/50 per ASTM E 84.

2.1.9.3 Polyvinylidene Chloride (PVDC) Film Vapor Retarder

The PVDC film vapor retarder shall have a maximum moisture vapor transmission of 0.02 perms, minimum puncture resistance of 150 Beach units, a minimum tensile strength in any direction of 30 lb/inch when tested per

ASTM D 882, and a maximum flame spread/smoke developed index of 25/50 per ASTM E 84.

2.1.9.4 Polyvinylidene Chloride Vapor Retarder Adhesive Tape

Requirements must meet the same as specified for Laminated Film Vapor Retarder above.

2.1.10 Vapor Retarder Not Required

ASTM C 921, Type II, Class D, minimum puncture resistance 50 Beach units on all surfaces except ductwork, where Type IV, maximum moisture vapor transmission 0.10, a minimum puncture resistance of 25 Beach units is acceptable. Jacket shall have a maximum flame spread/smoke developed index of 25/50 per ASTM E 84.

2.1.11 Wire

Soft annealed ASTM A 580/A 580M Type 302, 304 or 316 stainless steel, 16 or 18 gauge.

2.1.12 Insulation Bands

Insulation bands shall be 1/2 inch wide; 26 gauge stainless steel.

2.1.13 Sealants

Sealants shall be chosen from the butyl polymer type, the styrene-butadiene rubber type, or the butyl type of sealants. Sealants shall have a maximum moisture vapor transmission of 0.02 perms, and a maximum flame spread/smoke developed index of 25/50 per ASTM E 84.

2.2 PIPE INSULATION MATERIALS

Pipe insulation materials shall be limited to those listed herein and shall meet the following requirements:

2.2.1 Aboveground Cold Pipeline (-30 to 60 degrees F)

Insulation for outdoor, indoor, exposed or concealed applications, shall be as follows:

a. Cellular Glass: ASTM C 552, Type II, and Type III. Supply the insulation with manufacturer's recommended factory-applied jacket.

b. Flexible Elastomeric Cellular Insulation: ASTM C 534, Grade 1, Type I or II. Type II shall have vapor retarder skin on one or both sides of the insulation.

c. Phenolic Insulation: ASTM C 1126, Type III. Phenolic insulations shall comply with ASTM C 795 and with the ASTM C 665 paragraph Corrosiveness. Supply the insulation with manufacturer's recommended factory-applied jacket.

d. Polyisocyanurate Insulation: ASTM C 591, type I. Supply the insulation with manufacturer's recommended factory-applied vapor retarder.

2.2.2 Aboveground Hot Pipeline (Above 60 degrees F)

Insulation for outdoor, indoor, exposed or concealed applications shall meet the following requirements. Supply the insulation with manufacturer's recommended factory-applied jacket.

a. Mineral Fiber: ASTM C 547, Types I, II or III, supply the insulation with manufacturer's recommended factory-applied jacket.

b. Calcium Silicate: ASTM C 533, Type I indoor only, or outdoors above 250 degrees F pipe temperature. Supply insulation with the manufacturer's recommended factory-applied jacket.

c. Cellular Glass: ASTM C 552, Type II and Type III. Supply the insulation with manufacturer's recommended factory-applied jacket.

d. Flexible Elastomeric Cellular Insulation: ASTM C 534, Grade 1, Type I or II to 200 degrees F service.

e. Phenolic Insulation: ASTM C 1126 Type III to 250 F service shall comply with ASTM C 795. Supply the insulation with manufacturer's recommended factory-applied jacket.

f. Perlite Insulation: ASTM C 610

g. Polyisocyanurate Insulation: ASTM C 591, Type 1, to 300 degrees F service. Supply the insulation with manufacturer's recommended factory applied jacket.

2.2.3 Below-ground Pipeline Insulation

For below-ground pipeline insulation the following requirements shall be met.

2.2.3.1 Cellular Glass

ASTM C 552, type II.

2.2.3.2 Polyisocyanurate

ASTM C 591, Type 1, to 300 degrees F.

2.3 DUCT SYSTEMS INSULATION

2.3.1 Duct Insulation

Provide factory-applied insulation with insulation manufacturer's standard reinforced fire-retardant vapor barrier jacket.

2.3.1.1 Rigid Insulation

Rigid mineral fiber in accordance with ASTM C 612, Class 2 (maximum surface temperature 400 degrees F), 3 pcf average, one inch thick, Type IA, IB, II, III, and IV.

2.3.1.2 Blanket Insulation

Blanket flexible mineral fiber insulation conforming to ASTM C 553, Type 1, Class B-3, 3/4 pcf nominal, 2.0 inches thick or Type II up to 250 degrees F. Also ASTM C 1290 Type III may be used.

2.3.2 Duct Insulation Jackets

2.3.2.1 All-Purpose Jacket

Provide insulation with insulation manufacturer's standard reinforced fire-retardant jacket with or without integral vapor barrier as required by the service. In exposed locations, provide jacket with a white surface suitable for field painting.

2.3.2.2 Metal Jackets

a. Aluminum Jackets: ASTM B 209, Temper H14, minimum thickness of 27 gauge (0.016 inch), with factory-applied polyethylene and kraft paper moisture barrier on inside surface. Provide smooth surface jackets for jacket outside dimension 8 inches and larger. Provide corrugated surface jackets for jacket outside dimension 8 inches and larger. Provide stainless steel bands, minimum width of 0.5 inch.

b. Stainless Steel Jackets: ASTM A 167 or ASTM A 240/A 240M; Type 304, minimum thickness of 33 gauge (0.010 inch), smooth surface with factory-applied polyethylene and kraft paper moisture barrier on inside surface. Provide stainless steel bands, minimum width of 0.5 inch.

2.4 EQUIPMENT INSULATION MATERIALS

Insulate equipment and accessories as specified in Tables 4 and 5. In outside locations, provide insulation 1/2 inch thicker than specified. Increase the specified insulation thickness for equipment where necessary to equal the thickness of angles or other structural members to make a smooth, exterior surface.

PART 3 EXECUTION

3.1 APPLICATION - GENERAL

Insulation shall only be applied to unheated and uncooled piping and equipment. Flexible elastomeric cellular insulation shall not be compressed at joists, studs, columns, ducts, hangers, etc. The insulation shall not pull apart after a one hour period; any insulation found to pull apart after one hour, shall be replaced.

3.1.1 Installation

Except as otherwise specified, material shall be installed in accordance with the manufacturer's written instructions. Insulation materials shall not be applied until tests specified in other sections of this specification are completed. Material such as rust, scale, dirt and moisture shall be removed from surfaces to receive insulation. Insulation shall be kept clean and dry. Insulation shall not be removed from its shipping containers until

the day it is ready to use and shall be returned to like containers or equally protected from dirt and moisture at the end of each workday. Insulation that becomes dirty shall be thoroughly cleaned prior to use. If insulation becomes wet or if cleaning does not restore the surfaces to like new condition, the insulation will be rejected, and shall be immediately removed from the jobsite. Joints shall be staggered on multi layer insulation. Mineral fiber thermal insulating cement shall be mixed with demineralized water when used on stainless steel surfaces. Insulation, jacketing and accessories shall be installed in accordance with MICA Insulation Stds plates except where modified herein or on the drawings.

3.1.2 Firestopping

Where pipes and ducts pass through fire walls, fire partitions, above grade floors, and fire rated chase walls, the penetration shall be sealed with fire stopping materials as specified in Section 07840 FIRESTOPPING.

3.1.3 Painting and Finishing

Painting shall be as specified in Section 09900 PAINTS AND COATINGS.

3.1.4 Installation of Flexible Elastomeric Cellular Insulation

Flexible elastomeric cellular insulation shall be installed with seams and joints sealed with rubberized contact adhesive. Insulation with pre-applied adhesive is not permitted. Flexible elastomeric cellular insulation shall not be used on surfaces greater than 200 degrees F. Seams shall be staggered when applying multiple layers of insulation. Insulation exposed to weather and not shown to have jacketing shall be protected with two coats of UV resistant finish or PVC or metal jacketing as recommended by the manufacturer after the adhesive is dry and cured. A brush coating of adhesive shall be applied to both butt ends to be joined and to both slit surfaces to be sealed. The adhesive shall be allowed to set until dry to touch but tacky under slight pressure before joining the surfaces. Insulation seals at seams and joints shall not be capable of being pulled apart one hour after application. Insulation that can be pulled apart one hour after installation shall be replaced.

3.1.5 Welding

No welding shall be done on piping, duct</TAI> or equipment without written approval of the Contracting Officer. The capacitor discharge welding process may be used for securing metal fasteners to duct.

3.1.6 Pipes/Ducts/Equipment which Require Insulation

Insulation is required on all pipes, ducts, or equipment, except for omitted items, as specified.

3.2 PIPE INSULATION INSTALLATION

3.2.1 Pipe Insulation

3.2.1.1 General

Pipe insulation shall be installed on aboveground hot and cold pipeline systems as specified below to form a continuous thermal retarder, including

straight runs, fittings and appurtenances unless specified otherwise. Installation shall be with full length units of insulation and using a single cut piece to complete a run. Cut pieces or scraps abutting each other shall not be used. Pipe insulation shall be omitted on the following:

a. Chromium plated pipe to plumbing fixtures. However, fixtures for use by the physically handicapped shall have the hot water supply and drain, including the trap, insulated where exposed.

b. Sanitary drain lines.

c. Adjacent insulation.

d. ASME stamps.

e. Cleanouts or handholes.

f. Components within factory preinsulated HVAC equipment.

g. Factory preinsulated flexible ductwork.

h. Factory preinsulated HVAC equipment.

i. Manufacturer's nameplates.

j. Vibration isolating connections.

3.2.1.2 Pipes Passing Through Walls, Roofs, and Floors

a. Pipe insulation shall be continuous through the sleeve.

b. An aluminum jacket with factory applied moisture retarder shall be provided over the insulation wherever penetrations require sealing.

c. Where pipes penetrate interior walls, the aluminum jacket shall extend 2 inches beyond either side of the wall and shall be secured on each end with a band.

d. Where penetrating floors, the aluminum jacket shall extend from a point below the backup material to a point 10 inches above the floor with one band at the floor and one not more than 1 inch from the end of the aluminum jacket.

e. Where penetrating waterproofed floors, the aluminum jacket shall extend from below the backup material to a point 2 inches above the flashing with a band 1 inch from the end of the aluminum jacket.

f. Where penetrating exterior walls, the aluminum jacket required for pipe exposed to weather shall continue through the sleeve to a point 2 inches beyond the interior surface of the wall.

g. Where penetrating roofs, pipe shall be insulated as required for interior service to a point flush with the top of the flashing and sealed with vapor retarder coating. The insulation for exterior application shall butt tightly to the top of flashing and

interior insulation. The exterior aluminum jacket shall extend 2 inches down beyond the end of the insulation to form a counter flashing. The flashing and counter flashing shall be sealed underneath with caulking.

h. For hot water pipes supplying lavatories or other similar heated service that requires insulation, the insulation shall be terminated on the backside of the finished wall. The insulation termination shall be protected with two coats of vapor barrier coating with a minimum total thickness of 1/16 inch applied with glass tape embedded between coats (if applicable). The coating shall extend out onto the insulation 2 inches and shall seal the end of the insulation. Glass tape seams shall overlap 1 inch. The annular space between the pipe and wall penetration shall be caulked with approved fire stop material. The pipe and wall penetration shall be covered with a properly sized (well fitting) escutcheon plate. The escutcheon plate shall overlap the wall penetration at least 3/8 inches.

i. For domestic cold water pipes supplying lavatories or other similar cooling service that requires insulation, the insulation shall be terminated on the finished side of the wall (i.e., insulation must cover the pipe throughout the wall penetration). The insulation shall be protected with two coats of vapor barrier coating with a minimum total thickness of 1/16 inch. The coating shall extend out onto the insulation 2 inches and shall seal the end of the insulation. The annular space between the outer surface of the pipe insulation and the wall penetration shall be caulked with an approved fire stop material having vapor retarder properties. The pipe and wall penetration shall be covered with a properly sized (well fitting) escutcheon plate. The escutcheon plate shall overlap the wall penetration by at least 3/8 inches.

3.2.1.3 Pipes Passing Through Hangers

a. Insulation, whether hot or cold application, shall be continuous through hangers. All horizontal pipes 2 inches and smaller shall be supported on hangers with the addition of a Type 40 protection shield to protect the insulation in accordance with MSS SP-69. Whenever insulation shows signs of being compressed, or when the insulation or jacket shows visible signs of distortion at or near the support shield, insulation inserts as specified below for piping larger than 2 inches shall be installed.

b. Horizontal pipes larger than 2 inches at 60 degrees F and above shall be supported on hangers in accordance with MSS SP-69, and Section 15400A PLUMBING, GENERAL PURPOSE.

c. Horizontal pipes larger than 2 inches and below 60 degrees F shall be supported on hangers with the addition of a Type 40 protection shield in accordance with MSS SP-69. An insulation insert of cellular glass, calcium silicate (or perlite above 80 F), or the necessary strength polyisocyanurate shall be installed above each shield. The insert shall cover not less than the bottom 180-degree arc of the pipe. Inserts shall be the same thickness as the insulation, and shall extend 2 inches on each end beyond the protection shield. When insulation inserts are required per the

above, and the insulation thickness is less than 1 inch, wooden or cork dowels or blocks may be installed between the pipe and the shield to prevent the weight of the pipe from crushing the insulation, as an option to installing insulation inserts. The insulation jacket shall be continuous over the wooden dowel, wooden block, or insulation insert.

d. Vertical pipes shall be supported with either Type 8 or Type 42 riser clamps with the addition of two Type 40 protection shields in accordance with MSS SP-69 covering the 360-degree arc of the insulation. An insulation insert of cellular glass or calcium silicate shall be installed between each shield and the pipe. The insert shall cover the 360-degree arc of the pipe. Inserts shall be the same thickness as the insulation, and shall extend 2 inches on each end beyond the protection shield. When insulation inserts are required per the above, and the insulation thickness is less than 1 inch, wooden or cork dowels or blocks may be installed between the pipe and the shield to prevent the hanger from crushing the insulation, as an option instead of installing insulation inserts. The insulation jacket shall be continuous over the wooden dowel, wooden block, or insulation insert. The vertical weight of the pipe shall be supported with hangers located in a horizontal section of the pipe. When the pipe riser is longer than 30 feet, the weight of the pipe shall be additionally supported with hangers in the vertical run of the pipe that are directly clamped to the pipe, penetrating the pipe insulation. These hangers shall be insulated and the insulation jacket sealed as indicated herein for anchors in a similar service.

e. Inserts shall be covered with a jacket material of the same appearance and quality as the adjoining pipe insulation jacket, shall overlap the adjoining pipe jacket 1-1/2 inches, and shall be sealed as required for the pipe jacket. The jacket material used to cover inserts in flexible elastomeric cellular insulation shall conform to ASTM C 1136, Type 1, and is allowed to be of a different material than the adjoining insulation material.

3.2.1.4 Flexible Elastomeric Cellular Pipe Insulation

Flexible elastomeric cellular pipe insulation shall be tubular form for pipe sizes 6 inches and less. Grade 1, Type II sheet insulation used on pipes larger than 6 inches shall not be stretched around the pipe. On pipes larger than 12 inches, the insulation shall be adhered directly to the pipe on the lower 1/3 of the pipe. Seams shall be staggered when applying multiple layers of insulation. Sweat fittings shall be insulated with miter-cut pieces the same size as on adjacent piping. Screwed fittings shall be insulated with sleeved fitting covers fabricated from miter-cut pieces and shall be overlapped and sealed to the adjacent pipe insulation.

3.2.1.5 Pipes in high abuse areas.

In high abuse areas such as mechanical rooms, stainless steel or aluminum jackets shall be utilized. Pipe insulation to the 6 foot level shall be protected.

3.2.1.6 Pipe Insulation Material and Thickness

TABLE 1
Insulation Material For Piping (°F)

Service	Material	Spec.	Type	Class	Vapor Retarder Required
Cold Domestic Water Piping,	Cellular Glass	ASTM C 552	II	2	No
	Flex Elast Cell'r	ASTM C 534	I		No
	Faced Phenol Foam	ASTM C 1126	III		Yes
Hot Domestic Water Supply & Recirculating Piping (Max. 200°F)	Mineral Fiber	ASTM C 547	I	1	No
	Cellular Glass	ASTM C 552	II	2	No
	Flex Elast Cell'r	ASTM C 534	I		No
	Faced Phenol Foam	ASTM C 1126	III		Yes
Refrigerant Suction Piping (35°F nominal)	Flex Elast Cell'r	ASTM C 534	I		No
	Cellular Glass	ASTM C 552	II	1	Yes
	Faced Phenol Foam	ASTM C 1126	III		Yes
Exposed Lav'ry Drains, Exposed Domestic Water Piping & Drains to Areas for Handicap Personnel	Flex Elast Cell'r	ASTM C 534	I		No
A/C condensate Drain Located Inside Bldg.	Cellular Glass	ASTM C 552	II	2	No
	Flex Elast Cell'r	ASTM C 534	I		No
	Faced Phenol Foam	ASTM C 1126	II		Yes

TABLE 2
Piping Insulation Thickness (inch and °F)

Service	Material	Tube And Pipe Size (Inches) <1	1- <1.5	1.5- <4	4- <8	>or = to 8
Heating Hot Water Supply & Return	Mineral Fiber	1.5	1.5	2	2	2
	Calcium Silicate	2.5	2.5	3	3	3
	Cellular Glass	2	2 5	3	3	3
	Perlite	2.5	2.5	3	3	3
Cold Domestic	Cellular Glass	1.5	1.5	1.5	1.5	1.5

Water Piping	Flex Elas Cell'r Faced Phenolic Foam	0.5 1	0.5 1	0.5 1	N/A 1	N/A 1
Hot Domestic Water Supply and Recirculating Piping (Max 200°F)	Mineral Fiber Cellular Glass Flex Elas Cell'r	1 1.5 1	1 1.5 1	1 1.5 1	1.5 2 N/A	1.5 2 N/A
Refrigerant Suction Piping (35°F nominal)	Flex Elas Cell'r Cellular Glass Faced Phenol Foam	0.5 1.5 1	0.5 1.5 1	1 1.5 1	N/A 1.5 1	N/A 1.5 1
Exposed Lavatory Drains, Exposed Domestic Water Piping & Drains to Areas for Handicap Personnel	Flex Elas Cell'r	0.5	0.5	0.5	0.5	0.5
A/C condensate Drain Located Inside Bldg.	Cellular Glass Flex Elas Cell'r Faced Phenol Foam	1.5 1 1	1.5 1 1	1.5 1 1	1.5 N/A 1	1.5 N/A 1

3.2.2 Aboveground Cold Pipelines

The following cold pipelines shall be insulated per Table 2 minus 30 to plus 60 degrees F:

a. Domestic cold water.

b. Refrigerant suction lines.

c. Air conditioner condensate drains.

d. Exposed lavatory drains and domestic water lines serving plumbing fixtures for handicap persons.

3.2.2.1 Insulation Material and Thickness

Insulation thickness for cold pipelines shall be determined using Table 2.

3.2.2.2 Jacket for Mineral Fiber, Cellular Glass, Phenolic Foam, and Polyisocyanurate Foam Insulated Pipe

Insulation shall be covered with a factory applied vapor retarder jacket or field applied seal welded PVC jacket. Insulation inside the building, to be protected with an aluminum jacket, shall have the insulation and vapor retarder jacket installed as specified herein. The aluminum jacket shall be installed as specified for piping exposed to weather, except sealing of the laps of the aluminum jacket is not required. In high abuse areas such as mechanical rooms, aluminum jackets shall be utilized. Pipe insulation to the 6 ft level shall be protected.

3.2.2.3 Insulation for Straight Runs (Mineral Fiber, Cellular Glass, Phenolic Foam and Polyisocyanurate Foam)

a. Insulation shall be applied to the pipe with joints tightly butted. All butted joints and ends shall be sealed with joint sealant and sealed with a vapor retarder coating or PVDC adhesive tape.

b. Longitudinal laps of the jacket material shall overlap not less than 1-1/2 inches. Butt strips 3 inches wide shall be provided for circumferential joints.

c. Laps and butt strips shall be secured with adhesive and stapled on 4 inch centers if not factory self-sealing. If staples are used, they shall be sealed per item "e." below. Note that staples are not required with cellular glass systems.

d. Factory self-sealing lap systems may be used when the ambient temperature is between 40 and 120 degrees F during installation. The lap system shall be installed in accordance with manufacturer's recommendations. Stapler shall be used only if specifically recommended by the manufacturer. Where gaps occur, the section shall be replaced or the gap repaired by applying adhesive under the lap and then stapling.

e. All Staples, including those used to repair factory self-seal lap systems, shall be coated with a vapor retarder coating or PVDC adhesive tape. All seams, except those on factory self-seal systems shall be coated with vapor retarder coating or PVDC adhesive tape.

f. Breaks and punctures in the jacket material shall be patched by wrapping a strip of jacket material around the pipe and securing it with adhesive, stapling, and coating with vapor retarder coating or PVDC adhesive tape. The patch shall extend not less than 1-1/2 inches past the break.

g. At penetrations such as thermometers, the voids in the insulation shall be filled and sealed with vapor retarder coating or PVDC adhesive tape.

3.2.2.4 Insulation for Fittings and Accessories

a. Pipe insulation shall be tightly butted to the insulation of the fittings and accessories. The butted joints and ends shall be sealed with joint sealant and sealed with a vapor retarder coating or PVDC adhesive tape.

b. Precut or preformed insulation shall be placed around all fittings and accessories and shall conform to MICA plates except as modified herein: 5 for anchors; 10, 11, and 13 for fittings; 14 for valves; and 17 for flanges and unions. Insulation shall be the same insulation as the pipe insulation, including same density, thickness, and thermal conductivity. Where precut/preformed is unavailable, rigid preformed pipe insulation sections may be segmented into the shape required. Insulation of the same thickness and conductivity as the adjoining pipe insulation shall

be used. If nesting size insulation is used, the insulation shall be overlapped 2 inches or one pipe diameter. Elbows insulated using segments shall conform to MICA Tables 12.20 "Mitered Insulation Elbow'.

c. Upon completion of insulation installation on flanges, unions, valves, anchors, fittings and accessories, terminations, seams, joints and insulation not protected by factory vapor retarder jackets or PVC fitting covers shall be protected with PVDC adhesive tape or two coats of vapor retarder coating with a minimum total thickness of 1/16 inch, applied with glass tape embedded between coats. Tape seams shall overlap 1 inch. The coating shall extend out onto the adjoining pipe insulation 2 inches. Fabricated insulation with a factory vapor retarder jacket shall be protected with PVDC adhesive tape or two coats of vapor retarder coating with a minimum thickness of 1/16 inch and with a 2 inch wide glass tape embedded between coats. Where fitting insulation butts to pipe insulation, the joints shall be sealed with a vapor retarder coating and a 4 inch wide ASJ tape which matches the jacket of the pipe insulation.

d. Anchors attached directly to the pipe shall be insulated for a sufficient distance to prevent condensation but not less than 6 inches from the insulation surface.

e. Insulation shall be marked showing the location of unions, strainers, and check valves.

3.2.2.5 Optional PVC Fitting Covers

At the option of the Contractor, premolded, one or two piece PVC fitting covers may be used in lieu of the vapor retarder and embedded glass tape. Factory precut or premolded insulation segments shall be used under the fitting covers for elbows. Insulation segments shall be the same insulation as the pipe insulation including same density, thickness, and thermal conductivity. The covers shall be secured by PVC vapor retarder tape, adhesive, seal welding or with tacks made for securing PVC covers. Seams in the cover, and tacks and laps to adjoining pipe insulation jacket, shall be sealed with vapor retarder tape to ensure that the assembly has a continuous vapor seal.

3.2.3 Aboveground Hot Pipelines

The following hot pipelines above 60 degrees F shall be insulated per Table 2:

a. Domestic hot water supply & re-circulating system.

3.2.3.1 Jacket for Insulated Hot Pipe, Except Pipe Insulated with Flexible Elastomeric Cellular

Insulation shall be covered, in accordance with manufacturer's recommendations, with a factory applied Type II jacket or field applied aluminum where required or seal welded PVC.

3.2.3.2 Insulation for Straight Runs

a. Insulation shall be applied to the pipe with joints tightly butted.

b. Longitudinal laps of the jacket material shall overlap not less than 1-1/2 inches, and butt strips 3 inches wide shall be provided for circumferential joints.

c. Laps and butt strips shall be secured with adhesive and stapled on 4 inch centers if not factory self-sealing. Adhesive may be omitted where pipe is concealed.

d. Factory self-sealing lap systems may be used when the ambient temperature is between 40 and 120 degrees F and shall be installed in accordance with manufacturer's instructions. Laps and butt strips shall be stapled whenever there is non-adhesion of the system. Where gaps occur, the section shall be replaced or the gap repaired by applying adhesive under the lap and then stapling.

e. Breaks and punctures in the jacket material shall be patched by either wrapping a strip of jacket material around the pipe and securing with adhesive and staple on 4 inch centers (if not factory self-sealing), or patching with tape and sealing with a brush coat of vapor retarder coating. Adhesive may be omitted where pipe is concealed. Patch shall extend not less than 1-1/2 inches past the break.

f. Installation of flexible elastomeric cellular pipe insulation shall be by slitting the tubular sections and applying them onto the piping or tubing. Alternately, whenever possible slide un-slit sections over the open ends of piping or tubing. All seams and butt joints shall be secured and sealed with adhesive. When using self seal products only the butt joints shall be secured with adhesive. Insulation shall be pushed on the pipe, never pulled. Stretching of insulation may result in open seams and joints. All edges shall be clean cut. Rough or jagged edges of the insulation shall not be permitted. Proper tools such as sharp knives shall be used. Grade 1, Type II sheet insulation when used on pipe larger than 6 inches shall not be stretched around the pipe. On pipes larger than 12 inches, adhere sheet insulation directly to the pipe on the lower 1/3 of the pipe.

3.2.3.3 Insulation for Fittings and Accessories

a. Pipe insulation shall be tightly butted to the insulation of the fittings and accessories.

b. Precut or preformed insulation shall be placed around all fittings and accessories and shall conform to MICA plates, except as modified herein: 5 for anchors; 10, 11, 12,and 13 for fittings; 14, 15 and 16 for valves; 17 for flanges and unions; and 18 for couplings. Insulation shall be the same as the pipe insulation, including same density, thickness, and thermal conductivity. Where precut/preformed is unavailable, rigid preformed pipe insulation sections may be segmented into the shape required. Insulation of the same thickness and conductivity as the adjoining pipe

insulation shall be used. If nesting size insulation is used, the insulation shall be overlapped 2 inches or one pipe diameter. Elbows insulated using segments shall conform to MICA Tables 12.20 "Mitered Insulation Elbow".

c. Upon completion of installation of insulation on flanges, unions, valves, anchors, fittings and accessories, terminations and insulation not protected by factory jackets or PVC fitting covers shall be protected with two coats of adhesive applied with glass tape embedded between coats. Tape seams shall overlap 1 inch. Adhesive shall extend onto the adjoining insulation not less than 2 inches. The total dry film thickness shall be not less than 1/16 inch.

d. Insulation terminations shall be tapered to unions at a 45-degree angle.

e. At the option of the Contractor, factory pre-molded one- or two-piece PVC fitting covers may be used in lieu of the adhesive and embedded glass tape. Factory pre-molded segments or factory or field cut blanket insert insulation segments shall be used under the cover and shall be the same thickness as adjoining pipe insulation. The covers shall be secured by PVC vapor retarder tape, adhesive, seal welding or with tacks made for securing PVC covers.

3.2.4 Piping Exposed to Weather

Piping exposed to weather shall be insulated and jacketed as specified for the applicable service inside the building. After this procedure, an aluminum jacket or PVC jacket shall be applied. PVC jacketing requires no factory-applied jacket beneath it, however an all service jacket shall be applied if factory applied jacketing is not furnished. Flexible elastomeric cellular insulation exposed to weather shall be treated in accordance with paragraph INSTALLATION OF FLEXIBLE ELASTOMERIC CELLULAR INSULATION in PART 3.

3.2.4.1 Aluminum Jacket

The jacket for hot piping may be factory applied. The jacket shall overlap not less than 2 inches at longitudinal and circumferential joints and shall be secured with bands at not more than 12 inch centers. Longitudinal joints shall be overlapped down to shed water and located at 4 or 8 o'clock positions. Joints on piping 60 degrees F and below shall be sealed with caulking while overlapping to prevent moisture penetration. Where jacketing on piping 60 degrees F and below abuts an un-insulated surface, joints shall be caulked to prevent moisture penetration. Joints on piping above 60 degrees F shall be sealed with a moisture retarder.

3.2.4.2 Insulation for Fittings

Flanges, unions, valves, fittings, and accessories shall be insulated and finished as specified for the applicable service. Two coats of breather emulsion type weatherproof mastic (impermeable to water, permeable to air) recommended by the insulation manufacturer shall be applied with glass tape embedded between coats. Tape overlaps shall be not less than 1 inch and the adjoining aluminum jacket not less than 2 inches. Factory preformed

aluminum jackets may be used in lieu of the above. Molded PVC fitting covers shall be provided when PVC jackets are used for straight runs of pipe. PVC fitting covers shall have adhesive welded joints and shall be weatherproof.

3.2.4.3 PVC Jacket

PVC jacket shall be ultraviolet resistant and adhesive welded weather tight with manufacturer's recommended adhesive. Installation shall include provision for thermal expansion.

3.2.5 Below ground Pipe Insulation

The following shall be included:

3.2.5.1 Type of Insulation

Below ground pipe shall be insulated with Cellular Glass insulation, or with Polyisocyanurate insulation, in accordance with manufacturer's instructions for application with thickness as determined from Table 2 (whichever is the most restrictive).

3.2.5.2 Installation of Below ground Pipe Insulation

a. Bore surfaces of the insulation shall be coated with a thin coat of gypsum cement of a type recommended by the insulation manufacturer. Coating thickness shall be sufficient to fill surface cells of insulation. Mastic type materials shall not be used for this coating. Note that unless this is for a cyclic application (i.e., one that fluctuates between high and low temperature on a daily process basis) there is no need to bore coat the material.

b. Stainless steel bands, 3/4 inch wide by 0.020 inch thick shall be used to secure insulation in place. A minimum of two bands per section of insulation shall be applied. As an alternate, fiberglass reinforced tape may be used to secure insulation on piping up to 12 inches in diameter. A minimum of two bands per section of insulation shall be applied.

c. Insulation shall terminate at anchor blocks but shall be continuous through sleeves and manholes.

d. At point of entry to buildings, underground insulation shall be terminated 2 inches inside the wall or floor, shall butt tightly against the aboveground insulation and the butt joint shall be sealed with high temperature silicone sealant.

e. Provision for expansion and contraction of the insulation system shall be made in accordance with the insulation manufacturer's recommendations.

f. Flanges, couplings, valves, and fittings shall be insulated with factory pre-molded, prefabricated, or field-fabricated sections of insulation of the same material and thickness as the adjoining pipe insulation. Insulation sections shall be secured in

place with wire, the bore surfaces coated, and joints sealed as specified.

g. Insulation, including fittings, shall be finished with three coats of asphaltic mastic, with 6 by 5.5 mesh synthetic reinforcing fabric embedded between coats. Fabric shall be overlapped a minimum of 2 inches at joints. Total film thickness shall be a minimum of 3/16 inch. As an alternate, a prefabricated bituminous laminated jacket, reinforced with internal reinforcement mesh, shall be applied to the insulation. Jacketing material and application procedures shall match manufacturer's written instructions.

h. At termination points, other than building entrances, the mastic and cloth or tape shall cover the ends of insulation and extend 2 inches along the bare pipe.

3.3 DUCTWORK, PLENUMS, CASINGS, AND ACCESSORIES INSULATION INSTALLATION

Corner angles shall be installed on external corners of insulation on ductwork in exposed finished spaces before covering with jacket.

3.3.1 Duct Insulation Thickness

Table 3
Minimum Duct Insulation (inches and °F)

	Cooling		Heating	
Duct Location	Annual Cooling Degree Days Base 65 F	Insulation R-Value (h sf F)/Btu	Annual Heating Degree Days Base 65 F	Insulation R-Value (h sf F)/Btu
Exterior Of Building	<500 -	3.3	<1500	3.3
	500 - 1150	5.0	1500 - 4500	5.0
	1151 - 2000	6.5	4501 - 7500	6.5
	>2000	8.0	>7500	8.0
	Temperature Difference	Insulation R-Value (h sf F)/Btu	Temperature Difference	Insulation R-Value (h sf F)/Btu
Inside building envelope or in un-conditioned spaces	<15	None reqd	<15	None reqd
	15<TD<40	3.3	15<TD<40	3.3
	40<TD	5.0	40<TD	5.0

These R-values do not include the film resistances. The required minimum thicknesses do not consider water vapor transmission and condensation. Additional insulation, vapor retarders, or both, may be required to limit vapor transmission and condensation. Where ducts are designed to convey both heated and cooled air, duct insulation shall be as required by the most restrictive condition. Where exterior walls are used as plenum walls, wall insulation shall be as required by the most restrictive condition of this

section or the insulation for the building envelope. Cooling ducts are those designed to convey mechanically cooled air or return ducts in such systems. Heating ducts are those designed to convey mechanically heated air or return ducts in such systems. Thermal Resistance is to be measured in accordance with ASTM C 518 at a mean temperature of 75 degrees F. The temperature difference is at design conditions between the space within which the duct is located and the design air temperature in the duct. Resistance for run-outs to terminal devices less than 10 ft in length need not exceed 3.3 (h sf F)/Btu. Unconditioned spaces include crawlspaces and attics.

Duct insulation thickness shall be in accordance with Table 4.

Table 4 - Minimum Duct Insulation (inches)

Cold Air Ducts	2.0
Fresh Air Intake Ducts	1.5
Warm Air Ducts	2.0

3.3.2 Insulation and Vapor Retarder for Cold Air Duct

Insulation and vapor retarder shall be provided for the following cold air ducts and associated equipment.

a. Supply ducts.

b. Return air ducts.

c. Flexible run-outs (field-insulated).

d. Fresh air intake ducts.

Insulation for rectangular ducts shall be flexible type where concealed, and rigid type where exposed. Insulation for round/oval ducts shall be flexible type, with a factory Type I or II jacket; or, a semi rigid board, formed or fabricated to a tight fit, edges beveled and joints tightly butted and staggered, with a factory applied Type I or II all service jacket. Insulation for exposed ducts shall be provided with either a white, paintable, factory-applied Type I jacket or a vapor retarder jacket coating finish as specified. Insulation on concealed duct shall be provided with a factory-applied Type I or II vapor retarder jacket. The total dry film thickness shall be approximately 1/16 inch. Duct insulation shall be continuous through sleeves and prepared openings except firewall penetrations. Duct insulation terminating at fire dampers, shall be continuous over the damper collar and retaining angle of fire dampers, which are exposed to unconditioned air and which may be prone to condensate formation. Duct insulation and vapor retarder shall cover the collar, neck, and any un-insulated surfaces of diffusers, registers and grills. Vapor retarder materials shall be applied to form a complete unbroken vapor seal over the insulation. Sheet Metal Duct shall be sealed in accordance with Section 15895 AIR SUPPLY, DISTRIBUTION, VENTILATION, AND EXHAUST SYSTEM.

3.3.2.1 Installation on Concealed Duct

a. For rectangular, or round ducts, flexible insulation shall be attached by applying adhesive around the entire perimeter of the duct in 6 inch wide strips on 12 inch centers.

b. For rectangular ducts, 24 inches and larger insulation shall be additionally secured to bottom of ducts by the use of mechanical fasteners. Fasteners shall be spaced on 16 inch centers and not more than 16 inches from duct corners.

c. For rectangular and round ducts, mechanical fasteners shall be provided on sides of duct risers for all duct sizes. Fasteners shall be spaced on 16 inch centers and not more than 16 inches from duct corners.

d. Insulation shall be impaled on the mechanical fasteners (self stick pins) where used and shall be pressed thoroughly into the adhesive. Care shall be taken to ensure vapor retarder jacket joints overlap 2 inches. The insulation shall not be compressed to a thickness less than that specified. Insulation shall be carried over standing seams and trapeze-type duct hangers.

e. Self-locking washers shall be installed where mechanical fasteners are used. The pin shall be trimmed back and bent over.

f. Jacket overlaps shall be secured with staples and tape as necessary to ensure a secure seal. Staples, tape and seams shall be coated with a brush coat of vapor retarder coating or PVDC adhesive tape.

g. Breaks in the jacket material shall be covered with patches of the same material as the vapor retarder jacket. The patches shall extend not less than 2 inches beyond the break or penetration in all directions and shall be secured with tape and staples. Staples and tape joints shall be sealed with a brush coat of vapor retarder coating or PVDC adhesive tape.

h. At jacket penetrations such as hangers, thermometers, and damper operating rods, voids in the insulation shall be filled and the penetration sealed with a brush coat of vapor retarder coating or PVDC adhesive tape.

i. Insulation terminations and pin punctures shall be sealed and flashed with a reinforced vapor retarder coating finish or tape with a brush coat of vapor retarder coating.. The coating shall overlap the adjoining insulation and un-insulated surface 2 inches. Pin puncture coatings shall extend 2 inches from the puncture in all directions.

j. Where insulation standoff brackets occur, insulation shall be extended under the bracket and the jacket terminated at the bracket.

3.3.2.2 Installation on Exposed Duct Work

a. For rectangular ducts, rigid insulation shall be secured to the duct by mechanical fasteners on all four sides of the duct, spaced not more than 12 inches apart and not more than 3 inches from the

edges of the insulation joints. A minimum of two rows of fasteners shall be provided for each side of duct 12 inches and larger. One row shall be provided for each side of duct less than 12 inches. Mechanical fasteners shall be as corrosion resistant as G60 coated galvanized steel, and shall indefinitely sustain a 50 lb tensile dead load test perpendicular to the duct wall.

b. Duct insulation shall be formed with minimum jacket seams. Each piece of rigid insulation shall be fastened to the duct using mechanical fasteners. When the height of projections is less than the insulation thickness, insulation shall be brought up to standing seams, reinforcing, and other vertical projections and shall not be carried over. Vapor retarder jacket shall be continuous across seams, reinforcing, and projections. When height of projections is greater than the insulation thickness, insulation and jacket shall be carried over. Apply insulation with joints tightly butted. Neatly bevel insulation around name plates and access plates and doors.

c. Insulation shall be impaled on the fasteners; self-locking washers shall be installed and the pin trimmed or bent over.

d. Joints in the insulation jacket shall be sealed with a 4 inch wide strip of tape. Tape seams shall be sealed with a brush coat of vapor retarder coating.

e. Breaks and ribs or standing seam penetrations in the jacket material shall be covered with a patch of the same material as the jacket. Patches shall extend not less than 2 inches beyond the break or penetration and shall be secured with tape and stapled. Staples and joints shall be sealed with a brush coat of vapor retarder coating.

f. At jacket penetrations such as hangers, thermometers, and damper operating rods, the voids in the insulation shall be filled and the penetrations sealed with a brush coat of vapor retarder coating.

g. Insulation terminations and pin punctures shall be sealed and flashed with a reinforced vapor retarder coating finish. The coating shall overlap the adjoining insulation and un-insulated surface 2 inches. Pin puncture coatings shall extend 2 inches from the puncture in all directions.

h. Oval and round ducts, flexible type, shall be insulated with factory Type I jacket insulation with minimum density of 3/4 pcf, attached as per MICA standards.

3.3.3 Insulation for Warm Air Duct

Insulation and vapor barrier shall be provided for the following warm air ducts and associated equipment:.

a. Supply ducts.

b. Return air ducts

c. Flexible run-outs (field insulated)

Insulation for rectangular ducts shall be flexible type where concealed, and rigid type where exposed. Insulation on exposed ducts shall be provided with a white, paint-able, factory-applied Type II jacket, or finished with adhesive finish. Flexible type insulation shall be used for round ducts, with a factory-applied Type II jacket. Insulation on concealed duct shall be provided with a factory-applied Type II jacket. Adhesive finish where indicated to be used shall be accomplished by applying two coats of adhesive with a layer of glass cloth embedded between the coats. The total dry film thickness shall be approximately 1/16 inch. Duct insulation shall be continuous through sleeves and prepared openings. Duct insulation shall terminate at fire dampers and flexible connections.

3.3.3.1 Installation on Concealed Duct

a. For rectangular and round ducts, insulation shall be attached by applying adhesive around the entire perimeter of the duct in 6 inch wide strips on 12 inch centers.

b. For rectangular ducts 24 inches and larger, insulation shall be secured to the bottom of ducts by the use of mechanical fasteners. Fasteners shall be spaced on 18 inch centers and not more than 18 inches from duct corner.

c. For rectangular and round ducts, mechanical fasteners shall be provided on sides of duct risers for all duct sizes. Fasteners shall be spaced on 18 inch centers and not more than 18 inches from duct corners.

d. The insulation shall be impaled on the mechanical fasteners where used. The insulation shall not be compressed to a thickness less than that specified. Insulation shall be carried over standing seams and trapeze-type hangers.

e. Self-locking washers shall be installed where mechanical fasteners are used and the pin trimmed and bent over.

f. Insulation jacket shall overlap not less than 2 inches at joints and the lap shall be secured and stapled on 4 inch centers.

3.3.3.2 Installation on Exposed Duct

a. For rectangular ducts, the rigid insulation shall be secured to the duct by the use of mechanical fasteners on all four sides of the duct, spaced not more than 16 inches apart and not more than 6 inches from the edges of the insulation joints. A minimum of two rows of fasteners shall be provided for each side of duct 12 inches and larger and a minimum of one row for each side of duct less than 12 inches.

b. Duct insulation with factory-applied jacket shall be formed with minimum jacket seams, and each piece of rigid insulation shall be fastened to the duct using mechanical fasteners. When the height of projection is less than the insulation thickness, insulation shall be brought up to standing seams, reinforcing, and other vertical projections and shall not be carried over the

projection. Jacket shall be continuous across seams, reinforcing, and projections. Where the height of projections is greater than the insulation thickness, insulation and jacket shall be carried over the projection.

c. Insulation shall be impaled on the fasteners; self-locking washers shall be installed and pin excess clipped and bent over.

d. Joints on jacketed insulation shall be sealed with a 4 inch wide strip of tape and brushed with vapor retarder coating.

e. Breaks and penetrations in the jacket material shall be covered with a patch of the same material as the jacket. Patches shall extend not less than 2 inches beyond the break or penetration and shall be secured with adhesive and stapled.

f. Insulation terminations and pin punctures shall be sealed with tape and brushed with vapor retarder coating.

g. Round ducts, flexible type, shall be insulated with factory Type I jacket insulation, minimum density of 3/4 pcf attached by staples spaced not more than 16 inches and not more than 6 inches from the degrees of joints. Joints shall be sealed in accordance with item "d." above.

3.3.4 Duct Test Holes

After duct systems have been tested, adjusted, and balanced, breaks in the insulation and jacket shall be repaired in accordance with the applicable section of this specification for the type of duct insulation to be repaired.

3.3.5 Duct Exposed to Weather

3.3.5.1 Installation

Ducts exposed to weather shall be insulated and finished as specified for the applicable service for exposed duct inside the building. After the above is accomplished, the insulation shall then be further finished as detailed in the following subparagraphs.

3.3.5.2 Round Duct

Aluminum jacket with factory applied moisture retarder shall be applied with the joints lapped not less than 3 inches and secured with bands located at circumferential laps and at not more than 12 inch intervals throughout. Horizontal joints shall lap down to shed water and located at 4 or 8 o'clock position. Joints shall be sealed with caulking to prevent moisture penetration. Where jacketing abuts an un-insulated surface, joints shall be sealed with caulking.

3.3.5.3 Fittings

Fittings and other irregular shapes shall be finished as specified for rectangular ducts.

3.3.5.4 Rectangular Ducts

Two coats of weather barrier mastic reinforced with fabric or mesh for outdoor application shall be applied to the entire surface. Each coat of weatherproof mastic shall be 1/16 inch minimum thickness. The exterior shall be a metal jacketing applied for mechanical abuse and weather protection, and secured with screws.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 15 - MECHANICAL

SECTION 15182

REFRIGERANT PIPING

07/03

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 QUALIFICATIONS
1.4 SAFETY REQUIREMENTS
1.5 DELIVERY, STORAGE, AND HANDLING
1.6 PROJECT/SITE CONDITIONS
1.6.1 Verification of Dimensions
1.6.2 Contract Drawings
1.6.3 Spare Parts
1.7 MAINTENANCE

PART 2 PRODUCTS

2.1 STANDARD COMMERCIAL PRODUCTS
2.2 ELECTRICAL WORK
2.3 REFRIGERANT PIPING SYSTEM
2.4 PIPE, FITTINGS AND END CONNECTIONS (JOINTS)
2.4.1 Copper Tubing
2.4.2 Solder
2.4.3 Brazing Filler Metal
2.5 VALVES
2.5.1 Refrigerant Stop Valves
2.5.2 Check Valves
2.5.3 Liquid Solenoid Valves
2.5.4 Expansion Valves
2.5.5 Safety Relief Valves
2.5.6 Evaporator Pressure Regulators, Direct-Acting
2.5.7 Refrigerant Access Valves
2.6 PIPING ACCESSORIES
2.6.1 Filter Driers
2.6.2 Sight Glass and Liquid Level Indicator
2.6.2.1 Assembly and Components
2.6.2.2 Gauge Glass
2.6.2.3 Bull's-Eye and Inline Sight Glass Reflex Lens
2.6.2.4 Moisture Indicator
2.6.3 Vibration Dampeners
2.6.4 Flexible Pipe Connectors
2.6.5 Strainers
2.6.6 Pressure and Vacuum Gauges
2.6.7 Temperature Gauges
2.6.7.1 Stem Cased-Glass
2.6.7.2 Bimetallic Dial
2.6.7.3 Liquid-, Solid-, and Vapor-Filled Dial
2.6.7.4 Thermal Well

2.6.8 Pipe Hangers, Inserts, and Supports
2.6.9 Escutcheons
2.7 FABRICATION
2.7.1 Factory Coating
2.7.2 Factory Applied Insulation
2.8 FIELD APPLIED INSULATION

PART 3 EXECUTION

3.1 INSTALLATION
3.1.1 Directional Changes
3.1.2 Functional Requirements
3.1.3 Fittings and End Connections
3.1.3.1 Threaded Connections
3.1.3.2 Brazed Connections
3.1.3.3 Flared Connections
3.1.3.4 Flanged Connections
3.1.4 Valves
3.1.4.1 General
3.1.4.2 Expansion Valves
3.1.4.3 Valve Identification
3.1.5 Vibration Dampers
3.1.6 Strainers
3.1.7 Filter Dryer
3.1.8 Sight Glass
3.1.9 Discharge Line Oil Separator
3.1.10 Accumulator
3.1.11 Flexible Pipe Connectors
3.1.12 Pipe Hangers, Inserts, and Supports
3.1.12.1 Hangers
3.1.12.2 Inserts
3.1.12.3 C-Clamps
3.1.12.4 Angle Attachments
3.1.12.5 Saddles and Shields
3.1.12.6 Horizontal Pipe Supports
3.1.12.7 Vertical Pipe Supports
3.1.12.8 Pipe Guides
3.1.12.9 Steel Slides
3.1.12.10 High Temperature Guides with Cradles
3.1.12.11 Multiple Pipe Runs
3.1.12.12 Structural Attachments
3.1.13 Pipe Alignment Guides
3.1.14 Pipe Anchors
3.1.15 Building Surface Penetrations
3.1.15.1 General Service Areas
3.1.15.2 Waterproof Penetrations
3.1.15.3 Fire-Rated Penetrations
3.1.15.4 Escutcheons
3.1.16 Access Panels
3.1.17 Field Applied Insulation
3.1.18 Field Painting
3.1.18.1 Color Coding
3.1.18.2 Color Coding Scheme
3.2 CLEANING AND ADJUSTING
3.3 REFRIGERANT PIPING TESTS
3.3.1 Preliminary Procedures
3.3.2 Pneumatic Test
3.3.3 Evacuation Test
3.3.4 System Charging and Startup Test

3.3.5 Refrigerant Leakage
3.3.6 Contractor's Responsibility
3.4 DEMONSTRATIONS

-- End of Section Table of Contents --

SECTION 15182

REFRIGERANT PIPING
07/03

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR-CONDITIONING AND REFRIGERATION INSTITUTE (ARI)

ARI 710	(1986) Liquid-Line Driers
ARI 720	(2002) Refrigerant Access Valves and Hose Connectors
ARI 750	(2001) Thermostatic Refrigerant Expansion Valves
ARI 760	(2001) Solenoid Valves for Use With Volatile Refrigerants

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 15	(2001; Errata 2002) Safety Standard for Refrigeration Systems
ASHRAE 17	(1998; R 2003) Method of Testing Capacity of Thermostatic Refrigerant Expansion Valves

AMERICAN WELDING SOCIETY (AWS)

AWS A5.8	(1992) Filler Metals for Brazing and Braze Welding
AWS BRH	(2002) Brazing Handbook
AWS D1.1/D1.1M	(2002) Structural Welding Code - Steel
AWS Z49.1	(1999) Safety in Welding, Cutting and Allied Processes

ASME INTERNATIONAL (ASME)

ASME B1.20.1	(1983; R 2001) Pipe Threads, General Purpose, Inch
ASME B16.11	(2002) Forged Fittings, Socket-Welding and Threaded

ASME B16.21	(1992) Nonmetallic Flat Gaskets for Pipe Flanges
ASME B16.22	(2002) Wrought Copper and Copper Alloy Solder Joint Pressure Fittings
ASME B16.26	(1988) Cast Copper Alloy Fittings for Flared Copper Tubes
ASME B16.3	(1998) Malleable Iron Threaded Fittings
ASME B16.5	(1996) Pipe Flanges and Flanged Fittings
ASME B16.9	(2001) Factory-Made Wrought Steel Buttwelding Fittings
ASME B31.1	(2001) Power Piping
ASME B31.5	(2001) Refrigeration Piping and Heat Transfer Components
ASME B31.9	(1996) Building Services Piping
ASME B40.100	(2000) Pressure Gauges and Gauge Attachments
ASME BPVC SEC IX	(2001) Boiler and Pressure Vessel Code; Section IX, Welding and Brazing Qualifications

ASTM INTERNATIONAL (ASTM)

ASTM A 193/A 193M	(2003) Alloy-Steel and Stainless Steel Bolting Materials for High-Temperature Service
ASTM A 334/A 334M	(1999) Seamless and Welded Carbon and Alloy-Steel Tubes for Low-Temperature Service
ASTM A 53/A 53M	(2002) Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A 653/A 653M	(2003) Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM B 117	(2002) Operating Salt Spray (Fog) Apparatus
ASTM B 280	(2002) Seamless Copper Tube for Air Conditioning and Refrigeration Field Service
ASTM B 32	(2003) Solder Metal
ASTM B 62	(2002) Composition Bronze or Ounce Metal Castings
ASTM B 75	(2002) Seamless Copper Tube

ASTM B 75M	(1999) Seamless Copper Tube (Metric)
ASTM B 813	(2000e1) Liquid and Paste Fluxes for Soldering of Copper and Copper Alloy Tube
ASTM D 3308	(2001) PTFE Resin Skived Tape
ASTM D 520	(2000) Zinc Dust Pigment
ASTM E 84	(2003) Surface Burning Characteristics of Building Materials

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY (MSS)

MSS SP-58	(2002) Pipe Hangers and Supports - Materials, Design and Manufacture
MSS SP-69	(2002) Pipe Hangers and Supports - Selection and Application

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for Contractor Quality Control approval. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Refrigerant Piping System

Drawings, at least 5 weeks prior to beginning construction, provided in adequate detail to demonstrate compliance with contract requirements. Drawings shall consist of:

a. Piping layouts which identify all valves and fittings.

b. Plans and elevations which identify clearances required for maintenance and operation.

SD-03 Product Data

Refrigerant Piping System

Manufacturer's standard catalog data, at least 5 weeks prior to the purchase or installation of a particular component, highlighted to show material, size, options, performance charts and curves, etc. in adequate detail to demonstrate compliance with contract requirements. Data shall include manufacturer's recommended installation instructions and procedures. Data shall be provided for the following components as a minimum:

a. Piping and Fittings

b. Valves

c. Piping Accessories

d Pipe Hangers, Inserts, and Supports

Spare Parts

Spare parts data for each different item of equipment specified in Army projects only.

Qualifications

6 copies of qualified procedures, and list of names and identification symbols of qualified welders and welding operators, prior to non-factory welding operations.

Refrigerant Piping Tests

A schedule, at least 2 weeks prior to the start of related testing, for each test. The schedules shall identify the proposed date, time, and location for each test.

Demonstrations

A schedule, at least 2 weeks prior to the date of the proposed training course, which identifies the date, time, and location for the training.

Verification of Dimensions

A letter, at least 2 weeks prior to beginning construction, including the date the site was visited, conformation of existing conditions, and any discrepancies found.

SD-06 Test Reports

Refrigerant Piping Tests

Six copies of the report shall be provided in bound 8 1/2 x 11 inch booklets. Reports shall document all phases of the tests performed. The report shall include initial test summaries, all repairs/adjustments made, and the final test results.

SD-07 Certificates

Service Organization

A certified list of qualified permanent service organizations for support of the equipment which includes their addresses and qualifications. The service organizations shall be reasonably convenient to the equipment installation and be able to render satisfactory service to the equipment on a regular and emergency basis during the warranty period of the contract.

SD-10 Operation and Maintenance Data

Maintenance
Operation and Maintenance Manuals

Data Package 2 in accordance with Section 01781 OPERATION AND MAINTENANCE DATA.

Six complete copies of an operation manual in bound 8 1/2 x 11 inch booklets listing step-by-step procedures required for system startup, operation, abnormal shutdown, emergency shutdown, and normal shutdown at least 4 weeks prior to the first training course. The booklets shall include the manufacturer's name, model number, and parts list. The manuals shall include the manufacturer's name, model number, service manual, and a brief description of all equipment and their basic operating features.

Six complete copies of maintenance manual in bound 8 1/2 x 11 inch booklets listing routine maintenance procedures, possible breakdowns and repairs, and a trouble shooting guide. The manuals shall include piping layouts and simplified wiring and control diagrams of the system as installed.

1.3 QUALIFICATIONS

Piping shall be welded in accordance with the qualified procedures using performance qualified welders and welding operators. Procedures and welders shall be qualified in accordance with ASME BPVC SEC IX. Welding procedures qualified by others, and welders and welding operators qualified by another employer may be accepted as permitted by ASME B31.1. The Contracting Officer shall be notified 24 hours in advance of tests and the tests shall be performed at the work site if practical. The welder or welding operator shall apply the personally assigned symbol near each weld made, as a permanent record.

1.4 SAFETY REQUIREMENTS

Exposed moving parts, parts that produce high operating temperature, parts which may be electrically energized, and parts that may be a hazard to operating personnel shall be insulated, fully enclosed, guarded, or fitted with other types of safety devices. Safety devices shall be installed so that proper operation of equipment is not impaired. Welding and cutting safety requirements shall be in accordance with AWS Z49.1.

1.5 DELIVERY, STORAGE, AND HANDLING

Stored items shall be protected from the weather, humidity and temperature variations, dirt and dust, or other contaminants. Proper protection and care of all material both before and during installation shall be the Contractor's responsibility. Any materials found to be damaged shall be replaced at the Contractor's expense. During installation, piping and similar openings shall be capped to keep out dirt and other foreign matter.

1.6 PROJECT/SITE CONDITIONS

1.6.1 Verification of Dimensions

The Contractor shall become familiar with all details of the work, verify all dimensions in the field, and advise the Contracting Officer of any discrepancy before performing any work.

1.6.2 Contract Drawings

Because of the small scale of the drawings, it is not possible to indicate all offsets, fittings, and accessories that may be required. The Contractor shall carefully investigate the plumbing, fire protection, electrical, structural and finish conditions that would affect the work to be performed and shall arrange such work accordingly, furnishing required offsets, fittings, and accessories to meet such conditions.

1.6.3 Spare Parts

The Contractor shall submit spare parts data for each different item of equipment specified, after approval of detail drawings and not later than 2 months prior to the date of beneficial occupancy. The data shall include a complete list of parts and supplies, with current unit prices and source of supply, a recommended spare parts list for 1 year of operation, and a list of the parts recommended by the manufacturer to be replaced on a routine basis.

1.7 MAINTENANCE

Operation and maintenance data shall comply with the requirements of Section 01781 OPERATION AND MAINTENANCE DATA and as specified herein.

PART 2 PRODUCTS

2.1 STANDARD COMMERCIAL PRODUCTS

Materials and equipment shall be standard products of a manufacturer regularly engaged in the manufacturing of such products, which are of a similar material, design and workmanship. The standard products shall have been in satisfactory commercial or industrial use for 2 years prior to bid opening. The 2 year use shall include applications of equipment and materials under similar circumstances and of similar size. The 2 years experience shall be satisfactorily completed by a product which has been sold or is offered for sale on the commercial market through advertisements, manufacturer's catalogs, or brochures. Products having less than a 2 year field service record shall be acceptable if a certified record of satisfactory field operation, for not less than 6000 hours exclusive of the manufacturer's factory tests, can be shown. Products shall be supported by a service organization. System components shall be environmentally suitable for the indicated locations.

2.2 ELECTRICAL WORK

Electrical equipment and wiring shall be in accordance with Section 16402 INTERIOR DISTRIBUTION SYSTEM. Field wiring shall be in accordance with manufacturer's instructions. Manual or automatic control and protective or signal devices required for the operation specified and any control wiring required for controls and devices specified, but not shown, shall be provided.

2.3 REFRIGERANT PIPING SYSTEM

Refrigerant piping, valves, fittings, and accessories shall be in accordance with ASHRAE 15 and ASME B31.5, except as specified herein. Refrigerant piping, valves, fittings, and accessories shall be compatible with the fluids used and capable of withstanding the pressures and temperatures of the service. Refrigerant piping, valves, and accessories used for refrigerant service shall be cleaned, dehydrated, and sealed (capped or plugged) prior to shipment from the manufacturer's plant.

2.4 PIPE, FITTINGS AND END CONNECTIONS (JOINTS)

2.4.1 Copper Tubing

Copper tubing shall conform to ASTM B 280 annealed or hard drawn as required. Copper tubing shall be soft annealed where bending is required and hard drawn where no bending is required. Soft annealed copper tubing shall not be used in sizes larger than 1-3/8 inches. Joints shall be brazed except that joints on lines 7/8 inch and smaller may be flared. Cast copper alloy fittings for flared copper tube shall conform to ASME B16.26 and ASTM B 62. Wrought copper and bronze solder-joint pressure fittings shall conform to ASME B16.22 and ASTM B 75. Joints and fittings for brazed joint shall be wrought-copper or forged-brass sweat fittings. Cast sweat-type joints and fittings shall not be allowed for brazed joints. Brass or bronze adapters for brazed tubing may be used for connecting tubing to flanges and to threaded ends of valves and equipment.

2.4.2 Solder

Solder shall conform to ASTM B 32; grade Sb5, tin-antimony alloy for service pressures up to 150 psig. Solder flux shall be liquid or paste form, non-corrosive and conform to ASTM B 813.

2.4.3 Brazing Filler Metal

Filler metal shall conform to AWS A5.8, Type BAg-5 with AWS Type 3 flux, except Type BCuP-5 or BCuP-6 may be used for brazing copper-to-copper joints.

2.5 VALVES

Valves shall be designed, manufactured, and tested specifically for refrigerant service. Valve bodies shall be of brass, or bronze construction. Valves shall have brazed or socket welded connections. Threaded end connections shall not be used, except in pilot pressure or gauge lines where maintenance disassembly is required and welded flanges cannot be used. Internal parts shall be removable for inspection or replacement without applying heat or breaking pipe connections. Valve stems exposed to the atmosphere shall be stainless steel or corrosion resistant metal plated carbon steel. Direction of flow shall be legibly and permanently indicated on the valve body. Control valve inlets shall be fitted with integral or adapted strainer or filter where recommended or required by the manufacturer. Purge, charge and receiver valves shall be of manufacturer's standard configuration.

2.5.1 Refrigerant Stop Valves

Valve shall be the globe or full-port ball type with a back-seating stem especially packed for refrigerant service. Valve packing shall be replaceable under line pressure. Valve shall be provided with a wrench operator and a seal cap. Valve shall be the straight or angle pattern design as indicated.

2.5.2 Check Valves

Valve shall be the swing or lift type as required to provide positive shutoff at the differential pressure indicated. Valve shall be provided with resilient seat.

2.5.3 Liquid Solenoid Valves

Valves shall comply with ARI 760 and be suitable for continuous duty with applied voltages 15 percent under and 5 percent over nominal rated voltage at maximum and minimum encountered pressure and temperature service conditions. Valves shall be direct-acting or pilot-operating type, packless, except that packed stem, seal capped, manual lifting provisions shall be furnished. Solenoid coils shall be moisture-proof, UL approved, totally encapsulated or encapsulated and metal jacketed as required. Valves shall have safe working pressure of 400 psi and a maximum operating pressure differential of at least 200 psi at 85 percent rated voltage. Valves shall have an operating pressure differential suitable for the refrigerant used.

2.5.4 Expansion Valves

Valve shall conform to ARI 750 and ASHRAE 17. Valve shall be the diaphragm and spring-loaded type with internal or external equalizers, and bulb and capillary tubing. Valve shall be provided with an external superheat adjustment along with a seal cap. Internal equalizers may be utilized where flowing refrigerant pressure drop between outlet of the valve and inlet to the evaporator coil is negligible and pressure drop across the evaporator is less than the pressure difference corresponding to 2 degrees F of saturated suction temperature at evaporator conditions. Bulb charge shall be determined by the manufacturer for the application and such that liquid will remain in the bulb at all operating conditions. Gas limited liquid charged valves and other valve devices for limiting evaporator pressure shall not be used without a distributor or discharge tube or effective means to prevent loss of control when bulb becomes warmer than valve body. Pilot-operated valves shall have a characterized plug to provide required modulating control. A de-energized solenoid valve may be used in the pilot line to close the main valve in lieu of a solenoid valve in the main liquid line. An isolatable pressure gauge shall be provided in the pilot line, at the main valve. Automatic pressure reducing or constant pressure regulating expansion valves may be used only where indicted or for constant evaporator loads.

2.5.5 Safety Relief Valves

Valve shall be the two-way type, unless indicated otherwise. Valve shall bear the ASME code symbol. Valve capacity shall be certified by the National Board of Boiler and Pressure Vessel Inspectors. Valve shall be of an automatically reseating design after activation.

2.5.6 Evaporator Pressure Regulators, Direct-Acting

Valve shall include a diaphragm/spring assembly, external pressure adjustment with seal cap, and pressure gauge port. Valve shall maintain a constant inlet pressure by balancing inlet pressure on diaphragm against an adjustable spring load. Pressure drop at system design load shall not exceed the pressure difference corresponding to a 2 degrees F change in saturated refrigerant temperature at evaporator operating suction temperature. Spring shall be selected for indicated maximum allowable suction pressure range.

2.5.7 Refrigerant Access Valves

Refrigerant access valves and hose connections shall be in accordance with ARI 720.

2.6 PIPING ACCESSORIES

2.6.1 Filter Driers

Driers shall conform to ARI 710. Sizes 5/8 inch and larger shall be the full flow, replaceable core type. Sizes 1/2 inch and smaller shall be the sealed type. Cores shall be of suitable desiccant that will not plug, cake, dust, channel, or break down, and shall remove water, acid, and foreign material from the refrigerant. Filter driers shall be constructed so that none of the desiccant will pass into the refrigerant lines. Minimum bursting pressure shall be 1,500 psi.

2.6.2 Sight Glass and Liquid Level Indicator

2.6.2.1 Assembly and Components

Assembly shall be pressure- and temperature-rated and constructed of materials suitable for the service. Glass shall be borosilicate type. Ferrous components subject to condensation shall be electro-galvanized.

2.6.2.2 Gauge Glass

Gauge glass shall include top and bottom isolation valves fitted with automatic checks, and packing followers; red-line or green-line gauge glass; elastomer or polymer packing to suit the service; and gauge glass guard.

2.6.2.3 Bull's-Eye and Inline Sight Glass Reflex Lens

Bull's-eye and inline sight glass reflex lens shall be provided for dead-end liquid service. For pipe line mounting, two plain lenses in one body suitable for backlighted viewing shall be provided.

2.6.2.4 Moisture Indicator

Indicator shall be a self-reversible action, moisture reactive, color changing media. Indicator shall be furnished with full-color-printing tag containing color, moisture and temperature criteria. Unless otherwise indicated, the moisture indicator shall be an integral part of each corresponding sight glass.

2.6.3 Vibration Dampeners

Dampeners shall be of the all-metallic bellows and woven-wire type.

2.6.4 Flexible Pipe Connectors

Connector shall be a composite of interior corrugated phosphor bronze or Type 300 Series stainless steel, as required for fluid service, with exterior reinforcement of bronze, stainless steel or monel wire braid. Assembly shall be constructed with a safety factor of not less than 4 at 300 degrees F. Unless otherwise indicated, the length of a flexible connector shall be as recommended by the manufacturer for the service intended.

2.6.5 Strainers

Strainers used in refrigerant service shall have brass or cast iron body, Y- or angle-pattern, cleanable, not less than 60-mesh noncorroding screen of an area to provide net free area not less than ten times the pipe diameter with pressure rating compatible with the refrigerant service. Screens shall be stainless steel or monel and reinforced spring-loaded where necessary for bypass-proof construction.

2.6.6 Pressure and Vacuum Gauges

Gauges shall conform to ASME B40.100 and shall be provided with throttling type needle valve or a pulsation dampener and shut-off valve. Gauge shall be a minimum of 3-1/2 inches in diameter with a range from 0 psig to approximately 1.5 times the maximum system working pressure. Each gauge range shall be selected so that at normal operating pressure, the needle is within the middle-third of the range.

2.6.7 Temperature Gauges

Temperature gauges shall be the industrial duty type and be provided for the required temperature range. Gauges shall have Fahrenheit scale in 2 degree graduations scale (black numbers) on a white face. The pointer shall be adjustable. Rigid stem type temperature gauges shall be provided in thermal wells located within 5 feet of the finished floor. Universal adjustable angle type or remote element type temperature gauges shall be provided in thermal wells located 5 to 7 feet above the finished floor. Remote element type temperature gauges shall be provided in thermal wells located 7 feet above the finished floor.

2.6.7.1 Stem Cased-Glass

Stem cased-glass case shall be polished stainless steel or cast aluminum, 9 inches long, with clear acrylic lens, and non-mercury filled glass tube with indicating-fluid column.

2.6.7.2 Bimetallic Dial

Bimetallic dial type case shall be not less than 3-1/2 inches, stainless steel, and shall be hermetically sealed with clear acrylic lens. Bimetallic element shall be silicone dampened and unit fitted with external calibrator adjustment. Accuracy shall be one percent of dial range.

2.6.7.3 Liquid-, Solid-, and Vapor-Filled Dial

Liquid-, solid-, and vapor-filled dial type cases shall be not less than 3-1/2 inches, stainless steel or cast aluminum with clear acrylic lens. Fill

shall be nonmercury, suitable for encountered cross-ambients, and connecting capillary tubing shall be double-braided bronze.

2.6.7.4 Thermal Well

Thermal well shall be identical size, 1/2 or 3/4 inch NPT connection, brass or stainless steel. Where test wells are indicated, provide captive plug-fitted type 1/2 inch NPT connection suitable for use with either engraved stem or standard separable socket thermometer or thermostat. Mercury shall not be used in thermometers. Extended neck thermal wells shall be of sufficient length to clear insulation thickness by 1 inch.

2.6.8 Pipe Hangers, Inserts, and Supports

Pipe hangers, inserts, guides, and supports shall conform to MSS SP-58 and MSS SP-69.

2.6.9 Escutcheons

Escutcheons shall be chromium-plated iron or chromium-plated brass, either one piece or split pattern, held in place by internal spring tension or set screws.

2.7 FABRICATION

2.7.1 Factory Coating

Unless otherwise specified, equipment and component items, when fabricated from ferrous metal, shall be factory finished with the manufacturer's standard finish, except that items located outside of buildings shall have weather resistant finishes that will withstand 125 hours exposure to the salt spray test specified in ASTM B 117 using a 5 percent sodium chloride solution. Immediately after completion of the test, the specimen shall show no signs of blistering, wrinkling, cracking, or loss of adhesion and no sign of rust creepage beyond 1/8 inch on either side of the scratch mark. Cut edges of galvanized surfaces where hot-dip galvanized sheet steel is used shall be coated with a zinc-rich coating conforming to ASTM D 520, Type I.

2.7.2 Factory Applied Insulation

Refrigerant suction lines between the cooler and each compressor shall be insulated with not less than 3/4 inch thick unicellular plastic foam. Factory insulated items installed outdoors are not required to be fire-rated. As a minimum, factory insulated items installed indoors shall have a flame spread index no higher than 75 and a smoke developed index no higher than 150. Factory insulated items (no jacket) installed indoors and which are located in air plenums, in ceiling spaces, and in attic spaces shall have a flame spread index no higher than 25 and a smoke developed index no higher than 50. Flame spread and smoke developed indexes shall be determined by ASTM E 84. Insulation shall be tested in the same density and installed thickness as the material to be used in the actual construction. Material supplied by a manufacturer with a jacket shall be tested as a composite material. Jackets, facings, and adhesives shall have a flame spread index no higher than 25 and a smoke developed index no higher than 50 when tested in accordance with ASTM E 84.

2.8 FIELD APPLIED INSULATION

Field applied insulation shall be provided and installed in accordance with Section 15080A THERMAL INSULATION FOR MECHANICAL SYSTEMS.

PART 3 EXECUTION

3.1 INSTALLATION

Pipe and fitting installation shall conform to the requirements of ASME B31.1. Pipe shall be cut accurately to measurements established at the jobsite, and worked into place without springing or forcing, completely clearing all windows, doors, and other openings. Cutting or other weakening of the building structure to facilitate piping installation will not be permitted without written approval. Pipe or tubing shall be cut square, shall have burrs removed by reaming, and shall permit free expansion and contraction without causing damage to the building structure, pipe, joints, or hangers.

3.1.1 Directional Changes

Changes in direction shall be made with fittings, except that bending of pipe 4 inches and smaller will be permitted, provided a pipe bender is used and wide weep bends are formed. Mitering or notching pipe or other similar construction to form elbows or tees will not be permitted. The centerline radius of bends shall not be less than 6 diameters of the pipe. Bent pipe showing kinks, wrinkles, flattening, or other malformations will not be accepted.

3.1.2 Functional Requirements

Piping shall be installed 1/2 inch per 10 feet of pipe in the direction of flow to ensure adequate oil drainage. Open ends of refrigerant lines or equipment shall be properly capped or plugged during installation to keep moisture, dirt, or other foreign material out of the system. Piping shall remain capped until installation. Equipment piping shall be in accordance with the equipment manufacturer's recommendations and the contract drawings. Equipment and piping arrangements shall fit into space allotted and allow adequate acceptable clearances for installation, replacement, entry, servicing, and maintenance.

3.1.3 Fittings and End Connections

3.1.3.1 Threaded Connections

Threaded connections shall be made with tapered threads and made tight with PTFE tape complying with ASTM D 3308 or equivalent thread-joint compound applied to the male threads only. Not more than three threads shall show after the joint is made.

3.1.3.2 Brazed Connections

Brazing shall be performed in accordance with AWS BRH, except as modified herein. During brazing, the pipe and fittings shall be filled with a pressure regulated inert gas, such as nitrogen, to prevent the formation of scale. Before brazing copper joints, both the outside of the tube and the inside of the fitting shall be cleaned with a wire fitting brush until the

entire joint surface is bright and clean. Brazing flux shall not be used. Surplus brazing material shall be removed at all joints. Tubing shall be protected against oxidation during brazing by continuous purging of the inside of the piping using nitrogen. Piping shall be supported prior to brazing and not be sprung or forced.

3.1.3.3 Flared Connections

When flared connections are used, a suitable lubricant shall be used between the back of the flare and the nut in order to avoid tearing the flare while tightening the nut.

3.1.3.4 Flanged Connections

When steel refrigerant piping is used, union or flange joints shall be provided in each line immediately preceding the connection to each piece of equipment requiring maintenance, such as compressors, coils, chillers, control valves, and other similar items. Flanged joints shall be assembled square end tight with matched flanges, gaskets, and bolts. Gaskets shall be suitable for use with the refrigerants to be handled.

3.1.4 Valves

3.1.4.1 General

Refrigerant stop valves shall be installed on each side of each piece of equipment such as compressors condensers, evaporators, receivers, and other similar items in multiple-unit installation, to provide partial system isolation as required for maintenance or repair. Stop valves shall be installed with stems horizontal unless otherwise indicated. Ball valves shall be installed with stems positioned to facilitate operation and maintenance. Isolating valves for pressure gauges and switches shall be external to thermal insulation. Safety switches shall not be fitted with isolation valves. Filter dryers having access ports may be considered a point of isolation. Purge valves shall be provided at all points of systems where accumulated noncondensible gases would prevent proper system operation. Valves shall be furnished to match line size, unless otherwise indicated or approved.

3.1.4.2 Expansion Valves

Expansion valves shall be installed with the thermostatic expansion valve bulb located on top of the suction line when the suction line is less than 2-1/8 inches in diameter and at the 4 o'clock or 8 o'clock position on lines larger than 2-1/8 inches. The bulb shall be securely fastened with two clamps. The bulb shall be insulated. The bulb shall be installed in a horizontal portion of the suction line, if possible, with the pigtail on the bottom. If the bulb must be installed in a vertical line, the bulb tubing shall be facing up.

3.1.4.3 Valve Identification

Each system valve, including those which are part of a factory assembly, shall be tagged. Tags shall be in alphanumeric sequence, progressing in direction of fluid flow. Tags shall be embossed, engraved, or stamped plastic or nonferrous metal of various shapes, sized approximately 1-3/8 inch diameter, or equivalent dimension, substantially attached to a

component or immediately adjacent thereto. Tags shall be attached with nonferrous, heavy duty, bead or link chain, 14 gauge annealed wire, nylon cable bands or as approved. Tag numbers shall be referenced in Operation and Maintenance Manuals and system diagrams.

3.1.5 Vibration Dampers

Vibration damper shall be provided in the suction and discharge lines on spring mounted compressors. Vibration dampers shall be installed parallel with the shaft of the compressor and shall be anchored firmly at the upstream end on the suction line and the downstream end in the discharge line.

3.1.6 Strainers

Strainers shall be provided immediately ahead of solenoid valves and expansion devices. Strainers may be an integral part of an expansion valve.

3.1.7 Filter Dryer

A liquid line filter dryer shall be provided on each refrigerant circuit located such that all liquid refrigerant passes through a filter dryer. Dryers shall be sized in accordance with the manufacturer's recommendations for the system in which it is installed. Dryers shall be installed such that it can be isolated from the system, the isolated portion of the system evacuated, and the filter dryer replaced. Dryers shall be installed in the horizontal position except replaceable core filter dryers may be installed in the vertical position with the access flange on the bottom.

3.1.8 Sight Glass

A moisture indicating sight glass shall be installed in all refrigerant circuits down stream of all filter dryers and where indicated. Site glasses shall be full line size.

3.1.9 Discharge Line Oil Separator

Discharge line oil separator shall be provided in the discharge line from each compressor. Oil return line shall be connected to the compressor as recommended by the compressor manufacturer.

3.1.10 Accumulator

Accumulators shall be provided in the suction line to each compressor.

3.1.11 Flexible Pipe Connectors

Connectors shall be installed perpendicular to line of motion being isolated. Piping for equipment with bidirectional motion shall be fitted with two flexible connectors, in perpendicular planes. Reinforced elastomer flexible connectors shall be installed in accordance with manufacturer's instructions. Piping guides and restraints related to flexible connectors shall be provided as required.

3.1.12 Pipe Hangers, Inserts, and Supports

Pipe hangers, inserts, and supports shall conform to MSS SP-58 and MSS SP-69, except as modified herein. Pipe hanger types 5, 12, and 26 shall not be used. Hangers used to support piping 2 inches and larger shall be fabricated to permit adequate adjustment after erection while still supporting the load. Piping subjected to vertical movement, when operating temperatures exceed ambient temperatures, shall be supported by variable spring hangers and supports or by constant support hangers.

3.1.12.1 Hangers

Type 3 shall not be used on insulated piping. Type 24 may be used only on trapeze hanger systems or on fabricated frames.

3.1.12.2 Inserts

Type 18 inserts shall be secured to concrete forms before concrete is placed. Continuous inserts which allow more adjustments may be used if they otherwise meet the requirements for Type 18 inserts.

3.1.12.3 C-Clamps

Type 19 and 23 C-clamps shall be torqued per MSS SP-69 and have both locknuts and retaining devices, furnished by the manufacturer. Field-fabricated C-clamp bodies or retaining devices are not acceptable.

3.1.12.4 Angle Attachments

Type 20 attachments used on angles and channels shall be furnished with an added malleable-iron heel plate or adapter.

3.1.12.5 Saddles and Shields

Where Type 39 saddle or Type 40 shield are permitted for a particular pipe attachment application, the Type 39 saddle, connected to the pipe, shall be used on all pipe 4 inches and larger when the temperature of the medium is 60 degrees F or higher. Type 40 shields shall be used on all piping less than 4 inches and all piping 4 inches and larger carrying medium less than 60 degrees F. A high density insulation insert of cellular glass shall be used under the Type 40 shield for piping 2 inches and larger.

3.1.12.6 Horizontal Pipe Supports

Horizontal pipe supports shall be spaced as specified in MSS SP-69 and a support shall be installed not over 1 foot from the pipe fitting joint at each change in direction of the piping. Pipe supports shall be spaced not over 5 feet apart at valves.

3.1.12.7 Vertical Pipe Supports

Vertical pipe shall be supported at each floor, except at slab-on-grade, and at intervals of not more than 15 feet, not more than 8 feet from end of risers, and at vent terminations.

3.1.12.8 Pipe Guides

Type 35 guides using, steel, reinforced polytetrafluoroethylene (PTFE) or graphite slides shall be provided where required to allow longitudinal pipe

movement. Lateral restraints shall be provided as required. Slide materials shall be suitable for the system operating temperatures, atmospheric conditions, and bearing loads encountered.

3.1.12.9 Steel Slides

Where steel slides do not require provisions for restraint of lateral movement, an alternate guide method may be used. On piping 4 inches and larger, a Type 39 saddle shall be used. On piping under 4 inches, a Type 40 protection shield may be attached to the pipe or insulation and freely rest on a steel slide plate.

3.1.12.10 High Temperature Guides with Cradles

Where there are high system temperatures and welding to piping is not desirable, then the Type 35 guide shall include a pipe cradle, welded to the guide structure and strapped securely to the pipe. The pipe shall be separated from the slide material by at least 4 inches, or by an amount adequate for the insulation, whichever is greater.

3.1.12.11 Multiple Pipe Runs

In the support of multiple pipe runs on a common base member, a clip or clamp shall be used where each pipe crosses the base support member. Spacing of the base support members shall not exceed the hanger and support spacing required for an individual pipe in the multiple pipe run.

3.1.12.12 Structural Attachments

Attachment to building structure concrete and masonry shall be by cast-in concrete inserts, built-in anchors, or masonry anchor devices. Inserts and anchors shall be applied with a safety factor not less than 5. Supports shall not be attached to metal decking. Masonry anchors for overhead applications shall be constructed of ferrous materials only. Structural steel brackets required to support piping, headers, and equipment, but not shown, shall be provided under this section. Material used for support shall be as specified under Section 05120 STRUCTURAL STEEL.

3.1.13 Pipe Alignment Guides

Pipe alignment guides shall be provided where indicated for expansion loops, offsets, and bends and as recommended by the manufacturer for expansion joints, not to exceed 5 feet on each side of each expansion joint, and in lines 4 inches or smaller not more than 2 feet on each side of the joint.

3.1.14 Pipe Anchors

Anchors shall be provided wherever necessary or indicated to localize expansion or to prevent undue strain on piping. Anchors shall consist of heavy steel collars with lugs and bolts for clamping and attaching anchor braces, unless otherwise indicated. Anchor braces shall be installed in the most effective manner to secure the desired results using turnbuckles where required. Supports, anchors, or stays shall not be attached where they will injure the structure or adjacent construction during installation or by the weight of expansion of the pipeline. Where pipe and conduit penetrations of vapor barrier sealed surfaces occur, these items shall be anchored immediately adjacent to each penetrated surface, to provide essentially zero

movement within penetration seal. Detailed drawings of pipe anchors shall be submitted for approval before installation.

3.1.15 Building Surface Penetrations

Sleeves shall not be installed in structural members except where indicated or approved. Sleeves in nonload bearing surfaces shall be galvanized sheet metal, conforming to ASTM A 653/A 653M, Coating Class G-90, 20 gauge. Sleeves in load bearing surfaces shall be uncoated carbon steel pipe, conforming to ASTM A 53/A 53M, Standard weight. Sealants shall be applied to moisture and oil-free surfaces and elastomers to not less than 1/2 inch depth. Sleeves shall not be installed in structural members.

3.1.15.1 General Service Areas

Each sleeve shall extend through its respective wall, floor, or roof, and shall be cut flush with each surface. Pipes passing through concrete or masonry wall or concrete floors or roofs shall be provided with pipe sleeves fitted into place at the time of construction. Sleeves shall be of such size as to provide a minimum of 1/4 inch all-around clearance between bare pipe and sleeves or between jacketed-insulation and sleeves. Except in pipe chases or interior walls, the annular space between pipe and sleeve or between jacket over-insulation and sleeve shall be sealed in accordance with Section 07920 JOINT SEALANTS.

3.1.15.2 Waterproof Penetrations

Pipes passing through roof or floor waterproofing membrane shall be installed through a 17 ounce copper sleeve, or a 0.032 inch thick aluminum sleeve, each within an integral skirt or flange. Flashing sleeve shall be suitably formed, and skirt or flange shall extend not less than 8 inches from the pipe and be set over the roof or floor membrane in a troweled coating of bituminous cement. The flashing sleeve shall extend up the pipe a minimum of 2 inches above the roof or floor penetration. The annular space between the flashing sleeve and the bare pipe or between the flashing sleeve and the metal-jacket-covered insulation shall be sealed as indicated. Penetrations shall be sealed by either one of the following methods.

a. Waterproofing Clamping Flange: Pipes up to and including 10 inches in diameter passing through roof or floor waterproofing membrane may be installed through a cast iron sleeve with caulking recess, anchor lugs, flashing clamp device, and pressure ring with brass bolts. Waterproofing membrane shall be clamped into place and sealant shall be placed in the caulking recess.

b. Modular Mechanical Type Sealing Assembly: In lieu of a waterproofing clamping flange and caulking and sealing of annular space between pipe and sleeve or conduit and sleeve, a modular mechanical type sealing assembly may be installed. Seals shall consist of interlocking synthetic rubber links shaped to continuously fill the annular space between the pipe/conduit and sleeve with corrosion protected carbon steel bolts, nuts, and pressure plates. Links shall be loosely assembled with bolts to form a continuous rubber belt around the pipe with a pressure plate under each bolt head and each nut. After the seal assembly is

properly positioned in the sleeve, tightening of the bolt shall cause the rubber sealing elements to expand and provide a watertight seal rubber sealing elements to expand and provide a watertight seal between the pipe/conduit seal between the pipe/conduit and the sleeve. Each seal assembly shall be sized as recommended by the manufacturer to fit the pipe/conduit and sleeve involved. The Contractor electing to use the modular mechanical type seals shall provide sleeves of the proper diameters.

3.1.15.3 Fire-Rated Penetrations

Penetration of fire-rated walls, partitions, and floors shall be sealed as specified in Section 07840 FIRESTOPPING.

3.1.15.4 Escutcheons

Finished surfaces where exposed piping, bare or insulated, pass through floors, walls, or ceilings, except in boiler, utility, or equipment rooms, shall be provided with escutcheons. Where sleeves project slightly from floors, special deep-type escutcheons shall be used. Escutcheon shall be secured to pipe or pipe covering.

3.1.16 Access Panels

Access panels shall be provided for all concealed valves, vents, controls, and items requiring inspection or maintenance. Access panels shall be of sufficient size and located so that the concealed items may be serviced and maintained or completely removed and replaced. Access panels shall be as specified in Section 05500A MISCELLANEOUS METAL.

3.1.17 Field Applied Insulation

Field installed insulation shall be as specified in Section 15080A THERMAL INSULATION FOR MECHANICAL SYSTEMS, except as defined differently herein.

3.1.18 Field Painting

Painting required for surfaces not otherwise specified, and finish painting of items only primed at the factory are specified in Section 09900 PAINTS AND COATINGS.

3.1.18.1 Color Coding

Color coding for piping identification is specified in Section 09900 PAINTS AND COATINGS.

3.1.18.2 Color Coding Scheme

A color coding scheme for locating hidden piping shall be in accordance with Section 15400A PLUMBING, GENERAL PURPOSE.

3.2 CLEANING AND ADJUSTING

Clean uncontaminated system(s) by evacuation and purging procedures currently recommended by refrigerant and refrigerant equipment manufacturers, and as specified herein, to remove small amounts of air and moisture. Systems containing moderate amounts of air, moisture,

contaminated refrigerant, or any foreign matter shall be considered contaminated systems. Restoring contaminated systems to clean condition including disassembly, component replacement, evacuation, flushing, purging, and re-charging, shall be performed using currently approved refrigerant and refrigeration manufacturer's procedures. Restoring contaminated systems shall be at no additional cost to the Government as determined by the Contracting Officer. Water shall not be used in any procedure or test.

3.3 REFRIGERANT PIPING TESTS

After all components of the refrigerant system have been installed and connected, the entire refrigeration system shall be subjected to pneumatic, evacuation, and startup tests as described herein. Tests shall be conducted in the presence of the Contracting Officer. Water and electricity required for the tests will be furnished by the Government. Any material, equipment, instruments, and personnel required for the test shall be provided by the Contractor. The services of a qualified technician shall be provided as required to perform all tests and procedures indicated herein. Field tests shall be coordinated with Section 15990A TESTING, ADJUSTING, AND BALANCING OF HVAC SYSTEMS.

3.3.1 Preliminary Procedures

Prior to pneumatic testing, equipment which has been factory tested and refrigerant charged as well as equipment which could be damaged or cause personnel injury by imposed test pressure, positive or negative, shall be isolated from the test pressure or removed from the system. Safety relief valves and rupture discs, where not part of factory sealed systems, shall be removed and openings capped or plugged.

3.3.2 Pneumatic Test

Pressure control and excess pressure protection shall be provided at the source of test pressure. Valves shall be wide open, except those leading to the atmosphere. Test gas shall be dry nitrogen, with minus 70 degree F dewpoint and less than 5 ppm oil. Test pressure shall be applied in two stages before any refrigerant pipe is insulated or covered. First stage test shall be at 10 psi with every joint being tested with a thick soap or color indicating solution. Second stage tests shall raise the system to the minimum refrigerant leakage test pressure specified in ASHRAE 15 with a maximum test pressure 25 percent greater. Pressure above 100 psig shall be raised in 10 percent increments with a pressure acclimatizing period between increments. The initial test pressure shall be recorded along with the ambient temperature to which the system is exposed. Final test pressures of the second stage shall be maintained on the system for a minimum of 24 hours. At the end of the 24 hour period, the system pressure will be recorded along with the ambient temperature to which the system is exposed. A correction factor of 0.3 psi will be allowed for each degree F change between test space initial and final ambient temperature, plus for increase and minus for a decrease. If the corrected system pressure is not exactly equal to the initial system test pressure, then the system shall be investigated for leaking joints. To repair leaks, the joint shall be taken apart, thoroughly cleaned, and reconstructed as a new joint. Joints repaired by caulking, remelting, or back-welding/brazing shall not be acceptable. Following repair, the entire system shall be retested using the pneumatic tests described above. The entire system shall be reassembled once the pneumatic tests are satisfactorily completed.

3.3.3 Evacuation Test

Following satisfactory completion of the pneumatic tests, the pressure shall be relieved and the entire system shall be evacuated to an absolute pressure of 300 micrometers. During evacuation of the system, the ambient temperature shall be higher than 35 degrees F. No more than one system shall be evacuated at one time by one vacuum pump. Once the desired vacuum has been reached, the vacuum line shall be closed and the system shall stand for 1 hour. If the pressure rises over 500 micrometers after the 1 hour period, then the system shall be evacuated again down to 300 micrometers and let set for another 1 hour period. The system shall not be charged until a vacuum of at least 500 micrometers is maintained for a period of 1 hour without the assistance of a vacuum line. If during the testing the pressure continues to rise, check the system for leaks, repair as required, and repeat the evacuation procedure. During evacuation, pressures shall be recorded by a thermocouple-type, electronic-type, or a calibrated-micrometer type gauge.

3.3.4 System Charging and Startup Test

Following satisfactory completion of the evacuation tests, the system shall be charged with the required amount of refrigerant by raising pressure to normal operating pressure and in accordance with manufacturer's procedures. Following charging, the system shall operate with high-side and low-side pressures and corresponding refrigerant temperatures, at design or improved values. The entire system shall be tested for leaks. Fluorocarbon systems shall be tested with halide torch or electronic leak detectors.

3.3.5 Refrigerant Leakage

If a refrigerant leak is discovered after the system has been charged, the leaking portion of the system shall immediately be isolated from the remainder of the system and the refrigerant pumped into the system receiver or other suitable container. Under no circumstances shall the refrigerant be discharged into the atmosphere.

3.3.6 Contractor's Responsibility

The Contractor shall, at all times during the installation and testing of the refrigeration system, take steps to prevent the release of refrigerants into the atmosphere. The steps shall include, but not be limited to, procedures which will minimize the release of refrigerants to the atmosphere and the use of refrigerant recovery devices to remove refrigerant from the system and store the refrigerant for reuse or reclaim. At no time shall more than 3 ounces of refrigerant be released to the atmosphere in any one occurrence. Any system leaks within the first year shall be repaired in accordance with the requirements herein at no cost to the Government including material, labor, and refrigerant if the leak is the result of defective equipment, material, or installation.

3.4 DEMONSTRATIONS

Contractor shall conduct a training course for 5 members of the operating staff as designated by the Contracting Officer. The training period shall consist of a total 8 hours of normal working time and start after the system is functionally completed but prior to final acceptance tests. The field

posted instructions shall cover all of the items contained in the approved operation and maintenance manuals as well as demonstrations of routine maintenance operations.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 15 - MECHANICAL

SECTION 15400A

PLUMBING, GENERAL PURPOSE

04/04

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 STANDARD PRODUCTS
1.4 ELECTRICAL WORK
1.5 REGULATORY REQUIREMENTS
1.6 PROJECT/SITE CONDITIONS

PART 2 PRODUCTS

2.1 MATERIALS
2.1.1 Pipe Joint Materials
2.1.2 Miscellaneous Materials
2.1.3 Pipe Insulation Material
2.2 PIPE HANGERS, INSERTS, AND SUPPORTS
2.3 VALVES
2.3.1 Backwater Valves
2.3.2 Wall Faucets
2.3.3 Wall Hydrants
2.3.4 Yard Hydrants
2.3.5 Relief Valves
2.3.6 Thermostatic Mixing Valves
2.4 FIXTURES
2.4.1 Lavatories
2.5 BACKFLOW PREVENTERS
2.6 DRAINS
2.6.1 Floor and Shower Drains
2.7 TRAPS
2.8 WATER HEATERS
2.8.1 Automatic Storage Type
2.8.1.1 Electric Type
2.9 PUMPS
2.9.1 Circulating Pumps

PART 3 EXECUTION

3.1 GENERAL INSTALLATION REQUIREMENTS
3.1.1 Water Pipe, Fittings, and Connections
3.1.1.1 Utilities
3.1.1.2 Cutting and Repairing
3.1.1.3 Protection of Fixtures, Materials, and Equipment
3.1.1.4 Mains, Branches, and Runouts
3.1.1.5 Pipe Drains
3.1.1.6 Expansion and Contraction of Piping
3.1.1.7 Thrust Restraint

3.1.1.8 Commercial-Type Water Hammer Arresters
3.1.2 Joints
3.1.2.1 Threaded
3.1.2.2 Unions and Flanges
3.1.2.3 Cast Iron Soil, Waste and Vent Pipe
3.1.2.4 Copper Tube and Pipe
3.1.2.5 Plastic Pipe
3.1.2.6 Other Joint Methods
3.1.3 Dissimilar Pipe Materials
3.1.4 Corrosion Protection for Buried Pipe and Fittings
3.1.5 Pipe Sleeves and Flashing
3.1.5.1 Sleeve Requirements
3.1.5.2 Flashing Requirements
3.1.5.3 Waterproofing
3.1.5.4 Optional Counterflashing
3.1.5.5 Pipe Penetrations of Slab on Grade Floors
3.1.6 Fire Seal
3.1.7 Supports
3.1.7.1 General
3.1.7.2 Pipe Supports and Structural Bracing, Seismic Requirements
3.1.7.3 Pipe Hangers, Inserts, and Supports
3.1.7.4 Structural Attachments
3.1.8 Welded Installation
3.1.9 Pipe Cleanouts
3.2 WATER HEATERS
3.2.1 Relief Valves
3.2.2 Heat Traps
3.2.3 Connections to Water Heaters
3.2.4 Expansion Tank
3.3 FIXTURES AND FIXTURE TRIMMINGS
3.3.1 Fixture Connections
3.3.2 Flushometer Valves
3.3.3 Height of Fixture Rims Above Floor
3.3.4 Shower Bath Outfits
3.3.5 Fixture Supports
3.3.5.1 Support for Solid Masonry Construction
3.3.5.2 Support for Concrete-Masonry Wall Construction
3.3.5.3 Support for Steel Stud Frame Partitions
3.3.6 Backflow Prevention Devices
3.3.7 Access Panels
3.3.8 Traps
3.4 IDENTIFICATION SYSTEMS
3.4.1 Identification Tags
3.4.2 Pipe Color Code Marking
3.4.3 Color Coding Scheme for Locating Hidden Utility Components
3.5 ESCUTCHEONS
3.6 PAINTING
3.7 TESTS, FLUSHING AND DISINFECTION
3.7.1 Plumbing System
3.7.1.1 Test of Backflow Prevention Assemblies
3.7.2 Defective Work
3.7.3 System Flushing
3.7.3.1 During Flushing
3.7.3.2 After Flushing
3.7.4 Operational Test
3.7.5 Disinfection
3.8 PLUMBING FIXTURE SCHEDULE
3.9 POSTED INSTRUCTIONS
3.10 PERFORMANCE OF WATER HEATING EQUIPMENT

3.10.1 Storage Water Heaters
3.10.1.1 Electric
3.11 TABLES

-- End of Section Table of Contents --

SECTION 15400A

PLUMBING, GENERAL PURPOSE
04/04

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR-CONDITIONING AND REFRIGERATION INSTITUTE (ARI)

ARI 1010	(2002) Self-Contained, Mechanically Refrigerated Drinking-Water Coolers
ARI 700	(1999 with Appendix C) Specifications for Fluorocarbon Refrigerants

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI A117.1	(1998) Guidelines for Accessible and Usable Buildings and Facilities -- Providing Accessibility and Usability for Physically Handicapped People
ANSI Z124.1	(1995) Plastic Bathtub Units
ANSI Z124.3	(1995) Plastic Lavatories
ANSI Z124.5	(1997) Plastic Toilet (Water Closet) Seats
ANSI Z124.9	(1994) Plastic Urinal Fixtures
ANSI Z21.10.1	(2001; R 2002) Gas Water Heaters Vol. I, Storage Water Heaters with Input Ratings of 75,000 Btu Per Hour or Less
ANSI Z21.10.3	(2001) Gas Water Heaters Vol.III, Storage Water Heaters With Input Ratings Above 75,000 Btu Per Hour, Circulating and Instantaneous
ANSI Z21.22	(1999; A 2001) Relief Valves for Hot Water Supply Systems
ANSI Z21.56	(2001) Gas-Fired Pool Heaters
ANSI Z358.1	(1998) Emergency Eyewash and Shower Equipment

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 34	(2001; Errata 2002) Designation and Safety Classification of Refrigerants
ASHRAE 90.1	(2001; various Errata) Energy Standard for Buildings Except Low-Rise Residential Buildings

AMERICAN SOCIETY OF SANITARY ENGINEERING (ASSE)

ASSE 1001	(2002) Atmospheric Type Vacuum Breakers
ASSE 1002	(1999) Anti-siphon Fill Valves (Ballcocks) for Gravity Water Closet Flush Tanks
ASSE 1003	(2001) Water Pressure Reducing Valves
ASSE 1005	(1999) Water Heater Drain Valves
ASSE 1006	(1986) Residential Use Dishwashers
ASSE 1010	(1996) Water Hammer Arresters
ASSE 1011	(1993) Hose Connection Vacuum Breakers
ASSE 1012	(2002) Backflow Preventer with Intermediate Atmospheric Vent
ASSE 1013	(1999) Reduced Pressure Principle Backflow Preventers and Reduced Pressure Fire Protection Principle Backflow Preventers
ASSE 1018	(2001) Trap Seal Primer Valves - Potable, Water Supplied
ASSE 1020	(1998) Pressure Vacuum Breaker Assembly
ASSE 1037	(1990) Pressurized Flushing Devices (Flushometers) for Plumbing Fixtures

AMERICAN WATER WORKS ASSOCIATION(AWWA)

AWWA B300	(1999) Hypochlorites
AWWA B301	(1999) Liquid Chlorine
AWWA C203	(2002; A C203a-99) Coal-Tar Protective Coatings and Linings for Steel Water Pipelines - Enamel and Tape - Hot-Applied
AWWA C606	(1997) Grooved and Shouldered Joints
AWWA C651	(1999) Disinfecting Water Mains
AWWA C652	(2002) Disinfection of Water-Storage Facilities

AWWA C700	(2002) Cold-Water Meters - Displacement Type, Bronze Main Case
AWWA C701	(2002) Cold-Water Meters - Turbine Type, for Customer Service
AWWA D100	(1996) Welded Steel Tanks for Water Storage
AWWA EWW	(1998) Standard Methods for the Examination of Water and Wastewater

AMERICAN WELDING SOCIETY (AWS)

AWS A5.8	(1992) Filler Metals for Brazing and Braze Welding
AWS B2.2	(1991) Brazing Procedure and Performance Qualification

ASME INTERNATIONAL (ASME)

ASME A112.1.2	(1991; R 2002) Air Gaps in Plumbing Systems
ASME A112.14.1	(1975; R 1998)Backwater Valves
ASME A112.18.1	(2003) Plumbing Fixture Fittings
ASME A112.19.1M	(1994; R 1999) Enameled Cast Iron Plumbing Fixtures
ASME A112.19.2M	(1998) Vitreous China Plumbing Fixtures
ASME A112.19.3	(2001) Stainless Steel Fixtures (Designed for Residential Use)
ASME A112.19.4M	(1994; R 1999) Porcelain Enameled Formed Steel Plumbing Fixtures
ASME A112.21.2M	(1983) Roof Drains
ASME A112.36.2M	(1991; R 2002) Cleanouts
ASME A112.6.1M	(1997; R 2002) Floor Affixed Supports for Off-the-Floor Plumbing Fixtures for Public Use
ASME A112.6.3	(2001) Floor and French Drains
ASME B1.20.1	(1983; R 2001) Pipe Threads, General Purpose, Inch
ASME B16.12	(1998) Cast Iron Threaded Drainage Fittings
ASME B16.15	(1985; R 1994) Cast Bronze Threaded Fittings Classes 125 and 250

ASME B16.18	(2002) Cast Copper Alloy Solder Joint Pressure Fittings
ASME B16.21	(1992) Nonmetallic Flat Gaskets for Pipe Flanges
ASME B16.22	(2002) Wrought Copper and Copper Alloy Solder Joint Pressure Fittings
ASME B16.23	(2002) Cast Copper Alloy Solder Joint Drainage Fittings - DWV
ASME B16.24	(2002) Cast Copper Alloy Pipe Flanges and Flanged Fittings: Classes 150, 300, 400, 600, 900, 1500, and 2500
ASME B16.29	(2002) Wrought Copper and Wrought Copper Alloy Solder Joint Drainage Fittings - DWV
ASME B16.3	(1998) Malleable Iron Threaded Fittings
ASME B16.34	(1996) Valves Flanged, Threaded, and Welding End
ASME B16.39	(1998) Malleable Iron Threaded Pipe Unions
ASME B16.4	(1998) Gray Iron Threaded Fittings
ASME B16.5	(1996) Pipe Flanges and Flanged Fittings
ASME B31.1	(2001) Power Piping
ASME B31.5	(2001) Refrigeration Piping and Heat Transfer Components
ASME B40.100	(2000) Pressure Gauges and Gauge Attachments
ASME BPVC SEC IX	(2001) Boiler and Pressure Vessel Code; Section IX, Welding and Brazing Qualifications
ASME BPVC SEC VIII D1	(2001) Boiler and Pressure Vessel Code; Section VIII, Pressure Vessels Division 1 - Basic Coverage
ASME CSD-1	(2002) Control and Safety Devices for Automatically Fired Boilers

ASTM INTERNATIONAL (ASTM)

ASTM A 105/A 105M	(2002) Carbon Steel Forgings for Piping Applications
ASTM A 183	(2003) Carbon Steel Track Bolts and Nuts

ASTM A 193/A 193M	(2003) Alloy-Steel and Stainless Steel Bolting Materials for High-Temperature Service
ASTM A 47/A 47M	(1999) Ferritic Malleable Iron Castings
ASTM A 515/A 515M	(2003) Pressure Vessel Plates, Carbon Steel, for Intermediate- and Higher-Temperature Service
ASTM A 516/A 516M	(2003) Pressure Vessel Plates, Carbon Steel, for Moderate- and Lower-Temperature Service
ASTM A 518/A 518M	(1999) Corrosion-Resistant High-Silicon Iron Castings
ASTM A 53/A 53M	(2002) Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A 536	(1984; R 1999e1) Ductile Iron Castings
ASTM A 733	(2003) Welded and Seamless Carbon Steel and Austenitic Stainless Steel Pipe Nipples
ASTM A 74	(2003b) Cast Iron Soil Pipe and Fittings
ASTM A 888	(2003) Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste, and Vent Piping Applications
ASTM B 111	(1998e1) Copper and Copper-Alloy Seamless Condenser Tubes and Ferrule Stock
ASTM B 111M	(1998e1) Copper and Copper-Alloy Seamless Condenser Tubes and Ferrule Stock (Metric)
ASTM B 117	(2002) Operating Salt Spray (Fog) Apparatus
ASTM B 152/B 152M	(2000) Copper Sheet, Strip, Plate, and Rolled Bar
ASTM B 306	(2002) Copper Drainage Tube (DWV)
ASTM B 32	(2003) Solder Metal
ASTM B 370	(1998) Copper Sheet and Strip for Building Construction
ASTM B 42	(2002) Seamless Copper Pipe, Standard Sizes
ASTM B 43	(1998) Seamless Red Brass Pipe, Standard Sizes
ASTM B 584	(2000) Copper Alloy Sand Castings for General Applications
ASTM B 75	(2002) Seamless Copper Tube

ASTM B 75M	(1999) Seamless Copper Tube (Metric)
ASTM B 813	(2000e1) Liquid and Paste Fluxes for Soldering of Copper and Copper Alloy Tube
ASTM B 828	(2002) Making Capillary Joints by Soldering of Copper and Copper Alloy Tube and Fittings
ASTM B 88	(2002) Seamless Copper Water Tube
ASTM B 88M	(1999) Seamless Copper Water Tube (Metric)
ASTM C 1053	(2000) Borosilicate Glass Pipe and Fittings for Drain, Waste, and Vent (DWV) Applications
ASTM C 564	(2003) Rubber Gaskets for Cast Iron Soil Pipe and Fittings
ASTM C 920	(2002) Elastomeric Joint Sealants
ASTM D 1004	(2003) Initial Tear Resistance of Plastic Film and Sheeting
ASTM D 1248	(2002) Polyethylene Plastics Extrusion Materials for Wire and Cable
ASTM D 1785	(1999) Poly(Vinyl Chloride)(PVC) Plastic Pipe, Schedules 40, 80, and 120
ASTM D 2000	(2001) Rubber Products in Automotive Applications
ASTM D 2235	(2001) Solvent Cement for Acrylonitrile-Butadiene-Styrene (ABS) Plastic Pipe and Fittings
ASTM D 2239	(2003) Polyethylene (PE) Plastic Pipe (SIDR-PR) Based on Controlled Inside Diameter
ASTM D 2241	(2000) Poly(Vinyl Chloride) (PVC) Pressure-Rated Pipe (SDR Series)
ASTM D 2447	(2003) Polyethylene (PE) Plastic Pipe, Schedules 40 and 80, Based on Outside Diameter
ASTM D 2464	(1999) Threaded Poly(Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 80
ASTM D 2466	(2002) Poly(Vinyl Chloride)(PVC) Plastic Pipe Fittings, Schedule 40
ASTM D 2467	(2002) Poly(Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 80

ASTM D 2485	(1991; R 2000) Evaluating Coatings for High Temperature Service
ASTM D 2564	(2002) Solvent Cements for Poly(Vinyl Chloride) (PVC) Plastic Piping Systems
ASTM D 2657	(1997) Heat Fusion Joining Polyolefin Pipe and Fittings
ASTM D 2661	(2002) Acrylonitrile-Butadiene-Styrene (ABS) Schedule 40 Plastic Drain, Waste, and Vent Pipe and Fittings
ASTM D 2665	(2002ae1) Poly(Vinyl Chloride) (PVC) Plastic Drain, Waste, and Vent Pipe and Fittings
ASTM D 2672	(1996a) Joints for IPS PVC Pipe Using Solvent Cement
ASTM D 2683	(1998) Socket-Type Polyethylene Fittings for Outside Diameter-Controlled Polyethylene Pipe and Tubing
ASTM D 2737	(2003) Polyethylene (PE) Plastic Tubing
ASTM D 2822	(1991; R 1997e1) Asphalt Roof Cement
ASTM D 2846/D 2846M	(1999) Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Hot- and Cold-Water Distribution Systems
ASTM D 2855	(1996; R 2002) Making Solvent-Cemented Joints with Poly(Vinyl Chloride) (PVC) Pipe and Fittings
ASTM D 2996	(2001) Filament-Wound "Fiberglass" (Glass-Fiber-Reinforced Thermosetting-Resin) Pipe
ASTM D 3035	(2001) Polyethylene (PE) Plastic Pipe (DR-PR) Based on Controlled Outside Diameter
ASTM D 3122	(1995; R 2002) Solvent Cements for Styrene-Rubber (SR) Plastic Pipe and Fittings
ASTM D 3138	(2002) Solvent Cements for Transition Joints Between Acrylonitrile-Butadiene-Styrene (ABS) and Poly(Vinyl Chloride) (PVC) Non-Pressure Piping Components
ASTM D 3139	(1998) Joints for Plastic Pressure Pipes Using Flexible Elastomeric Seals
ASTM D 3212	(1996a; R 2003) Joints for Drain and Sewer Plastic Pipes Using Flexible Elastomeric Seals

ASTM D 3261	(2003) Butt Heat Fusion Polyethylene (PE) Plastic Fittings for Polyethylene (PE) Plastic Pipe and Tubing
ASTM D 3308	(2001) PTFE Resin Skived Tape
ASTM D 3311	(2002) Drain, Waste, and Vent (DWV) Plastic Fittings Patterns
ASTM D 4060	(2001) Abrasion Resistance of Organic Coatings by the Taber Abraser
ASTM D 4101	(2003) Polypropylene Injection and Extrusion Materials
ASTM D 4551	(1996; R 2001) Poly(Vinyl Chloride) (PVC) Plastic Flexible Concealed Water-Containment Membrane
ASTM D 638	(2002a) Tensile Properties of Plastics
ASTM E 1	(2003) ASTM Thermometers
ASTM E 96	(2000e1) Water Vapor Transmission of Materials
ASTM F 1290	(1998a) Electrofusion Joining Polyolefin Pipe and Fittings
ASTM F 1760	(2001) Coextruded Poly(Vinyl Chloride) (PVC) Non-Pressure Plastic Pipe Having Reprocessed-Recycled Content
ASTM F 409	(2002) Thermoplastic Accessible and Replaceable Plastic Tube and Tubular Fittings
ASTM F 437	(1999) Threaded Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 80
ASTM F 438	(2002e1) Socket-Type Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 40
ASTM F 439	(2002e1) Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 80
ASTM F 441/F 441M	(1999e1) Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe, Schedules 40 and 80
ASTM F 442/F 442M	(1999) Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe (SDR-PR)
ASTM F 477	(2002e1) Elastomeric Seals (Gaskets) for Joining Plastic Pipe

ASTM F 493	(1997) Solvent Cements for Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe and Fittings
ASTM F 628	(2001) Acrylonitrile-Butadiene-Styrene (ABS) Schedule 40 Plastic Drain, Waste, and Vent Pipe with a Cellular Core
ASTM F 877	(2002a) Crosslinked Polyethylene (PEX) Plastic Hot- and Cold- Water Distribution Systems
ASTM F 891	(2000e1) Coextruded Poly (Vinyl Chloride) (PVC) Plastic Pipe with a Cellular Core

CAST IRON SOIL PIPE INSTITUTE (CISPI)

CISPI 301	(2000) Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste, and Vent Piping Applications
CISPI 310	(1997) Coupling for Use in Connection with Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste, and Vent Piping Applications

COPPER DEVELOPMENT ASSOCIATION (CDA)

CDA A4015	(1994; R 1995) Copper Tube Handbook

FOUNDATION FOR CROSS-CONNECTION CONTROL AND HYDRAULIC RESEARCH (FCCCHR)

FCCCHR Manual	(9th Edition) Manual of Cross-Connection Control

INTERNATIONAL CODE COUNCIL (ICC)

ICC A117.1	(1998) Accessible and Usable Buildings and Facilities
ICC IPC	(2003)International Plumbing Code

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY (MSS)

MSS SP-110	(1996) Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends
MSS SP-25	(1998) Standard Marking System for Valves, Fittings, Flanges and Unions
MSS SP-44	(1996; R 2001) Steel Pipeline Flanges
MSS SP-58	(2002) Pipe Hangers and Supports - Materials, Design and Manufacture

MSS SP-67	(2002) Butterfly Valves
MSS SP-69	(2002) Pipe Hangers and Supports - Selection and Application
MSS SP-70	(1998) Cast Iron Gate Valves, Flanged and Threaded Ends
MSS SP-71	(1997) Gray Iron Swing Check Valves, Flanged and Threaded Ends
MSS SP-72	(1999) Ball Valves with Flanged or Butt-Welding Ends for General Service
MSS SP-73	(2003) Brazing Joints for Copper and Copper Alloy Pressure Fittings
MSS SP-78	(1998) Cast Iron Plug Valves, Flanged and Threaded Ends
MSS SP-80	(2003) Bronze Gate, Globe, Angle and Check Valves
MSS SP-83	(2001) Class 3000 Steel Pipe Unions, Socket-Welding and Threaded
MSS SP-85	(2002) Cast Iron Globe & Angle Valves, Flanged and Threaded Ends

NACE INTERNATIONAL (NACE)

NACE RP0169	(2002) Control of External Corrosion on Underground or Submerged Metallic Piping Systems

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA 250	(2003) Enclosures for Electrical Equipment (1000 Volts Maximum)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 31	(2001) Installation of Oil Burning Equipment
NFPA 54	(2002) National Fuel Gas Code
NFPA 90A	(2002) Installation of Air Conditioning and Ventilating Systems

NSF INTERNATIONAL (NSF)

NSF 14	(2003) Plastics Piping System Components and Related Materials
NSF 3	(2003) Commercial Warewashing Equipment

NSF 5	(2000e) Water Heaters, Hot Water Supply Boilers, and Heat Recovery Equipment
NSF 61	(2003e) Drinking Water System Components - Health Effects

PLASTIC PIPE AND FITTINGS ASSOCIATION (PPFA)

PPFA-01	(1998) Plastic Pipe in Fire Resistive Construction

PLUMBING AND DRAINAGE INSTITUTE (PDI)

PDI G 101	(1996) Testing and Rating Procedure for Grease Interceptors with Appendix of Sizing and Installation Data
PDI WH 201	(1992) Water Hammer Arresters

SOCIETY OF AUTOMOTIVE ENGINEERS INTERNATIONAL (SAE)

SAE J1508	(1997) Hose Clamp Specifications

THE SOCIETY FOR PROTECTIVE COATINGS (SSPC)

SSPC SP 5	(2000) White Metal Blast Cleaning

U.S. GENERAL SERVICES ADMINISTRATION (GSA)

CID A-A-50012	(Basic) Garbage Disposal Machine, Commercial

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

10 CFR 430	Energy Conservation Program for Consumer Products
21 CFR 175	Indirect Food Additives: Adhesives and Components of Coatings
40 CFR 50.12	National Primary and Secondary Ambient Air Quality Standards for Lead
PL 93-523	(1974; A 1999) Safe Drinking Water Act

UNDERWRITERS LABORATORIES (UL)

UL 174	(1996; Rev thru Oct 1999) Household Electric Storage Tank Water Heaters
UL 430	(1994; Rev thru Mar 2001) Waste Disposers
UL 732	(1995; Rev thru Jan 1999) Oil-Fired Storage Tank Water Heaters
UL 749	(1997; Rev thru Mar 2003) Household Dishwashers

UL 921 (1996; Rev thru Mar 2000) Commercial Electric Dishwashers

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for Contractor Quality Control approval. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Plumbing System

Detail drawings consisting of illustrations, schedules, performance charts, instructions, brochures, diagrams, and other information to illustrate the requirements and operations of each system. Detail drawings for the complete plumbing system including piping layouts and locations of connections; dimensions for roughing-in, foundation, and support points; schematic diagrams and wiring diagrams or connection and interconnection diagrams. Detail drawings shall indicate clearances required for maintenance and operation. Where piping and equipment are to be supported other than as indicated, details shall include loadings and proposed support methods. Mechanical drawing plans, elevations, views, and details, shall be drawn to scale. Provide the manufacturer's written installation instructions and recommendations for all fixtures and equipment to be installed.

Electrical Work

Complete electrical schematic lineless or full line interconnection and connection diagram for each piece of mechanical equipment having more than one automatic or manual electrical control device.

SD-03 Product Data

Welding

A copy of qualified procedures and a list of names and identification symbols of qualified welders and welding operators.

Plumbing Fixture Schedule

Catalog cuts of specified plumbing fixtures, valves, and related piping system and system location where installed.

Plumbing System

Diagrams, instructions, and other sheets proposed for posting. Manufacturer's recommendations for the installation of bell and spigot and hubless joints for cast iron soil pipe.

SD-06 Test Reports

Tests, Flushing and Disinfection

Test reports in booklet form showing all field tests performed to adjust each component and all field tests performed to prove compliance with the specified performance criteria, completion and testing of the installed system. Each test report shall indicate the final position of controls.

Test of Backflow Prevention Assemblies.

Certification of proper operation shall be as accomplished in accordance with state regulations by an individual certified by the state to perform such tests. If no state requirement exists, the Contractor shall have the manufacturer's representative test the device, to ensure the unit is properly installed and performing as intended. The Contractor shall provide written documentation of the tests performed and signed by the individual performing the tests.

SD-07 Certificates

Materials and Equipment

Where materials or equipment are specified to comply with requirements of AGA, ASME, or NSF proof of such compliance shall be included. The label or listing of the specified agency will be acceptable evidence. In lieu of the label or listing, a written certificate may be submitted from an approved, nationally recognized testing organization equipped to perform such services, stating that the items have been tested and conform to the requirements and testing methods of the specified agency. Where equipment is specified to conform to requirements of the ASME Boiler and Pressure Vessel Code, the design, fabrication, and installation shall conform to the code.

Bolts

Written certification by the bolt manufacturer that the bolts furnished comply with the specified requirements. The certification shall include illustrations of product-required markings, the date of manufacture, and the number of each type of bolt to be furnished based on this certification.

SD-10 Operation and Maintenance Data

Plumbing System.

Six copies of the operation manual outlining the step-by-step procedures required for system startup, operation and shutdown. The manual shall include the manufacturer's name, model number, service manual, parts list, and brief description of all equipment and their basic operating features. Six copies of the maintenance manual listing routine maintenance procedures, possible breakdowns and repairs. The manual shall include piping and equipment layout and simplified wiring and control diagrams of the system as installed.

1.3 STANDARD PRODUCTS

Specified materials and equipment shall be standard products of a manufacturer regularly engaged in the manufacture of such products. Specified equipment shall essentially duplicate equipment that has performed satisfactorily at least two years prior to bid opening.

1.4 ELECTRICAL WORK

Motors, motor controllers and motor efficiencies shall conform to the requirements of Section 16402 INTERIOR DISTRIBUTION SYSTEM. Electrical motor-driven equipment specified herein shall be provided complete with motors. Equipment shall be rated at 60 Hz, single phase, ac unless otherwise indicated. Where a motor controller is not provided in a motor-control center on the electrical drawings, a motor controller shall be as indicated. Motor controllers shall be provided complete with properly sized thermal-overload protection in each ungrounded conductor, auxiliary contact, and other equipment, at the specified capacity, and including an allowable service factor.

1.5 REGULATORY REQUIREMENTS

Unless otherwise required herein, plumbing work shall be in accordance with ICC IPC.

1.6 PROJECT/SITE CONDITIONS

The Contractor shall become familiar with details of the work, verify dimensions in the field, and advise the Contracting Officer of any discrepancy before performing any work.

PART 2 PRODUCTS

2.1 MATERIALS

Materials for various services shall be in accordance with TABLES I and II. Pipe schedules shall be selected based on service requirements. Pipe fittings shall be compatible with the applicable pipe materials. Plastic pipe, fittings, and solvent cement shall meet NSF 14 and shall be NSF listed for the service intended. Plastic pipe, fittings, and solvent cement used for potable hot and cold water service shall bear the NSF seal "NSF-PW." Pipe threads (except dry seal) shall conform to ASME B1.20.1. Material or equipment containing lead shall not be used in any potable water system. In line devices such as building valves, check valves, valves, fittings and back flow preventers shall comply with PL 93-523 and NSF 61, Section 8. End point devices such as drinking water fountains, lavatory faucets, kitchen and bar faucets, residential ice makers, supply stops and end point control valves used to dispense water for drinking must meet the requirements of NSF 61, Section 9. Hubless cast-iron soil pipe shall not be installed underground, under concrete floor slabs, or in crawl spaces below kitchen floors. Plastic pipe shall not be installed in air plenums.

2.1.1 Pipe Joint Materials

Hubless cast-iron soil pipe shall not be used under ground. Joints and gasket materials shall conform to the following:

a. Coupling for Cast-Iron Pipe: for hub and spigot type ASTM A 74, AWWA C606. For hubless type: CISPI 310

b. Coupling for Steel Pipe: AWWA C606.

c. Flange Gaskets: Gaskets shall be made of non-asbestos material in accordance with ASME B16.21. Gaskets shall be flat, 1/16 inch thick, and contain Aramid fibers bonded with Styrene Butadiene Rubber (SBR) or Nitro Butadiene Rubber (NBR). Gaskets shall be the full face or self centering flat ring type. Gaskets used for hydrocarbon service shall be bonded with NBR.

d. Brazing Material: Brazing material shall conform to AWS A5.8, BCuP-5.

e. Brazing Flux: Flux shall be in paste or liquid form appropriate for use with brazing material. Flux shall be as follows: lead-free; have a 100 percent flushable residue; contain slightly acidic reagents; contain potassium borides; and contain fluorides.

f. Solder Material: Solder metal shall conform to ASTM B 32.

g. Solder Flux: Flux shall be liquid form, non-corrosive, and conform to ASTM B 813, Standard Test 1.

h. PTFE Tape: PTFE Tape, for use with Threaded Metal or Plastic Pipe, ASTM D 3308.

i. Rubber Gaskets for Cast-Iron Soil-Pipe and Fittings (hub and spigot type and hubless type): ASTM C 564.

j. Flexible Elastomeric Seals: ASTM D 3139, ASTM D 3212 or ASTM F 477.

k. Plastic Solvent Cement for PVC Plastic Pipe: ASTM D 2564 and ASTM D 2855.

l. Plastic Solvent Cement for CPVC Plastic Pipe: ASTM F 493.

m. Flanged fittings including flanges, bolts, nuts, bolt patterns, etc., shall be in accordance with ASME B16.5 class 150 and shall have the manufacturer's trademark affixed in accordance with MSS SP-25. Flange material shall conform to ASTM A 105/A 105M. Blind flange material shall conform to ASTM A 516/A 516M cold service and ASTM A 515/A 515M for hot service. Bolts shall be high strength or intermediate strength with material conforming to ASTM A 193/A 193M.

2.1.2 Miscellaneous Materials

Miscellaneous materials shall conform to the following:

a. Water Hammer Arrester: PDI WH 201.

b. Copper, Sheet and Strip for Building Construction: ASTM B 370.

c. Asphalt Roof Cement: ASTM D 2822.

d. Hose Clamps: SAE J1508.

e. Supports for Off-The-Floor Plumbing Fixtures: ASME A112.6.1M.

f. Metallic Cleanouts: ASME A112.36.2M.

g. Plumbing Fixture Setting Compound: A preformed flexible ring seal molded from hydrocarbon wax material. The seal material shall be nonvolatile nonasphaltic and contain germicide and provide watertight, gastight, odorproof and verminproof properties.

h. Coal-Tar Protective Coatings and Linings for Steel Water Pipelines:

AWWA C203.

i. Hypochlorites: AWWA B300.

j. Liquid Chlorine: AWWA B301.

k. Gauges - Pressure and Vacuum Indicating Dial Type - Elastic Element: ASME B40.100.

l. Thermometers: ASTM E 1. Mercury shall not be used in thermometers.

2.1.3 Pipe Insulation Material

Insulation shall be as specified in Section 15080A THERMAL INSULATION FOR MECHANICAL SYSTEMS.

2.2 PIPE HANGERS, INSERTS, AND SUPPORTS

Pipe hangers, inserts, and supports shall conform to MSS SP-58 and MSS SP-69.

2.3 VALVES

Valves shall be provided on supplies to equipment and fixtures. Valves shall be bronze with threaded bodies for pipe and solder-type connections for tubing. Pressure ratings shall be based upon the application. Valves shall conform to the following standards:

Description	Standard
Butterfly Valves	MSS SP-67
Ball Valves with Flanged Butt-Welding Ends for General Service	MSS SP-72
Ball Valves Threaded, Socket-Welding, Solder Joint, and Flared Ends	MSS SP-110

Bronze Gate, Globe, Angle, and Check Valves	MSS SP-80
Backwater Valves	ASME A112.14.1
Vacuum Relief Valves	ANSI Z21.22
Water Pressure Reducing Valves	ASSE 1003
Water Heater Drain Valves	ASSE 1005
Trap Seal Primer Valves	ASSE 1018
Temperature and Pressure Relief Valves for Hot Water Supply Systems	ANSI Z21.22

2.3.1 Backwater Valves

Backwater valves shall be either separate from the floor drain or a combination floor drain, P-trap, and backwater valve, as shown. Valves shall have cast-iron bodies with cleanouts large enough to permit removal of interior parts. Valves shall be of the flap type, hinged or pivoted, with revolving disks. Hinge pivots, disks, and seats shall be nonferrous metal. Disks shall be slightly open in a no-flow no-backwater condition. Cleanouts shall extend to finished floor and be fitted with threaded countersunk plugs.

2.3.2 Wall Faucets

Wall faucets with vacuum-breaker backflow preventer shall be brass with 3/4 inch male inlet threads, hexagon shoulder, and 3/4 inch hose connection. Faucet handle shall be securely attached to stem.

2.3.3 Wall Hydrants

Wall hydrants with vacuum-breaker backflow preventer shall have a nickel-brass or nickel-bronze wall plate or flange with nozzle and detachable key handle. A brass or bronze operating rod shall be provided within a galvanized iron casing of sufficient length to extend through the wall so that the valve is inside the building, and the portion of the hydrant between the outlet and valve is self-draining. A brass or bronze valve with coupling and union elbow having metal-to-metal seat shall be provided. Valve rod and seat washer shall be removable through the face of the hydrant. The hydrant shall have 3/4 inch exposed hose thread on spout and 3/4 inch male pipe thread on inlet.

2.3.4 Yard Hydrants

Yard box or post hydrants shall have valve housings located below frost lines. Water from the casing shall be drained after valve is shut off. Hydrant shall be bronze with cast-iron box or casing guard. "T" handle key shall be provided.

2.3.5 Relief Valves

Water heaters shall have a combination pressure and temperature (P&T) relief valve. The pressure relief element of a P&T relief valve shall have adequate capacity to prevent excessive pressure buildup in the system when the system is operating at the maximum rate of heat input. The temperature element of a P&T relief valve shall have a relieving capacity which is at least equal to the total input of the heaters when operating at their maximum capacity. Relief valves shall be rated according to ANSI Z21.22. Relief valves shall have 3/4 inch minimum inlets, and 3/4 inch outlets. The discharge pipe from the relief valve shall be the size of the valve outlet.

2.3.6 Thermostatic Mixing Valves

Mixing valves, thermostatic type, pressure-balanced or combination thermostatic and pressure-balanced shall be line size and shall be constructed with rough or finish bodies either with or without plating. Each valve shall be constructed to control the mixing of hot and cold water and to deliver water at a desired temperature regardless of pressure or input temperature changes. The control element shall be of an approved type. The body shall be of heavy cast bronze, and interior parts shall be brass, bronze, corrosion-resisting steel or copper. The valve shall be equipped with necessary stops, check valves, unions, and sediment strainers on the inlets. Mixing valves shall maintain water temperature within 5 degrees F of any setting.

2.4 FIXTURES

Fixtures shall be water conservation type, in accordance with ICC IPC. Fixtures for use by the physically handicapped shall be in accordance with ICC A117.1. Vitreous china, nonabsorbent, hard-burned, and vitrified throughout the body shall be provided. Porcelain enameled ware shall have specially selected, clear white, acid-resisting enamel coating evenly applied on surfaces. No fixture will be accepted that shows cracks, crazes, blisters, thin spots, or other flaws. Fixtures shall be equipped with appurtenances such as traps, faucets, stop valves, and drain fittings. Each fixture and piece of equipment requiring connections to the drainage system shall be equipped with a trap. Brass expansion or toggle bolts capped with acorn nuts shall be provided for supports, and polished chromium-plated pipe, valves, and fittings shall be provided where exposed to view. Fixtures with the supply discharge below the rim shall be equipped with backflow preventers. Internal parts of flush and/or flushometer valves, shower mixing valves, shower head face plates, pop-up stoppers of lavatory waste drains, and pop-up stoppers and overflow tees and shoes of bathtub waste drains may contain acetal resin, fluorocarbon, nylon, acrylonitrile-butadiene-styrene (ABS) or other plastic material, if the material has provided satisfactory service under actual commercial or industrial operating conditions for not less than 2 years. Plastic in contact with hot water shall be suitable for 180 degrees F water temperature. Plumbing fixtures shall be as indicated in paragraph PLUMBING FIXTURE SCHEDULE.

2.4.1 Lavatories

Vitreous china lavatories shall be provided with two integral molded lugs on the back-underside of the fixture and drilled for bolting to the wall in a manner similar to the hanger plate.

2.5 BACKFLOW PREVENTERS

Backflow preventers shall be approved and listed by the Foundation For Cross-Connection Control & Hydraulic Research. Reduced pressure principle assemblies, double check valve assemblies, atmospheric (nonpressure) type vacuum breakers, and pressure type vacuum breakers shall be tested, approved, and listed in accordance with FCCCHR Manual. Backflow preventers with intermediate atmospheric vent shall conform to ASSE 1012. Reduced pressure principle backflow preventers shall conform to ASSE 1013. Hose connection vacuum breakers shall conform to ASSE 1011. Pipe applied atmospheric type vacuum breakers shall conform to ASSE 1001. Pressure vacuum breaker assembly shall conform to ASSE 1020. Air gaps in plumbing systems shall conform to ASME A112.1.2.

2.6 DRAINS

2.6.1 Floor and Shower Drains

Floor and shower drains shall consist of a galvanized body, integral seepage pan, and adjustable perforated or slotted chromium-plated bronze, nickel-bronze, or nickel-brass strainer, consisting of grate and threaded collar. Floor drains shall be cast iron. Drains shall be of double drainage pattern for embedding in the floor construction. The seepage pan shall have weep holes or channels for drainage to the drainpipe. The strainer shall be adjustable to floor thickness. A clamping device for attaching flashing or waterproofing membrane to the seepage pan without damaging the flashing or waterproofing membrane shall be provided when required. Drains shall be provided with threaded connection. Between the drain outlet and waste pipe, a neoprene rubber gasket conforming to ASTM C 564 may be installed, provided that the drain is specifically designed for the rubber gasket compression type joint. Floor and shower drains shall conform to ASME A112.6.3.

2.7 TRAPS

Unless otherwise specified, traps shall be plastic per ASTM F 409 or copper-alloy adjustable tube type with slip joint inlet and swivel. Traps shall be without a cleanout. Tubes shall be copper alloy with walls not less than 0.032 inch thick within commercial tolerances, except on the outside of bends where the thickness may be reduced slightly in manufacture by usual commercial methods. Inlets shall have rubber washer and copper alloy nuts for slip joints above the discharge level. Swivel joints shall be below the discharge level and shall be of metal-to-metal or metal-to-plastic type as required for the application. Nuts shall have flats for wrench grip. Outlets shall have internal pipe thread, except that when required for the application, the outlets shall have sockets for solder-joint connections. The depth of the water seal shall be not less than 2 inches. The interior diameter shall be not more than 1/8 inch over or under the nominal size, and interior surfaces shall be reasonably smooth throughout. A copper alloy "P" trap assembly consisting of an adjustable "P" trap and threaded trap wall nipple with cast brass wall flange shall be provided for lavatories. The assembly shall be a standard manufactured unit and may have a rubber-gasketed swivel joint.

2.8 WATER HEATERS

Water heater types and capacities shall be as indicated. Each water heater shall have replaceable anodes. Each primary water heater shall have

controls with an adjustable range that includes 90 to 160 degrees F. Hot water systems utilizing recirculation systems shall be tied into building off-hour controls. The thermal efficiencies and standby heat losses shall conform to TABLE III for each type of water heater specified. Plastic materials polyetherimide (PEI) and polyethersulfone (PES) are forbidden to be used for vent piping of combustion gases. A factory pre-charged expansion tank shall be installed on the cold water supply to each water heater. Expansion tanks shall be specifically designed for use on potable water systems and shall be rated for 200 degrees F water temperature and 150 psi working pressure. The expansion tank size and acceptance volume shall be as indicated.

2.8.1 Automatic Storage Type

Heaters shall be complete with control system and shall have ASME rated combination pressure and temperature relief valve.

2.8.1.1 Electric Type

Electric type water heaters shall conform to UL 174 with dual heating elements. Each element shall be 4.5 KW. The elements shall be wired so that only one element can operate at a time.

2.9 PUMPS

2.9.1 Circulating Pumps

Domestic hot water circulating pumps shall be electrically driven, single-stage, centrifugal, with mechanical seals, suitable for the intended service. Pump capacities, efficiencies, motor sizes, speeds, and impeller types shall be as shown. Pump and motor shall be supported by the piping on which it is installed. The shaft shall be one-piece, heat-treated, corrosion-resisting steel with impeller and smooth-surfaced housing of bronze. Motor shall be totally enclosed, fan-cooled and shall have sufficient horsepower for the service required. Each pump motor shall be equipped with an across-the-line magnetic controller in a NEMA 250, Type 1 enclosure with "START-STOP" switch in cover. Pump motors smaller than Fractional horsepower pump motors shall have integral thermal overload protection in accordance with Section 16402 INTERIOR DISTRIBUTION SYSTEM. Guards shall shield exposed moving parts.

PART 3 EXECUTION

3.1 GENERAL INSTALLATION REQUIREMENTS

Piping located in air plenums shall conform to NFPA 90A requirements. Plastic pipe shall not be installed in air plenums. Piping located in shafts that constitute air ducts or that enclose air ducts shall be noncombustible in accordance with NFPA 90A. Installation of plastic pipe where in compliance with NFPA may be installed in accordance with PPFA-01. The plumbing system shall be installed complete with necessary fixtures, fittings, traps, valves, and accessories. Water and drainage piping shall be extended 5 feet outside the building, unless otherwise indicated. A gate valve and drain shall be installed on the water service line inside the building approximately 6 inches above the floor from point of entry. Piping shall be connected to the exterior service lines or capped or plugged if the exterior service is not in place. Sewer and water pipes shall be laid in

separate trenches, except when otherwise shown. Exterior underground utilities shall be at least 12 inches below the or as indicated on the drawings. If trenches are closed or the pipes are otherwise covered before being connected to the service lines, the location of the end of each plumbing utility shall be marked with a stake or other acceptable means. Valves shall be installed with control no lower than the valve body.

3.1.1 Water Pipe, Fittings, and Connections

3.1.1.1 Utilities

The piping shall be extended to fixtures, outlets, and equipment. The hot-water and cold-water piping system shall be arranged and installed to permit draining. The supply line to each item of equipment or fixture, except faucets, flush valves, or other control valves which are supplied with integral stops, shall be equipped with a shutoff valve to enable isolation of the item for repair and maintenance without interfering with operation of other equipment or fixtures. Supply piping to fixtures, faucets, hydrants, shower heads, and flushing devices shall be anchored to prevent movement.

3.1.1.2 Cutting and Repairing

The work shall be carefully laid out in advance, and unnecessary cutting of construction shall be avoided. Damage to building, piping, wiring, or equipment as a result of cutting shall be repaired by mechanics skilled in the trade involved.

3.1.1.3 Protection of Fixtures, Materials, and Equipment

Pipe openings shall be closed with caps or plugs during installation. Fixtures and equipment shall be tightly covered and protected against dirt, water, chemicals, and mechanical injury. Upon completion of the work, the fixtures, materials, and equipment shall be thoroughly cleaned, adjusted, and operated. Safety guards shall be provided for exposed rotating equipment.

3.1.1.4 Mains, Branches, and Runouts

Piping shall be installed as indicated. Pipe shall be accurately cut and worked into place without springing or forcing. Structural portions of the building shall not be weakened. Aboveground piping shall run parallel with the lines of the building, unless otherwise indicated. Branch pipes from service lines may be taken from top, bottom, or side of main, using crossover fittings required by structural or installation conditions. Supply pipes, valves, and fittings shall be kept a sufficient distance from other work and other services to permit not less than 1/2 inch between finished covering on the different services. Bare and insulated water lines shall not bear directly against building structural elements so as to transmit sound to the structure or to prevent flexible movement of the lines. Water pipe shall not be buried in or under floors unless specifically indicated or approved. Changes in pipe sizes shall be made with reducing fittings. Use of bushings will not be permitted except for use in situations in which standard factory fabricated components are furnished to accommodate specific accepted installation practice. Change in direction shall be made with fittings, except that bending of pipe 4 inches and smaller will be permitted, provided a pipe bender is used and wide sweep bends are formed. The center-line radius of bends shall be not less than

six diameters of the pipe. Bent pipe showing kinks, wrinkles, flattening, or other malformations will not be acceptable.

3.1.1.5 Pipe Drains

Pipe drains indicated shall consist of 3/4 inch hose bibb with renewable seat and gate valve ahead of hose bibb. At other low points, 3/4 inch brass plugs or caps shall be provided. Disconnection of the supply piping at the fixture is an acceptable drain.

3.1.1.6 Expansion and Contraction of Piping

Allowance shall be made throughout for expansion and contraction of water pipe. Each hot-water and hot-water circulation riser shall have provisions such as offsets, changes in direction, etc., where indicated and/or required. Risers shall be securely anchored as required or where indicated to force expansion to loops. Branch connections from risers shall be made with ample swing or offset to avoid undue strain on fittings or short pipe lengths. Horizontal runs of pipe over 50 feet in length shall be anchored to the wall or the supporting construction about midway on the run to force expansion, evenly divided, toward the ends. Sufficient flexibility shall be provided on branch runouts from mains and risers to provide for expansion and contraction of piping. Flexibility shall be provided by installing one or more turns in the line so that piping will spring enough to allow for expansion without straining.

3.1.1.7 Thrust Restraint

Plugs, caps, tees, valves and bends deflecting 11.25 degrees or more, either vertically or horizontally, in waterlines 4 inches in diameter or larger shall be provided with thrust blocks, where indicated, to prevent movement. Thrust blocking shall be concrete of a mix not leaner than: 1 cement, 2-1/2 sand, 5 gravel; and having a compressive strength of not less than 2000 psi after 28 days. Blocking shall be placed between solid ground and the fitting to be anchored. Unless otherwise indicated or directed, the base and thrust bearing sides of the thrust block shall be poured against undisturbed earth. The side of the thrust block not subject to thrust shall be poured against forms. The area of bearing will be as shown. Blocking shall be placed so that the joints of the fitting are accessible for repair. Steel rods and clamps, protected by galvanizing or by coating with bituminous paint, shall be used to anchor vertical down bends into gravity thrust blocks.

3.1.1.8 Commercial-Type Water Hammer Arresters

Commercial-type water hammer arresters shall be provided on hot- and cold-water supplies and shall be located as generally indicated, with precise location and sizing to be in accordance with PDI WH 201. Water hammer arresters, where concealed, shall be accessible by means of access doors or removable panels. Commercial-type water hammer arresters shall conform to ASSE 1010. Vertical capped pipe columns will not be permitted.

3.1.2 Joints

Installation of pipe and fittings shall be made in accordance with the manufacturer's recommendations. Mitering of joints for elbows and notching of straight runs of pipe for tees will not be permitted. Joints shall be

made up with fittings of compatible material and made for the specific purpose intended.

3.1.2.1 Threaded

Threaded joints shall have American Standard taper pipe threads conforming to ASME B1.20.1. Only male pipe threads shall be coated with graphite or with an approved graphite compound, or with an inert filler and oil, or shall have a polytetrafluoroethylene tape applied.

3.1.2.2 Unions and Flanges

Unions, flanges and mechanical couplings shall not be concealed in walls, ceilings, or partitions. Unions shall be used on pipe sizes 2-1/2 inches and smaller; flanges shall be used on pipe sizes 3 inches and larger.

3.1.2.3 Cast Iron Soil, Waste and Vent Pipe

Bell and spigot compression and hubless gasketed clamp joints for soil, waste and vent piping shall be installed per the manufacturer's recommendations.

3.1.2.4 Copper Tube and Pipe

a. Brazed. Brazed joints shall be made in conformance with AWS B2.2, MSS SP-73, and CDA A4015 with flux and are acceptable for all pipe sizes. Copper to copper joints shall include the use of copper-phosphorus or copper-phosphorus-silver brazing metal without flux. Brazing of dissimilar metals (copper to bronze or brass) shall include the use of flux with either a copper-phosphorus, copper-phosphorus-silver or a silver brazing filler metal.

b. Soldered. Soldered joints shall be made with flux and are only acceptable for piping 2 inches and smaller. Soldered joints shall conform to ASME B31.5 and CDA A4015. Soldered joints shall not be used in compressed air piping between the air comppressor and the receiver.

c. Copper Tube Extracted Joint. Mechanically extracted joints shall be made in accordance with ICC IPC.

3.1.2.5 Plastic Pipe

PVC and CPVC pipe shall have joints made with solvent cement elastomeric, threading, (threading of Schedule 80 Pipe is allowed only where required for disconnection and inspection; threading of Schedule 40 Pipe is not allowed), or mated flanged.

3.1.2.6 Other Joint Methods

3.1.3 Dissimilar Pipe Materials

Connections between ferrous and non-ferrous copper water pipe shall be made with dielectric unions or flange waterways. Dielectric waterways shall have temperature and pressure rating equal to or greater than that specified for the connecting piping. Waterways shall have metal connections on both ends suited to match connecting piping. Dielectric waterways shall be internally

lined with an insulator specifically designed to prevent current flow between dissimilar metals. Dielectric flanges shall meet the performance requirements described herein for dielectric waterways. Connecting joints between plastic and metallic pipe shall be made with transition fitting for the specific purpose.

3.1.4 Corrosion Protection for Buried Pipe and Fittings

Ductile iron, cast iron, and steel pipe, fittings, and joints shall have a protective coating.

3.1.5 Pipe Sleeves and Flashing

Pipe sleeves shall be furnished and set in their proper and permanent location.

3.1.5.1 Sleeve Requirements

Pipes passing through concrete or masonry walls or concrete floors or roofs shall be provided with pipe sleeves fitted into place at the time of construction. Sleeves are not required for supply, drainage, waste and vent pipe passing through concrete slab on grade, except where penetrating a membrane waterproof floor. A modular mechanical type sealing assembly may be installed in lieu of a waterproofing clamping flange and caulking and sealing of annular space between pipe and sleeve. The seals shall consist of interlocking synthetic rubber links shaped to continuously fill the annular space between the pipe and sleeve using galvanized steel bolts, nuts, and pressure plates. The links shall be loosely assembled with bolts to form a continuous rubber belt around the pipe with a pressure plate under each bolt head and each nut. After the seal assembly is properly positioned in the sleeve, tightening of the bolt shall cause the rubber sealing elements to expand and provide a watertight seal between the pipe and the sleeve. Each seal assembly shall be sized as recommended by the manufacturer to fit the pipe and sleeve involved. Sleeves shall not be installed in structural members, except where indicated or approved. Rectangular and square openings shall be as detailed. Each sleeve shall extend through its respective floor, or roof, and shall be cut flush with each surface, except for special circumstances. Pipe sleeves passing through floors in wet areas such as mechanical equipment rooms, lavatories, kitchens, and other plumbing fixture areas shall extend a minimum of 4 inches above the finished floor. Unless otherwise indicated, sleeves shall be of a size to provide a minimum of 1/4 inch clearance between bare pipe or insulation and inside of sleeve or between insulation and inside of sleeve. Sleeves in bearing walls and concrete slab on grade floors shall be steel pipe or cast-iron pipe. Sleeves in nonbearing walls or ceilings may be steel pipe, cast-iron pipe, galvanized sheet metal with lock-type longitudinal seam, or plastic. Except as otherwise specified, the annular space between pipe and sleeve, or between jacket over insulation and sleeve, shall be sealed as indicated with sealants conforming to ASTM C 920 and with a primer, backstop material and surface preparation as specified in Section 07920 JOINT SEALANTS. The annular space between pipe and sleeve, between bare insulation and sleeve or between jacket over insulation and sleeve shall not be sealed for interior walls which are not designated as fire rated. Sleeves through below-grade walls in contact with earth shall be recessed 1/2 inch from wall surfaces on both sides. Annular space between pipe and sleeve shall be filled with backing material and sealants in the joint between the pipe and concrete or masonry wall as specified above.

Sealant selected for the earth side of the wall shall be compatible with dampproofing/waterproofing materials that are to be applied over the joint sealant. Pipe sleeves in fire-rated walls shall conform to the requirements in Section 07840 FIRESTOPPING.

3.1.5.2 Flashing Requirements

Pipes passing through roof shall be installed through a 16 ounce copper flashing, each within an integral skirt or flange. Flashing shall be suitably formed, and the skirt or flange shall extend not less than 8 inches from the pipe and shall be set over the roof or floor membrane in a solid coating of bituminous cement. The flashing shall extend up the pipe a minimum of 10 inches. For cleanouts, the flashing shall be turned down into the hub and caulked after placing the ferrule. Pipes passing through pitched roofs shall be flashed, using lead or copper flashing, with an adjustable integral flange of adequate size to extend not less than 8 inches from the pipe in all directions and lapped into the roofing to provide a watertight seal. The annular space between the flashing and the bare pipe or between the flashing and the metal-jacket-covered insulation shall be sealed as indicated. Flashing for dry vents shall be turned down into the pipe to form a waterproof joint. Pipes, up to and including 10 inches in diameter, passing through roof or floor waterproofing membrane may be installed through a cast-iron sleeve with caulking recess, anchor lugs, flashing-clamp device, and pressure ring with brass bolts. Flashing shield shall be fitted into the sleeve clamping device. Pipes passing through wall waterproofing membrane shall be sleeved as described above. A waterproofing clamping flange shall be installed.

3.1.5.3 Waterproofing

Waterproofing at floor-mounted water closets shall be accomplished by forming a flashing guard from soft-tempered sheet copper. The center of the sheet shall be perforated and turned down approximately 1-1/2 inches to fit between the outside diameter of the drainpipe and the inside diameter of the cast-iron or steel pipe sleeve. The turned-down portion of the flashing guard shall be embedded in sealant to a depth of approximately 1-1/2 inches; then the sealant shall be finished off flush to floor level between the flashing guard and drainpipe. The flashing guard of sheet copper shall extend not less than 8 inches from the drainpipe and shall be lapped between the floor membrane in a solid coating of bituminous cement. If cast-iron water closet floor flanges are used, the space between the pipe sleeve and drainpipe shall be sealed with sealant and the flashing guard shall be upturned approximately 1-1/2 inches to fit the outside diameter of the drainpipe and the inside diameter of the water closet floor flange. The upturned portion of the sheet fitted into the floor flange shall be sealed.

3.1.5.4 Optional Counterflashing

Instead of turning the flashing down into a dry vent pipe, or caulking and sealing the annular space between the pipe and flashing or metal-jacket-covered insulation and flashing, counterflashing may be accomplished by utilizing the following:

a. A standard roof coupling for threaded pipe up to 6 inches in diameter.

b. A tack-welded or banded-metal rain shield around the pipe.

3.1.5.5 Pipe Penetrations of Slab on Grade Floors

Where pipes, fixture drains, floor drains, cleanouts or similar items penetrate slab on grade floors, except at penetrations of floors with waterproofing membrane as specified in paragraphs Flashing Requirements and Waterproofing, a groove 1/4 to 1/2 inch wide by 1/4 to 3/8 inch deep shall be formed around the pipe, fitting or drain. The groove shall be filled with a sealant as specified in Section 07920 JOINT SEALANTS.

3.1.6 Fire Seal

Where pipes pass through fire walls, fire-partitions, fire-rated pipe chase walls or floors above grade, a fire seal shall be provided as specified in Section 07840 FIRESTOPPING.

3.1.7 Supports

3.1.7.1 General

Hangers used to support piping 2 inches and larger shall be fabricated to permit adequate adjustment after erection while still supporting the load. Pipe guides and anchors shall be installed to keep pipes in accurate alignment, to direct the expansion movement, and to prevent buckling, swaying, and undue strain. Piping subjected to vertical movement when operating temperatures exceed ambient temperatures shall be supported by variable spring hangers and supports or by constant support hangers. In the support of multiple pipe runs on a common base member, a clip or clamp shall be used where each pipe crosses the base support member. Spacing of the base support members shall not exceed the hanger and support spacing required for an individual pipe in the multiple pipe run. Threaded sections of rods shall not be formed or bent.

3.1.7.2 Pipe Supports and Structural Bracing, Seismic Requirements

Piping and attached valves shall be supported and braced to resist seismic loads as specified in Section15070A SEISMIC PROTECTION FOR MECHANICAL EQUIPMENT. Structural steel required for reinforcement to properly support piping, headers, and equipment, but not shown, shall be provided. Material used for supports shall be as specified in Section 05120 STRUCTURAL STEEL.

3.1.7.3 Pipe Hangers, Inserts, and Supports

Installation of pipe hangers, inserts and supports shall conform to MSS SP-58 and MSS SP-69, except as modified herein.

a. Types 5, 12, and 26 shall not be used.

b. Type 3 shall not be used on insulated pipe.

c. Type 18 inserts shall be secured to concrete forms before concrete is placed. Continuous inserts which allow more adjustment may be used if they otherwise meet the requirements for type 18 inserts.

d. Type 19 and 23 C-clamps shall be torqued per MSS SP-69 and shall have both locknuts and retaining devices furnished by the

manufacturer. Field-fabricated C-clamp bodies or retaining devices are not acceptable.

e. Type 20 attachments used on angles and channels shall be furnished with an added malleable-iron heel plate or adapter.

f. Type 24 may be used only on trapeze hanger systems or on fabricated frames.

g. Type 39 saddles shall be used on insulated pipe 4 inches and larger when the temperature of the medium is 60 degrees F or higher. Type 39 saddles shall be welded to the pipe.

h. Type 40 shields shall:

(1) Be used on insulated pipe less than 4 inches.

(2) Be used on insulated pipe 4 inches and larger when the temperature of the medium is 60 degrees F or less.

(3) Have a high density insert for all pipe sizes. High density inserts shall have a density of 8 pcf or greater.

i. Horizontal pipe supports shall be spaced as specified in MSS SP-69 and a support shall be installed not over 1 foot from the pipe fitting joint at each change in direction of the piping. Pipe supports shall be spaced not over 5 feet apart at valves. Operating temperatures in determining hanger spacing for PVC or CPVC pipe shall be 120 degrees F for PVC and 180 degrees F for CPVC. Horizontal pipe runs shall include allowances for expansion and contraction.

j. Vertical pipe shall be supported at each floor, except at slab-on-grade, at intervals of not more than 15 feet nor more than 8 feet from end of risers, and at vent terminations. Vertical pipe risers shall include allowances for expansion and contraction.

k. Type 35 guides using steel, reinforced polytetrafluoroethylene (PTFE) or graphite slides shall be provided to allow longitudinal pipe movement. Slide materials shall be suitable for the system operating temperatures, atmospheric conditions, and bearing loads encountered. Lateral restraints shall be provided as needed. Where steel slides do not require provisions for lateral restraint the following may be used:

(1) On pipe 4 inches and larger when the temperature of the medium is 60 degrees F or higher, a Type 39 saddle, welded to the pipe, may freely rest on a steel plate.

(2) On pipe less than 4 inches a Type 40 shield, attached to the pipe or insulation, may freely rest on a steel plate.

(3) On pipe 4 inches and larger carrying medium less that 60 degrees F a Type 40 shield, attached to the pipe or insulation, may freely rest on a steel plate.

l. Pipe hangers on horizontal insulated pipe shall be the size of the outside diameter of the insulation. The insulation shall be continuous through the hanger on all pipe sizes and applications.

m. Where there are high system temperatures and welding to piping is not desirable, the type 35 guide shall include a pipe cradle, welded to the guide structure and strapped securely to the pipe. The pipe shall be separated from the slide material by at least 4 inches or by an amount adequate for the insulation, whichever is greater.

n. Hangers and supports for plastic pipe shall not compress, distort, cut or abrade the piping, and shall allow free movement of pipe except where otherwise required in the control of expansion/contraction.

3.1.7.4 Structural Attachments

Attachment to building structure concrete and masonry shall be by cast-in concrete inserts, built-in anchors, or masonry anchor devices. Inserts and anchors shall be applied with a safety factor not less than 5. Supports shall not be attached to metal decking. Supports shall not be attached to the underside of concrete filled floor or concrete roof decks unless approved by the Contracting Officer. Masonry anchors for overhead applications shall be constructed of ferrous materials only.

3.1.8 Welded Installation

Plumbing pipe weldments shall be as indicated. Changes in direction of piping shall be made with welding fittings only; mitering or notching pipe to form elbows and tees or other similar type construction will not be permitted. Branch connection may be made with either welding tees or forged branch outlet fittings. Branch outlet fittings shall be forged, flared for improvement of flow where attached to the run, and reinforced against external strains. Beveling, alignment, heat treatment, and inspection of weld shall conform to ASME B31.1. Weld defects shall be removed and repairs made to the weld, or the weld joints shall be entirely removed and rewelded. After filler metal has been removed from its original package, it shall be protected or stored so that its characteristics or welding properties are not affected. Electrodes that have been wetted or that have lost any of their coating shall not be used.

3.1.9 Pipe Cleanouts

Pipe cleanouts shall be the same size as the pipe except that cleanout plugs larger than 4 inches will not be required. A cleanout installed in connection with cast-iron soil pipe shall consist of a long-sweep 1/4 bend or one or two 1/8 bends extended to the place shown. An extra-heavy cast-brass or cast-iron ferrule with countersunk cast-brass head screw plug shall be caulked into the hub of the fitting and shall be flush with the floor. Cleanouts in connection with other pipe, where indicated, shall be T-pattern, 90-degree branch drainage fittings with cast-brass screw plugs, except plastic plugs shall be installed in plastic pipe. Plugs shall be the same size as the pipe up to and including 4 inches. Cleanout tee branches with screw plug shall be installed at the foot of soil and waste stacks, at the foot of interior downspouts, on each connection to building storm drain where interior downspouts are indicated, and on each building drain outside

the building. Cleanout tee branches may be omitted on stacks in single story buildings with slab-on-grade construction or where less than 18 inches of crawl space is provided under the floor. Cleanouts on pipe concealed in partitions shall be provided with chromium plated bronze, nickel bronze, nickel brass or stainless steel flush type access cover plates. Round access covers shall be provided and secured to plugs with securing screw. Square access covers may be provided with matching frames, anchoring lugs and cover screws. Cleanouts in finished walls shall have access covers and frames installed flush with the finished wall. Cleanouts installed in finished floors subject to foot traffic shall be provided with a chrome-plated cast brass, nickel brass, or nickel bronze cover secured to the plug or cover frame and set flush with the finished floor. Heads of fastening screws shall not project above the cover surface. Where cleanouts are provided with adjustable heads, the heads shall be cast iron or plastic.

3.2 WATER HEATERS

3.2.1 Relief Valves

No valves shall be installed between a relief valve and its water heater or storage tank. The P&T relief valve shall be installed where the valve actuator comes in contact with the hottest water in the heater. Whenever possible, the relief valve shall be installed directly in a tapping in the tank or heater; otherwise, the P&T valve shall be installed in the hot-water outlet piping. A vacuum relief valve shall be provided on the cold water supply line to the hot-water storage tank or water heater and mounted above and within 6 inches above the top of the tank or water heater.

3.2.2 Heat Traps

Piping to and from each water heater and hot water storage tank shall be routed horizontally and downward a minimum of 2 feet before turning in an upward direction.

3.2.3 Connections to Water Heaters

Connections of metallic pipe to water heaters shall be made with dielectric unions or flanges.

3.2.4 Expansion Tank

A pre-charged expansion tank shall be installed on the cold water supply between the water heater inlet and the cold water supply shut-off valve. The Contractor shall adjust the expansion tank air pressure, as recommended by the tank manufacturer, to match incoming water pressure.

3.3 FIXTURES AND FIXTURE TRIMMINGS

Polished chromium-plated pipe, valves, and fittings shall be provided where exposed to view. Angle stops, straight stops, stops integral with the faucets, or concealed type of lock-shield, and loose-key pattern stops for supplies with threaded, sweat or solvent weld inlets shall be furnished and installed with fixtures. Where connections between copper tubing and faucets are made by rubber compression fittings, a beading tool shall be used to mechanically deform the tubing above the compression fitting. Exposed traps and supply pipes for fixtures and equipment shall be connected to the rough piping systems at the wall, unless otherwise specified under

the item. Floor and wall escutcheons shall be as specified. Drain lines and hot water lines of fixtures for handicapped personnel shall be insulated and do not require polished chrome finish. Plumbing fixtures and accessories shall be installed within the space shown.

3.3.1 Fixture Connections

Where space limitations prohibit standard fittings in conjunction with the cast-iron floor flange, special short-radius fittings shall be provided. Connections between earthenware fixtures and flanges on soil pipe shall be made gastight and watertight with a closet-setting compound or neoprene gasket and seal. Use of natural rubber gaskets or putty will not be permitted. Fixtures with outlet flanges shall be set the proper distance from floor or wall to make a first-class joint with the closet-setting compound or gasket and fixture used.

3.3.2 Flushometer Valves

Flushometer valves shall be secured to prevent movement by anchoring the long finished top spud connecting tube to wall adjacent to valve with approved metal bracket. Flushometer valves for water closets shall be installed 39 inches above the floor, except at water closets intended for use by the physically handicapped where flushometer valves shall be mounted at approximately 30 inches above the floor and arranged to avoid interference with grab bars. In addition, for water closets intended for handicap use, the flush valve handle shall be installed on the wide side of the enclosure. Bumpers for water closet seats shall be installed on the wall.

3.3.3 Height of Fixture Rims Above Floor

Lavatories shall be mounted with rim 31 inches above finished floor. Wall-hung drinking fountains and water coolers shall be installed with rim 42 inches above floor. Wall-hung service sinks shall be mounted with rim 28 inches above the floor. Installation of fixtures for use by the physically handicapped shall be in accordance with ICC A117.1.

3.3.4 Shower Bath Outfits

The area around the water supply piping to the mixing valves and behind the escutcheon plate shall be made watertight by caulking or gasketing.

3.3.5 Fixture Supports

Fixture supports for off-the-floor lavatories, water closets, and other fixtures of similar size, design, and use, shall be of the chair-carrier type. The carrier shall provide the necessary means of mounting the fixture, with a foot or feet to anchor the assembly to the floor slab. Adjustability shall be provided to locate the fixture at the desired height and in proper relation to the wall. Support plates, in lieu of chair carrier, shall be fastened to the wall structure only where it is not possible to anchor a floor-mounted chair carrier to the floor slab.

3.3.5.1 Support for Solid Masonry Construction

Chair carrier shall be anchored to the floor slab. Where a floor-anchored chair carrier cannot be used, a suitable wall plate shall be imbedded in the masonry wall.

3.3.5.2 Support for Concrete-Masonry Wall Construction

Chair carrier shall be anchored to floor slab. Where a floor-anchored chair carrier cannot be used, a suitable wall plate shall be fastened to the concrete wall using through bolts and a back-up plate.

3.3.5.3 Support for Steel Stud Frame Partitions

Chair carrier shall be used. The anchor feet and tubular uprights shall be of the heavy duty design; and feet (bases) shall be steel and welded to a square or rectangular steel tube upright. Wall plates, in lieu of floor-anchored chair carriers, shall be used only if adjoining steel partition studs are suitably reinforced to support a wall plate bolted to these studs.

3.3.6 Backflow Prevention Devices

Plumbing fixtures, equipment, and pipe connections shall not cross connect or interconnect between a potable water supply and any source of nonpotable water. Backflow preventers shall be installed where indicated and in accordance with ICC IPC at all other locations necessary to preclude a cross-connect or interconnect between a potable water supply and any nonpotable substance. In addition backflow preventers shall be installed at all locations where the potable water outlet is below the flood level of the equipment, or where the potable water outlet will be located below the level of the nonpotable substance. Backflow preventers shall be located so that no part of the device will be submerged. Backflow preventers shall be of sufficient size to allow unrestricted flow of water to the equipment, and preclude the backflow of any nonpotable substance into the potable water system. Bypass piping shall not be provided around backflow preventers. Access shall be provided for maintenance and testing. Each device shall be a standard commercial unit.

3.3.7 Access Panels

Access panels shall be provided for concealed valves and controls, or any item requiring inspection or maintenance. Access panels shall be of sufficient size and located so that the concealed items may be serviced, maintained, or replaced. Access panels shall be as specified in Section 05500A MISCELLANEOUS METAL.

3.3.8 Traps

Each trap shall be placed as near the fixture as possible, and no fixture shall be double-trapped. Traps installed on cast-iron soil pipe shall be cast iron. Traps installed on steel pipe or copper tubing shall be recess-drainage pattern, or brass-tube type. Traps installed on plastic pipe may be plastic conforming to ASTM D 3311. Traps for acid-resisting waste shall be of the same material as the pipe.

3.4 IDENTIFICATION SYSTEMS

3.4.1 Identification Tags

Identification tags made of brass, engraved laminated plastic, or engraved anodized aluminum, indicating service and valve number shall be installed on valves, except those valves installed on supplies at plumbing fixtures. Tags shall be 1-3/8 inch minimum diameter, and marking shall be stamped or engraved. Indentations shall be black, for reading clarity. Tags shall be attached to valves with No. 12 AWG, copper wire, chrome-plated beaded chain, or plastic straps designed for that purpose.

3.4.2 Pipe Color Code Marking

Color code marking of piping shall be as specified in Section 09900 PAINTS AND COATINGS.

3.4.3 Color Coding Scheme for Locating Hidden Utility Components

Scheme shall be provided in buildings having suspended grid ceilings. The color coding scheme shall identify points of access for maintenance and operation of operable components which are not visible from the finished space and installed in the space directly above the suspended grid ceiling. The operable components shall include valves, dampers, switches, linkages and thermostats. The color coding scheme shall consist of a color code board and colored metal disks. Each colored metal disk shall be approximately 3/8 inch in diameter and secured to removable ceiling panels with fasteners. The fasteners shall be inserted into the ceiling panels so that the fasteners will be concealed from view. The fasteners shall be manually removable without tools and shall not separate from the ceiling panels when panels are dropped from ceiling height. Installation of colored metal disks shall follow completion of the finished surface on which the disks are to be fastened. The color code board shall have the approximate dimensions of 3 foot width, 30 inches height, and 1/2 inch thickness. The board shall be made of wood fiberboard and framed under glass or 1/16 inch transparent plastic cover. Unless otherwise directed, the color code symbols shall be approximately 3/4 inch in diameter and the related lettering in 1/2 inch high capital letters. The color code board shall be mounted and located in the mechanical or equipment room.

3.5 ESCUTCHEONS

Escutcheons shall be provided at finished surfaces where bare or insulated piping, exposed to view, passes through floors, walls, or ceilings, except in boiler, utility, or equipment rooms. Escutcheons shall be fastened securely to pipe or pipe covering and shall be satin-finish, corrosion-resisting steel, polished chromium-plated zinc alloy, or polished chromium-plated copper alloy. Escutcheons shall be either one-piece or split-pattern, held in place by internal spring tension or setscrew.

3.6 PAINTING

Painting of pipes, hangers, supports, and other iron work, either in concealed spaces or exposed spaces, is specified in Section 09900 PAINTS AND COATINGS.

3.7 TESTS, FLUSHING AND DISINFECTION

3.7.1 Plumbing System

The following tests shall be performed on the plumbing system in accordance with ICC IPC, except that the drainage and vent system final test shall include the smoke test. The Contractor has the option to perform a peppermint test in lieu of the smoke test. If a peppermint test is chosen, the Contractor must submit a testing procedure to the Contracting Officer for approval.

a. Drainage and Vent Systems Test. The final test shall include a smoke test.

b. Building Sewers Tests.

c. Water Supply Systems Tests.

3.7.1.1 Test of Backflow Prevention Assemblies

Backflow prevention assembly shall be tested using gauges specifically designed for the testing of backflow prevention assemblies. Gauges shall be tested annually for accuracy in accordance with the University of Southern California's Foundation of Cross Connection Control and Hydraulic Research or the American Water Works Association Manual of Cross Connection (Manual M-14). Report form for each assembly shall include, as a minimum, the following:

Data on Device	Data on Testing Firm
Type of Assembly	Name
Manufacturer	Address
Model Number	Certified Tester
Serial Number	Certified Tester No.
Size	Date of Test
Location	
Test Pressure Readings	Serial Number and Test Data of Gauges

If the unit fails to meet specified requirements, the unit shall be repaired and retested.

3.7.2 Defective Work

If inspection or test shows defects, such defective work or material shall be replaced or repaired as necessary and inspection and tests shall be repeated. Repairs to piping shall be made with new materials. Caulking of screwed joints or holes will not be acceptable.

3.7.3 System Flushing

3.7.3.1 During Flushing

Before operational tests or disinfection, potable water piping system shall be flushed with potable water. Sufficient water shall be used to produce a water velocity that is capable of entraining and removing debris in all portions of the piping system. This requires simultaneous operation of all fixtures on a common branch or main in order to produce a flushing velocity of approximately 4 fps through all portions of the piping system. In the event that this is impossible due to size of system, the Contracting Officer (or the designated representative) shall specify the number of fixtures to be operated during flushing. Contractor shall provide adequate personnel to

monitor the flushing operation and to ensure that drain lines are unobstructed in order to prevent flooding of the facility. Contractor shall be responsible for any flood damage resulting from flushing of the system. Flushing shall be continued until entrained dirt and other foreign materials have been removed and until discharge water shows no discoloration. All faucets and drinking water fountains, to include any device considered as an end point device by NSF 61, Section 9, shall be flushed a minimum of 0.25 gallons per 24 hour period, ten times over a 14 day period.

3.7.3.2 After Flushing

System shall be drained at low points. Strainer screens shall be removed, cleaned, and replaced. After flushing and cleaning, systems shall be prepared for testing by immediately filling water piping with clean, fresh potable water. Any stoppage, discoloration, or other damage to the finish, furnishings, or parts of the building due to the Contractor's failure to properly clean the piping system shall be repaired by the Contractor. When the system flushing is complete, the hot-water system shall be adjusted for uniform circulation. Flushing devices and automatic control systems shall be adjusted for proper operation. Unless more stringent local requirements exist, lead levels shall not exceed limits established by 40 CFR 50.12 Part 141.80(c)(1). The water supply to the building shall be tested separately to ensure that any lead contamination found during potable water system testing is due to work being performed inside the building.

3.7.4 Operational Test

Upon completion of flushing and prior to disinfection procedures, the Contractor shall subject the plumbing system to operating tests to demonstrate satisfactory functional and operational efficiency. Such operating tests shall cover a period of not less than 8 hours for each system and shall include the following information in a report with conclusion as to the adequacy of the system:

a. Time, date, and duration of test.

b. Water pressures at the most remote and the highest fixtures.

c. Operation of each fixture and fixture trim.

d. Operation of each valve, hydrant, and faucet.

e. Temperature of each domestic hot-water supply.

f. Operation of each floor and roof drain by flooding with water.

g. Operation of each vacuum breaker and backflow preventer.

3.7.5 Disinfection

After operational tests are complete, the entire domestic hot- and cold-water distribution system shall be disinfected. System shall be flushed as specified, before introducing chlorinating material. The chlorinating material shall be hypochlorites or liquid chlorine. Except as herein specified, water chlorination procedure shall be in accordance with AWWA C651 and AWWA C652. The chlorinating material shall be fed into the water

piping system at a constant rate at a concentration of at least 50 parts per million (ppm). A properly adjusted hypochlorite solution injected into the main with a hypochlorinator, or liquid chlorine injected into the main through a solution-feed chlorinator and booster pump, shall be used. The chlorine residual shall be checked at intervals to ensure that the proper level is maintained. Chlorine application shall continue until the entire main is filled. The water shall remain in the system for a minimum of 24 hours. Each valve in the system being disinfected shall be opened and closed several times during the contact period to ensure its proper disinfection. Following the 24-hour period, no less than 25 ppm chlorine residual shall remain in the system. Water tanks shall be disinfected by the addition of chlorine directly to the filling water. Following a 6 hour period, no less than 50 ppm chlorine residual shall remain in the tank. If after the 24 hour and 6 hour holding periods, the residual solution contains less than 25 ppm and 50 ppm chlorine respectively, flush the piping and tank with potable water, and repeat the above procedures until the required residual chlorine levels are satisfied. The system including the tanks shall then be flushed with clean water until the residual chlorine level is reduced to less than one part per million. During the flushing period each valve and faucet shall be opened and closed several times. Samples of water in disinfected containers shall be obtained from several locations selected by the Contracting Officer. The samples of water shall be tested for total coliform organisms (coliform bacteria, fecal coliform, streptococcal, and other bacteria) in accordance with AWWA EWW. The testing method used shall be either the multiple-tube fermentation technique or the membrane-filter technique. Disinfection shall be repeated until tests indicate the absence of coliform organisms (zero mean coliform density per 100 milliliters) in the samples for at least 2 full days. The system will not be accepted until satisfactory bacteriological results have been obtained.

3.8 PLUMBING FIXTURE SCHEDULE

P-1 WATER CLOSET:

Siphon-jet, elongated bowl, top supply spud, ASME A112.19.2M, floor mounted. Floor flange shall be copper alloy, cast iron, or plastic.

Gasket shall be wax type.

Seat - ANSI Z124.5, black plastic, elongated, open front.

Flushometer Valve - ASSE 1037, large diaphragm type with non-hold-open feature, backcheck angle control stop, and vacuum breaker. Minimum upper chamber inside diameter of not less than 2-5/8 inches at the point where the diaphragm is sealed between the upper and lower chambers. The maximum water use shall be 1.6 gallons per flush. Automatic flush valves shall be as indicated in paragraph Automatic.

P-1a WATER CLOSET HANDICAPPED:

Height of top rim of bowl shall be in accordance with ICC A117.1; other features are the same as P-1.

P-2 LAVATORY:

Manufacturer's standard sink depth, vitreous china ASME A112.19.2M, countertop style.

Faucet - Faucets shall meet the requirements of NSF 61, Section 9. Faucets shall be center set type. Faucets shall have replaceable seats and washers. Valves and handles shall be copper alloy. Connection between valve and spout for center-set faucet shall be of rigid metal tubing. Flow shall be limited to 0.25 gallon per cycle at a flowing water pressure of 80 psi if a metering device or fitting is used that limits the period of water discharge such as a foot switch or fixture occupancy sensor. If a metering device is not used, the flow shall be limited to 2.5 gpm at a flowing pressure of 80 psi.

Handles - Index turn, Four arm, or Crown type. Cast, formed, or drop forged copper alloy.

Drain - Pop-up drain shall include stopper, lift rods, jam nut, washer, and tail piece. See paragraph FIXTURES for optional plastic accessories.

P-2A WHEELCHAIR LAVATORY:

Vitreous china, ASME A112.19.2M, wheelchair lavatory with wrist or elbow controls 20 inches wide x 27 inches deep with gooseneck spout. Flow shall be limited to 0.25 gallon per cycle at a flowing water pressure of 80 psi if a metering device or fitting is used that limits the period of water discharge such as foot switch or fixture occupancy sensor. If a metering device is not used, the flow shall be limited to 2.5 gpm at a flowing water pressure of 80 psi.

Drain - Strainer shall be copper alloy or stainless steel.

P-3 KITCHEN SINK:

Ledge back with holes for faucet and spout double bowl 32 x 21 inches stainless steel ASME A112.19.3.

Faucet and Spout - Faucets shall meet the requirements of NSF 61, Section 9. Cast or wrought copper alloy. Aerator shall have internal threads. Flow shall be limited to 0.25 gallon per cycle at a flowing water pressure of 80 psi if a metering device or fitting is used that limits the period of water discharge such as a foot switch or fixture occupancy sensor. If a metering device is not used, the flow shall be limited to 2.5 gpm at a flowing water pressure of 80 psi.

Handle - Cast copper alloy, wrought copper alloy, or stainless steel. Single lever type.

Drain Assembly - Plug, cup strainer, crossbars, jam nuts, washers, couplings, stopper, etc., shall be copper alloy or stainless steel.

P-3A KITCHEN SINK:

Three bowl style; other features are the same as P-2.

P-3B KITCHEN SINK:

Single bowl style; other features are the same as P-2.

P-4 SHOWER:

Free standing cabinet, single unit with receptor; size as shown on the drawings, fiberglass reinforced plastic with terrazzo or plastic receptor. Cabnet shall include curtain rod, trim, and concealed fittings. Shower head, ASME A112.18.1 shall be adjustable spray type stainless steel or chromium plated brass with ball joint and shall include a non-removable, tamperproof device to limit water flow to 2.5 gpm when tested in accordance with ASME A112.18.1. Handles shall be chrome-plated die cast zinc alloy. Control valves shall be copper alloy and have metal integral parts of copper alloy, nickel alloy, or stainless steel.

P-5 TABLE TUB:

Standard 24-5/8" Wide X 60-1/2" Long x 36" High stainless steel tub with stainless steel grating table. Tub shall depth shall be 16" deep minimum. Unit to be supported on 1-1/4" stainless steel square tubing frame. Unit shall be Shor-Line item no. 904.3001.00 or approved equal.

P-6 DISHWASHING MACHINE:

Dishwashing machines shall conform to UL 749 and ASSE 1006, sized as indicated.

3.9 POSTED INSTRUCTIONS

Framed instructions under glass or in laminated plastic, including wiring and control diagrams showing the complete layout of the entire system, shall be posted where directed. Condensed operating instructions explaining preventive maintenance procedures, methods of checking the system for normal safe operation, and procedures for safely starting and stopping the system shall be prepared in typed form, framed as specified above for the wiring and control diagrams and posted beside the diagrams. The framed instructions shall be posted before acceptance testing of the systems.

3.10 PERFORMANCE OF WATER HEATING EQUIPMENT

Standard rating condition terms are as follows:

EF = Energy factor, overall efficiency.

ET = Thermal efficiency with 70 degrees F delta T.

EC = Combustion efficiency, 100 percent - flue loss when smoke = o (trace is permitted).

SL = Standby loss in W/sq. ft. based on 80 degrees F delta T, or in percent per hour based on nominal 90 degrees F delta T.

HL = Heat loss of tank surface area.

V = Storage volume in liters

3.10.1 Storage Water Heaters

3.10.1.1 Electric

a. Storage capacity of 120 gallons or less, and input rating of 12 kW or less: minimum energy factor (EF) shall be 0.95-0.00132V per 10 CFR 430.

3.11 TABLES

TABLE I
PIPE AND FITTING MATERIALS FOR
DRAINAGE, WASTE, AND VENT PIPING SYSTEMS

		SERVICE			
Item #	Pipe and Fitting Materials	A	B	C	D
1	Cast iron soil pipe and fittings, hub and spigot, ASTM A 74 with compression gaskets. Pipe and fittings shall be marked with the CISPI trademark.	X	X	X	X
2	Cast iron soil pipe and fittings hubless, CISPI 301 and ASTM A 888. Pipe and fittings shall be marked with the CISPI trademark.		X	X	X
3	Cast iron drainage fittings, threaded, ASME B16.12 for use with Item 10	X		X	X
4	Cast iron screwed fittings (threaded) ASME B16.4 for use with Item 10				X
5	Malleable-iron threaded fittings, galvanized ASME B16.3 for use with Item 6				X
6	Steel pipe, seamless galvanized, ASTM A 53/A 53M, Type S, Grade B				X
7	Seamless red brass pipe, ASTM B 43		X		
8	Bronzed flanged fittings, ASME B16.24 for use with Items 7 and 10				X
9	Cast copper alloy solder joint pressure fittings, ASME B16.18 for use with Item 10				X
10	Seamless copper pipe, ASTM B 42				
11	Cast bronze threaded fittings, ASME B16.15				X
12	Copper drainage tube, (DWV), ASTM B 306	X*	X	X*	X

13	Wrought copper and wrought alloy solder-joint drainage fittings. ASME B16.29	X	X	X	X
14	Cast copper alloy solder joint drainage fittings, DWV, ASME B16.23	X	X	X	X
15	Polyvinyl Chloride plastic drain, waste and vent pipe and fittings, ASTM D 2665, ASTM F 891, (Sch 40) ASTM F 1760	X	X	X	X

SERVICE:

A - Underground Building Soil, Waste and Storm Drain
B - Aboveground Soil, Waste, Drain In Buildings
C - Underground Vent
D - Aboveground Vent
* - Hard Temper

TABLE II
PIPE AND FITTING MATERIALS FOR PRESSURE PIPING SYSTEMS

		SERVICE		
Item No.	Pipe and Fitting Materials	A	B	C
1	Seamless red brass pipe, ASTM B 43	X	X	X
2	Bronze flanged fittings, ASME B16.24 for use with Items 1 and 3	X	X	X
3	Seamless copper pipe, ASTM B 42	X	X	X
4	Seamless copper water tube, ASTM B 88, ASTM B 88M	X**	X**	X***
5	Cast bronze threaded fittings, ASME B16.15 for use with Items 1 and 3	X	X	X
6	Wrought copper and bronze solder-joint pressure fittings, ASME B16.22 for use with Items 1, 3 and 4	X	X	X
7	Cast copper alloy solder-joint pressure fittings, ASME B16.18 for use with Item 4	X	X	X

8	Chlorinated polyvinyl chloride (CPVC) plastic hot and cold water distribution system, ASTM D 2846/D 2846M	X	X	X
9	Chlorinated polyvinyl chloride (CPVC) plastic pipe, Schedule 40 and 80, ASTM F 441/F 441M	X	X	X
10	Chlorinated polyvinyl chloride (CPVC) plastic pipe (SDR-PR) ASTM F 442/F 442M	X	X	X
11	Threaded chlorinated polyvinyl chloride (chloride CPVC) plastic pipe fittings, Schedule 80, ASTM F 437, for use with Items 9, and 10	X	X	X
12	Socket-type chlorinated polyvinyl chloride (CPVC) plastic pipe fittings, Schedule 40, ASTM F 438 for use with Items 9, 10, and 11	X	X	X
13	Socket-type chlorinated polyvinyl chloride (CPVC) plastic pipe fittings Schedule 80, ASTM F 439 for use with Items 9, 10, and 11	X	X	X
14	Polyvinyl chloride (PVC) plastic pipe, Schedules 40, 80, and 120, ASTM D 1785	X		X
15	Polyvinyl chloride (PVC) pressure-rated pipe (SDR Series), ASTM D 2241	X		X
16	Polyvinyl chloride (PVC) plastic pipe fittings, Schedule 40, ASTM D 2466	X		X
17	Socket-type polyvinyl chloride (PVC) plastic pipe fittings, schedule 80, ASTM D 2467 for use with Items 15 and 16	X		X
18	Threaded polyvinyl chloride (PVC) plastic pipe fittings, schedule 80, ASTM D 2464	X		X
19	Fittings: brass or bronze; ASME B16.15, and ASME B16.18 ASTM B 828	X	X	

A - Cold Water Service Aboveground

B - Hot and Cold Water Distribution 180 degrees F Maximum Aboveground
C - Cold Water Service Belowground
Indicated types are minimum wall thicknesses.
** - Type L - Hard
*** - Type K - Hard temper with brazed joints only or type K-soft temper without joints in or under floors
**** - In or under slab floors only brazed joints

TABLE III
STANDARD RATING CONDITIONS AND MINIMUM PERFORMANCE RATINGS FOR WATER HEATING EQUIPMENT

A. STORAGE WATER HEATERS

FUEL	STORAGE CAPACITY GALLONS	INPUT RATING	TEST PROCEDURE	REQUIRED PERFORMANCE
Elect.	120 max.	12 kW max.	10 CFR 430	EF = 0.95-0.00132V minimum
Elect.	120 min. OR	12 kW min.	ASHRAE 90.1 (Addenda B)	SL = 1.9 W/sq. ft. maximum

TERMS:

EF = Energy factor, overall efficiency.
ET = Thermal efficiency with 70 degrees F delta T.
EC = Combustion efficiency, 100 percent - flue loss when smoke = 0 (trace is permitted).
SL = Standby loss in W/sq. ft. based on 80 degrees F delta T, or in percent per hour based on nominal 90 degrees F delta T.
HL = Heat loss of tank surface area
V = Storage volume in gallons

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 15 - MECHANICAL

SECTION 15700A

UNITARY HEATING AND COOLING EQUIPMENT

10/04

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 SAFETY REQUIREMENTS
1.4 DELIVERY, STORAGE, AND HANDLING
1.5 PROJECT REQUIREMENTS
1.5.1 Verification of Dimensions
1.5.2 Drawings
1.5.3 Spare Parts

PART 2 PRODUCTS

2.1 STANDARD COMMERCIAL PRODUCTS
2.2 NAMEPLATES
2.3 ELECTRICAL WORK
2.4 UNITARY EQUIPMENT, ROOM UNIT
2.4.1 Packaged Terminal Unit
2.4.2 Compressor
2.4.3 Air-To-Refrigerant Coils
2.4.4 Fans
2.4.5 Air Filters
2.4.6 Primary/Supplemental Heat
2.4.7 Cabinet Construction
2.4.8 Wall Sleeve
2.4.9 Duct Package
2.4.10 Unit Controls
2.5 UNITARY EQUIPMENT, SPLIT SYSTEM
2.5.1 Air-to-Refrigerant Coil
2.5.2 Compressor
2.5.3 Refrigeration Circuit
2.5.4 Unit Controls
2.6 REMOTE CONDENSER OR CONDENSING UNIT
2.6.1 Air-Cooled Condenser
2.6.1.1 Connections
2.6.1.2 Condensing Coil
2.6.1.3 Unit Controls
2.7 EQUIPMENT EFFICIENCY
2.8 UNITARY EQUIPMENT COMPONENTS
2.8.1 Refrigerant and Oil
2.8.2 Fans
2.8.3 Primary/Supplemental Heating
2.8.3.1 Electric Heating Coil
2.8.4 Air Filters
2.8.4.1 Extended Surface Pleated Panel Filters
2.8.5 Coil Frost Protection

2.8.6 Pressure Vessels
2.8.6.1 Hot Gas Muffler
2.8.7 Cabinet Construction
2.8.7.1 Indoor Cabinet
2.8.7.2 Outdoor Cabinet
2.9 ACCESSORIES
2.9.1 Bird Screen
2.10 FABRICATION
2.10.1 Factory Coating
2.10.2 Factory Applied Insulation
2.11 SUPPLEMENTAL COMPONENTS/SERVICES
2.11.1 Refrigerant Piping
2.11.2 Ductwork
2.11.3 Temperature Controls

PART 3 EXECUTION

3.1 INSTALLATION
3.1.1 Equipment
3.1.2 Field Applied Insulation
3.1.3 Field Painting
3.2 CLEANING AND ADJUSTING
3.3 REFRIGERANT TESTS, CHARGING, AND START-UP
3.3.1 Refrigerant Leakage
3.3.2 Contractor's Responsibility
3.4 SYSTEM PERFORMANCE TESTS
3.5 DEMONSTRATIONS

-- End of Section Table of Contents --

SECTION 15700A

UNITARY HEATING AND COOLING EQUIPMENT
10/04

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR-CONDITIONING AND REFRIGERATION INSTITUTE (ARI)

ARI 210/240	(2003) Unitary Air-Conditioning and Air-Source Heat Pump Equipment
ARI 270	(1995) Sound Rating of Outdoor Unitary Equipment
ARI 310/380	(1993) Packaged Terminal Air-Conditioners and Heat Pumps
ARI 320	(1998) Water-Source Heat Pumps
ARI 325	(1998) Ground Water-Source Heat Pumps
ARI 340/360	(2000) Commercial and Industrial Unitary Air-Conditioning and Heat Pump Equipment
ARI 350	(2000) Sound Rating of Non-Ducted Indoor Air-Conditioning Equipment
ARI 370	(2001) Sound Rating of Large Outdoor Refrigerating and Air-Conditioning Equipment
ARI 410	(2001; Addendum 2002) Forced-Circulation Air-Cooling and Air-Heating Coils
ARI 460	(2000) Remote Mechanical-Draft Air-Cooled Refrigerant Condensers
ARI 490	(1998) Remote Mechanical-Draft Evaporative Refrigerant Condensers
ARI 495	(1999) Refrigerant Liquid Receivers
ARI 500	(2000) Variable Capacity Positive Displacement Refrigerant Compressors and Compressor Units for Air-Conditioners and Heat Pump Applications
ARI 700	(1999 with Appendix C) Specifications for Fluorocarbon Refrigerants

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 127	(2001) Method of Testing for Rating Computer and Data Processing Room Unitary Air-Conditioners
ASHRAE 15	(2001; Errata 2002) Safety Standard for Refrigeration Systems
ASHRAE 34	(2001; Errata 2002) Designation and Safety Classification of Refrigerants
ASHRAE 52.1	(1992) Gravimetric and Dust-Spot Procedures for Testing Air-Cleaning Devices Used in General Ventilation for Removing Particulate Matter
ASHRAE 64	(1995) Methods of Testing Remote Mechanical-Draft Evaporative Refrigerant Condensers

AMERICAN WELDING SOCIETY (AWS)

AWS Z49.1	(1999) Safety in Welding, Cutting and Allied Processes

ASME INTERNATIONAL (ASME)

ASME BPVC SEC IX	(2001) Boiler and Pressure Vessel Code; Section IX, Welding and Brazing Qualifications
ASME BPVC SEC VIII D1	(2001) Boiler and Pressure Vessel Code; Section VIII, Pressure Vessels Division 1 - Basic Coverage

ASSOCIATION OF HOME APPLIANCE MANUFACTURERS (AHAM)

AHAM RAC-1	(2003) Directory of Certified Room Air Conditioners

ASTM INTERNATIONAL (ASTM)

ASTM A 123/A 123M	(2002) Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A 153/A 153M	(2003) Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A 307	(2002) Carbon Steel Bolts and Studs, 60 000 PSI Tensile Strength
ASTM B 117	(2002) Operating Salt Spray (Fog) Apparatus
ASTM C 1071	(2000) Fibrous Glass Duct Lining Insulation (Thermal and Sound Absorbing Material)

ASTM D 520	(2000) Zinc Dust Pigment
ASTM E 84	(2003) Surface Burning Characteristics of Building Materials
ASTM F 104	(2003) Nonmetallic Gasket Materials

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA ICS 6	(1993; R 2001) Industrial Control and Systems: Enclosures
NEMA MG 1	(2003) Motors and Generators
NEMA MG 2	(2001) Safety Standard for Construction and Guide for Selection, Installation, and Use of Electric Motors and Generators

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 54	(2002) National Fuel Gas Code
NFPA 70	(2002) National Electrical Code
NFPA 90A	(2002) Installation of Air Conditioning and Ventilating Systems

UNDERWRITERS LABORATORIES (UL)

UL 1995	(1995; Rev thru Aug 1999) Heating and Cooling Equipment
UL 207	(2001) Refrigerant-Containing Components and Accessories, Nonelectrical
UL 484	(1993; Rev thru Sep 2002) Room Air Conditioners
UL 586	(1996; Rev thru Apr 2000) High-Efficiency, Particulate, Air Filter Units
UL 900	(1994; Rev thru Oct 1999) Air Filter Units

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for Contractor Quality Control approval. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Drawings

Drawings provided in adequate detail to demonstrate compliance with contract requirements, as specified.

SD-03 Product Data

Materials and Equipment

Manufacturer's standard catalog data, at least 5 weeks prior to the purchase or installation of a particular component, highlighted to show material, size, options, performance charts and curves, etc. in adequate detail to demonstrate compliance with contract requirements. Data shall include manufacturer's recommended installation instructions and procedures. If vibration isolation is specified for a unit, vibration isolator literature shall be included containing catalog cuts and certification that the isolation characteristics of the isolators provided meet the manufacturer's recommendations. Data shall be submitted for each specified component.

Spare Parts

Spare parts data for each different item of equipment specified.

Posted Instructions

Posted instructions, at least 2weeks prior to construction completion, including equipment layout, wiring and control diagrams, piping, valves and control sequences, and typed condensed operation instructions. The condensed operation instructions shall include preventative maintenance procedures, methods of checking the system for normal and safe operation, and procedures for safely starting and stopping the system. The posted instructions shall be framed under glass or laminated plastic and be posted where indicated by the Contracting Officer.

Verification of Dimensions

A letter, at least 2 weeks prior to beginning construction, including the date the site was visited, conformation of existing conditions, and any discrepancies found.

System Performance Tests

A schedule, at least 2 weeks prior to the start of related testing, for the system performance tests. The schedules shall identify the proposed date, time, and location for each test.

Demonstrations

A schedule, at least 2 weeks prior to the date of the proposed training course, which identifies the date, time, and location for the training.

SD-06 Test Reports

Refrigerant Tests, Charging, and Start-Up

Six copies of each test containing the information described below in bound 8-1/2 x 11 inch booklets. Individual reports shall be submitted for the refrigerant system tests.

a. The date the tests were performed.

b. A list of equipment used, with calibration certifications.

c. Initial test summaries.

d. Repairs/adjustments performed.

e. Final test results.

System Performance Tests

Six copies of the report provided in bound 8-1/2 x 11 inch booklets. The report shall document compliance with the specified performance criteria upon completion and testing of the system. The report shall indicate the number of days covered by the tests and any conclusions as to the adequacy of the system. The report shall also include the following information and shall be taken at least three different times at outside dry-bulb temperatures that are at least 5 degrees F apart:

a. Date and outside weather conditions.

b. The load on the system based on the following:

(1) The refrigerant used in the system.
(2) Condensing temperature and pressure.
(3) Suction temperature and pressure.
(4) Ambient, condensing and coolant temperatures.
(5) Running current, voltage and proper phase sequence for each phase of all motors.

c. The actual on-site setting of operating and safety controls.

d. Thermostatic expansion valve superheat - value as determined by field test.

e. Subcooling.

f. High and low refrigerant temperature switch set-points

g. Low oil pressure switch set-point.

h. Defrost system timer and thermostat set-points.

i. Moisture content.

j. Capacity control set-points.

k. Field data and adjustments which affect unit performance and energy consumption.

l. Field adjustments and settings which were not permanently marked as an integral part of a device.

SD-07 Certificates

Materials and Equipment

Where the system, components, or equipment are specified to comply with requirements of ARI, ASHRAE, ASME, or UL, proof of such compliance shall be provided. The label or listing of the specified agency shall be acceptable evidence. In lieu of the label or listing, a written certificate from an approved, nationally recognized testing organization equipped to perform such services, stating that the items have been tested and conform to the requirements and testing methods of the specified agency may be submitted. When performance requirements of this project's drawings and specifications vary from standard ARI rating conditions, computer printouts, catalog, or other application data certified by ARI or a nationally recognized laboratory as described above shall be included. If ARI does not have a current certification program that encompasses such application data, the manufacturer may self certify that his application data complies with project performance requirements in accordance with the specified test standards.

Service Organization

A certified list of qualified permanent service organizations, which includes their addresses and qualifications, for support of the equipment. The service organizations shall be reasonably convenient to the equipment installation and be able to render satisfactory service to the equipment on a regular and emergency basis during the warranty period of the contract.

SD-10 Operation and Maintenance Data

Operation and Maintenance Manuals

Six complete copies of an operation manual in bound 8-1/2 x 11 inch booklets listing step-by-step procedures required for system startup, operation, abnormal shutdown, emergency shutdown, and normal shutdown at least 4 weeks prior to the first training course. The booklets shall include the manufacturer's name, model number, and parts list. The manuals shall include the manufacturer's name, model number, service manual, and a brief description of all equipment and their basic operating features. Six complete copies of maintenance manual in bound 8-1/2 x 11 inch booklets listing routine maintenance procedures, possible breakdowns and repairs, and a trouble shooting guide. The manuals shall include piping and equipment layouts and simplified wiring and control diagrams of the system as installed.

1.3 SAFETY REQUIREMENTS

Exposed moving parts, parts that produce high operating temperature, parts which may be electrically energized, and parts that may be a hazard to operating personnel shall be insulated, fully enclosed, guarded, or fitted

with other types of safety devices. Safety devices shall be installed so that proper operation of equipment is not impaired. Welding and cutting safety requirements shall be in accordance with AWS Z49.1.

1.4 DELIVERY, STORAGE, AND HANDLING

Stored items shall be protected from the weather, humidity and temperature variations, dirt and dust, or other contaminants. Proper protection and care of all material both before and during installation shall be the Contractor's responsibility. Any materials found to be damaged shall be replaced at the Contractor's expense. During installation, piping and similar openings shall be capped to keep out dirt and other foreign matter.

1.5 PROJECT REQUIREMENTS

1.5.1 Verification of Dimensions

The Contractor shall become familiar with all details of the work, verify all dimensions in the field, and advise the Contracting Officer of any discrepancy before performing any work.

1.5.2 Drawings

The Contractor shall submit drawings consisting of:

a. Equipment layouts which identify assembly and installation details.

b. Plans and elevations which identify clearances required for maintenance and operation.

c. Wiring diagrams which identify each component individually and interconnected or interlocked relationships between components.

d. Foundation drawings, bolt-setting information, and foundation bolts prior to concrete foundation construction for equipment indicated or required to have concrete foundations.

e. Details, if piping and equipment are to be supported other than as indicated, which include loadings and type of frames, brackets, stanchions, or other supports.

f. Automatic temperature control diagrams and control sequences.

g. Installation details which includes the amount of factory set superheat and corresponding refrigerant pressure/temperature.

Because of the small scale of the drawings, it is not possible to indicate all offsets, fittings, and accessories that may be required. The Contractor shall carefully investigate the plumbing, fire protection, electrical, structural and finish conditions that would affect the work to be performed and arrange such work accordingly, furnishing required offsets, fittings, and accessories to meet such conditions.

1.5.3 Spare Parts

The Contractor shall submit spare parts data for each different item of equipment specified, after approval of detail drawings and not later than one month prior to the date of beneficial occupancy. The data shall include a complete list of parts and supplies, with current unit prices and source of supply, a recommended spare parts list for 1 year of operation, and a list of the parts recommended by the manufacturer to be replaced on a routine basis.

PART 2 PRODUCTS

2.1 STANDARD COMMERCIAL PRODUCTS

Materials and equipment shall be standard products of a manufacturer regularly engaged in the manufacturing of such products, which are of a similar material, design and workmanship. The standard products shall have been in satisfactory commercial or industrial use for 2 years prior to bid opening. The 2 year use shall include applications of equipment and materials under similar circumstances and of similar size. The 2 years experience shall be satisfactorily completed by a product which has been sold or is offered for sale on the commercial market through advertisements, manufacturer's catalogs, or brochures. Products having less than a 2 year field service record shall be acceptable if a certified record of satisfactory field operation, for not less than 6000 hours exclusive of the manufacturer's factory tests, can be shown. Products shall be supported by a service organization. System components shall be environmentally suitable for the indicated locations.

2.2 NAMEPLATES

Major equipment including compressors, condensers, fans, and motors shall have the manufacturer's name, address, type or style, model or serial number, and catalog number on a plate secured to the item of equipment. Plates shall be durable and legible throughout equipment life and made of anodized aluminum or stainless steel. Plates shall be fixed in prominent locations with nonferrous screws or bolts.

2.3 ELECTRICAL WORK

Electrical equipment, motors, motor efficiencies, and wiring shall be in accordance with Section 16402 INTERIOR DISTRIBUTION SYSTEM. Electrical motor driven equipment specified shall be provided complete with motors, motor starters, and controls. Electrical characteristics shall be as shown, and unless otherwise indicated, all motors of 1 horsepower and above with open, dripproof, totally enclosed, or explosion proof fan cooled enclosures, shall be high efficiency type. Field wiring shall be in accordance with manufacturer's instructions. Each motor shall conform to NEMA MG 1 and NEMA MG 2 and be of sufficient size to drive the equipment at the specified capacity without exceeding the nameplate rating of the motor. Motors shall be continuous duty with the enclosure specified. Motor starters shall be provided complete with thermal overload protection and other appurtenances necessary for the motor control indicated. Motors shall be furnished with a magnetic across-the-line or reduced voltage type starter as required by the manufacturer. Motor duty requirements shall allow for maximum frequency start-stop operation and minimum encountered interval between start and stop. Motors shall be sized for the applicable loads. Motor torque shall be capable of accelerating the connected load within 20 seconds with 80 percent of the rated voltage maintained at motor terminals during one

starting period. Motor bearings shall be fitted with grease supply fittings and grease relief to outside of enclosure. Manual or automatic control and protective or signal devices required for the operation specified and any control wiring required for controls and devices specified, but not shown, shall be provided.

2.4 UNITARY EQUIPMENT, ROOM UNIT

2.4.1 Packaged Terminal Unit

Unit shall be a through-the-wall mounted, heavy-duty commercial grade, factory assembled and precharged heat pump unit. Unit shall be in accordance with ARI 310/380 and UL 1995. Units shall be removable from inside the building for servicing without removing the outside cabinet. Unit shall have a noise rating in accordance with ARI 350. Heat pump units shall contain a reversing valve to change unit to heating cycle. An outdoor coil temperature sensor shall be provided to guard against coil freeze-up by either switching to supplemental heat only, or by cycling the compressor to defrost the coil.

2.4.2 Compressor

Compressor shall be hermetically sealed reciprocating, rotary, or scroll type. Compressor shall be fitted with permanent split capacitor motor, overload protection, and vibration isolators. Compressor shall be protected against high discharge pressure, loss of charge, low voltage, and short cycling.

2.4.3 Air-To-Refrigerant Coils

Evaporator and condenser coils shall have copper or aluminum tubes of 3/8 inch minimum diameter with copper or aluminum fins that are mechanically bonded or soldered to the tubes. Coils shall be protected with a minimum 3 mil thick phenolic or vinyl coating. Casing shall be galvanized steel or aluminum. Contact of dissimilar metals shall be avoided. Coils shall be tested in accordance with ASHRAE 15 at the factory and be suitable for the working pressure of the installed system. Each coil shall be dehydrated and sealed after testing and prior to evaluation and charging. Each unit shall be provided with a factory operating charge of refrigerant and oil or a holding charge. Unit shipped with a holding charge shall be field charged. A condensate removal system shall be provided.

2.4.4 Fans

Indoor and outdoor fans shall be the centrifugal, direct driven type. Fans shall be statically and dynamically balanced. Outdoor fan shall be designed so that condensate will evaporate without drip, splash, or spray on building exterior. Indoor fan shall be provided with a minimum two-speed motor with built-in overload protection. Fan motors shall be the inherently protected, permanent split-capacitor type.

2.4.5 Air Filters

Filters shall be of the sectional or panel cleanable type and be capable of filtering the entire air supply.

2.4.6 Primary/Supplemental Heat

Supplemental heat shall be provided as specified in paragraph "Unitary Equipment Components".

2.4.7 Cabinet Construction

Cabinet shall be free of visible fasteners, sharp protuberances and edges. Enclosure sheet metal shall be a minimum of 18 gauge steel with a protective coating. Face panels shall be removable and shall provide full access to unit appurtenances. Access to controls shall be without removal of the face panel. Conditioned air shall discharge through adjustable louvers. Cabinet shall be thermally and acoustically insulated with materials which conform to NFPA 90A. Units shall be furnished with a prewired subbase. Subbase shall have leveling screws with provisions for remote unit control. Subbase shall be of 18 gauge galvanized steel construction with a protective coating to match that of the room cabinet. Paint and finishes shall comply with the requirements specified in paragraph FACTORY COATING.

2.4.8 Wall Sleeve

Louver shall be stormproof type, constructed of anodized, stamped or extruded aluminum. Sleeve shall be a water and airtight completely insulated assembly, with weather-resistant protective coating.

2.4.9 Duct Package

Duct extension shall consist of 18 gauge minimum galvanized steel plenum extender with all necessary internal dampers and baffles. Duct extension shall be painted with a protective coating that matches room cabinet.

2.4.10 Unit Controls

Controls shall include an on-off switch, high and low selector switch for both the heating and cooling mode, multiple speed fan cooling and heating mode, room air fan switch, outside air damper control, and an adjustable cooling and heating thermostat. Function and temperature controls shall be remotely mounted as indicated or as accepted by the Contracting Officer.

2.5 UNITARY EQUIPMENT, SPLIT SYSTEM

Unit shall be an air-cooled, split system which employs a remote condensing unit, a separate indoor unit, and interconnecting refrigerant piping. Unit shall be the heat pump type conforming to applicable Underwriters Laboratories (UL) standards including UL 1995. Unit shall be rated in accordance with ARI 210/240. Unit shall be provided with necessary fans, air filters, coil frost protection, supplemental heat, and cabinet construction as specified in paragraph "Unitary Equipment Components". The remote unit shall be as specified in paragraph REMOTE CONDENSER OR CONDENSING UNIT. Evaporator or supply fans shall be double-width, double inlet, forward curved, backward inclined, or airfoil blade, centrifugal scroll type. Condenser or outdoor fans shall be the manufacturer's standard for the unit specified and may be either propeller or centrifugal scroll type. Fan and condenser motors shall have open or dripproof enclosures.

2.5.1 Air-to-Refrigerant Coil

Coils shall have copper or aluminum tubes of 3/8 inch minimum diameter with copper or aluminum fins that are mechanically bonded or soldered to the tubes. Coils shall be protected with a minimum 3 mil thick phenolic or vinyl coating. Casing shall be galvanized steel or aluminum. Contact of dissimilar metals shall be avoided. Coils shall be tested in accordance with ASHRAE 15 at the factory and be suitable for the working pressure of the installed system. Each coil shall be dehydrated and sealed after testing and prior to evaluation and charging. Each unit shall be provided with a factory operating charge of refrigerant and oil or a holding charge. Unit shipped with a holding charge shall be field charged. Separate expansion devices shall be provided for each compressor circuit.

2.5.2 Compressor

Compressor shall be direct drive, semi-hermetic or hermetic reciprocating, or scroll type capable of operating at partial load conditions. Compressor shall be capable of continuous operation down to the lowest step of unloading as specified. Compressor shall be provided with vibration isolators, crankcase heater, thermal overloads, high and low pressure safety cutoffs and protection against short cycling.

2.5.3 Refrigeration Circuit

Refrigerant-containing components shall comply with ASHRAE 15 and be factory tested, cleaned, dehydrated, charged, and sealed. Refrigerant charging valves and connections, and pumpdown valves shall be provided for each circuit. Filter-drier shall be provided in each liquid line and be reversible-flow type. Refrigerant flow control devices shall be an adjustable superheat thermostatic expansion valve with external equalizer matched to coil, capillary or thermostatic control, and a pilot solenoid controlled, leak-tight, four-way refrigerant flow reversing valve. A refrigerant suction line thermostatic control shall be provided to prevent freeze-up in event of loss of water flow during heating cycle.

2.5.4 Unit Controls

Unit shall be internally prewired with a 24 volt control circuit powered by an internal transformer. Terminal blocks shall be provided for power wiring and external control wiring. Unit shall have cutoffs for high and low pressure, and safety interlocks on all service panels. Head pressure controls shall sustain unit operation with ambient temperature of 20 degrees F. Adjustable-cycle timers shall prevent short-cycling. Multiple compressors shall be staged by means of a time delay. Unit shall be internally protected by fuses or a circuit breaker in accordance with UL 1995. Low cost cooling shall be made possible by means of a control circuit which will modulate dampers to provide 100 percent outside air while locking out compressors.

2.6 REMOTE CONDENSER OR CONDENSING UNIT

Each remote condenser coil shall be fitted with a manual isolation valve and an access valve on the coil side. Saturated refrigerant condensing temperature shall not exceed 120 degrees F at 95 degrees F ambient. Fan and cabinet construction shall be provided as specified in paragraph "Unitary

Equipment Components". Fan and condenser motors shall have open or dripproof enclosures.

2.6.1 Air-Cooled Condenser

Unit shall be rated in accordance with ARI 460 and conform to the requirements of UL 1995. Unit shall be factory fabricated, tested, packaged, and self-contained. Unit shall be complete with casing, propeller or centrifugal type fans, heat rejection coils, connecting piping and wiring, and all necessary appurtenances.

2.6.1.1 Connections

Interconnecting refrigeration piping, electrical power, and control wiring between the condensing unit and the indoor unit shall be provided as required and as indicated. Electrical and refrigeration piping terminal connections between condensing unit and evaporator units shall be provided.

2.6.1.2 Condensing Coil

Coils shall have copper or aluminum tubes of 3/8 inch minimum diameter with copper or aluminum fins that are mechanically bonded or soldered to the tubes. Coils shall be protected with a minimum 3 mil thick phenolic or vinyl coating. Casing shall be galvanized steel or aluminum. Contact of dissimilar metals shall be avoided. Coils shall be tested in accordance with ASHRAE 15 at the factory and be suitable for the working pressure of the installed system. Each coil shall be dehydrated and sealed after testing and prior to evaluation and charging. Each unit shall be provided with a factory operating charge of refrigerant and oil or a holding charge. Unit shipped with a holding charge shall be field charged. Separate expansion devices shall be provided for each compressor circuit.

2.6.1.3 Unit Controls

The control system shall be complete with required accessories for regulating condenser pressure by fan cycling, solid-state variable fan speed, modulating condenser coil or fan dampers, flooding the condenser, or a combination of the above. Unit mounted control panels or enclosures shall be constructed in accordance with applicable requirements of NFPA 70 and housed in NEMA ICS 6, Class 1 or 3A enclosures. Controls shall include control transformer, fan motor, time delay start-up, overload protective devices, interface with local and remote components, and intercomponent wiring to terminal block points.

2.7 EQUIPMENT EFFICIENCY

Unit shall have an efficiency as indicated on the drawings.

2.8 UNITARY EQUIPMENT COMPONENTS

2.8.1 Refrigerant and Oil

Refrigerant shall be one of the fluorocarbon gases. Refrigerants shall have number designations and safety classifications in accordance with ASHRAE 34. Refrigerants shall meet the requirements of ARI 700 as a minimum. Refrigerants shall have an Ozone Depletion Potential (ODP) of less than or equal to 0.05. Contractor shall provide and install a complete charge of

refrigerant for the installed system as recommended by the manufacturer. Except for factory sealed units, two complete charges of lubricating oil for each compressor crankcase shall be furnished. One charge shall be used during the system performance testing period. Following the satisfactory completion of the performance testing, the oil shall be drained and replaced with a second charge. Lubricating oil shall be of a type and grade recommended by the manufacturer for each compressor. Where color leak indicator dye is incorporated, charge shall be in accordance with manufacturer's recommendation.

2.8.2 Fans

Fan wheel shafts shall be supported by either maintenance-accessible lubricated antifriction block-type bearings, or permanently lubricated ball bearings. Unit fans shall be selected to produce the cfm required at the fan total pressure. Motor starters, if applicable, shall be magnetic across-the-line type with a open or dripproof enclosure. Thermal overload protection shall be of the manual or automatic-reset type. Fan wheels or propellers shall be constructed of aluminum or galvanized steel. Centrifugal fan wheel housings shall be of galvanized steel, and both centrifugal and propeller fan casings shall be constructed of aluminum or galvanized steel. Steel elements of fans, except fan shafts, shall be hot-dipped galvanized after fabrication or fabricated of mill galvanized steel. Mill-galvanized steel surfaces and edges damaged or cut during fabrication by forming, punching, drilling, welding, or cutting shall be recoated with an approved zinc-rich compound. Fan wheels or propellers shall be statically and dynamically balanced. Direct-drive fan motors shall be of the multiple-speed variety. Belt-driven fans shall have adjustable sheaves to provide not less than 20 percent fan-speed adjustment. The sheave size shall be selected so that the fan speed at the approximate midpoint of the sheave adjustment will produce the specified air quantity. Centrifugal scroll-type fans shall be provided with streamlined orifice inlet and V-belt drive. Each drive will be independent of any other drive. Propeller fans shall be direct-drive drive type with fixed pitch blades. V-belt driven fans shall be mounted on a corrosion protected drive shaft supported by either maintenance-accessible lubricated antifriction block-type bearings, or permanently lubricated ball bearings. Each drive will be independent of any other drive. Drive bearings shall be protected with water slingers or shields. V-belt drives shall be fitted with guards where exposed to contact by personnel and fixed pitch sheaves.

2.8.3 Primary/Supplemental Heating

2.8.3.1 Electric Heating Coil

Coil shall be an electric duct heater in accordance with UL 1995 and NFPA 70. Coil shall be duct- or unit-mounted. Coil shall be of the nickel chromium resistor, single stage, strip type. Coil shall be provided with a built-in or surface-mounted high-limit thermostat interlocked electrically so that the coil cannot be energized unless the fan is energized. Coil casing and support brackets shall be of galvanized steel or aluminum. Coil shall be mounted to eliminate noise from expansion and contraction and be completely accessible for service.

2.8.4 Air Filters

Air filters shall be listed in accordance with requirements of UL 900.

2.8.4.1 Extended Surface Pleated Panel Filters

Filters shall be sectional type of the size indicated and shall have an average efficiency of 25 to 30 percent when tested in accordance with ASHRAE 52.1. Initial resistance at 500 feet/minute will not exceed 0.36 inches water gauge. Filters shall be UL Class 2. Media shall be nonwoven cotton and synthetic fiber mat. A wire support grid bonded to the media shall be attached to a moisture resistant fiberboard frame. Four edges of the filter media shall be bonded to the inside of the frame to prevent air bypass and increase rigidity.

2.8.5 Coil Frost Protection

Each circuit shall be provided with a coil frost protection system which is a manufacturer's standard. The coil frost protection system shall use a temperature sensor in the suction line of the compressor to shut the compressor off when coil frosting occurs. Timers shall be used to prevent the compressor from rapid cycling.

2.8.6 Pressure Vessels

Pressure vessels shall conform to ASME BPVC SEC VIII D1 or UL 207, as applicable for maximum and minimum pressure or temperature encountered. Where referenced publications do not apply, pressure components shall be tested at 1-1/2 times design working pressure. Refrigerant wetted carbon steel surfaces shall be pickled or abrasive blasted free of mill scale, cleaned, dried, charged, and sealed.

2.8.6.1 Hot Gas Muffler

Unit shall be selected by the manufacturer for maximum noise attenuation. Units rated for 30 tons capacity and under may be field tunable type.

2.8.7 Cabinet Construction

Casings for the specified unitary equipment shall be constructed of galvanized steel or aluminum sheet metal and galvanized or aluminum structural members. Minimum thickness of single wall exterior surfaces shall be 18 gauge galvanized steel or 0.071 inch thick aluminum. Casing shall be fitted with lifting provisions, access panels or doors, fan vibration isolators, electrical control panel, corrosion-resistant components, structural support members, insulated condensate drip pan and drain, and internal insulation in the cold section of the casing. Where double-wall insulated construction is proposed, minimum exterior galvanized sheet metal thickness shall be 20 gauge. Provisions to permit replacement of major unit components shall be incorporated. Penetrations of cabinet surfaces, including the floor, shall be sealed. Unit shall be fitted with a drain pan which extends under all areas where water may accumulate. Drain pan shall be fabricated from Type 300 stainless steel, galvanized steel with protective coating as required, or an approved plastic material. Pan insulation shall be water impervious. Extent and effectiveness of the insulation of unit air containment surfaces shall prevent, within limits of the specified insulation, heat transfer between the unit exterior and ambient air, heat transfer between the two conditioned air streams, and condensation on surfaces. Insulation shall conform to ASTM C 1071. Paint

and finishes shall comply with the requirements specified in paragraph FACTORY COATING.

2.8.7.1 Indoor Cabinet

Indoor cabinets shall be suitable for the specified indoor service and enclose all unit components.

2.8.7.2 Outdoor Cabinet

Outdoor cabinets shall be suitable for outdoor service with a weathertight, insulated and corrosion-protected structure. Cabinets constructed exclusively for indoor service which have been modified for outdoor service are not acceptable.

2.9 ACCESSORIES

2.9.1 Bird Screen

Screen shall be 0.063 inch diameter aluminum wire or 0.031 inch diameter stainless steel wire.

2.10 FABRICATION

2.10.1 Factory Coating

Unless otherwise specified, equipment and component items, when fabricated from ferrous metal, shall be factory finished with the manufacturer's standard finish, except that items located outside of buildings shall have weather resistant finishes that will withstand 125 hours exposure to the salt spray test specified in ASTM B 117 using a 5 percent sodium chloride solution. Immediately after completion of the test, the specimen shall show no signs of blistering, wrinkling, cracking, or loss of adhesion and no sign of rust creepage beyond 1/8 inch on either side of the scratch mark. Cut edges of galvanized surfaces where hot-dip galvanized sheet steel is used shall be coated with a zinc-rich coating conforming to ASTM D 520, Type I.

2.10.2 Factory Applied Insulation

Refrigeration equipment shall be provided with factory installed insulation on surfaces subject to sweating including the suction line piping. Where motors are the gas-cooled type, factory installed insulation shall be provided on the cold-gas inlet connection to the motor per manufacturer's standard practice. Factory insulated items installed outdoors are not required to be fire-rated. As a minimum, factory insulated items installed indoors shall have a flame spread index no higher than 75 and a smoke developed index no higher than 150. Factory insulated items (no jacket) installed indoors and which are located in air plenums, in ceiling spaces, and in attic spaces shall have a flame spread index no higher than 25 and a smoke developed index no higher than 50. Flame spread and smoke developed indexes shall be determined by ASTM E 84. Insulation shall be tested in the same density and installed thickness as the material to be used in the actual construction. Material supplied by a manufacturer with a jacket shall be tested as a composite material. Jackets, facings, and adhesives shall have a flame spread index no higher than 25 and a smoke developed index no higher than 50 when tested in accordance with ASTM E 84.

2.11 SUPPLEMENTAL COMPONENTS/SERVICES

2.11.1 Refrigerant Piping

Refrigerant piping for split-system unitary equipment shall be provided and installed in accordance with Section 15182 REFRIGERANT PIPING.

2.11.2 Ductwork

Ductwork shall be provided and installed in accordance with Section 15895 AIR SUPPLY, DISTRIBUTION, VENTILATION, AND EXHAUST SYSTEM.

2.11.3 Temperature Controls

Temperature controls shall be as shown on the drawings.

PART 3 EXECUTION

3.1 INSTALLATION

Work shall be performed in accordance with the manufacturer's published diagrams, recommendations, and equipment warranty requirements. Where equipment is specified to conform to the requirements of ASME BPVC SEC VIII D1and ASME BPVC SEC IX, the design, fabrication, and installation of the system shall conform to ASME BPVC SEC VIII D1 and ASME BPVC SEC IX.

3.1.1 Equipment

Equipment and the installation thereof shall conform to ASHRAE 15. Necessary supports shall be provided for all equipment, appurtenances, and pipe as required. Compressors shall be isolated from the building structure. If mechanical vibration isolators are not provided, vibration absorbing foundations shall be provided. Each foundation shall include isolation units consisting of machine and floor or foundation fastenings, together with intermediate isolation material. Other floor-mounted equipment shall be set on not less than a 6 inch concrete pad doweled in place. Isolators shall limit vibration to 10 percent at lowest equipment rpm. Lines connected to pumps mounted on pedestal blocks shall be provided with flexible connectors. Foundation drawings, bolt-setting information, and foundation bolts shall be furnished prior to concrete foundation construction for all equipment indicated or required to have concrete foundations. Concrete for foundations shall be as specified in Section 03300A CAST-IN-PLACE STRUCTURAL CONCRETE. Equipment shall be properly leveled, aligned, and secured in place in accordance with manufacturer's instructions.

3.1.2 Field Applied Insulation

Field applied insulation shall be as specified in Section 15080A THERMAL INSULATION FOR MECHANICAL SYSTEMS, except as defined differently herein.

3.1.3 Field Painting

Painting required for surfaces not otherwise specified, and finish painting of items only primed at the factory are specified in Section 09900 PAINTS AND COATINGS.

3.2 CLEANING AND ADJUSTING

Equipment shall be wiped clean, with all traces of oil, dust, dirt, or paint spots removed. Temporary filters shall be provided for all fans that are operated during construction, and new filters shall be installed after all construction dirt has been removed from the building. System shall be maintained in this clean condition until final acceptance. Bearings shall be properly lubricated with oil or grease as recommended by the manufacturer. Belts shall be tightened to proper tension. Control valves and other miscellaneous equipment requiring adjustment shall be adjusted to setting indicated or directed. Fans shall be adjusted to the speed indicated by the manufacturer to meet specified conditions. Testing, adjusting, and balancing shall be as specified in Section 15990A TESTING, ADJUSTING, AND BALANCING OF HVAC SYSTEMS.

3.3 REFRIGERANT TESTS, CHARGING, AND START-UP

Split-system refrigerant piping systems shall be tested and charged as specified in Section 15182 REFRIGERANT PIPING. Packaged refrigerant systems which are factory charged shall be checked for refrigerant and oil capacity to verify proper refrigerant levels per manufacturer's recommendations. Following charging, packaged systems shall be tested for leaks with a halide torch or an electronic leak detector.

3.3.1 Refrigerant Leakage

If a refrigerant leak is discovered after the system has been charged, the leaking portion of the system shall immediately be isolated from the remainder of the system and the refrigerant pumped into the system receiver or other suitable container. Under no circumstances shall the refrigerant be discharged into the atmosphere.

3.3.2 Contractor's Responsibility

The Contractor shall, at all times during the installation and testing of the refrigeration system, take steps to prevent the release of refrigerants into the atmosphere. The steps shall include, but not be limited to, procedures which will minimize the release of refrigerants to the atmosphere and the use of refrigerant recovery devices to remove refrigerant from the system and store the refrigerant for reuse or reclaim. At no time shall more than 3 ounces of refrigerant be released to the atmosphere in any one occurrence. Any system leaks within the first year shall be repaired in accordance with the requirements herein at no cost to the Government including material, labor, and refrigerant if the leak is the result of defective equipment, material, or installation.

3.4 SYSTEM PERFORMANCE TESTS

Before each refrigeration system is accepted, tests to demonstrate the general operating characteristics of all equipment shall be conducted by a registered professional engineer or an approved manufacturer's start-up representative experienced in system start-up and testing, at such times as directed. Tests shall cover a period of not less than 48 hours for each system and shall demonstrate that the entire system is functioning in accordance with the drawings and specifications. Corrections and adjustments shall be made as necessary and tests shall be re-conducted to demonstrate that the entire system is functioning as specified. Prior to

acceptance, service valve seal caps and blanks over gauge points shall be installed and tightened. Any refrigerant lost during the system startup shall be replaced. If tests do not demonstrate satisfactory system performance, deficiencies shall be corrected and the system shall be retested. Tests shall be conducted in the presence of the Contracting Officer. Water and electricity required for the tests will be furnished by the Government. Any material, equipment, instruments, and personnel required for the test shall be provided by the Contractor. Field tests shall be coordinated with Section 15990A TESTING, ADJUSTING, AND BALANCING OF HVAC SYSTEMS.

3.5 DEMONSTRATIONS

Contractor shall conduct a training course for the operating staff as designated by the Contracting Officer. The training period shall consist of a total 8 hours of normal working time and start after the system is functionally completed but prior to final acceptance tests. The field posted instructions shall cover all of the items contained in the approved operation and maintenance manuals as well as demonstrations of routine maintenance operations.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 15 - MECHANICAL

SECTION 15895

AIR SUPPLY, DISTRIBUTION, VENTILATION, AND EXHAUST SYSTEM

02/03

PART 1 GENERAL

1.1 REFERENCES
1.2 COORDINATION OF TRADES
1.3 DELIVERY AND STORAGE
1.4 FIELD MEASUREMENTS
1.5 SUBMITTALS

PART 2 PRODUCTS

2.1 STANDARD PRODUCTS
2.2 ASBESTOS PROHIBITION
2.3 NAMEPLATES
2.4 EQUIPMENT GUARDS AND ACCESS
2.5 PIPING COMPONENTS
2.5.1 Insulation
2.5.2 Condensate Drain Lines
2.6 ELECTRICAL WORK
2.7 CONTROLS
2.8 DUCTWORK COMPONENTS
2.8.1 Metal Ductwork
2.8.1.1 Transitions
2.8.1.2 Metallic Flexible Duct
2.8.1.3 Insulated Nonmetallic Flexible Duct Runouts
2.8.1.4 General Service Duct Connectors
2.8.2 Ductwork Accessories
2.8.2.1 Duct Access Doors
2.8.2.2 Splitters and Manual Balancing Dampers
2.8.2.3 Air Deflectors and Branch Connections
2.8.3 Duct Sleeves, Framed Prepared Openings, Closure Collars
2.8.3.1 Duct Sleeves
2.8.3.2 Framed Prepared Openings
2.8.3.3 Closure Collars
2.8.4 Diffusers, Registers, and Grilles
2.8.4.1 Diffusers
2.8.4.2 Registers and Grilles
2.8.5 Louvers
2.8.6 Bird Screens and Frames
2.9 AIR SYSTEMS EQUIPMENT
2.9.1 Fans
2.9.1.1 Centrifugal Fans
2.9.1.2 Centrifugal Type Power Wall Ventilators
2.9.1.3 Ceiling Exhaust Fans
2.9.2 Coils
2.9.2.1 Direct-Expansion Coils
2.9.2.2 Water Coils

2.9.3 Air Filters
2.9.3.1 Holding Frames
2.9.3.2 Filter Gauges
2.10 AIR HANDLING UNITS
2.10.1 Factory-Fabricated Air Handling Units
2.10.1.1 Casings
2.10.1.2 Heating and Cooling Coils
2.10.1.3 Air Filters
2.10.1.4 Fans
2.10.1.5 Dampers
2.11 FACTORY PAINTING

PART 3 EXECUTION

3.1 INSTALLATION
3.1.1 Condensate Drain Lines
3.1.2 Equipment and Installation
3.1.3 Access Panels
3.1.4 Flexible Connectors
3.1.5 Sleeved and Framed Openings
3.1.6 Metal Ductwork
3.1.7 Dust Control
3.1.8 Insulation
3.1.9 Duct Test Holes
3.1.10 Power Roof Ventilator Mounting
3.1.11 Power Transmission Components Adjustment
3.2 FIELD PAINTING AND IDENTIFICATION SYSTEMS
3.2.1 Identification Tags
3.2.2 Finish Painting and Pipe Color Code Marking
3.2.3 Color Coding Scheme for Locating Hidden Utility Components
3.3 PIPING HYDROSTATIC TEST
3.4 DUCTWORK LEAK TEST
3.5 TESTING, ADJUSTING, AND BALANCING
3.6 PERFORMANCE TESTS
3.7 CLEANING AND ADJUSTING
3.8 FIELD TRAINING

-- End of Section Table of Contents --

SECTION 15895

AIR SUPPLY, DISTRIBUTION, VENTILATION, AND EXHAUST SYSTEM
02/03

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR CONDITIONING AND REFRIGERATION INSTITUTE (ARI)

ARI 260	(2001) Sound Rating of Ducted Air Moving and Conditioning Equipment
ARI 350	(2000) Sound Rating of Non-Ducted Indoor Air-Conditioning Equipment
ARI 410	(1991) Forced-Circulation Air-Cooling and Air-Heating Coils
ARI 430	(1999) Central-Station Air-Handling Units
ARI 440	(1998) Room Fan-Coils
ARI 445	(1987; R 1993) Room Air-Induction Units
ARI 880	(1998) Air Terminals
ARI Guideline D	(1996) Application and Installation of Central Station Air-Handling Units

AIR CONDITIONING CONTRACTORS OF AMERICA (ACCA)

ACCA Manual 4	(2001) Installation Techniques for Perimeter Heating & Cooling; 11th Edition

AIR MOVEMENT AND CONTROL ASSOCIATION (AMCA)

AMCA 210	(1999) Laboratory Methods of Testing Fans for Aerodynamic Performance Rating
AMCA 300	(1996) Reverberant Room Method for Sound Testing of Fans

AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA)

ABMA 9	(1990; R 2000) Load Ratings and Fatigue Life for Ball Bearings

ABMA 11	(1990; R 1999) Load Ratings and Fatigue Life for Roller Bearings

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI S12.32	(1990; R 2001) Precision Methods for the Determination of Sound Power Levels of Discrete-Frequency and Narrow-Band Noise Sources in Reverberation Rooms

ASTM INTERNATIONAL (ASTM)

ASTM A 47/A 47M	(1999) Ferritic Malleable Iron Castings
ASTM A 53/A 53M	(2001) Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A 106	(1999el) Seamless Carbon Steel Pipe for High-Temperature Service
ASTM A 123/A 123M	(2001a) Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A 167	(1999) Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
ASTM A 181/A 181M	(2001) Carbon Steel Forgings, for General-Purpose Piping
ASTM A 183	(1998) Carbon Steel Track Bolts and Nuts
ASTM A 193/A 193M	(2001b) Alloy-Steel and Stainless Steel Bolting Materials for High-Temperature Service
ASTM A 234/A 234M	(2001a) Piping Fittings of Wrought Carbon Steel and Alloy Steel for Moderate and High Temperature Service
ASTM A 536	(1984; R 1999el) Ductile Iron Castings
ASTM A 733	(2001) Welded and Seamless Carbon Steel and Austenitic Stainless Steel Pipe Nipples
ASTM A 924/A 924M	(1999) General Requirements for Steel Sheet, Metallic-Coated by the Hot-Dip Process
ASTM B 62	(1993) Composition Bronze or Ounce Metal Castings
ASTM B 75	(1999) Seamless Copper Tube
ASTM B 75M	(1999) Seamless Copper Tube (Metric)
ASTM B 88	(1999el) Seamless Copper Water Tube
ASTM B 88M	(1999) Seamless Copper Water Tube (Metric)

ASTM B 117	(1997) Operating Salt Spray (Fog) Apparatus
ASTM B 650	(1995) Electrodeposited Engineering Chromium Coatings on Ferrous Substrates
ASTM B 813	(2000) Liquid and Paste Fluxes for Soldering of Copper and Copper Alloy Tube
ASTM C 916	(1985; R 1996el) Adhesives for Duct Thermal Insulation
ASTM C 1071	(2000) Fibrous Glass Duct Lining Insulation (Thermal and Sound Absorbing Material)
ASTM D 520	(2000) Zinc Dust Pigment
ASTM D 1384	(2001) Corrosion Test for Engine Coolants in Glassware
ASTM D 1654	(1992; R 2000) Evaluation of Painted or Coated Specimens Subjected to Corrosive Environments
ASTM D 1785	(1999) Poly (Vinyl Chloride) (PVC) Plastic Pipe, Schedules 40, 80, and 120
ASTM D 2000	(2001) Rubber Products in Automotive Applications
ASTM D 2466	(2001) Poly (Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 40
ASTM D 2564	(1996a) Solvent Cements for Poly (Vinyl Chloride) (PVC) Plastic Piping Systems
ASTM D 2855	(1996) Making Solvent-Cemented Joints with Poly (Vinyl Chloride) (PVC) Pipe and Fittings
ASTM D 3359	(1997) Measuring Adhesion by Tape Test
ASTM E 84	(2001) Surface Burning Characteristics of Building Materials
ASTM E 437	(1992; R 1997) Industrial Wire Cloth and Screens (Square Opening Series)
ASTM F 872	(1984; R 1990) Filter Units, Air-Conditioning: Viscous-Impingement Type, Cleanable
ASTM F 1199	(1988; R 1998) Cast (All Temperatures and Pressures) and Welded Pipe Line Strainers (150 psig and 150 degrees F Maximum)
ASTM F 1200	(1988; R 1998) Fabricated (Welded) Pipe Line Strainers (Above 150 psig and 150 degrees F)

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 15	(2001) Safety Standard for Refrigeration Systems
ASHRAE 52.1	(1992) Gravimetric and Dust-Spot Procedures for Testing Air-Cleaning Devices Used in General Ventilation for Removing Particulate Matter
ASHRAE 68	(1997) Laboratory Method of Testing to Determine the Sound Power in a Duct
ASHRAE 70	(1991) Method of Testing for Rating the Performance of Air Outlets and Inlets
ASHRAE 84	(1991) Method of Testing Air-to-Air Heat Exchangers

ASME INTERNATIONAL (ASME)

ASME B1.20.1	(1983; R 2001) Pipe Threads, General Purpose, Inch
ASME B16.3	(1998) Malleable Iron Threaded Fittings
ASME B16.5	(1996) Pipe Flanges and Flanged Fittings
ASME B16.9	(2001) Factory-Made Wrought Steel Buttwelding Fittings
ASME B16.11	(2001) Forged Fittings, Socket-Welding and Threaded
ASME B16.18	(2001) Cast Copper Alloy Solder Joint Pressure Fittings
ASME B16.21	(1992) Nonmetallic Flat Gaskets for Pipe Flanges
ASME B16.22	(1995) Wrought Copper and Copper Alloy Solder Joint Pressure Fittings
ASME B16.26	(1988) Cast Copper Alloy Fittings for Flared Copper Tubes
ASME B16.39	(1998) Malleable Iron Threaded Pipe Unions
ASME B31.1	(2001) Power Piping
ASME B40.1	(1991) Gauges - Pressure Indicating Dial Type - Elastic Element

ASME BPVC IX	(2001) Boiler and Pressure Vessel Code; Section IX, Welding and Brazing Qualifications

AMERICAN WATER WORKS ASSOCIATION (AWWA)

AWWA C606	(1997) Grooved and Shouldered Joints

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1/D1.1M	(2000) Structural Welding Code - Steel

U.S. GENERL SERVICES ADMINISTRATION (GSA)

CID A-A-1419	(Rev D; Canc. Notice 1) Filter Element, Air Conditioning (Viscous-Impingement and Dry Types, Replaceable)

EXPANSION JOINT MANUFACTURERS ASSOCIATION (EJMA)

EJMA Stds	(1998; 7th Edition; Addenda 2000) EJMA Standards

INSTITUTE OF ENVIRONMENTAL SCIENCES AND TECHNOLOGY (IEST)

IEST RP-CC-001.3	(1997) HEPA and ULPA Filters

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY (MSS)

MSS SP-25	(1998) Standard Marking System for Valves, Fittings, Flanges and Unions
MSS SP-58	(1993) Pipe Hangers and Supports - Materials, Design and Manufacture
MSS SP-69	(1996) Pipe Hangers and Supports - Selection and Application
MSS SP-70	(1998) Cast Iron Gate Valves, Flanged and Threaded Ends
MSS SP-71	(1997) Gray Iron Swing Check Valves, Flanged and Threaded Ends
MSS SP-72	(1999) Ball Valves with Flanged or Butt-Welding Ends for General Service
MSS SP-80	(1997) Bronze Gate, Globe, Angle and Check Valves
MSS SP-85	(1994) Cast Iron Globe & Angle Valves, Flanged and Threaded Ends
MSS SP-110	(1996) Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA MG 1	(1998) Motors and Generators

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2002) National Electrical Code
NFPA 90A	(1999) Installation of Air Conditioning and Ventilating Systems
NFPA 96	(2001) Ventilation Control and Fire Protection of Commercial Cooking Equipment

NORTH AMERICAN INSULATION MANUFACTURERS ASSOCIATION (NAIMA)

NAIMA AH115	(2001) Fibrous Glass Duct Construction Standards

SHEET METAL & AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION (SMACNA)

SMACNA HVAC Duct Const Stds	(1995; Addenda Nov 1997; 6th Printing 2001) HVAC Duct Construction Standards - Metal and Flexible
SMACNA Industry Practice	(1975; 8th Printing 1997) Accepted Industry Practice for Industrial Duct Construction
SMACNA Install Fire Damp HVAC	(1992; 2nd Printing 1996) Fire, Smoke and Radiation Damper Installation Guide for HVAC Systems
SMACNA Leakage Test Mnl	(1985; 6th Printing 1997) HVAC Air Duct Leakage Test Manual

UNDERWRITERS LABORATORIES (UL)

UL 94	(1996; Rev thru May 2001) Tests for Flammability of Plastic Materials for Parts in Devices and Appliances
UL 181	(1996; Rev thru Dec 1998) Factory-Made Air Ducts and Air Connectors
UL 214	(1997; Rev thru Aug 2001) Tests for Flame-Propagation of Fabrics and Films
UL 555	(1999; Rev thru Jan 2002) Fire Dampers
UL 586	(1996; Rev thru Apr 2000) High-Efficiency, Particulate, Air Filter Units
UL 705	(1994; Rev thru Feb 1999) Power Ventilators
UL 723	(1996; Rev thru Sep 2001) Test for Surface Burning Characteristics of Building Materials

UL 900	(1994; Rev thru Oct 1999) Air Filter Units
UL 1995	(1995; Rev thru Aug 1999) Heating and Cooling Equipment
UL Bld Mat Dir	(1999) Building Materials Directory
UL Elec Const Dir	(2001) Electrical Construction Equipment Directory
UL Fire Resist Dir	(2001) Fire Resistance Directory (2 Vol.)

1.2 COORDINATION OF TRADES

Ductwork, piping offsets, fittings, and accessories shall be furnished as required to provide a complete installation and to eliminate interference with other construction.

1.3 DELIVERY AND STORAGE

Equipment delivered and placed in storage shall be stored with protection from the weather, humidity and temperature variations, dirt and dust, or other contaminants. Additionally, all pipes shall either be capped or plugged until installed.

1.4 FIELD MEASUREMENTS

After becoming familiar with all details of the work, the Contractor shall verify all dimensions in the field, and shall advise the Contracting Officer of any discrepancy before performing the work.

1.5 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only or as otherwise designated. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Drawings;
Installation;

Drawings showing equipment layout, including assembly and installation details and electrical connection diagrams; ductwork layout showing the location of all supports and hangers, typical hanger details, gauge reinforcement, reinforcement spacing rigidity classification, and static pressure and seal classifications; and piping layout showing the location of all guides and anchors, the load imposed on each support or anchor, and typical support details. Drawings shall include any information required to demonstrate that the system has been coordinated and will properly function as a unit and shall show equipment relationship to other

parts of the work, including clearances required for operation and maintenance.

SD-03 Product Data

Components and Equipment;

Manufacturer's catalog data included with the detail drawings for the following items. The data shall be highlighted to show model, size, options, etc., that are intended for consideration. Data shall be adequate to demonstrate compliance with contract requirements for the following:

a. Ductwork Components

b. Air Systems Equipment

c. Air Handling Units

Test Procedures;

Proposed test procedures for piping hydrostatic test, ductwork leak test, and performance tests of systems, at least 2 weeks prior to the start of related testing.

Welding Procedures;

A copy of qualified welding procedures, at least 2 weeks prior to the start of welding operations.

Diagrams; G

Proposed diagrams, at least 2 weeks prior to start of related testing. System diagrams that show the layout of equipment, piping, and ductwork, and typed condensed operation manuals explaining preventative maintenance procedures, methods of checking the system for normal, safe operation, and procedures for safely starting and stopping the system shall be framed under glass or laminated plastic. After approval, these items shall be posted where directed.

Manufacturer's Experience

Statement demonstrating successful completion of similar services on at least 5 projects of similar size and scope, at least 2 weeks prior to submittal of other items required by this section.

Welded Joints

A list of names and identification symbols of qualified welders and welding operators, at least 2 weeks prior to the start of welding operations.

Performance Tests

Proposed test schedules for hydrostatic test of piping, ductwork leak test, and performance tests, at least 2 weeks prior to the start of related testing.

Field Training

Proposed schedule for field training, at least 2 weeks prior to the start of related training.

SD-06 Test Reports

Performance Tests
Testing, Adjusting, and Balancing

Test reports for the piping hydrostatic test, ductwork leak test, and performance tests in booklet form, upon completion of testing. Reports shall document phases of tests performed including initial test summary, repairs/adjustments made, and final test results.

SD-07 Certificates

Bolts

Written certification from the bolt manufacturer that the bolts furnished comply with the requirements of this specification. The certification shall include illustrations of product markings, and the number of each type of bolt to be furnished.

SD-10 Operation and Maintenance Data

Operating and Maintenance Instructions

Six manuals listing step-by-step procedures required for system startup, operation, shutdown, and routine maintenance, at least 2 weeks prior to field training. The manuals shall include the manufacturer's name, model number, parts list, list of parts and tools that should be kept in stock by the owner for routine maintenance including the name of a local supplier, simplified wiring and controls diagrams, troubleshooting guide, and recommended service organization (including address and telephone number) for each item of equipment. Each service organization submitted shall be capable of providing 4 hour onsite response to a service call on an emergency basis.

PART 2 PRODUCTS

2.1 STANDARD PRODUCTS

Components and equipment shall be standard products of a manufacturer regularly engaged in the manufacturing of products that are of a similar material, design and workmanship. The standard products shall have been in satisfactory commercial or industrial use for 2 years before bid opening. The 2-year manufacturer's experience shall include applications of components and equipment under similar circumstances and of similar size. The 2 years must be satisfactorily completed by a product which has been sold or is offered for sale on the commercial market through advertisements, manufacturers' catalogs, or brochures. Products having less than a 2-year

field service record will be acceptable if a certified record of satisfactory field operation, for not less than 6000 hours exclusive of the manufacturer's factory tests, can be shown. The equipment items shall be supported by a service organization.

2.2 ASBESTOS PROHIBITION

Asbestos and asbestos-containing products shall not be used.

2.3 NAMEPLATES

Equipment shall have a nameplate installed by the manufacturer that identifies the manufacturer's name, address, type or style, model or serial number, and catalog number.

2.4 EQUIPMENT GUARDS AND ACCESS

Belts, pulleys, chains, gears, couplings, projecting setscrews, keys, and other rotating parts exposed to personnel contact shall be fully enclosed or guarded according to OSHA requirements. High temperature equipment and piping exposed to contact by personnel or where it creates a potential fire hazard shall be properly guarded or covered with insulation of a type specified.

2.5 PIPING COMPONENTS

2.5.1 Insulation

Shop and field applied insulation shall be as specified in Section 15080A THERMAL INSULATION FOR MECHANICAL SYSTEMS.

2.5.2 Condensate Drain Lines

Condensate drainage shall be provided for each item of equipment that generates condensate as specified for drain, waste, and vent piping systems in Section 15400A PLUMBING, GENERAL PURPOSE.

2.6 ELECTRICAL WORK

Electrical motor-driven equipment specified shall be provided complete with motor, motor starter, and controls. Unless otherwise specified, electric equipment, including wiring and motor efficiencies, shall be according to Section 16415A ELECTRICAL WORK, INTERIOR. Electrical characteristics and enclosure type shall be as shown. Unless otherwise indicated, motors of 1 hp and above shall be high efficiency type. Motor starters shall be provided complete with thermal overload protection and other appurtenances necessary. Each motor shall be according to NEMA MG 1 and shall be of sufficient size to drive the equipment at the specified capacity without exceeding the nameplate rating of the motor. Manual or automatic control and protective or signal devices required for the operation specified, and any control wiring required for controls and devices, but not shown, shall be provided. Where two-speed motors are indicated, solid-state variable-speed controller may be provided to accomplish the same function. Solid-state variable-speed controllers shall be utilized for motors rated 10 hp or less. Adjustable frequency drives shall be used for larger motors.

2.7 CONTROLS

Controls shall be electric or electronic and shall provide the sequence of control shown on the drawings. Thermostats shall be microprocessor based and shall be programmable to allow seven day program with night setback.

2.8 DUCTWORK COMPONENTS

2.8.1 Metal Ductwork

All aspects of metal ductwork construction, including all fittings and components, shall comply with SMACNA HVAC Duct Const Stds unless otherwise specified. Elbows shall be radius type with a centerline radius of 1.5 times the width or diameter of the duct where space permits. Otherwise, elbows having a minimum radius equal to the width or diameter of the duct or square elbows with factory fabricated turning vanes may be used. All ductwork shall be static pressure class 1/2 inch w.g. and shall meet the requirements of Seal Class C. Sealants shall conform to fire hazard classification specified in Section 15080A THERMAL INSULATION FOR MECHANICAL SYSTEMS and shall be suitable for the range of air distribution and ambient temperatures that it will be exposed to. Pressure sensitive tape shall not be used as a sealant. Spiral lock seam duct, and flat oval shall be made with duct sealant and locked with not less than 3 equally spaced drive screws or other approved methods indicated in SMACNA HVAC Duct Const Stds. The sealant shall be applied to the exposed male part of the fitting collar so that the sealer will be on the inside of the joint and fully protected by the metal of the duct fitting. One brush coat of the sealant shall be applied over the outside of the joint to at least 2 inch band width covering all screw heads and joint gap. Dents in the male portion of the slip fitting collar will not be acceptable. Outdoor air intake ducts and plenums shall be fabricated with watertight soldered or brazed joints and seams.

2.8.1.1 Transitions

Diverging air flow transitions shall be made with each side pitched out a maximum of 15 degrees, for an included angle of 30 degrees. Transitions for converging air flow shall be made with each side pitched in a maximum of 30 degrees, for an included angle of 60 degrees, or shall be as indicated. Factory-fabricated reducing fittings for systems using round duct sections when formed to the shape of the ASME short flow nozzle, need not comply with the maximum angles specified.

2.8.1.2 Metallic Flexible Duct

Metallic type duct shall be single-ply galvanized steel or Type 316 stainless steel. Duct shall be of corrugated/interlocked, folded and knurled type seam construction, bendable without damage through 180 degrees with a throat radius equal to 0.5 duct diameter. Duct shall conform to UL 181 and shall be rated for positive or negative working pressure of 15 inches water gauge at 650 degrees F when duct is galvanized steel or stainless steel.

2.8.1.3 Insulated Nonmetallic Flexible Duct Runouts

Flexible duct runouts shall be used only where indicated. Runout length shall be as shown on the drawings, but shall in no case exceed 10 feet. Runouts shall be preinsulated, factory fabricated, and shall comply with

NFPA 90A and UL 181. Either field or factory applied vapor barrier shall be provided. The insulated material and vapor barrier shall conform to the requirements of Section 15080A THERMAL INSULATION FOR MECHANICAL SYSTEMS. The insulation material surface shall not be exposed to the air stream.

2.8.1.4 General Service Duct Connectors

A flexible duct connector approximately 6 inches in width shall be provided where sheet metal connections are made to fans or where ducts of dissimilar metals are connected. For round/oval ducts, the flexible material shall be secured by stainless steel or zinc-coated, iron clinch-type draw bands. For rectangular ducts, the flexible material locked to metal collars shall be installed using normal duct construction methods. The composite connector system shall comply with UL 214 and be classified as "flame-retarded fabrics" in UL Bld Mat Dir.

2.8.2 Ductwork Accessories

2.8.2.1 Duct Access Doors

Access doors shall be provided in ductwork and plenums where indicated and at all automatic dampers, fire dampers, coils, thermostats, and other apparatus requiring service and inspection in the duct system, and unless otherwise shown, shall conform to SMACNA HVAC Duct Const Stds. Doors shall be minimum 15 x 18 inches, unless otherwise shown. Where duct size will not accommodate this size door, the doors shall be made as large as practicable. Doors 24 x 24 inches or larger shall be provided with fasteners operable from both sides. Doors in insulated ducts shall be the insulated type.

2.8.2.2 Splitters and Manual Balancing Dampers

Splitters and manual balancing dampers shall be furnished with accessible operating mechanisms. Where operators occur in finished portions of the building, operators shall be chromium plated with all exposed edges rounded. Splitters shall be operated by quadrant operators or 3/16 inch rod brought through the side of the duct with locking setscrew and bushing. Two rods are required on splitters over 8 inches. Manual volume control dampers shall be operated by locking-type quadrant operators. Dampers and splitters shall be 2 gauges heavier than the duct in which installed. Unless otherwise indicated, multileaf dampers shall be opposed blade type with maximum blade width of 12 inches. Access doors or panels shall be provided for all concealed damper operators and locking setscrews. Unless otherwise indicated, the locking-type quadrant operators for dampers, when installed on ducts to be thermally insulated, shall be provided with stand-off mounting brackets, bases, or adapters to provide clearance between the duct surface and the operator not less than the thickness of the insulation. Stand-off mounting items shall be integral with the operator or standard accessory of the damper manufacturer. Volume dampers shall be provided where indicated.

2.8.2.3 Air Deflectors and Branch Connections

Air deflectors shall be provided at duct mounted supply outlets, at takeoff or extension collars to supply outlets, at duct branch takeoff connections, and at 90 degree elbows, as well as at locations as indicated on the drawings or otherwise specified. Conical branch connections or 45 degree entry connections may be used in lieu of deflectors or extractors for branch

connections. All air deflectors, except those installed in 90 degree elbows, shall be provided with an approved means of adjustment. Adjustment shall be made from easily accessible means inside the duct or from an adjustment with sturdy lock on the face of the duct. When installed on ducts to be thermally insulated, external adjustments shall be provided with stand-off mounting brackets, integral with the adjustment device, to provide clearance between the duct surface and the adjustment device not less than the thickness of the thermal insulation. Air deflectors shall be factory-fabricated units consisting of curved turning vanes or louver blades designed to provide uniform air distribution and change of direction with minimum turbulence or pressure loss. Air deflectors shall be factory or field assembled. Blade air deflectors, also called blade air extractors, shall be approved factory fabricated units consisting of equalizing grid and adjustable blade and lock. Adjustment shall be easily made from the face of the diffuser or by position adjustment and lock external to the duct. Stand-off brackets shall be provided on insulated ducts and are described herein. Fixed air deflectors, also called turning vanes, shall be provided in 90 degree elbows.

2.8.3 Duct Sleeves, Framed Prepared Openings, Closure Collars

2.8.3.1 Duct Sleeves

Duct sleeves shall be provided for round ducts 15 inches in diameter or less passing through floors, walls, ceilings, or roof, and installed during construction of the floor, wall, ceiling, or roof. Round ducts larger than 15 inches in diameter and square, rectangular, and oval ducts passing through floors, walls, ceilings, or roof shall be installed through framed prepared openings. The Contractor shall be responsible for the proper size and location of sleeves and prepared openings. Sleeves and framed openings are also required where grilles, registers, and diffusers are installed at the openings. Framed prepared openings shall be fabricated from 20 gauge galvanized steel, unless otherwise indicated. Where sleeves are installed in bearing walls or partitions, black steel pipe, ASTM A 53/A 53M, Schedule 20 shall be used. Sleeve shall provide 1 inch clearance between the duct and the sleeve or 1 inch clearance between the insulation and the sleeve for insulated ducts.

2.8.3.2 Framed Prepared Openings

Openings shall have 1 inch clearance between the duct and the opening or 1 inch clearance between the insulation and the opening for insulated ducts.

2.8.3.3 Closure Collars

Collars shall be fabricated of galvanized sheet metal not less than 4 inches wide, unless otherwise indicated, and shall be installed on exposed ducts on each side of walls or floors where sleeves or prepared openings are provided. Collars shall be installed tight against surfaces. Collars shall fit snugly around the duct or insulation. Sharp edges of the collar around insulated duct shall be ground smooth to preclude tearing or puncturing the insulation covering or vapor barrier. Collars for round ducts 15 inches in diameter or less shall be fabricated from 20 gauge galvanized steel. Collars for round ducts larger than 15 inches and square, and rectangular ducts shall be fabricated from 18 gauge galvanized steel. Collars shall be installed with fasteners on maximum 6 inch centers, except that not less than 4 fasteners shall be used.

2.8.4 Diffusers, Registers, and Grilles

Units shall be factory-fabricated of steel, corrosion-resistant steel, or aluminum and shall distribute the specified quantity of air evenly over space intended without causing noticeable drafts, air movement faster than 50 fpm in occupied zone, or dead spots anywhere in the conditioned area. Outlets for diffusion, spread, throw, and noise level shall be as required for specified performance. Performance shall be certified according to ASHRAE 70. Inlets and outlets shall be sound rated and certified according to ASHRAE 70. Sound power level shall be as indicated. Diffusers and registers shall be provided with volume damper with accessible operator, unless otherwise indicated; or if standard with the manufacturer, an automatically controlled device will be acceptable. Volume dampers shall be opposed blade type for all diffusers and registers. Where the inlet and outlet openings are located less than 7 feet above the floor, they shall be protected by a grille or screen according to NFPA 90A.

2.8.4.1 Diffusers

Diffuser types shall be as indicated. Ceiling mounted units shall be furnished with anti-smudge devices, unless the diffuser unit minimizes ceiling smudging through design features. Diffusers shall be provided with air deflectors of the type indicated. Ceiling mounted units shall be installed with rims tight against ceiling. Sponge rubber gaskets shall be provided between ceiling and surface mounted diffusers for air leakage control. Suitable trim shall be provided for flush mounted diffusers. Duct collar connecting the duct to diffuser shall be airtight and shall not interfere with volume controller. Return or exhaust units shall be similar to supply diffusers.

2.8.4.2 Registers and Grilles

Units shall be four-way directional-control type, except that return and exhaust registers may be fixed horizontal or vertical louver type similar in appearance to the supply register face. Registers shall be provided with sponge-rubber gasket between flanges and wall or ceiling. Wall supply registers shall be installed at least 6 inches below the ceiling unless otherwise indicated. Return and exhaust registers shall be located 6 inches above the floor unless otherwise indicated. Four-way directional control may be achieved by a grille face which can be rotated in 4 positions or by adjustment of horizontal and vertical vanes. Grilles shall be as specified for registers, without volume control damper.

2.8.5 Louvers

Louvers for installation in exterior walls which are associated with the air supply and distribution system shall be as specified in Section 07600A SHEET METALWORK, GENERAL.

2.8.6 Bird Screens and Frames

Bird screens shall conform to ASTM E 437, No. 2 mesh, aluminum or stainless steel. Aluminum screens shall be rated "medium-light". Stainless steel screens shall be rated "light". Frames shall be removable type, or stainless steel or extruded aluminum.

2.9 AIR SYSTEMS EQUIPMENT

2.9.1 Fans

Fans shall be tested and rated according to AMCA 210. Fans may be connected to the motors either directly or indirectly with V-belt drive. V-belt drives shall be designed for not less than 150 percent of the connected driving capacity. Motor sheaves shall be variable pitch for 15 hp and below and fixed pitch as defined by ARI Guideline D. Variable pitch sheaves shall be selected to drive the fan at a speed which will produce the specified capacity when set at the approximate midpoint of the sheave adjustment. When fixed pitch sheaves are furnished, a replaceable sheave shall be provided when needed to achieve system air balance. Motors for V-belt drives shall be provided with adjustable rails or bases. Removable metal guards shall be provided for all exposed V-belt drives, and speed-test openings shall be provided at the center of all rotating shafts. Fans shall be provided with personnel screens or guards on both suction and supply ends, except that the screens need not be provided, unless otherwise indicated, where ducts are connected to the fan. Fan and motor assemblies shall be provided with vibration-isolation supports or mountings as indicated. Vibration-isolation units shall be standard products with published loading ratings. Each fan shall be selected to produce the capacity required at the fan static pressure indicated. Sound power level shall be as indicated. The sound power level values shall be obtained according to AMCA 300. Standard AMCA arrangement, rotation, and discharge shall be as indicated.

2.9.1.1 Centrifugal Fans

Centrifugal fans shall be fully enclosed, single-width single-inlet, or double-width double-inlet, AMCA Pressure Class I, II, or III as required or indicated for the design system pressure. Impeller wheels shall be rigidly constructed, accurately balanced both statically and dynamically. Fan blades may be forward curved or backward-inclined airfoil design in wheel sizes up to 30 inches. Fan wheels over 36 inches in diameter shall have overhung pulleys and a bearing on each side of the wheel. Fan wheels 36 inches or less in diameter may have one or more extra long bearings between the fan wheel and the drive. Bearings shall be sleeve type, self-aligning and self-oiling with oil reservoirs, or precision self-aligning roller or ball-type with accessible grease fittings or permanently lubricated type. Grease fittings shall be connected to tubing and serviceable from a single accessible point. Bearing life shall be L50 rated at not less than 200,000 hours as defined by ABMA 9 and ABMA 11. Fan shafts shall be steel, accurately finished, and shall be provided with key seats and keys for impeller hubs and fan pulleys. Each fan outlet shall be of ample proportions and shall be designed for the attachment of angles and bolts for attaching flexible connections. Motors, unless otherwise indicated, shall not exceed 1800 rpm and shall have open or dripproof enclosures. Motor starters shall be magnetic across-the-line type with general-purpose enclosure.

2.9.1.2 Centrifugal Type Power Wall Ventilators

Fans shall be direct or V-belt driven centrifugal type as specified on the drawings with backward inclined, non-overloading wheel. Motor housing shall be removable and weatherproof. Unit housing shall be designed for sealing

to building surface and for discharge and condensate drippage away from building surface. Housing shall be constructed of heavy gauge aluminum. Unit shall be fitted with an aluminum or plated steel wire discharge bird screen, anodized aluminum or stainless steel wall grille, manufacturer's standard gravity motor-operated damper, and an airtight and liquid-tight metallic wall sleeve. Motor enclosure shall be dripproof type. Lubricated bearings shall be provided.

2.9.1.3 Ceiling Exhaust Fans

Suspended cabinet-type ceiling exhaust fans shall be centrifugal type, direct-driven. Fans shall have acoustically insulated housing. Integral backdraft damper shall be chatter-proof. The integral face grille shall be of egg-crate design or louver design. Fan motors shall be mounted on vibration isolators. Unit shall be provided with mounting flange for hanging unit from above. Fans shall be U.L. listed.

2.9.2 Coils

Coils shall be fin-and-tube type constructed of seamless copper tubes and aluminum or copper fins mechanically bonded or soldered to the tubes. Copper tube wall thickness shall be a minimum of 0.016 inches. Aluminum fins shall be 0.0055 inch minimum thickness. Copper fins shall be 0.0045 inch minimum thickness. Casing and tube support sheets shall be not lighter than 16 gauge galvanized steel, formed to provide structural strength. When required, multiple tube supports shall be provided to prevent tube sag. Each coil shall be tested at the factory under water at not less than 400 psi air pressure and shall be suitable for 200 psi working pressure. Coils shall be mounted for counterflow service. Coils shall be rated and certified according to ARI 410.

2.9.2.1 Direct-Expansion Coils

Direct-expansion coils shall be suitable for the refrigerant involved. Suction headers shall be seamless copper tubing or seamless or resistance welded steel tube with copper connections. Supply headers shall consist of a distributor which shall distribute the refrigerant through seamless copper tubing equally to all circuits in the coil. Tubes shall be circuited to ensure minimum pressure drop and maximum heat transfer. Circuiting shall permit refrigerant flow from inlet to suction outlet without causing oil slugging or restricting refrigerant flow in coil. Each coil to be field installed shall be completely dehydrated and sealed at the factory upon completion of pressure tests.

2.9.2.2 Water Coils

Water coils shall be installed with a pitch of not less than 1/8 inch per foot of the tube length toward the drain end. Headers shall be constructed of cast iron, welded steel or copper. Each coil shall be provided with a plugged vent and drain connection extending through the unit casing.

2.9.3 Air Filters

Air filters shall be listed according to requirements of UL 900.

2.9.3.1 Holding Frames

Frames shall be fabricated from not lighter than 16 gauge sheet steel with rust-inhibitor coating. Each holding frame shall be equipped with suitable filter holding devices. Holding frame seats shall be gasketed. All joints shall be airtight.

2.9.3.2 Filter Gauges

Filter gauges shall be dial type, diaphragm actuated draft and shall be provided for all filter stations, including those filters which are furnished as integral parts of factory fabricated air handling units. Gauges shall be at least 3-7/8 inches in diameter, shall have white dials with black figures, and graduations and shall have a minimum range of 1 inch beyond the specified final resistance for the filter bank on which each gauge is applied. Each gauge shall incorporate a screw operated zero adjustment and shall be furnished complete with two static pressure tips with integral compression fittings, two molded plastic vent valves, two 5 foot minimum lengths of 1/4 inch diameter vinyl tubing, and all hardware and accessories for gauge mounting.

2.10 AIR HANDLING UNITS

2.10.1 Factory-Fabricated Air Handling Units

Units shall be single-zone draw-through type as indicated. Units shall include fans, coils, airtight insulated casing, adjustable V-belt drives, belt guards for externally mounted motors, access sections where indicated, vibration-isolators, and appurtenances required for specified operation. Vibration isolators shall be as indicated. Each air handling unit shall have physical dimensions suitable to fit space allotted to the unit and shall have the capacity indicated. Air handling unit shall have published ratings based on tests performed according to ARI 430.

2.10.1.1 Casings

Casing sections shall be single wall type, constructed of a minimum 18 gauge galvanized steel, or 18 gauge steel outer casing protected with a corrosion resistant paint finish according to paragraph FACTORY PAINTING. Casing shall be designed and constructed with an integral insulated structural steel frame such that exterior panels are non-load bearing. Exterior panels shall be individually removable. Removal shall not affect the structural integrity of the unit. Casings shall be provided with inspection doors, access sections, and access doors as indicated. Inspection and access doors shall be insulated, fully gasketed, double-wall type, of a minimum 18 gauge outer and 20 gauge inner panels. Doors shall be rigid and provided with heavy duty hinges and latches. Inspection doors shall be a minimum 12 inches wide by 12 inches high. Access doors shall be minimum 24 inches wide and shall be the full height of the unit casing. Drain pan shall be double-wall insulated type constructed of 16 gauge galvanized or stainless steel, pitched to the drain connection. Drain pans shall be constructed water tight, treated to prevent corrosion, and designed for positive condensate drainage. Drain pan shall be constructed so that the pan may be visually inspected easily including underneath the coil without removal of the coil and so that the pan may be physically cleaned completely and easily underneath the coil without removal of the coil. Casing insulation shall conform to NFPA 90A. Single-wall casing sections handling conditioned air shall be insulated with not less than 1 inch thick, 1-1/2 pound density coated fibrous glass material having a thermal conductivity not greater than

0.23 Btu/hr-sf-F. Factory applied fibrous glass insulation shall conform to ASTM C 1071, except that the minimum thickness and density requirements do not apply, and shall meet the requirements of NFPA 90A. Air handling unit casing insulation shall be uniform over the entire casing. Duct liner material, coating, and adhesive shall conform to fire-hazard requirements specified in Section 15080A THERMAL INSULATION FOR MECHANICAL SYSTEMS. Exposed insulation edges and joints where insulation panels are butted together shall be protected with a metal nosing strip or shall be coated to conform to meet erosion resistance requirements of ASTM C 1071. A latched and hinged inspection door, shall be provided in the fan and coil sections.

2.10.1.2 Heating and Cooling Coils

Coils shall be provided as specified in paragraph AIR SYSTEMS EQUIPMENT, for types indicated.

2.10.1.3 Air Filters

Air filters shall be as specified in paragraph AIR SYSTEMS EQUIPMENT for types and thickness indicated.

2.10.1.4 Fans

Fans shall be double-inlet, centrifugal type with each fan in a separate scroll. Fans and shafts shall be dynamically balanced prior to installation into air handling unit, then the entire fan assembly shall be statically and dynamically balanced at the factory after it has been installed in the air handling unit. Fans shall be mounted on steel shafts accurately ground and finished. Fan bearings shall be sealed against dust and dirt and shall be precision self-aligning ball or roller type. Bearing life shall be L50 rated at not less than 200,000 hours as defined by ABMA 9 and ABMA 11. Bearings shall be permanently lubricated or lubricated type with lubrication fittings readily accessible at the drive side of the unit. Bearings shall be supported by structural shapes, or die formed sheet structural members, or support plates securely attached to the unit casing. Bearings may not be fastened directly to the unit sheet metal casing. Fans and scrolls shall be furnished with coating indicated. Fans shall be driven by a unit-mounted or a floor-mounted motor connected to fans by V-belt drive complete with belt guard for externally mounted motors. Belt guards shall be the three sided enclosed type with solid or expanded metal face. Belt drives shall be designed for not less than a 1.3 service factor based on motor nameplate rating. Motor sheaves shall be variable pitch. Variable pitch sheaves shall be selected to drive the fan at a speed that will produce the specified capacity when set at the approximate midpoint of the sheave adjustment. Motors for V-belt drives shall be provided with adjustable bases. Fan motors shall have open or splashproof enclosures. Motor starters shall be magnetic across-the-line type with general-purpose enclosure. Unit fan or fans shall be selected to produce the required capacity at the fan static pressure. Sound power level shall be as indicated. The sound power level values shall be obtained according to AMCA 300, ASHRAE 68, or ARI 260.

2.10.1.5 Dampers

Dampers shall be as specified in paragraph CONTROLS.

2.11 FACTORY PAINTING

Units which are not of galvanized construction according to ASTM A 123/A 123M or ASTM A 924/A 924M shall be factory painted with a corrosion resisting paint finish. Internal and external ferrous metal surfaces shall be cleaned, phosphatized and coated with a paint finish which has been tested according to ASTM B 117, ASTM D 1654, and ASTM D 3359. Evidence of satisfactory paint performance for a minimum of 125 hours for units to be installed indoors and 500 hours for units to be installed outdoors shall be submitted. Rating of failure at the scribe mark shall be not less than 6, average creepage not greater than 1/8 inch. Rating of the inscribed area shall not be less than 10, no failure. On units constructed of galvanized steel which have been welded, exterior surfaces of welds or welds that have burned through from the interior shall receive a final shop docket of zinc-rich protective paint according to ASTM D 520 Type I.

PART 3 EXECUTION

3.1 INSTALLATION

Work shall be installed as shown and according to the manufacturer's diagrams and recommendations.

3.1.1 Condensate Drain Lines

Water seals shall be provided in the condensate drain from all units. The depth of each seal shall be 2 inches plus the number of inches, measured in water gauge, of the total static pressure rating of the unit to which the drain is connected. Water seals shall be constructed of 2 tees and an appropriate U-bend with the open end of each tee plugged. Pipe cap or plug cleanouts shall be provided where indicated. Drains indicated to connect to the sanitary waste system shall be connected by an indirect waste fitting. Air conditioner drain lines shall be insulated as specified in Section 15080A THERMAL INSULATION FOR MECHANICAL SYSTEMS.

3.1.2 Equipment and Installation

Frames and supports shall be provided for air handling units, fans, coils, dampers, and other similar items requiring supports. Air handling units shall be floor mounted or ceiling hung, as indicated. The method of anchoring and fastening shall be as detailed. Floor-mounted equipment, unless otherwise indicated, shall be set on not less than 6 inch concrete pads or curbs doweled in place. Foundation drawings, bolt-setting information, and foundation bolts shall be furnished prior to concrete foundation construction for all equipment indicated or required to have concrete foundations.

3.1.3 Access Panels

Access panels shall be provided for concealed valves, controls, dampers, and items requiring inspection or maintenance. Access panels shall be of sufficient size and located so that the concealed items may be serviced and maintained or completely removed and replaced. Access panels shall be as specified in Section 05500A MISCELLANEOUS METALS.

3.1.4 Flexible Connectors

Pre-insulated flexible connectors and flexible duct shall be attached to other components in accordance with the latest printed instructions of the manufacturer to ensure a vapor tight joint. Hangers, when required to suspend the connectors, shall be of the type recommended by the connector or duct manufacturer and shall be provided at the intervals recommended.

3.1.5 Sleeved and Framed Openings

Space between the sleeved or framed opening and the duct or the duct insulation shall be packed as specified in Section 07840A FIRESTOPPING for fire rated penetrations. For non-fire rated penetrations, the space shall be packed as specified in Section 07900A JOINT SEALING.

3.1.6 Metal Ductwork

Installation shall be according to SMACNA HVAC Duct Const Stds unless otherwise indicated. Duct supports for sheet metal ductwork shall be according to SMACNA HVAC Duct Const Stds, unless otherwise specified. Friction beam clamps indicated in SMACNA HVAC Duct Const Stds shall not be used. Supports shall be attached only to structural framing members and concrete slabs. Supports shall not be anchored to metal decking unless a means is provided and approved for preventing the anchor from puncturing the metal decking. Where supports are required between structural framing members, suitable intermediate metal framing shall be provided. Where C-clamps are used, retainer clips shall be provided.

3.1.7 Dust Control

To prevent the accumulation of dust, debris and foreign material during construction, temporary dust control protection shall be provided. The distribution system (supply and return) shall be protected with temporary seal-offs at all inlets and outlets at the end of each day's work. Temporary protection shall remain in place until system is ready for startup.

3.1.8 Insulation

Thickness and application of insulation materials for ductwork, piping, and equipment shall be according to Section 15080A THERMAL INSULATION FOR MECHANICAL SYSTEMS. Outdoor air intake ducts and plenums shall be externally insulated up to the point where the outdoor air reaches the conditioning unit.

3.1.9 Duct Test Holes

Holes with closures or threaded holes with plugs shall be provided in ducts and plenums as indicated or where necessary for the use of pitot tube in balancing the air system. Extensions, complete with cap or plug, shall be provided where the ducts are insulated.

3.1.10 Power Roof Ventilator Mounting

Foamed 1/2 inch thick, closed-cell, flexible elastomer insulation shall cover width of roof curb mounting flange. Where wood nailers are used, holes shall be pre-drilled for fasteners.

3.1.11 Power Transmission Components Adjustment

V-belts and sheaves shall be tested for proper alignment and tension prior to operation and after 72 hours of operation at final speed. Belts on drive side shall be uniformly loaded, not bouncing. Alignment of direct driven couplings shall be to within 50 percent of manufacturer's maximum allowable range of misalignment.

3.2 FIELD PAINTING AND IDENTIFICATION SYSTEMS

3.2.1 Identification Tags

Identification tags made of brass, engraved laminated plastic, or engraved anodized aluminum, indicating service and item number shall be installed on all valves and dampers. Tags shall be 1-3/8 inch minimum diameter and marking shall be stamped or engraved. Indentations shall be black for reading clarity. Tags shall be attached to valves with No. 12 AWG, copper wire, chrome-plated beaded chain or plastic straps designed for that purpose.

3.2.2 Finish Painting and Pipe Color Code Marking

Finish painting of items only primed at the factory, surfaces not specifically noted otherwise, and color code marking for piping shall be as specified in Section 09900 PAINTS AND COATINGS.

3.2.3 Color Coding Scheme for Locating Hidden Utility Components

Scheme shall be provided in buildings having suspended grid ceilings. The color coding scheme shall identify points of access for maintenance and operation of components and equipment that are not visible from the finished space and are accessible from the ceiling grid. The color coding scheme shall consist of a color code board and colored metal disks. Each colored metal disk shall be approximately 3/8 inch diameter and secured to removable ceiling panels with fasteners. Each fastener shall be inserted into the ceiling panel so as to be concealed from view. The fasteners shall be manually removable without the use of tools and shall not separate from the ceiling panels when the panels are dropped from ceiling height. Installation of colored metal disks shall follow completion of the finished surface on which the disks are to be fastened. The color code board shall be approximately 3 foot wide, 30 inches high, and 1/2 inches thick. The board shall be made of wood fiberboard and framed under glass or 1/16 inch transparent plastic cover. The color code symbols shall be approximately 3/4 inch in diameter and the related lettering in 1/2 inch high capital letters. The color code board shall be mounted in the mechanical or equipment room.

3.3 PIPING HYDROSTATIC TEST

After cleaning, water piping shall be hydrostatically tested at a pressure equal to 150 percent of the total system operating pressure for period of time sufficient to inspect every joint in the system and in no case less than 2 hours. Leaks shall be repaired and piping retested until test is successful. No loss of pressure will be allowed. Leaks shall be repaired by re-welding or replacing pipe or fittings. Caulking of joints will not be permitted. Concealed and insulated piping shall be tested in place before covering or concealing.

3.4 DUCTWORK LEAK TEST

Ductwork leak test shall be performed for the entire air distribution and exhaust system, including fans, coils, filters, etc. Test procedure, apparatus, and report shall conform to SMACNA Leakage Test Mnl. Ductwork leak test shall be completed with satisfactory results prior to applying insulation to ductwork exterior.

3.5 TESTING, ADJUSTING, AND BALANCING

Testing, adjusting, and balancing shall be as specified in Section 15990A TESTING, ADJUSTING, AND BALANCING OF HVAC SYSTEMS. Testing, adjusting, and balancing shall begin only when the air supply and distribution, including controls, has been completed, with the exception of performance tests.

3.6 PERFORMANCE TESTS

After testing, adjusting, and balancing has been completed as specified, each system shall be tested as a whole to see that all items perform as integral parts of the system and temperatures and conditions are evenly controlled throughout the building. Corrections and adjustments shall be made as necessary to produce the conditions indicated or specified. Capacity tests and general operating tests shall be conducted by an experienced engineer. Tests shall cover a period of not less than one day for each system and shall demonstrate that the entire system is functioning according to the specifications. Coincidental chart recordings shall be made at points indicated on the drawings for the duration of the time period and shall record the temperature at space thermostats or space sensors, the humidity at space humidistats or space sensors and the ambient temperature and humidity in a shaded and weather protected area.

3.7 CLEANING AND ADJUSTING

Inside of ducts, plenums, and casing shall be thoroughly cleaned of debris and blown free of small particles of rubbish and dust and then shall be vacuum cleaned before installing outlet faces. Equipment shall be wiped clean, with traces of oil, dust, dirt, or paint spots removed. Temporary filters shall be provided prior to startup of all fans that are operated during construction, and new filters shall be installed after all construction dirt has been removed from the building, and the ducts, plenums, casings, and other items specified have been vacuum cleaned. System shall be maintained in this clean condition until final acceptance. Bearings shall be properly lubricated with oil or grease as recommended by the manufacturer. Belts shall be tightened to proper tension. Control valves and other miscellaneous equipment requiring adjustment shall be adjusted to setting indicated or directed. Fans shall be adjusted to the speed indicated by the manufacturer to meet specified conditions.

3.8 FIELD TRAINING

The Contractor shall conduct a training course for operating and maintenance personnel as designated by the Contracting Officer. Training shall be provided for a period of 8 hours of normal working time and shall start after the system is functionally complete but prior to the performance tests. The field instruction shall cover all of the items contained in the approved Operating and Maintenance Instructions.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 15 - MECHANICAL

SECTION 15990A

TESTING, ADJUSTING, AND BALANCING OF HVAC SYSTEMS

06/03

PART 1 GENERAL

1.1 REFERENCES
1.2 SUBMITTALS
1.3 SIMILAR TERMS
1.4 TAB STANDARD
1.5 QUALIFICATIONS
1.5.1 TAB Firm
1.5.2 TAB Specialist
1.6 TAB SPECIALIST RESPONSIBILITIES

PART 2 PRODUCTS (Not Applicable)

PART 3 EXECUTION

3.1 DESIGN REVIEW
3.2 TAB RELATED HVAC SUBMITTALS
3.3 TAB SCHEMATIC DRAWINGS AND REPORT FORMS
3.4 DUCTWORK LEAK TESTING
3.5 TESTING, ADJUSTING, AND BALANCING
3.5.1 TAB Procedures
3.5.2 Systems Readiness Check
3.5.3 Preparation of TAB Report
3.5.4 TAB Verification
3.5.5 Marking of Setting
3.5.6 Identification of Test Ports

-- End of Section Table of Contents --

SECTION 15990A

TESTING, ADJUSTING, AND BALANCING OF HVAC SYSTEMS
06/03

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASSOCIATED AIR BALANCE COUNCIL (AABC)

AABC MN-1	(2002) National Standards for Total System Balance

NATIONAL ENVIRONMENTAL BALANCING BUREAU (NEBB)

NEBB TABES	(1998) Procedural Standards for Testing, Adjusting, Balancing of Environmental Systems

SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION (SMACNA)

SMACNA HVACTAB	(2002, 3rd Ed) HVAC Systems - Testing, Adjusting and Balancing

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for Contractor Quality Control approval. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

TAB Schematic Drawings and Report Forms

Three copies of the TAB Schematic Drawings and Report Forms, no later than 21 days prior to the start of TAB field measurements.

SD-03 Product Data

TAB Related HVAC Submittals

A list of the TAB Related HVAC Submittals, no later than 7 days after the approval of the TAB Specialist.

TAB Procedures

Proposed procedures for TAB, submitted with the TAB Schematic Drawings and Report Forms.

Calibration

List of each instrument to be used during TAB, stating calibration requirements required or recommended by both the TAB Standard and the instrument manufacturer and the actual calibration history of the instrument, submitted with the TAB Procedures. The calibration history shall include dates calibrated, the qualifications of the calibration laboratory, and the calibration procedures used.

Systems Readiness Check

Proposed date and time to begin the Systems Readiness Check, no later than 7 days prior to the start of the Systems Readiness Check.

TAB Execution

Proposed date and time to begin field measurements, making adjustments, etc., for the TAB Report, submitted with the Systems Readiness Check Report.

TAB Verification

Proposed date and time to begin the TAB Verification, submitted with the TAB Report.

SD-06 Test Reports

Design Review Report

A copy of the Design Review Report, no later than 14 days after approval of the TAB Firm and the TAB Specialist.

Systems Readiness Check

A copy of completed checklists for each system, each signed by the TAB Specialist, at least 7 days prior to the start of TAB Execution. All items in the Systems Readiness Check Report shall be signed by the TAB Specialist and shall bear the seal of the Professional Society or National Association used as the TAB Standard.

TAB Report

Three copies of the completed TAB Reports, no later than 7 days after the execution of TAB. All items in the TAB Report shall be signed by the TAB Specialist and shall bear the seal of the Professional Society or National Association used as the TAB Standard.

TAB Verification Report

Three copies of the completed TAB Verification Report, no later than 7 days after the execution of TAB Verification. All items in the TAB Verification Report shall be signed by the TAB Specialist and shall bear the seal of the Professional Society or National Association used as the TAB Standard.

SD-07 Certificates

Ductwork Leak Testing

A written statement signed by the TAB Specialist certifying that the TAB Specialist witnessed the Ductwork Leak Testing, it was successfully completed, and that there are no known deficiencies related to the ductwork installation that will prevent TAB from producing satisfactory results.

TAB Firm

Certification of the proposed TAB Firm's qualifications by either AABC, NEBB, or TABB to perform the duties specified herein and in other related Sections, no later than 21 days after the Notice to Proceed. The documentation shall include the date that the Certification was initially granted and the date that the current Certification expires. Any lapses in Certification of the proposed TAB Firm or disciplinary action taken by AABC, NEBB or TABB against the proposed TAB Firm shall be described in detail.

TAB Specialist

Certification of the proposed TAB Specialist's qualifications by either AABC, NEBB, or TABB to perform the duties specified herein and in other related Sections, no later than 21 days after the Notice to Proceed. The documentation shall include the date that the Certification was initially granted and the date that the current Certification expires. Any lapses in Certification of the proposed TAB Specialist or disciplinary action taken by AABC, NEBB, or TABB against the proposed TAB Specialist shall be described in detail.

1.3 SIMILAR TERMS

In some instances, terminology differs between the Contract and the TAB Standard primarily because the intent of this Section is to use the industry standards specified, along with additional requirements listed herein to produce optimal results. The following table of similar terms is provided for clarification only. Contract requirements take precedent over the corresponding AABC, NEBB, or TABB requirements where differences exist.

SIMILAR TERMS

Contract Term	AABC Term	NEBB Term	TABB Term
TAB Standard	National Standards for Testing and Balancing Heating, Ventilating, and Air Conditioning	Procedural Standards for Testing, Adjusting, and Balancing of Environmental Systems.	SMACNA's Procedures

	Systems		
TAB Specialist	TAB Engineer	TAB Supervisor	TAB Supervisor
Systems Readiness Check	Construction Phase Inspection	Field Readiness Check & Preliminary Field Procedures.	Field Readiness Check & Prelim. Field Procedures

1.4 TAB STANDARD

TAB shall be performed in accordance with the requirements of the standard under which the TAB Firm's qualifications are approved, i.e., AABC MN-1, NEBB TABES, or SMACNA HVACTAB unless otherwise specified herein. All recommendations and suggested practices contained in the TAB Standard shall be considered mandatory. The provisions of the TAB Standard, including checklists, report forms, etc., shall, as nearly as practical, be used to satisfy the Contract requirements. The TAB Standard shall be used for all aspects of TAB, including qualifications for the TAB Firm and Specialist and calibration of TAB instruments. Where the instrument manufacturer calibration recommendations are more stringent than those listed in the TAB Standard, the manufacturer's recommendations shall be adhered to. All quality assurance provisions of the TAB Standard such as performance guarantees shall be part of this contract. For systems or system components not covered in the TAB Standard, TAB procedures shall be developed by the TAB Specialist. Where new procedures, requirements, etc., applicable to the Contract requirements have been published or adopted by the body responsible for the TAB Standard used (AABC, NEBB, or TABB), the requirements and recommendations contained in these procedures and requirements shall be considered mandatory.

1.5 QUALIFICATIONS

1.5.1 TAB Firm

The TAB Firm shall be either a member of AABC or certified by the NEBB or the TABB and certified in all categories and functions where measurements or performance are specified on the plans and specifications. The certification shall be maintained for the entire duration of duties specified herein. If, for any reason, the firm loses subject certification during this period, the Contractor shall immediately notify the Contracting Officer and submit another TAB Firm for approval. Any firm that has been the subject of disciplinary action by either the AABC, the NEBB, or the TABB within the five years preceding Contract Award shall not be eligible to perform any duties related to the HVAC systems, including TAB. All work specified in this Section and in other related Sections to be performed by the TAB Firm shall be considered invalid if the TAB Firm loses its certification prior to Contract completion and must be performed by an approved successor. These TAB services are to assist the prime Contractor in performing the quality oversight for which it is responsible. The TAB Firm shall be a subcontractor of the prime Contractor and shall be financially and corporately independent of the mechanical subcontractor, and shall report to and be paid by the prime Contractor.

1.5.2 TAB Specialist

The TAB Specialist shall be either a member of AABC, an experienced technician of the Firm certified by the NEBB, or a Supervisor certified by the TABB. The certification shall be maintained for the entire duration of duties specified herein. If, for any reason, the Specialist loses subject certification during this period, the Contractor shall immediately notify the Contracting Officer and submit another TAB Specialist for approval. Any individual that has been the subject of disciplinary action by either the AABC, the NEBB, or the TABB within the five years preceding Contract Award shall not be eligible to perform any duties related to the HVAC systems, including TAB. All work specified in this Section and in other related Sections performed by the TAB Specialist shall be considered invalid if the TAB Specialist loses its certification prior to Contract completion and must be performed by the approved successor.

1.6 TAB SPECIALIST RESPONSIBILITIES

All TAB work specified herein and in related sections shall be performed under the direct guidance of the TAB Specialist. The TAB Specialist shall participate in the commissioning process specified in Section 15995ACOMMISSIONING OF HVAC SYSTEMS.

PART 2 PRODUCTS (NOT APPLICABLE)

PART 3 EXECUTION

3.1 DESIGN REVIEW

The TAB Specialist shall review the Contract Plans and Specifications and advise the Contracting Officer of any deficiencies that would prevent the effective and accurate TAB of the system. The TAB Specialist shall provide a Design Review Report individually listing each deficiency and the corresponding proposed corrective action necessary for proper system operation.

3.2 TAB RELATED HVAC SUBMITTALS

The TAB Specialist shall prepare a list of the submittals from the Contract Submittal Register that relate to the successful accomplishment of all HVAC TAB. The submittals identified on this list shall be accompanied by a letter of approval signed and dated by the TAB Specialist when submitted to the Government. The TAB Specialist shall also ensure that the location and details of ports, terminals, connections, etc., necessary to perform TAB are identified on the submittals.

3.3 TAB SCHEMATIC DRAWINGS AND REPORT FORMS

A schematic drawing showing each system component, including balancing devices, shall be provided for each system. Each drawing shall be accompanied by a copy of all report forms required by the TAB Standard used for that system. Where applicable, the acceptable range of operation or appropriate setting for each component shall be included on the forms or as an attachment to the forms. The schematic drawings shall identify all testing points and cross reference these points to the report forms and procedures.

3.4 DUCTWORK LEAK TESTING

The TAB Specialist shall witness the Ductwork Leak Testing specified in Section 15895 AIR SUPPLY, DISTRIBUTION, VENTILATION, AND EXHAUST SYSTEM and approve the results as specified in Paragraph TAB RELATED HVAC SUBMITTALS.

3.5 TESTING, ADJUSTING, AND BALANCING

3.5.1 TAB Procedures

Step by step procedures for each measurement required during TAB Execution shall be provided. The procedures shall be oriented such that there is a separate section for each system. The procedures shall include measures to ensure that each system performs as specified in all operating modes, interactions with other components (such as exhaust fans, kitchen hoods, fume hoods, relief vents, etc.) and systems, and with all seasonal operating differences, diversity, simulated loads, and pressure relationships required.

3.5.2 Systems Readiness Check

The TAB Specialist shall inspect each system to ensure that it is complete, including installation and operation of controls, and that all aspects of the facility that have any bearing on the HVAC systems, including installation of ceilings, walls, windows, doors, and partitions, are complete to the extent that TAB results will not be affected by any detail or touch-up work remaining. The TAB Specialist shall also verify that all items such as ductwork and piping ports, terminals, connections, etc., necessary to perform TAB shall be complete during the Systems Readiness Check.

3.5.3 Preparation of TAB Report

Preparation of the TAB Report shall begin only when the Systems Readiness Report has been approved. The Report shall be oriented so that there is a separate section for each system. The Report shall include a copy of the appropriate approved Schematic Drawings and TAB Related Submittals, such as pump curves, fan curves, etc., along with the completed report forms for each system. The operating points measured during successful TAB Execution and the theoretical operating points listed in the approved submittals shall be marked on the performance curves and tables. Where possible, adjustments shall be made using an "industry standard" technique which would result in the greatest energy savings, such as adjusting the speed of a fan instead of throttling the flow. Any deficiencies outside of the realm of normal adjustments and balancing during TAB Execution shall be noted along with a description of corrective action performed to bring the measurement into the specified range. If, for any reason, the TAB Specialist determines during TAB Execution that any Contract requirement cannot be met, the TAB Specialist shall immediately provide a written description of the deficiency and the corresponding proposed corrective action necessary for proper system operation to the Contracting Officer.

3.5.4 TAB Verification

The TAB Specialist shall recheck ten percent of the measurements listed in the Tab Report and prepare a TAB Verification Report. The measurements selected for verification and the individuals that witness the verification

will be selected by the Contracting Officer's Representative (COR). The measurements will be recorded in the same manner as required for the TAB Report. All measurements that fall outside the acceptable operating range specified shall be accompanied by an explanation as to why the measurement does not correlate with that listed in the TAB Report and a description of corrective action performed to bring the measurement into the specified range. The TAB Specialist shall update the original TAB report to reflect any changes or differences noted in the TAB verification report and submit the updated TAB report. If over 20 percent of the measurements selected by the COR for verification fall outside of the acceptable operating range specified, the COR will select an additional ten percent for verification. If over 20 percent of the total tested (including both test groups) fall outside of the acceptable range, the TAB Report shall be considered invalid and all contract TAB work shall be repeated beginning with the Systems Readiness Check.

3.5.5 Marking of Setting

Following approval of TAB Verification Report, the setting of all HVAC adjustment devices including valves, splitters, and dampers shall be permanently marked by the TAB Specialist so that adjustment can be restored if disturbed at any time.

3.5.6 Identification of Test Ports

The TAB Specialist shall permanently and legibly identify the location points of duct test ports. If the ductwork has exterior insulation, the identification shall be made on the exterior side of the insulation. All penetrations through ductwork and ductwork insulation shall be sealed to prevent air leakage or to maintain integrity of vapor barrier.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 16 - ELECTRICAL

SECTION 16370A

ELECTRICAL DISTRIBUTION SYSTEM, AERIAL

07/02

PART 1 GENERAL

1.1 REFERENCES
1.2 GENERAL REQUIREMENTS
1.2.1 Terminology
1.3 SUBMITTALS
1.4 DELIVERY, STORAGE, AND HANDLING
1.5 EXTRA MATERIALS

PART 2 PRODUCTS

2.1 GENERAL REQUIREMENTS
2.2 STANDARD PRODUCT
2.3 NAMEPLATES
2.3.1 General
2.3.2 Liquid-Filled Transformer Nameplates
2.4 CORROSION PROTECTION
2.4.1 Aluminum Materials
2.4.2 Ferrous Metal Materials
2.4.2.1 Hardware
2.4.2.2 Equipment
2.4.3 Finishing
2.5 CONDUCTORS, CONNECTORS, AND SPLICES
2.5.1 Copper Conductors
2.5.2 Connectors and Splices
2.6 MEDIUM-VOLTAGE LINES
2.6.1 Bare Medium-Voltage Lines
2.7 POLES AND HARDWARE
2.7.1 Wood Poles
2.7.2 Pole Line Hardware
2.7.3 Guy Assemblies
2.8 INSULATORS
2.8.1 Medium-Voltage Line Insulators
2.8.2 Apparatus Insulators
2.9 CROSSARM ASSEMBLIES
2.9.1 Crossarms
2.10 FUSES AND SWITCHES, MEDIUM-VOLTAGE
2.10.1 Fuse Cutouts
2.15 TRANSFORMERS
2.11 SURGE ARRESTERS
2.12 GROUNDING AND BONDING
2.12.1 Driven Ground Rods
2.12.2 Grounding Conductors
2.13 WARNING SIGNS
2.14 LIQUID DIELECTRICS
2.15 FACTORY TESTS

PART 3 EXECUTION

3.1 GENERAL INSTALLATION REQUIREMENTS
3.1.1 Conformance to Codes
3.1.2 Verification of Dimensions
3.2 POLE INSTALLATION
3.2.1 Wood Pole Setting
3.3 CROSSARM MOUNTING
3.3.1 Line Arms and Buck Arms
3.3.2 Equipment Arms
3.4 GUY INSTALLATION
3.5 CONDUCTOR INSTALLATION
3.5.1 Line Conductors
3.5.2 Connectors and Splices
3.5.2.1 Sag and Tension Calculations
3.5.2 Conductor-To-Insulator Attachments
3.6 TRANSFORMER INSTALLATION
3.7 CONNECTIONS TO UTILITY LINES
3.8 GROUNDING
3.8.1 Grounding Electrodes
3.8.2 Grounding and Bonding Connections
3.8.3 Grounding Electrode Conductors
3.9 FIELD TESTING
3.9.1 General
3.9.2 Safety
3.9.3 Ground-Resistance Tests
3.9.4 Sag and Tension Test
3.9.5 Liquid-Filled Transformer Tests
3.9.6 Pre-Energization Services
3.9.7 Operating Tests
3.10 ACCEPTANCE

-- End of Section Table of Contents --

SECTION 16370A

ELECTRICAL DISTRIBUTION SYSTEM, AERIAL
07/02

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI C29.1	(1988; R 1996) Electrical Power Insulators - Test Methods
ANSI C29.5	(1984; R 1995) Wet-Process Porcelain Insulators - Low- and Medium-Voltage Types
ANSI C29.8	(1985; R 1995) Wet-Process Porcelain Insulators - Apparatus, Cap and Pin Type
ANSI C57.12.20	(1997) Overhead Type Distribution Transformers, 500 KVA and Smaller: High Voltage 34 500 Volts and Below: Low Voltage, 7970/13 800 Y Volts and Below
ANSI C135.1	(1979) Galvanized Steel Bolts and Nuts for Overhead Line Construction
ANSI C135.2	(1999) Threaded Zinc-Coated Ferrous Strand-Eye Anchor Rods and Nuts for Overhead Line Construction
ANSI C135.4	(1987) Zinc-Coated Ferrous Eyebolts and Nuts for Overhead Line Construction
ANSI C135.14	(1979) Staples with Rolled or Slash Points for Overhead Line Construction
ANSI C135.30	(1988) Zinc-Coated Ferrous Ground Rods for Overhead or Underground Line Construction
ANSI O5.1	(1992) Specifications and Dimensions for Wood Poles

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 36/A 36M	(2001) Carbon Structural Steel
ASTM A 123/A 123M	(2001a) Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products

ASTM A 153/A 153M	(2001a) Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A 475	(1998) Zinc-Coated Steel Wire Strand
ASTM A 575	(1996; R 2002) Steel Bars, Carbon, Merchant Quality, M-Grades
ASTM A 576	(1990b; R 2000) Steel Bars, Carbon, Hot-Wrought, Special Quality
ASTM B 1	(2001) Hard-Drawn Copper Wire
ASTM B 8	(1999) Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft
ASTM B 117	(1997) Operating Salt Spray (Fog) Apparatus
ASTM D 923	(1997) Sampling Electrical Insulating Liquids
ASTM D 1654	(1992; R 2000) Evaluation of Painted or Coated Specimens Subjected to Corrosive Environments
ASTM D 4059	(2000) Analysis of Polychlorinated Biphenyls in Insulating Liquids by Gas Chromatography.

AMERICAN WOOD-PRESERVERS' ASSOCIATION (AWPA)

AWPA C4	(1999) Poles - Preservative Treatment by Pressure Processes
AWPA C25	(2001) Sawn Crossarms - Preservative Treatment by Pressure Processes
AWPA P5	(2001) Standard for Waterborne Preservatives
AWPA P8	(2001) Standard for Oil-Borne Preservatives
AWPA P9	(2001) Standards for Solvents and Formulations for Organic Preservative Systems

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE C2	(2002) National Electrical Safety Code
IEEE C37.34	(1994) Test Code for High-Voltage Air Switches
IEEE C37.41	(2000) Design Tests for High-Voltage Fuses, Distribution Enclosed Single-Pole Air Switches, Fuse Disconnecting Switches, and Accessories
IEEE C57.12.00	(2000) General Requirements for Liquid-Immersed Distribution, Power, and Regulating Transformers

IEEE C57.19.00	(1991; R 1997) Standard General Requirements and Test Procedures for Outdoor Power Apparatus Bushings
IEEE C57.19.01	(2000) Performance Characteristics and Dimensions for Outdoor Apparatus Bushings
IEEE C57.98	(1994) Guide for Transformer Impulse Tests
IEEE C62.1	(1989; R 1994) Surge Arresters for AC Power Circuits
IEEE C62.11	(1999) Metal-Oxide Surge Arresters for AC Power Circuits
IEEE Std 81	(1983) Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System (Part 1)
IEEE Std 100	(2000) IEEE Standard Dictionary of Electrical and Electronics Terms

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA ICS 6	(1993; R 2001) Industrial Control and Systems, Enclosures
NEMA LA 1	(1992; R 1999) Surge Arresters
NEMA SG 2	(1993) High Voltage Fuses

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2005) National Electrical Code

U.S. DEPARTMENT OF AGRICULTURE (USDA)

RUS Bull 1728H-701	(1993) REA Specification for Wood Crossarms (Solid and Laminated), Transmission Timbers and Pole Keys

UNDERWRITERS LABORATORIES (UL)

UL 467	(1993; Rev thru Feb 2001) Grounding and Bonding Equipment
UL 486A	(1997; Rev thru May 2001) Wire Connectors and Soldering Lugs for Use with Copper Conductors
UL 486B	(1997; Rev thru May 2001) Wire Connectors for Use with Aluminum Conductors

1.2 GENERAL REQUIREMENTS

1.2.1 Terminology

Terminology used in this specification is as defined in IEEE Std 100.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Electrical Distribution System; G, TS-D

Detail drawings consisting of equipment drawings, illustrations, schedules, instructions, diagrams and other information necessary to define the installation and enable the Government to check conformity with the requirements of the contract drawings. Detail drawings shall as a minimum include:

a. Poles.

b. Crossarms.

c. Transformers.

d. Conductors.

e. Insulators.

f. Surge arresters.

If departures from the contract drawings are deemed necessary by the Contractor, complete details of such departures shall be submitted with the detail drawings. Approved departures shall be made at no additional cost to the Government.

Detail drawings shall show how components are assembled, function together and how they will be installed on the project. Data and drawings for component parts of an item or system shall be coordinated and submitted as a unit. Data and drawings shall be coordinated and included in a single submission. Multiple submissions for the same equipment or system are not acceptable except where prior approval has been obtained from the Contracting Officer. In such cases, a list of data to be submitted later shall be included with the first submission. Detail drawings shall consist of the following:

a. Detail drawings showing physical arrangement, construction details, connections, finishes, materials used in fabrication, provisions for conduit entrance, access requirements for installation and maintenance, physical size, electrical characteristics, foundation and support details, and equipment

weight. Drawings shall be drawn to scale and/or dimensioned. Optional items shall be clearly identified as included or excluded.

b. Internal wiring diagrams of equipment showing wiring as actually provided for this project. External wiring connections shall be clearly identified.

As-Built Drawings; G, TS-DG

The as-built drawings shall be a record of the construction as installed. The drawings shall include the information shown on the contract drawings as well as deviations, modifications, and changes from the contract drawings, however minor. The as-built drawings shall be kept at the job site and updated daily. The as-built drawings shall be a full sized set of prints marked to reflect deviations, modifications, and changes. The as-built drawings shall be complete and show the location, dimensions, part identification, and other information. Additional sheets may be added. The as-built drawings shall be jointly inspected for accuracy and completeness by the Contractor's quality control representative and by the Contracting Officer prior to the submission of each monthly pay estimate. Upon completion of the work, the Contractor shall submit three full sized sets of the marked prints to the Contracting Officer for approval. If upon review, the as-built drawings are found to contain errors and/or omissions, they will be returned to the Contractor for correction. The Contractor shall correct and return the as-built drawings to the Contracting Officer for approval within ten calendar days from the time the drawings are returned to the Contractor.

SD-03 Product Data

Nameplates; G, TS-DG

Catalog cuts, brochures, circulars, specifications, product data, and printed information in sufficient detail and scope to verify compliance with the requirements of the contract documents.

Material and Equipment; G, TS-DG

A complete itemized listing of equipment and materials proposed for incorporation into the work. Each entry shall include the item number, the quantity of items proposed, and the name of the manufacturer of the item.

General Installation Requirements; G, TS-OL

As a minimum, installation procedures for transformers. Procedures shall include diagrams, instructions, and precautions required to install, adjust, calibrate, and test the devices and equipment.

SD-06 Test Reports

Factory Tests; G, TS-DG

Certified factory test reports shall be submitted when the manufacturer performs routine factory tests, including tests required by standards listed in paragraph REFERENCES. Results of factory tests performed shall be certified by the manufacturer, or an approved testing laboratory, and submitted within 7 days following successful completion of the tests specified in applicable publications or in these specifications.

Sag and Tension Calculations: G, TS-DG

Submit Sag and Tension calculations for overhead lines for approval prior to installation

Field Testing; G, TS-DG

A proposed field test plan 20 days prior to testing the installed system. No field test shall be performed until the test plan is approved. The test plan shall consist of complete field test procedures including tests to be performed, test equipment required, and tolerance limits.

Operating Tests; G, TS-OL

Six copies of the information described below in 8-1/2 by 11 inch binders having a minimum of 5 rings, and including a separate section for each test. Sections shall be separated by heavy plastic dividers with tabs.

a. A list of equipment used, with calibration certifications.

b. A copy of measurements taken.

c. The dates of testing.

d. The equipment and values to be verified.

e. The condition specified for the test.

f. The test results, signed and dated.

g. A description of adjustments made.

SD-07 Certificates

Material and Equipment; G, TS-OL

Where materials or equipment are specified to conform to the standards of the Underwriters Laboratories (UL) or to be constructed or tested, or both, in accordance with the standards of the American National Standards Institute (ANSI), the Institute of Electrical and Electronics Engineers (IEEE), or the National Electrical Manufacturers Association (NEMA), the Contractor shall submit proof that the items provided under this section of the specifications conform to such requirements. The label of, or listing by, UL will be acceptable as evidence that the items conform thereto. Either a certification or a published catalog specification data statement, to the effect that the item is in

accordance with the referenced ANSI or IEEE standard, will be acceptable as evidence that the item conforms thereto. A similar certification or published catalog specification data statement to the effect that the item is in accordance with the referenced NEMA standard, by a company listed as a member company of NEMA, will be acceptable as evidence that the item conforms thereto. In lieu of such certification or published data, the Contractor may submit a certificate from a recognized testing agency equipped and competent to perform such services, stating that the items have been tested and that they conform to the requirements listed, including methods of testing of the specified agencies.

1.4 DELIVERY, STORAGE, AND HANDLING

Devices and equipment shall be visually inspected by the Contractor when received and prior to acceptance from conveyance. Stored items shall be protected from the environment in accordance with the manufacturer's published instructions. Damaged items shall be replaced. Oil filled transformers shall be stored in accordance with the manufacturer's requirements. Wood poles held in storage for more than 2 weeks shall be stored in accordance with ANSI O5.1. Handling of wood poles shall be in accordance with ANSI O5.1, except that pointed tools capable of producing indentations more than inch in depth shall not be used.

1.5 EXTRA MATERIALS

One additional spare fuse or fuse element for each furnished fuse or fuse element shall be delivered to the Contracting Officer when the electrical system is accepted. Two complete sets of all special tools required for maintenance shall be provided, complete with a suitable tool box. Special tools are those that only the manufacturer provides, for special purposes (to access compartments, or operate, adjust, or maintain special parts).

PART 2 PRODUCTS

2.1 GENERAL REQUIREMENTS

Products shall conform to the following requirements. Items of the same classification shall be identical including equipment, assemblies, parts, and components.

2.2 STANDARD PRODUCT

Material and equipment shall be the standard product of a manufacturer regularly engaged in the manufacture of the product and shall essentially duplicate items that have been in satisfactory use for at least 2 years prior to bid opening.

2.3 NAMEPLATES

2.3.1 General

Each major component shall have the manufacturer's name, address, type or style, model or serial number, and catalog number on a nameplate securely attached to the equipment. Equipment containing liquid-dielectrics shall have the type of dielectric on the nameplate. Nameplates shall be made of

noncorrosive metal. As a minimum, nameplates shall be provided for transformers, regulators, circuit breakers, capacitors, meters and switches.

2.3.2 Liquid-Filled Transformer Nameplates

Power transformers shall be provided in accordance with IEEE C57.12.00. Nameplates shall indicate the number of gallons and composition of liquid-dielectric, and shall be permanently marked with a statement that the transformer dielectric to be supplied is non-polychlorinated biphenyl. If transformer nameplate is not so marked, the Contractor shall furnish manufacturer's certification for each transformer that the dielectric in non-PCB classified, with less than 2 ppm PCb content in accordance with paragraph LIQUID DIELECTRICS. Certifications shall be related to serial numbers on transformer nameplates. Transformer dielectric exceeding the 2 ppm PCB content or transformers without certification will be considered as PCB insulated and will not be accepted.

2.4 CORROSION PROTECTION

2.4.1 Aluminum Materials

Aluminum shall not be used in contact with earth or concrete.

2.4.2 Ferrous Metal Materials

2.4.2.1 Hardware

Ferrous metal hardware shall be hot-dip galvanized in accordance with ASTM A 153/A 153M and ASTM A 123/A 123M.

2.4.2.2 Equipment

Equipment and component items, including but not limited to transformers and ferrous metal luminaires not hot-dip galvanized or porcelain enamel finished, shall be provided with corrosion-resistant finishes which shall withstand 120 hours of exposure to the salt spray test specified in ASTM B 117 without loss of paint or release of adhesion of the paint primer coat to the metal surface in excess of 1/16 inch from the test mark. The described test mark and test evaluation shall be in accordance with ASTM D 1654 with a rating of not less than 7 in accordance with TABLE 1, (procedure A). Cut edges or otherwise damaged surfaces of hot-dip galvanized sheet steel or mill galvanized sheet steel shall be coated with a zinc rich paint conforming to the manufacturer's standard.

2.4.3 Finishing

Painting required for surfaces not otherwise specified and finish painting of items only primed at the factory shall be as specified in Section 09900 PAINTS AND COATINGS.

2.5 CONDUCTORS, CONNECTORS, AND SPLICES

2.5.1 Copper Conductors

Hard-drawn-copper and medium-hard-drawn conductors shall comply with ASTM B 1 and ASTM B 8 as appropriate for the conductor size. Hard-drawn copper conductors shall be used for all jumpers.

2.5.2 Connectors and Splices

Connectors and splices shall be of copper alloys for copper conductors.

2.6 MEDIUM-VOLTAGE LINES

2.6.1 Bare Medium-Voltage Lines

Bare medium-voltage line conductors shall be 2/0 copper. Conductors larger than No. 6 AWG shall be stranded.

2.7 POLES AND HARDWARE

Poles shall be of lengths and classes indicated.

2.7.1 Wood Poles

Wood poles shall comply with ANSI O5.1, and shall be pressure treated in accordance with AWPA C4, with pentachlorophenol (PENTA) conforming to AWPA P1/P13or and conforming to AWPA P8 and AWPA P9, respectively. Any species listed in ANSI O5.1 for which a preservative treatment is not specified in AWPA C4, shall not be used; northern white cedar, if treated as specified for western red cedar, and western fir, if treated as specified for Douglas fir, may be used. Wood poles shall have pole markings located approximately 10 feet from pole butts for poles 50 feet or less in length. Poles shall be machine trimmed by turning smooth full length.

2.7.2 Pole Line Hardware

Zinc-coated hardware shall comply with ANSI C135.1, ANSI C135.2, ANSI C135.4, ANSI C135.14 ANSI C135.22. Steel hardware shall comply with ASTM A 575 and ASTM A 576. Hardware shall be hot-dip galvanized in accordance with ASTM A 153/A 153M. Pole-line hardware shall be hot-dip galvanized steel. Washers shall be installed under boltheads and nuts on wood surfaces and elsewhere as required. Washers used on through-bolts and double-arming bolts shall be approximately 2-1/4 inches square and 3/16 inch thick. The diameter of holes in washers shall be the correct standard size for the bolt on which a washer is used. Washers for use under heads of carriage-bolts shall be of the proper size to fit over square shanks of bolts. Eye bolts, bolt eyes, eyenuts, strain-load plates, lag screws, guy clamps, fasteners, hooks, shims, and clevises shall be used wherever required to support and to protect poles, brackets, crossarms, guy wires, and insulators.

2.7.3 Guy Assemblies

Guy assemblies shall be zinc-coated steel in accordance with ASTM A 475. Guy assemblies, including insulators and attachments, shall provide a strength exceeding the required guy strength. Anchors shall provide adequate strength to support all loads. Guy strand shall be 7 strand. Guy material shall be as shown on the drawings.

2.8 INSULATORS

Insulators shall comply with NEMA HV 2 for general requirements. Suspension insulators shall be used at corners, angles, dead-ends, other areas where

line insulators do not provide adequate strength, and as indicated. Mechanical strength of suspension insulators and hardware shall exceed the rated breaking strength of the attached conductors.

2.8.1 Medium-Voltage Line Insulators

Medium-voltage line insulators shall comply with ANSI C29.2, ANSI C29.5, and ANSI C29.6, and as applicable. Ratings shall not be lower than as shown on the drawings.

2.8.2 Apparatus Insulators

Apparatus insulators shall comply with IEEE C57.19.00, IEEE C57.19.01, ANSI C29.8, and ANSI C29.9 as applicable.

2.9 CROSSARM ASSEMBLIES

2.9.1 Crossarms

Crossarms shall be Douglas-Fir. Crossarms shall comply with RUS Bull 1728H-701 and shall be solid wood, distribution type, except cross-sectional area with pressure treatment conforming to AWPA C25, and a 1/4 inch, 45 degree chamfer on all top edges. Cross-sectional area minimum dimensions shall be 4-3/4 inches in height by 3-3/4 inches in depth in accordance with IEEE C2 for Grade B construction. Crossarms length shall be as shown. Crossarms shall be machined, chamfered, trimmed, and bored for stud and bolt holes before pressure treatment. Factory drilling shall be provided for pole and brace mounting, for four pin or four vertical line-post insulators, and for four suspension insulators, except where otherwise indicated or required. Drilling shall provide required climbing space and wire clearances. Crossarms shall be straight and free of twists to within 1/10 inch per foot of length. Bend or twist shall be in one direction only.

2.10 FUSES AND SWITCHES, MEDIUM-VOLTAGE

2.10.1 Fuse Cutouts

Medium-voltage fuses and cutouts shall comply with NEMA SG 2 and shall be of the open type construction rated 15 kV and of the heavy duty type. Open-link cut-outs are not acceptable. Fuses shall be either indicating or dropout type. Fuse cutouts shall be equipped with mounting brackets suitable for the indicated installations.

2.15 TRANSFORMERS

Transformers shall comply with IEEE C57.12.00 for general requirements and ANSI C57.12.20 for specific requirements for overhead transformers. Overhead distribution transformers shall be of the outdoor type, mineral-oil-insulated single-phase and have two separate windings per phase. Transformers shall be provided with necessary auxiliary mounting devices suitable for the indicated installation. Transformers shall have two 2-1/2 percent rated kVA high-voltage taps above rated primary voltage and two 2-1/2 percent rated kVA high-voltage taps below rated primary voltage. Transformer shall have two high voltage cover-mounted porcelain primary bushings with eye bolt terminal. Transformer shall include three side-mounted porcelain secondary bushings with eye bolt terminals, 65 degree c temperature rise over an ambient temperature of 30 degrees C, neutral ground

strap installed from the neutral bushing to the low-voltage tank grounding provision. Transformer shall have basic impulse ratings of HV BIL: 95 KV, LV BIL: 30 KV. Transformer installations shall include one primary fuse cutout and one surge arrester for each ungrounded phase conductor. Self-protected transformers are not acceptable. Transformer tanks shall have a standard gray finish.

2.11 SURGE ARRESTERS

Surge arresters shall comply with NEMA LA 1 and IEEE C62.1, IEEE C62.2, and IEEE C62.11, and shall be provided for protection of aerial-to-underground transitions, transformers and other indicated equipment. Arresters shall be distribution class. Arresters shall be equipped with mounting brackets suitable for the indicated installations. Arresters shall be of the metal-oxide varistor type as shown suitable for outdoor installations.

2.12 GROUNDING AND BONDING

2.12.1 Driven Ground Rods

Ground rods shall be of copper-clad steel conforming to UL 467 not less than 3/4" in diameter by 20' in length of the sectional type driven full length into the earth.

2.12.2 Grounding Conductors

Grounding conductors shall be bare, except where installed in conduit with associated phase conductors. Insulated conductors shall be of the same material as the phase conductors and green color-coded, except that conductors shall be rated no more than 600 volts. Bare conductors shall be ASTM B 8 soft-drawn unless otherwise indicated. Aluminum is not acceptable.

2.13 WARNING SIGNS

Warning signs shall be porcelain enameled steel or approved equal. Voltage warning signs shall comply with IEEE C2.

2.14 LIQUID DIELECTRICS

Liquid dielectrics for transformers and other liquid-filled electrical equipment shall be non-polychlorinated biphenyl (PCB) mineral-oil. Nonflammable fluids shall not be used. Tetrachloroethylene (perchloroethylene) and 1, 2, 4 tetrachlorobenzene fluids shall not be used. Liquid dielectrics in retrofitted equipment shall be certified by the manufacturer as having less than 2 parts-per-million (ppm) PCB content. In lieu of the manufacturer's certification, the Contractor may submit a test sample of the dielectric in accordance with ASTM D 923 and have tests performed per ASTM D 4059 at a testing facility approved by the Contracting Officer. Equipment with test results indicating PCB level exceeding 2 ppm shall be replaced.

2.15 FACTORY TESTS

Factory tests shall be performed, as follows, in accordance with the applicable publications and with other requirements of these specifications. The Contracting Officer shall be notified at least 10 days before the equipment is ready for testing.

a. Transformers: Manufacturer's standard routine tests in accordance with IEEE C57.12.00. and IEEE C57.12.20

b. High-Voltage Fuses: Manufacturer's standard tests in accordance with IEEE C37.41.

c. Electric Power Insulators: Manufacturer's standard tests in accordance with ANSI C29.1.

PART 3 EXECUTION

3.1 GENERAL INSTALLATION REQUIREMENTS

Equipment and devices shall be installed and energized in accordance with the manufacturer's published instructions. Secondary circuits installed in conduit on poles shall conform to the requirements of Section 16415A ELECTRICAL WORK, INTERIOR.

3.1.1 Conformance to Codes

The installation shall comply with the requirements and recommendations of IEEE C2 for medium loading districts, Grade B construction. No reduction in clearance shall be made. The installation shall also comply with the applicable parts of NFPA 70.

3.1.2 Verification of Dimensions

The Contractor shall become familiar with details of the work, shall verify dimensions in the field, and shall notify the Contracting Officer of any discrepancy before performing any work.

3.2 POLE INSTALLATION

3.2.1 Wood Pole Setting

Wood Pole Setting: Wood poles shall be set straight and firm. In normal firm ground, minimum pole-setting depths shall be as listed in Table II. In rocky or swampy ground, pole-setting depths shall be decreased or increased respectively in accordance with the local utility's published standards and as approved. Poles shall be set to maintain as even a grade as practicable. When the average ground run is level, consecutive poles shall not vary more than 5 feet in height. Holes shall be dug large enough to permit proper use of tampers to the full depth of a hole. Earth shall be placed into the hole in 6 inch maximum layers, and then thoroughly tamped before the next layer is placed. Surplus earth shall be placed around each pole in a conical shape and packed tightly to drain water away from poles.

TABLE II

MINIMUM POLE-SETTING DEPTH (FEET)

Length Overall	Straight	Curves, Corners, and Points of

Feet	Lines	Extra Strain
45	6.5	7.0

3.3 CROSSARM MOUNTING

Crossarms shall be bolted to poles with 5/8 inch through-bolts with square washers at each end. Bolts shall extend not less than 1/8 inch nor more than 2 inches beyond nuts. On single crossarm construction, the bolt head shall be installed on the crossarm side of the pole. Wood crossarm braces shall be provided on crossarms. Crossarm braces shall be as shown. Double crossarms shall be securely held in position by means of 5/8 inch double-arming bolts. Each double-arming bolt shall be equipped with four nuts and four square washers.

3.3.1 Line Arms and Buck Arms

Line arms and buck arms shall be set at right angles to lines for straight runs and for angles 45 degrees and greater; and line arms shall bisect angles of turns of less than 45 degrees. Dead-end assemblies shall be used for turns where shown. Buckarms shall be installed, as shown, at corners and junction poles. Double crossarms shall be provided at ends of joint use or conflict sections, at dead-ends, and at angles and corners to provide adequate vertical and longitudinal strength.

3.3.2 Equipment Arms

Equipment arms shall be set parallel or at right angles to lines as required to provide climbing space. Equipment arms shall be located below line construction to provide necessary wire and equipment clearances.

3.4 GUY INSTALLATION

Guys shall be provided where shown, and wherever conductor tensions are not balanced, such as at angles, corners, and dead-ends. Where a single guy will not provide the required strength, two or more guys shall be provided. Where guys are wrapped around poles, at least two guy hooks shall be provided and pole shims shall be provided where guy tension exceeds 6000 pounds. Guy clamps 6 inches in length with three 5/8 inch bolts, or offset-type guy clamps, or approved guy grips shall be provided at each guy terminal. Guy-strain insulators shall be provided in each guy for wood poles. Multiple-helix screw anchors shall be provided in marshy ground; rock anchors shall be installed in rock at right angles to guys, elsewhere anchors shall be of an expanding type, except that power installed screw anchors of equivalent holding power are acceptable. A half-round yellow polyvinyl, fiberglass, or other suitable plastic guy marker, not less than 8 feet in length, shall be provided at the anchor end of each guy shown, securely clamped to the guy or anchor at the bottom and top of the marker. Holding capacities for down guys shall be based on a lead angle of 45 degrees.

3.5 CONDUCTOR INSTALLATION

3.5.1 Line Conductors

Unless otherwise indicated, conductors shall be installed in accordance with manufacturer's approved tables of sags and tensions. Proper care shall be taken in handling and stringing conductors to avoid abrasions, sharp bends, cuts, kinks, or any possibility of damage to insulation or conductors. Conductors shall be paid out with the free end of conductors fixed and cable reels portable, except where terrain or obstructions make this method unfeasible. Bend radius for any insulated conductor shall not be less than the applicable NEMA specification recommendation. Conductors shall not be drawn over rough or rocky ground, nor around sharp bends. When installed by machine power, conductors shall be drawn from a mounted reel through stringing sheaves in straight lines clear of obstructions. Initial sag and tension shall be checked by the Contractor, in accordance with the manufacturer's approved sag and tension charts, within an elapsed time after installation as recommended by the manufacturer.

3.5.2 Connectors and Splices

Connectors and splices shall be mechanically and electrically secure under tension and shall be of the nonbolted compression type. The tensile strength of any splice shall be not less than the rated breaking strength of the conductor. Splice materials, sleeves, fittings, and connectors shall be noncorrosive and shall not adversely affect conductors. Aluminum-composition conductors shall be wire brushed and an oxide inhibitor applied before making a compression connection. Connectors which are factory-filled with an inhibitor are acceptable. Inhibitors and compression tools shall be of types recommended by the connector manufacturer. Primary line apparatus taps shall be by means of hot line clamps attached to compression type bail clamps (stirrups). Low-voltage connectors for copper conductors shall be of the solderless pressure type. Noninsulated connectors shall be smoothly taped to provide a waterproof insulation equivalent to the original insulation, when installed on insulated conductors. On overhead connections of aluminum and copper, the aluminum shall be installed above the copper.

3.5.2.1 Sag and Tension Calculations

The preferred method for determining sags and tensions is by computer program. Contractor shall provide conductor manufacturer with specific requirements as outlined below and as shown on the drawings for the manufacturers preparation of sag and tension tables and calculations. Ruling span sag tables shall include both initial and final sags at 15 degrees Fahrenheit (NESC medium loading conditions), 15 degrees Fahrenheit unloaded, 176 degrees Fahrenheit, and 212 degrees Fahrenheit. Stringing charts shall include installation temperature ranges at intervals not to exceed 10 degrees Fahrenheit. Stringing sag charts shall be in feet and inches. In calculating sags and tensions the NESC rules and requirements shall be followed.

Maximum allowable sag for 2/0 Meduim-Hard-Drawn 2/0 copper lines shall be 44 inches at 60 degrees Fahrenheit.

Conductors shall be strung in, sagged, and tied in within the same working day and no more than 12 hours shall elapse between stringing in new conductors and tie-in of the conductors per provided sag-tension charts. Conductors shall not be left hanging overnight prior to tie-in. Conductor sagging in the field shall be done using an accurate thermometer to determine the wire temperature. It is preferred that field sagging be measured by a calibrated dynamometer.

3.5.2 Conductor-To-Insulator Attachments

Conductors shall be attached to insulators by means of clamps, shoes or tie wires, in accordance with the type of insulator.

3.6 TRANSFORMER INSTALLATION

Transformers shall be carefully installed so as not to scratch finishes or damage bushings. Transformers shall be installed in accordance with the manufacturer's instructions. After installation, surfaces shall be inspected and scratches shall be touched up with a finish provided by the transformer manufacturer for this purpose.

3.7 CONNECTIONS TO UTILITY LINES

The Contractor shall coordinate the work with the Contracting Officer and shall provide for final connections to the utility electric lines.

3.8 GROUNDING

Noncurrent-carrying metal parts of equipment and conductor assemblies, such as luminaires, medium-voltage cable terminations and messengers, metal poles, operating mechanisms of pole top switches, panel enclosures, transformers, capacitors, recloser frames (cases) and other noncurrent-carrying metal items shall be grounded. Additional grounding of equipment, neutral, and surge arrester grounding systems shall be installed at poles where indicated.

3.8.1 Grounding Electrodes

Grounding electrodes shall be installed as follows:

a. Driven rod electrodes - Unless otherwise indicated, ground rods shall be located approximately 3 feet out from base of the pole and shall be driven into the earth until the tops of the rods are approximately 1 foot below finished grade. Multiple rods shall be evenly spaced at least 20 feet apart and connected together 2 feet below grade with a minimum No. 6 bare copper conductor.

b. Ground Resistance - The maximum resistance of a driven ground rod shall not exceed 10 ohms under normally dry conditions. Whenever the required ground resistance is not met, provide additional electrodes interconnected with grounding conductors, to achieve the specified ground resistance. The additional electrodes will be up to three, 20 feet rods spaced a minimum of 20 feet apart, driven perpendicular to grade. If the resultant resistance exceeds 10 ohms measured not less than 48 hours after rainfall, the Contracting Officer shall be notifies immediately. Connections below grade shall be fusion welded. Connections above grade shall be fusion welded or shall use UL 467 approved connectors.

3.8.2 Grounding and Bonding Connections

Connections above grade shall be made by the fusion-welding process or with bolted solderless connectors in compliance with UL 467, and those below grade shall be made by a fusion-welding process. Where grounding conductors are connected to aluminum-composition conductors, specially treated or lined copper-to-aluminum connectors suitable for this purpose shall be used.

3.8.3 Grounding Electrode Conductors

Pole mounted transformer installations shall have at least two grounds brought down the pole and located on opposite sides of the pole from one another. The ground wires shall be bonded together not less than 10 feet above the ground, shall be bonded to the grounding electrode using exothermic welding process, and ground electrodes (where there are more than one) shall be bonded together below ground using exothermic welding process. Neutrals, surge arresters, and equipment grounding conductors shall be bonded to this conductor. Grounding electrode conductors shall be sized as shown. Secondary system neutral conductors shall be connected directly to the transformer neutral bushings, then connected with a neutral bonding jumper between the transformer neutral bushing and the vertical grounding electrode conductor, as shown. Grounding electrode conductors shall be stapled to wood poles at intervals not exceeding 2 feet. Bends greater than 45 degrees in grounding electrode conductor are not permitted.

3.9 FIELD TESTING

3.9.1 General

Field testing shall be performed in the presence of the Contracting Officer. The Contractor shall notify the Contracting Officer 10 days prior to conducting tests. The Contractor shall furnish materials, labor, and equipment necessary to conduct field tests. The Contractor shall perform tests and inspections recommended by the manufacturer unless specifically waived by the Contracting Officer. The Contractor shall maintain a written record of tests which includes date, test performed, personnel involved, devices tested, serial number and name of test equipment, and test results. Field reports will be signed and dated by the Contractor.

3.9.2 Safety

The Contractor shall provide and use safety devices such as rubber gloves, protective barriers, and danger signs to protect and warn personnel in the test vicinity. The Contractor shall replace any devices or equipment which are damaged due to improper test procedures or handling.

3.9.3 Ground-Resistance Tests

The resistance of each grounding electrode system shall be measured using the fall-of-potential method defined in IEEE Std 81. Ground resistance measurements shall be made before the electrical distribution system is energized and shall be made in normally dry conditions not less than 48 hours after the last rainfall. Resistance measurements of separate grounding electrode systems shall be made before the systems are bonded together below grade. The combined resistance of separate systems may be used to meet the required resistance, but the specified number of electrodes shall be provided.

3.9.4 Sag and Tension Test

The Contracting Officer shall be given prior notice of the time schedule for stringing conductors or cables serving overhead medium-voltage circuits and reserves the right to witness the procedures used for ascertaining that initial stringing sags and tensions are in compliance with requirements for the applicable loading district and cable weight.

3.9.5 Liquid-Filled Transformer Tests

The following field tests shall be performed on liquid-filled transformers . Pass-fail criteria shall be in accordance with the transformer manufacturer's specifications.

a. Insulation resistance test phase-to-ground.

b. Turns ratio test.

c. Correct phase sequence.

3.9.6 Pre-Energization Services

The following services shall be performed on the equipment listed below. These services shall be performed subsequent to testing but prior to the initial energization. The equipment shall be inspected to insure that installation is in compliance with the recommendations of the manufacturer and as shown on the detail drawings. Terminations of conductors at major equipment shall be inspected to ensure the adequacy of connections. Bare and insulated conductors between such terminations shall be inspected to detect possible damage during installation. If factory tests were not performed on completed assemblies, tests shall be performed after the installation of completed assemblies. Components shall be inspected for damage caused during installation or shipment and to ensure that packaging materials have been removed. Components capable of being both manually and electrically operated shall be operated manually prior to the first electrical operation. Components capable of being calibrated, adjusted, and tested shall be calibrated, adjusted, and tested in accordance with the instructions of the equipment manufacturer. Items for which such services shall be provided, but are not limited to, are the following:

Transformers.

3.9.7 Operating Tests

After the installation is completed, and at such time as the Contracting Officer may direct, the Contractor shall conduct operating tests for approval. The equipment shall be demonstrated to operate in accordance with the specified requirements. An operating test report shall be submitted in accordance with paragraph SUBMITTALS.

3.10 ACCEPTANCE

Final acceptance of the facility will not be given until the Contractor has successfully completed all tests and after all defects in installation, material or operation have been corrected.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 16 - ELECTRICAL

SECTION 16415A

ELECTRICAL WORK, INTERIOR

06/02

PART 1 GENERAL

1.1 REFERENCES
1.2 GENERAL
1.2.1 Rules
1.2.2 Coordination
1.2.3 Special Environments
1.2.3.1 Weatherproof Locations
1.2.3.2 Ducts, Plenums and Other Air-Handling Spaces
1.2.4 Standard Products
1.2.5 Nameplates
1.2.5.1 Identification Nameplates
1.2.5.2 Liquid-Filled Transformer Nameplates
1.2.6 As-Built Drawings
1.2.7 Recessed Light Fixtures (RLF) Option
1.3 SUBMITTALS
1.4 WORKMANSHIP

PART 2 PRODUCTS

2.1 CABLES AND WIRES
2.1.1 Equipment Manufacturer Requirements
2.1.2 Aluminum Conductors
2.1.3 Insulation
2.1.4 Bonding Conductors
2.1.5 Service Entrance Cables
2.1.6 Cord Sets and Power-Supply Cords
2.2 CIRCUIT BREAKERS
2.2.1 MOLDED-CASE CIRCUIT BREAKERS
2.2.1.1 Construction
2.2.1.2 Ratings
2.2.1.3 Thermal-Magnetic Trip Elements
2.2.2 HACR Circuit Breakers
2.2.3 Ground Fault Circuit Interrupters
2.3 CONDUIT AND TUBING
2.3.1 Electrical, Zinc-Coated Steel Metallic Tubing (EMT)
2.3.2 Electrical Nonmetallic Tubing (ENT)
2.3.3 Electrical Plastic Tubing and Conduit
2.3.4 Flexible Conduit, Steel and Plastic
2.3.5 Intermediate Metal Conduit
2.3.6 Rigid Metal Conduit
2.3.7 Rigid Plastic Conduit
2.4 CONDUIT AND DEVICE BOXES AND FITTINGS
2.4.1 Boxes, Metallic Outlet
2.4.2 Boxes, Nonmetallic, Outlet and Flush-Device Boxes and Covers
2.4.3 Boxes, Switch (Enclosed), Surface-Mounted

2.4.4 Fittings for Conduit and Outlet Boxes
2.4.5 Fittings, PVC, for Use with Rigid PVC Conduit and Tubing
2.5 CONNECTORS, WIRE PRESSURE
2.5.1 For Use With Copper Conductors
2.6 ELECTRICAL GROUNDING AND BONDING EQUIPMENT
2.6.1 Ground Rods
2.7 ENCLOSURES
2.7.1 Cabinets and Boxes
2.7.2 Circuit Breaker Enclosures
2.8 LIGHTING FIXTURES, LAMPS, BALLASTS, EMERGENCY EQUIPMENT, CONTROLS AND ACCESSORIES
2.8.1 Lamps
2.8.2 Ballasts and Transformers
2.8.3 Fixtures
2.8.4 Lampholders, Starters, and Starter Holders
2.9 LOW-VOLTAGE FUSES AND FUSEHOLDERS
2.9.1 Fuses, Low Voltage Cartridge Type
2.9.2 Fuses, Class R
2.9.3 Fuses, Class T
2.9.4 Fuseholders
2.10 PANELBOARDS
2.11 RECEPTACLES
2.11.1 Standard Grade
2.11.2 Ground Fault Interrupters
2.11.3 NEMA Standard Receptacle Configurations
2.12 Service Entrance Equipment
2.13 SPLICE, CONDUCTOR
2.14 SNAP SWITCHES
2.15 TAPES
2.15.1 Plastic Tape
2.15.2 Rubber Tape
2.16 TRANSFORMERS
2.16.1 Liquid-Insulated Transformers
2.17 WIRING DEVICES
2.18 Liquid-Dielectrics

PART 3 EXECUTION

3.1 GROUNDING
3.1.1 Ground Rods
3.1.2 Grounding Conductors
3.2 WIRING METHODS
3.2.1 Conduit and Tubing Systems
3.2.1.1 Pull Wires
3.2.1.2 Conduit Stub-Ups
3.2.1.3 Below Slab-on-Grade or in the Ground
3.2.1.4 Installing in Slabs Including Slabs on Grade
3.2.1.5 Changes in Direction of Runs
3.2.1.6 Supports
3.2.1.7 Exposed Raceways
3.2.1.8 Communications Raceways
3.2.2 Cables and Conductors
3.2.2.1 Sizing
3.2.2.2 Use of Aluminum Conductors in Lieu of Copper
3.2.2.3 Cable Splicing
3.2.2.4 Conductor Identification and Tagging
3.3 BOXES AND SUPPORTS
3.3.1 Box Applications
3.3.2 Brackets and Fasteners

3.3.3 Mounting in Walls, Ceilings, or Recessed Locations
3.3.4 Installation in Overhead Spaces
3.4 DEVICE PLATES
3.5 RECEPTACLES
3.5.1 Single and Duplex, 15 or 20-ampere, 125 volt
3.5.2 Weatherproof Applications
3.5.2.1 Damp Locations
3.6 WALL SWITCHES
3.7 SERVICE EQUIPMENT
3.8 PANELBOARDS AND LOADCENTERS
3.8.1 Panelboards
3.9 FUSES
3.9.1 Cartridge Fuses; Current-Limiting Type
3.10 UNDERGROUND SERVICE
3.11 MOTOR-DISCONNECT MEANS
3.12 LIGHTING FIXTURES, LAMPS AND BALLASTS
3.12.1 Lamps
3.12.2 Lighting Fixtures
3.12.2.1 Accessories
3.12.2.2 Ceiling Fixtures
3.12.2.3 Fixtures for Installation in Grid Type Ceilings
3.12.2.4 Suspended Fixtures
3.12.3 Emergency Light Sets
3.13 EQUIPMENT CONNECTIONS
3.13.1 Motors and Motor Control
3.14 PAINTING AND FINISHING
3.15 REPAIR OF EXISTING WORK
3.16 FIELD TESTING
3.16.1 Safety
3.16.2 Ground-Resistance Tests
3.16.3 Cable Tests
3.16.3.1 Low Voltage Cable Tests
3.16.4 Motor Tests
3.16.5 Liquid-Filled Transformer Tests
3.16.6 Circuit Breaker Tests
3.16.6.1 Circuit Breakers, Molded Case
3.17 OPERATING TESTS
3.18 ACCEPTANCE

-- End of Section Table of Contents --

SECTION 16415A

ELECTRICAL WORK, INTERIOR
06/02

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI C135.30	(1988) Zinc-Coated Ferrous Ground Rods for Overhead or Underground Line Construction
ANSI C57.12.13	(1982) Conformance Requirements for Liquid-Filled Transformers Used in Unit Installations, Including Unit Substations
ANSI C57.12.70	(1978; R 1993) Terminal Markings and Connections for Distribution and Power Transformers
ANSI C78.1	(1991; C78.1a; R 1996) Fluorescent Lamps - Rapid-Start Types - Dimensional and Electrical Characteristics
ANSI C78.1375	(1996) 400-Watt, M59 Single-Ended Metal-Halide Lamps
ANSI C78.1376	(1996) 1000-Watt, M47 Metal-Halide Lamps
ANSI C78.20	(1995) Electric Lamps - Characteristics of Incandescent Lamps A, G, PS, and Similar Shapes with E26 Medium Screw Bases
ANSI C82.1	(1997) Specifications for Fluorescent Lamp Ballasts \$18.00$\F\X Addenda D & E
ANSI C82.4	(1992) Ballasts for High-Intensity-Discharge and Low-Pressure Sodium Lamps (Multiple-Supply Type)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B 1	(1995) Hard-Drawn Copper Wire
ASTM B 8	(1999) Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft

ASTM D 4059	(1996) Analysis of Polychlorinated Biphenyls in Insulating Liquids by Gas Chromatography
ASTM D 709	(2000) Laminated Thermosetting Materials

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE C2	(1997) National Electrical Safety Code
IEEE C57.100	(1999) Test Procedure for Thermal Evaluation of Oil-Immersed Distribution Transformers \$avail only as part of Distribution, Power, and Regulating Transformers Stds Collection
IEEE C57.12.00	(1993) Standard General Requirements for Liquid-Immersed Distribution, Power, and Regulating Transformers
IEEE C57.12.80	(1996) Terminology for Power and Distribution Transformers \$avail only as part of Distribution, Power, and Regulating Transformer Stds Collection
IEEE C57.12.90	1999) Test Code for Liquid-Immersed Distribution, Power, and Regulating Transformers and Guide for Short-Circuit Testing of Distribution and Power Transformers \$avail only as part of Distribution, Power, and Regulating Transformers Stds Collection
IEEE C57.13	(1993) Instrument Transformers
IEEE C57.98	(1993) Guide for Transformer Impulse Tests \$avail only as part of Distribution, Power, and Regulating Transformers Stds Collection
IEEE C62.41	(1991; R 1995) Surge Voltages in Low-Voltage AC Power Circuits
IEEE Std 242	(1986; R 1991) Recommended Practice for Protection and Coordination of Industrial and Commercial Power Systems
IEEE Std 399	(1997) Recommended Practice for Industrial and Commercial Power Systems Analysis
IEEE Std 81	(1983) Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System (Part 1) \$31.00$\F

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA 250	(1997) Enclosures for Electrical Equipment (1000 Volts Maximum)

NEMA AB 1	(1993) Molded Case Circuit Breakers and Molded Case Switches
NEMA FU 1	(1986) Low Voltage Cartridge Fuses
NEMA ICS 1	(1993) Industrial Control and Systems
NEMA ICS 2	(1993) Industrial Controls and Systems Controllers, Contactors, and Overload Relays Rated Not More Than 2,000 Volts AC or 750 Volts DC
NEMA ICS 3	(1993) Industrial Control and Systems Factory Built Assemblies
NEMA ICS 6	(1993) Industrial Control and Systems, Enclosures
NEMA LE 4	(1987) Recessed Luminaires, Ceiling Compatibility
NEMA MG 1	(1998) Motors and Generators
NEMA MG 10	(1994) Energy Management Guide for Selection and Use of Polyphase Motors
NEMA OS 1	(1996) Sheet-Steel Outlet Boxes, Device Boxes, Covers, and Box Supports
NEMA OS 2	(1998) Nonmetallic Outlet Boxes, Device Boxes, Covers and Box Supports
NEMA PB 1	(1995) Panelboards
NEMA TC 13	(1993) Electrical Nonmetallic Tubing (ENT)
NEMA TC 2	(1998) Electrical Polyvinyl Chloride (PVC) Tubing (EPT) and Conduit (EPC-40 and EPC-80)
NEMA WD 1	(1999) General Requirements for Wiring Devices
NEMA WD 6	(1997) Wiring Devices - Dimensional Requirements

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 101	(2000) Life Safety Code
NFPA 70	(2005) National Electrical Code

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

47 CFR 18	Industrial, Scientific, and Medical Equipment

UNDERWRITERS LABORATORIES (UL)

UL 1	(2000) Flexible Metal Conduit
UL 1004	(1994; Rev thru Nov 1999) Electric Motors
UL 1029	(1994; Rev thru Dec 1997) High-Intensity-Discharge Lamp Ballasts
UL 1242	(1996; Rev Mar 1998) Intermediate Metal Conduit
UL 1449	(1996; Rev thru Dec 1999) Transient Voltage Surge Suppressors
UL 1570	(1995; Rev thru Nov 1999) Fluorescent Lighting Fixtures
UL 1571	(1995; Rev thru Nov 1999) Incandescent Lighting Fixtures
UL 1572	(1995; Rev thru Nov 1999) High Intensity Discharge Lighting Fixtures
UL 1660	(2000) Liquid-Tight Flexible Nonmetallic Conduit
UL 198B	(1995) Class H Fuses
UL 198C	(1986; Rev thru Feb 1998) High-Interrupting-Capacity Fuses, Current-Limiting Types
UL 198E	(1988; Rev Jul 1988) Class R Fuses
UL 198G	(1988; Rev May 1988) Fuses for Supplementary Overcurrent Protection
UL 20	(1995; Rev thru Oct 1998) General-Use Snap Switches
UL 360	(1996; Rev thru Oct 1997) Liquid-Tight Flexible Steel Conduit
UL 44	(1999) Thermoset-Insulated Wires and Cables
UL 467	(1993; Rev thru Apr 1999) Grounding and Bonding Equipment
UL 486A	(1997; Rev thru Dec 1998) Wire Connectors and Soldering Lugs for Use with Copper Conductors
UL 486C	(1997; Rev thru Aug 1998) Splicing Wire Connectors
UL 486E	(1994; Rev thru Feb 1997) Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors

UL 489	(1996; Rev thru Dec 1998) Molded-Case Circuit Breakers, Molded-Case Switches, and Circuit-Breaker Enclosures
UL 498	(1996; Rev thru Jan 1999) Attachment Plugs and Receptacles
UL 50	(1995; Rev thru Nov 1999) Enclosures for Electrical Equipment
UL 508	(1999) Industrial Control Equipment
UL 510	(1994; Rev thru Apr 1998) Polyvinyl Chloride, Polyethylene, and Rubber Insulating Tape
UL 512	(1993; Rev thru Mar 1999) Fuseholders
UL 514A	(1996; Rev Dec 1999) Metallic Outlet Boxes
UL 514B	(1997; Rev Oct 1998) Fittings for Cable and Conduit
UL 514C	(1996; Rev thru Dec 1999) Nonmetallic Outlet Boxes, Flush-Device Boxes, and Covers
UL 542	(1999) Lampholders, Starters, and Starter Holders for Fluorescent Lamps
UL 6	(1997) Rigid Metal Conduit
UL 651	(1995; Rev thru Oct 1998) Schedule 40 and 80 Rigid PVC Conduit
UL 651A	(1995; Rev thru Apr 1998) Type EB and A Rigid PVC Conduit and HDPE Conduit
UL 67	(1993; Rev thru Oct 1999) Panelboards
UL 797	(1993; Rev thru Mar 1997) Electrical Metallic Tubing
UL 817	(1994; Rev thru May 1999) Cord Sets and Power-
UL 83	(1998; Rev thru Sep 1999) Thermoplastic-Insulated Wires and Cables
UL 854	(1996; Rev Oct 1999) Service-Entrance Cables
UL 857	(1994; Rev thru Dec 1999) Busways and Associated Fittings
UL 869A	(1998) Reference Standard for Service Equipment

UL 916	(1998) Energy Management Equipment
UL 924	(1995; Rev thru Oct 97) Emergency Lighting and Power Equipment
UL 935	(1995; Rev thru Oct 1998) Fluorescent-Lamp Ballasts
UL 943	(1993; Rev thru May 1998) Ground-Fault Circuit-Interrupters
UL 98	(1994; Rev thru Jun 1998) Enclosed and Dead-Front Switches
UL Elec Const Dir	(1999) Electrical Construction Equipment Directory

1.2 GENERAL

1.2.1 Rules

The installation shall conform to the requirements of NFPA 70 and NFPA 101, unless more stringent requirements are indicated or shown.

1.2.2 Coordination

The drawings indicate the extent and the general location and arrangement of equipment, conduit, and wiring. The Contractor shall become familiar with all details of the work and verify all dimensions in the field so that the outlets and equipment shall be properly located and readily accessible. Lighting fixtures, outlets, and other equipment and materials shall be carefully coordinated with mechanical or structural features prior to installation and positioned according to architectural reflected ceiling plans; otherwise, lighting fixtures shall be symmetrically located according to the room arrangement when uniform illumination is required, or asymmetrically located to suit conditions fixed by design and shown. Raceways, junction and outlet boxes, and lighting fixtures shall not be supported from sheet metal roof decks. If any conflicts occur necessitating departures from the drawings, details of and reasons for departures shall be submitted and approved prior to implementing any change. The Contractor shall coordinate the electrical requirements of the mechanical work and provide all power related circuits, wiring, hardware and structural support, even if not shown on the drawings.

1.2.3 Special Environments

1.2.3.1 Weatherproof Locations

Wiring, Fixtures, and equipment in designated locations shall conform to NFPA 70 requirements for installation in damp or wet locations.

1.2.3.2 Ducts, Plenums and Other Air-Handling Spaces

Wiring and equipment in ducts, plenums and other air-handling spaces shall be installed using materials and methods in conformance with NFPA 70unless

more stringent requirements are indicated in this specification or on the contract drawings.

1.2.4 Standard Products

Material and equipment shall be a standard product of a manufacturer regularly engaged in the manufacture of the product and shall essentially duplicate items that have been in satisfactory use for at least 2 years prior to bid opening.

1.2.5 Nameplates

1.2.5.1 Identification Nameplates

Major items of electrical equipment and major components shall be permanently marked with an identification name to identify the equipment by type or function and specific unit number as indicated. Designation of motors shall coincide with their designation in the panel. Unless otherwise specified, identification nameplates shall be made of laminated plastic in accordance with ASTM D 709 with black outer layers and a white core. Edges shall be chamfered. Plates shall be fastened with black-finished round-head drive screws, except motors, or approved nonadhesive metal fasteners. When the nameplate is to be installed on an irregular-shaped object, the Contractor shall devise an approved support suitable for the application and ensure the proper installation of the supports and nameplates. In all instances, the nameplate shall be installed in a conspicuous location. At the option of the Contractor, the equipment manufacturer's standard embossed nameplate material with black paint-filled letters may be furnished in lieu of laminated plastic. The front of each panelboard shall have a nameplate to indicate the phase letter, corresponding color and arrangement of the phase conductors. The following equipment, as a minimum, shall be provided with identification nameplates:

Minimum 1/4 inch High Letters	Minimum 1/8 inch High Letters
Panelboards	
Starters	Control Devices
Safety Switches	
Transformers	
Equipment Enclosures	
Motors	

1.2.5.2 Liquid-Filled Transformer Nameplates

Power transformers shall be provided with Nameplate C information in accordance with IEEE C57.12.00. Nameplates shall indicate percent impedance, voltage, kVA, frequency, number of phases, cooling class, insulation class, temperature rise, the number of gallons and composition of liquid-dielectric, and shall be permanently marked with a statement that the transformer dielectric to be supplied is non-polychlorinated biphenyl. The Contractor shall furnish manufacturer's certification for each transformer that the dielectric is non-PCB classified, with less than 50 ppm PCB content in accordance with paragraph LIQUID DIELECTRICS. Certifications

shall be related to serial numbers on transformer nameplates. Transformer dielectric exceeding the 50 ppm PCB content or transformers without certification will be considered as PCB insulated and will not be accepted.

1.2.6 As-Built Drawings

Following the project completion or turnover, within 30 days the Contractor shall furnish 2 sets of as-built drawings to the Contracting Officer.

1.2.7 Recessed Light Fixtures (RLF) Option

The Contractor has the option to substitute inch-pound (I-P) RLF to metric RLF. This option shall be coordinated with Section 09510A ACOUSTICAL CEILINGS.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Interior Electrical Equipment; G, TS-DG.

Detail drawings consisting of equipment drawings, illustrations, schedules, instructions, diagrams, and other information necessary to define the installation. Detail drawings shall show the rating of items and systems and how the components of an item and system are assembled, function together, and how they will be installed on the project. Data and drawings for component parts of an item or system shall be coordinated and submitted as a unit. Data and drawings shall be coordinated and included in a single submission. Multiple submissions for the same equipment or system are not acceptable except where prior approval has been obtained from the Contracting Officer. In such cases, a list of data to be submitted later shall be included with the first submission. Detail drawings shall show physical arrangement, construction details, connections, finishes, materials used in fabrication, provisions for conduit or busway entrance, access requirements for installation and maintenance, physical size, electrical characteristics, foundation and support details, and equipment weight. Drawings shall be drawn to scale and/or dimensioned. Optional items shall be clearly identified as included or excluded. Detail drawings shall as a minimum include:

a. Transformers.

b. Motors and rotating machinery.

SD-03 Product Data

Manufacturer's Catalog; G, TS-DG.

Data composed of catalog cuts, brochures, circulars, specifications, product data, and printed information in sufficient detail and scope to verify compliance with the requirements of the contract documents.

Material, Equipment, and Fixture Lists; G, TS-DG.

A complete itemized listing of equipment and materials proposed for incorporation into the work. Each entry shall include an item number, the quantity of items proposed, and the name of the manufacturer of each item.

Installation Procedures; FIO.

Installation procedures for rotating equipment and transformers, and precautions required to install, adjust, calibrate, and test devices and equipment.

As-Built Drawings; G, TS-DG.

The as-built drawings shall be a record of the construction as installed. The drawings shall include all the information shown on the contract drawings, deviations, modifications, and changes from the contract drawings, however minor. The as-built drawings shall be kept at the job site and updated daily. The as-built drawings shall be a full-sized set of prints marked to reflect all deviations, changes, and modifications. The as-built drawings shall be complete and show the location, size, dimensions, part identification, and other information. Additional sheets may be added. The as-built drawings shall be jointly inspected for accuracy and completeness by the Contractor's quality control representative and by the Contracting Officer prior to the submission of each monthly pay estimate. Upon completion of the work, the Contractor shall submit three full sized sets of the marked prints to the Contracting Officer for approval. If upon review, the as-built drawings are found to contain errors and/or omissions, they will be returned to the Contractor for correction. The Contractor shall correct and return the as-built drawings to the Contracting Officer for approval within ten calendar days from the time the drawings are returned to the Contractor.

Onsite Tests; G, TS-DG.

A detailed description of the Contractor's proposed procedures for on-site tests.

SD-06 Test Reports

Field Test Plan; G, TS-DG.

A detailed description of the Contractor's proposed procedures for onsite test submitted 20 days prior to testing the installed system. No field test will be performed until the test plan is approved. The test plan shall consist of complete field test procedures including tests to be performed, test equipment required, and tolerance limits.

Field Test Reports; G, TS-DG.

Six copies of the information described below in 8 1/2 x 11 inch binders having a minimum of 5 rings from which material may readily be removed and replaced, including a separate section for each test. Sections shall be separated by heavy plastic dividers with tabs.

a. A list of equipment used, with calibration certifications.

b. A copy of measurements taken.

c. The dates of testing.

d. The equipment and values to be verified.

e. The conditions specified for the test.

f. The test results, signed and dated.

g. A description of adjustments made.

h. Final position of controls and device settings.

SD-07 Certificates

Materials and Equipment; FIO.

The label or listing of the Underwriters Laboratories, Inc., will be accepted as evidence that the materials or equipment conform to the applicable standards of that agency. In lieu of this label or listing, a statement from a nationally recognized, adequately equipped testing agency indicating that the items have been tested in accordance with required procedures and that the materials and equipment comply with all contract requirements will be accepted. However, materials and equipment installed in hazardous locations must bear the UL label unless the data submitted from other testing agency is specifically approved in writing by the Contracting Officer. Items which are required to be listed and labeled in accordance with Underwriters Laboratories must be affixed with a UL label that states that it is UL listed. No exceptions or waivers will be granted to this requirement. Materials and equipment will be approved based on the manufacturer's published data.

For other than equipment and materials specified to conform to UL publications, a manufacturer's statement indicating complete compliance with the applicable standard of the American Society for Testing and Materials, National Electrical Manufacturers Association, or other commercial standard, is acceptable.

1.4 WORKMANSHIP

Materials and equipment shall be installed in accordance with NFPA 70, recommendations of the manufacturer, and as shown.

PART 2 PRODUCTS

Products shall conform to the respective publications and other requirements specified below. Materials and equipment not listed below shall be as specified elsewhere in this section. Items of the same classification shall be identical including equipment, assemblies, parts, and components.

2.1 CABLES AND WIRES

Conductors No. 8 AWG and larger diameter shall be stranded. Conductors No. 10 AWG and smaller diameter shall be solid, except that conductors for remote control, alarm, and signal circuits, classes 1, 2, and 3, shall be stranded unless specifically indicated otherwise. Conductor sizes and ampacities shown are based on copper, unless indicated otherwise. All conductors shall be copper.

2.1.1 Equipment Manufacturer Requirements

When manufacturer's equipment requires copper conductors at the terminations or requires copper conductors to be provided between components of equipment, provide copper conductors or splices, splice boxes, and other work required to meet manufacturer's requirements.

2.1.2 Aluminum Conductors

Aluminum conductors shall not be used.

2.1.3 Insulation

Unless indicated otherwise, or required by NFPA 70, power and lighting wires shall be 600-volt, Type THWN, THHN, or THW conforming to UL 83, except that grounding wire may be type TW conforming to UL 83; remote-control and signal circuits shall be Type TW, THW or TF, conforming to UL 83. Where lighting fixtures require 90-degree Centigrade (C) conductors, provide only conductors with 90-degree C insulation or better.

2.1.4 Bonding Conductors

ASTM B 1, solid bare copper wire for sizes No. 8 AWG and smaller diameter; ASTM B 8, Class B, stranded bare copper wire for sizes No. 6 AWG and larger diameter.

2.1.5 Service Entrance Cables

Service entrance (SE) and underground service entrance (USE) cables, UL 854.

2.1.6 Cord Sets and Power-Supply Cords

UL 817.

2.2 CIRCUIT BREAKERS

2.2.1 MOLDED-CASE CIRCUIT BREAKERS

Molded-case circuit breakers shall conform to NEMA AB 1 and UL 489and for circuit breakers. Circuit breakers may be installed in panelboards.

2.2.1.1 Construction

Circuit breakers shall be suitable for mounting and operating in any position. Lug shall be listed for copper conductors only in accordance with UL 486E. Single-pole circuit breakers shall be full module size with not more than one pole per module. Multi-pole circuit breakers shall be of the common-trip type having a single operating handle such that an overload or short circuit on any one pole will result in all poles opening simultaneously. Sizes of 100 amperes or less may consist of single-pole breakers permanently factory assembled into a multi-pole unit having an internal, mechanical, nontamperable common-trip mechanism and external handle ties. All circuit breakers shall have a quick-make, quick-break overcenter toggle-type mechanism, and the handle mechanism shall be trip-free to prevent holding the contacts closed against a short-circuit or sustained overload. All circuit breaker handles shall assume a position between "ON" and "OFF" when tripped automatically. All ratings shall be clearly visible.

2.2.1.2 Ratings

Voltage ratings shall be not less than the applicable circuit voltage. The interrupting rating of the circuit breakers shall be at least equal to the available short-circuit current at the line terminals of the circuit breaker and correspond to the UL listed integrated short-circuit current rating specified for the panelboards and switchboards. Molded-case circuit breakers shall have nominal voltage ratings, maximum continuous-current ratings, and maximum short-circuit interrupting ratings in accordance with NEMA AB 1.

2.2.1.3 Thermal-Magnetic Trip Elements

Thermal magnetic circuit breakers shall be provided as shown. Automatic operation shall be obtained by means of thermal-magnetic tripping devices located in each pole providing inverse time delay and instantaneous circuit protection.

2.2.2 HACR Circuit Breakers

Circuit breakers 60 amperes or below, 240 volts, 1-pole or 2-pole, intended to protect multi-motor and combination-load installations involved in heating, air conditioning, and refrigerating equipment shall be marked "Listed HACR Type."

2.2.3 Ground Fault Circuit Interrupters

UL 943. Breakers equipped with ground fault circuit interrupters shall have ground fault class, interrupting capacity, and voltage and current ratings as indicated.

2.3 CONDUIT AND TUBING

2.3.1 Electrical, Zinc-Coated Steel Metallic Tubing (EMT)

UL 797

2.3.2 Electrical Nonmetallic Tubing (ENT)

NEMA TC 13.

2.3.3 Electrical Plastic Tubing and Conduit

NEMA TC 2.

2.3.4 Flexible Conduit, Steel and Plastic

General-purpose type, UL 1; liquid tight, UL 360, and UL 1660.

2.3.5 Intermediate Metal Conduit

UL 1242.

2.3.6 Rigid Metal Conduit

UL 6.

2.3.7 Rigid Plastic Conduit

NEMA TC 2, UL 651 and UL 651A.

2.4 CONDUIT AND DEVICE BOXES AND FITTINGS

2.4.1 Boxes, Metallic Outlet

NEMA OS 1 and UL 514A.

2.4.2 Boxes, Nonmetallic, Outlet and Flush-Device Boxes and Covers

NEMA OS 2 and UL 514C.

2.4.3 Boxes, Switch (Enclosed), Surface-Mounted

UL 98.

2.4.4 Fittings for Conduit and Outlet Boxes

UL 514B.

2.4.5 Fittings, PVC, for Use with Rigid PVC Conduit and Tubing

UL 514B.

2.5 CONNECTORS, WIRE PRESSURE

2.5.1 For Use With Copper Conductors

UL 486A.

2.6 ELECTRICAL GROUNDING AND BONDING EQUIPMENT

UL 467.

2.6.1 Ground Rods

Ground rods shall be of copper-clad steel conforming to UL 467 not less than 5/8 inch in diameter by 20 feet in length of the sectional type driven full length into the earth.

2.7 ENCLOSURES

NEMA ICS 6 or NEMA 250 unless otherwise specified.

2.7.1 Cabinets and Boxes

Cabinets and boxes with volume greater than 100 cubic inches shall be in accordance with UL 50, hot-dip, zinc-coated, if sheet steel.

2.7.2 Circuit Breaker Enclosures

UL 489.

2.8 LIGHTING FIXTURES, LAMPS, BALLASTS, EMERGENCY EQUIPMENT, CONTROLS AND ACCESSORIES

The following specifications are supported and supplemented by information and details on the drawings. Additional fixtures, if shown, shall conform to this specification. Lamps, lampholders, ballasts, transformers, electronic circuitry and other lighting system components shall be constructed according to industry standards. Equipment shall be tested and listed by a recognized independent testing laboratory for the expected installation conditions. Equipment shall conform to the standards listed below.

2.8.1 Lamps

Lamps shall be constructed to operate in the specified fixture, and shall function without derating life or output as listed in published data. Lamps shall meet the requirements of the Energy Policy Act of 1992.

a. Incandescent and tungsten halogen lamps shall be designed for 125 volt operation (except for low voltage lamps), shall be rated for minimum life of 2,000 hours, and shall have color temperature between 2,800 and 3,200 degrees Kelvin. Tungsten halogen lamps shall incorporate quartz capsule construction. Lamps shall comply with ANSI C78.20 and sections 238 and 270 of ANSI C78.21.

b. Fluorescent lamps shall be green-tipped and shall have color temperature of degrees Kelvin. They shall be designed to operate with the ballasts and circuitry of the fixtures in which they will

be used. Fluorescent lamps, including spares, shall be manufactured by one manufacturer to provide for color and performance consistency. Fluorescent lamps shall comply with ANSI C78.1. Fluorescent tube lamp efficiencies shall meet or exceed the following requirements.

T8, 32 watts	(4' lamp)	2800 lumens

(1) Linear fluorescent lamps, unless otherwise indicated, shall be 4 feet long 32 watt T8, 265 mA, with minimum CRI of 75. Lamps of other lengths or types shall be used only where specified or shown. Lamps shall deliver rated life when operated on rapid start ballasts.

c. High intensity discharge lamps, including spares, shall be manufactured by one manufacturer in order to provide color and performance consistency. High intensity discharge lamps shall be designed to operate with the ballasts and circuitry of the fixtures in which they will be used and shall have wattage, shape and base as shown. High intensity discharge lamps, unless otherwise shown, shall have medium or mogul screw base and minimum starting temperature of -20 degrees F. Metal halide lamps, unless otherwise shown, shall have minimum CRI of 65; color temperature of 4,300 degrees Kelvin; shall be -BU configuration if used in base-up position; and shall be -H or high output configuration if used in horizontal position. Lamps shall comply with all applicable ANSI C78.1350, ANSI C78.1351, ANSI C78.1352, ANSI C78.1355,ANSI C78.1375, and ANSI C78.1376.

2.8.2 Ballasts and Transformers

Ballasts or transformers shall be designed to operate the designated lamps within their optimum specifications, without derating the lamps. Lamp and ballast combinations shall be certified as acceptable by the lamp manufacturer.

a. Fluorescent ballasts shall comply with ANSI C82.1 and shall be mounted integrally within fluorescent fixture housing unless otherwise shown. Ballasts shall have maximum current crest factor of 1.7; high power factor; Class A sound rating; maximum operating case temperature of 77 degrees F above ambient; and shall be rated Class P. Unless otherwise indicated, the minimum number of ballasts shall be used to serve each individual fixture. A single ballast may be used to serve multiple fixtures if they are continuously mounted, identically controlled and factory manufactured for that installation with an integral wireway.

(1) Electronic fluorescent ballasts shall comply with 47 CFR 18 for electromagnetic interference. Ballasts shall withstand line transients per IEEE C62.41, Category A. Ballasts shall have total harmonic distortion between 10 and 20%; minimum frequency of 20,000Hz; filament voltage between 2.5 and 4.5 volts; maximum starting inrush current of 20 amperes; and shall comply with the minimum Ballast Efficacy Factors shown in the table below. Minimum

starting temperature shall be 50 degrees F. Ballasts shall carry a manufacturer's full warranty of three years, including a minimum $10 labor allowance per ballast.

ELECTRONIC FLUORESCENT BALLAST EFFICACY FACTORS

LAMP TYPE	TYPE OF STARTER & LAMP	NOMINAL OPERATIONAL VOLTAGE	NUMBER OF LAMPS	MINIMUM BALLAST EFFICACY FACTOR
32W T8	rapid	120 or 277 V	1	2.54
	start		2	1.44
	linear &		3	0.93
	U-tubes		4	0.73

2.8.3 Fixtures

Fixtures shall be in accordance with the size, shape, appearance, finish, and performance shown. Unless otherwise indicated, lighting fixtures shall be provided with housings, junction boxes, wiring, lampholders, mounting supports, trim, hardware and accessories for a complete and operable installation. Recessed housings shall be minimum 20 gauge cold rolled or galvanized steel as shown. Extruded aluminum fixtures shall have minimum wall thickness of 0.125 inches. Plastic lenses shall be 100% virgin acrylic or as shown. Glass lenses shall be tempered. Heat resistant glass shall be borosilicate type. Conoid recessed reflector cones shall be Alzak with clear specular low iridescent finish.

a. Incandescent fixtures shall comply with UL 1571. Incandescent fixture specular reflector cone trims shall be integral to the cone and shall be finished to match. Painted trim finishes shall be white with minimum reflectance of 88%. Low voltage incandescent fixtures shall have integral step-down transformers.

b. Fluorescent fixtures shall comply with UL 1570. Recessed ceiling fixtures shall comply with NEMA LE 4. Fixtures shall be plainly marked for proper lamp and ballast type to identify lamp diameter, wattage, color and start type. Marking shall be readily visible to service personnel, but not visible from normal viewing angles. Fluorescent fixture lens frames on recessed and surface mounted troffers shall be one assembly with mitered corners. Parabolic louvers shall have a low iridescent finish and 45 degree cut-off. Louver intersection joints shall be hairline type and shall conceal mounting tabs or other assembly methods. Louvers shall be free from blemishes, lines or defects which distort the visual surface. Integral ballast and wireway compartments shall be easily accessible without the use of special tools. Housings shall be constructed to include grounding necessary to start the lamps. Open fixtures shall be equipped with a sleeve, wire guard, or other positive means to prevent lamps from falling. Medium bi-pin lampholders shall be twist-in type with positive locking position. Long compact fluorescent fixtures and fixtures utilizing U-bend lamps shall have clamps or secondary lampholders to support the free ends of the lamps.

c. High intensity discharge fixture shall comply with UL 1572. Recessed ceiling fixtures shall comply with NEMA LE 4. Reflectors shall be anodized aluminum. Fixtures for horizontal lamps shall have position oriented lampholders. Lampholders shall be pulse-rated to 5,000 volts. Fixtures indicated as classified or rated for hazardous locations or special service shall be designed and independently tested for the environment in which they are installed. Recessed lens fixtures shall have extruded aluminum lens frames. Ballasts shall be integral to fixtures and shall be accessible without the use of special tools. Remote ballasts shall be encased and potted. Lamps shall be shielded from direct view with a UV absorbing material such as tempered glass, and shall be circuited through a cut-off switch which will shut off the lamp circuit if the lens is not in place.

d. Emergency lighting fixtures and accessories shall be constructed and independently tested to meet the requirements of applicable codes. Batteries shall be Nicad or equal with no required maintenance, and shall have a minimum life expectancy of five years and warranty period of three years.

e. Exit Signs

Exit signs shall be ENERGY STAR compliant, thereby meeting the following requirements. Input power shall be less than 5 watts per face. Letter size and spacing shall adhere to NFPA 101. Luminance contrast shall be greater than 0.8. Average luminance shall be greater than 15 cd/m 2 measured at normal (0 degree) and 45 degree viewing angles. Minimum luminance shall be greater than 8.6 cd/m 2 measured at normal and 45 degree viewing angles. Maximum to minimum luminance shall be less than 20:1 measured at normal and 45 degree viewing angles. The manufacturer warranty for defective parts shall be at least 5 years.

2.8.4 Lampholders, Starters, and Starter Holders

UL 542

2.9 LOW-VOLTAGE FUSES AND FUSEHOLDERS

2.9.1 Fuses, Low Voltage Cartridge Type

NEMA FU 1.

2.9.2 Fuses, Class R

UL 198E.

2.9.3 Fuses, Class T

UL 198H.

2.9.4 Fuseholders

UL 512.

2.10 PANELBOARDS

Dead-front construction, NEMA PB 1 and UL 67.

2.11 RECEPTACLES

2.11.1 Standard Grade

UL 498.

2.11.2 Ground Fault Interrupters

UL 943, Class A.

2.11.3 NEMA Standard Receptacle Configurations

NEMA WD 6.

a. Single and Duplex, 15-Ampere and 20-Ampere, 125 Volt

15-ampere, non-locking: NEMA type 5-15R, locking: NEMA type L5-15R, 20-ampere, non-locking: NEMA type 5-20R, locking: NEMA type L5-20R.

2.12 SERVICE ENTRANCE EQUIPMENT

UL 869A.

2.13 SPLICE, CONDUCTOR

UL 486C.

2.14 SNAP SWITCHES

UL 20.

2.15 TAPES

2.15.1 Plastic Tape

UL 510.

2.15.2 Rubber Tape

UL 510.

2.16 TRANSFORMERS

Single- phase transformers shall have two windings per phase. Full-capacity standard NEMA taps shall be provided in the primary windings of transformers unless otherwise indicated.

2.16.1 Liquid-Insulated Transformers

IEEE C57.12.00, ANSI C57.12.10, ANSI C57.12.13, ANSI C57.12.27, ANSI C57.12.70, IEEE C57.12.80, IEEE C57.12.90, IEEE C57.98, and IEEE C57.100. Transformers may be the mineral-oil insulated, silicone, or the high-

molecular weight hydrocarbon (HMWH) type. Voltage and KVA ratings shall be as indicated. Temperature rise shall not exceed 55/65 degrees C under full load operation in an ambient temperature of 40 degrees C. Percent voltage impedance shall be manufacturer's standard. The basic impulse insulation level (BIL) rating shall be not less than 95 kV for the distribution voltage shown. Nameplates shall be provided in accordance with IEEE C57.12.00.

2.17 WIRING DEVICES

NEMA WD 1 for wiring devices, and NEMA WD 6 for dimensional requirements of wiring devices.

2.18 LIQUID-DIELECTRICS

Liquid dielectrics for transformers, capacitors, and other liquid-filled electrical equipment shall be non-polychlorinated biphenyl (PCB) mineral oil or less flammable liquid as specified. Nonflammable fluids shall not be used. Tetrachloroethylene (perchloroethylene) and 1, 2, 4 trichlorobenzene fluids shall be certified by the manufacturer as having less than 50 parts per million (ppm) PCB content. In lieu of the manufacturer's certification, the Contractor may submit a test sample of the dielectric in accordance with ASTM D 4059 at a testing facility approved by the Contracting Officer. Equipment with test results indicating PCB level exceeding 50 ppm shall be replaced.

PART 3 EXECUTION

3.1 GROUNDING

Grounding shall be in conformance with NFPA 70, the contract drawings, and the following specifications.

3.1.1 Ground Rods

The resistance to ground shall be measured using the fall-of-potential method described in IEEE Std 81. The maximum resistance of a driven ground shall not exceed 25 ohms under normally dry conditions. If this resistance cannot be obtained with a single rod, one additional rod not less than 6 feet on center. If the resultant resistance exceeds 25 ohms measured not less than 48 hours after rainfall, the Contracting Officer shall be notified immediately. Connections below grade shall be fusion welded. Connections above grade shall be fusion welded or shall use UL 467 approved connectors.

3.1.2 Grounding Conductors

A green equipment grounding conductor, sized in accordance with NFPA 70 shall be provided, regardless of the type of conduit. Equipment grounding bars shall be provided in all panelboards. The equipment grounding conductor shall be carried back to the service entrance grounding connection or separately derived grounding connection. All equipment grounding conductors, including metallic raceway systems used as such, shall be bonded or joined together in each wiring box or equipment enclosure. Metallic raceways and grounding conductors shall be checked to assure that they are wired or bonded into a common junction. Metallic boxes and enclosures, if used, shall also be bonded to these grounding conductors by an approved

means per NFPA 70. When switches, or other utilization devices are installed, any designated grounding terminal on these devices shall also be bonded to the equipment grounding conductor junction with a short jumper.

3.2 WIRING METHODS

Wiring shall conform to NFPA 70, the contract drawings, and the following specifications. Unless otherwise indicated, wiring shall consist of insulated conductors installed in rigid zinc-coated steel conduit rigid plastic conduit, electrical metallic tubing, electrical nonmetallic tubing, intermediate metal conduit. Wire fill in conduits shall be based on NFPA 70 for the type of conduit and wire insulations specified. Wire fill in conduits located in Class I or II hazardous areas shall be limited to 25 percent of the cross sectional area of the conduit.

3.2.1 Conduit and Tubing Systems

Conduit and tubing systems shall be installed as indicated. Conduit sizes shown are based on use of copper conductors with insulation types as described in paragraph WIRING METHODS. Minimum size of raceways shall be 1/2 inch. Only metal conduits will be permitted when conduits are required for shielding or other special purposes indicated, or when required by conformance to NFPA 70. Nonmetallic conduit and tubing may be used in damp, wet or corrosive locations when permitted by NFPA 70 and the conduit or tubing system is provided with appropriate boxes, covers, clamps, screws or other appropriate type of fittings. Electrical metallic tubing (EMT) may be installed only within buildings. EMT may be installed in concrete and grout in dry locations. EMT installed in concrete or grout shall be provided with concrete tight fittings. EMT shall not be installed in damp or wet locations, or the air space of exterior masonry cavity walls. Bushings, manufactured fittings or boxes providing equivalent means of protection shall be installed on the ends of all conduits and shall be of the insulating type, where required by NFPA 70. Only UL listed adapters shall be used to connect EMT to rigid metal conduit, cast boxes, and conduit bodies. Penetrations of above grade floor slabs, time-rated partitions and fire walls shall be firestopped in accordance with Section 07840A FIRESTOPPING. Except as otherwise specified, IMC may be used as an option for rigid steel conduit in areas as permitted by NFPA 70. Raceways shall be kept 6 inches away from parallel runs of hot-water pipes. Raceways shall be concealed within finished walls, ceilings, and floors unless otherwise shown. Raceways crossing structural expansion joints or seismic joints shall be provided with suitable expansion fittings or other suitable means to compensate for the building expansion and contraction and to provide for continuity of grounding.

3.2.1.1 Pull Wires

A pull wire shall be inserted in each empty raceway in which wiring is to be installed if the raceway is more than 50 feet in length and contains more than the equivalent of two 90-degree bends, or where the raceway is more than 150 feet in length. The pull wire shall be of No. 14 AWG zinc-coated steel, or of plastic having not less than 200 pounds per square inch tensile strength. Not less than 10 inches of slack shall be left at each end of the pull wire.

3.2.1.2 Conduit Stub-Ups

Where conduits are to be stubbed up through concrete floors, a short elbow shall be installed below grade to transition from the horizontal run of conduit to a vertical run. A conduit coupling fitting, threaded on the inside shall be installed, to allow terminating the conduit flush with the finished floor. Wiring shall be extended in rigid threaded conduit to equipment, except that where required, flexible conduit may be used 6 inches above the floor. Empty or spare conduit stub-ups shall be plugged flush with the finished floor with a threaded, recessed plug.

3.2.1.3 Below Slab-on-Grade or in the Ground

Electrical wiring below slab-on-grade shall be protected by a conduit system. Conduit passing vertically through slabs-on-grade shall be rigid steel or IMC. Rigid steel or IMC conduits installed below slab-on-grade or in the earth shall be field wrapped with 0.010 inch thick pipe-wrapping plastic tape applied with a 50 percent overlay, or shall have a factory-applied polyvinyl chloride, plastic resin, or epoxy coating system.

3.2.1.4 Installing in Slabs Including Slabs on Grade

Conduit installed in slabs-on-grade shall be rigid steel or IMC. Conduits shall be installed as close to the middle of concrete slabs as practicable without disturbing the reinforcement. Outside diameter shall not exceed 1/3 of the slab thickness and conduits shall be spaced not closer than 3 diameters on centers except at cabinet locations where the slab thickness shall be increased as approved by the Contracting Officer. Where conduit is run parallel to reinforcing steel, the conduit shall be spaced a minimum of one conduit diameter away but not less than one inch from the reinforcing steel.

3.2.1.5 Changes in Direction of Runs

Changes in direction of runs shall be made with symmetrical bends or cast-metal fittings. Field-made bends and offsets shall be made with an approved hickey or conduit-bending machine. Crushed or deformed raceways shall not be installed. Trapped raceways in damp and wet locations shall be avoided where possible. Lodgment of plaster, dirt, or trash in raceways, boxes, fittings and equipment shall be prevented during the course of construction. Clogged raceways shall be cleared of obstructions or shall be replaced.

3.2.1.6 Supports

Metallic conduits and tubing, and the support system to which they are attached, shall be securely and rigidly fastened in place to prevent vertical and horizontal movement at intervals of not more than 10 feet and within 3 feet of boxes, cabinets, and fittings, with approved pipe straps, wall brackets, conduit clamps, conduit hangers, threaded C-clamps, beam clamps, or ceiling trapeze. Loads and supports shall be coordinated with supporting structure to prevent damage or deformation to the structure. Loads shall not be applied to joist bridging. Attachment shall be by wood screws or screw-type nails to wood; by toggle bolts on hollow masonry units; by expansion bolts on concrete or brick; by machine screws, welded threaded studs, heat-treated or spring-steel-tension clamps on steel work. Nail-type nylon anchors or threaded studs driven in by a powder charge and provided with lock washers and nuts may be used in lieu of expansion bolts or machine screws. Raceways or pipe straps shall not be welded to steel structures. Cutting the main reinforcing bars in reinforced concrete beams or joists

shall be avoided when drilling holes for support anchors. Holes drilled for support anchors, but not used, shall be filled. In partitions of light steel construction, sheet-metal screws may be used. Raceways shall not be supported using wire or nylon ties. Raceways shall be independently supported from the structure. Upper raceways shall not be used as a means of support for lower raceways. Supporting means shall not be shared between electrical raceways and mechanical piping or ducts. Cables and raceways shall not be supported by ceiling grids. Except where permitted by NFPA 70, wiring shall not be supported by ceiling support systems. Conduits shall be fastened to sheet-metal boxes and cabinets with two locknuts where required by NFPA 70, where insulating bushings are used, and where bushings cannot be brought into firm contact with the box; otherwise, a single locknut and bushing may be used. Threadless fittings for electrical metallic tubing shall be of a type approved for the conditions encountered. Additional support for horizontal runs is not required when EMT rests on steel stud cutouts.

3.2.1.7 Exposed Raceways

Exposed raceways shall be installed parallel or perpendicular to walls, structural members, or intersections of vertical planes and ceilings. Raceways under raised floors and above accessible ceilings shall be considered as exposed installations in accordance with NFPA 70 definitions.

3.2.1.8 Communications Raceways

Communications raceways indicated shall be installed in accordance with the previous requirements for conduit and tubing and with the additional requirement that no length of run shall exceed 50 feet for 1/2 inch and 3/4 inch sizes, and 100 feet for 1 inch or larger sizes, and shall not contain more than two 90-degree bends or the equivalent. Additional pull or junction boxes shall be installed to comply with these limitations whether or not indicated. Inside radii of bends in conduits of 1 inch size or larger shall not be less than ten times the nominal diameter.

3.2.2 Cables and Conductors

Installation shall conform to the requirements of NFPA 70. Covered, bare or insulated conductors of circuits rated over 600 volts shall not occupy the same equipment wiring enclosure, cable, or raceway with conductors of circuits rated 600 volts or less.

3.2.2.1 Sizing

Unless otherwise noted, all sizes are based on copper conductors and the insulation types indicated. Sizes shall be not less than indicated. Branch-circuit conductors shall be not smaller than No. 12 AWG. Conductors for branch circuits of 120 volts more than 100 feet long and of 277 volts more than 230 feet long, from panel to load center, shall be no smaller than No. 10 AWG. Class 1 remote control and signal circuit conductors shall be not less than No. 14 AWG. Class 2 remote control and signal circuit conductors shall be not less than No. 16 AWG. Class 3 low-energy, remote-control and signal circuits shall be not less than No. 22 AWG.

3.2.2.2 Use of Aluminum Conductors in Lieu of Copper

Aluminum conductors shall not be used.

3.2.2.3 Cable Splicing

Splices shall be made in an accessible location. Crimping tools and dies shall be approved by the connector manufacturer for use with the type of connector and conductor.

a. Copper Conductors, 600 Volt and Under: Splices in conductors No. 10 AWG and smaller diameter shall be made with an insulated, pressure-type connector. Splices in conductors No. 8 AWG and larger diameter shall be made with a solderless connector and insulated with tape or heat-shrink type insulating material equivalent to the conductor insulation.

3.2.2.4 Conductor Identification and Tagging

Power, control, and signal circuit conductor identification shall be provided within each enclosure where a tap, splice, or termination is made. Where several feeders pass through a common pull box, the feeders shall be tagged to indicate clearly the electrical characteristics, circuit number, and panel designation. Phase conductors of low voltage power circuits shall be identified by color coding. Phase identification by a particular color shall be maintained continuously for the length of a circuit, including junctions.

a. Color coding shall be provided for service, feeder, branch, and ground conductors. Color shall be green for grounding conductors and white for neutrals; except where neutrals of more than one system are installed in the same raceway or box, other neutral shall be white with colored (not green) stripe. The color coding for 3-phase and single-phase low voltage systems shall be as follows:

120/208-volt, 3-phase: Black(A), red(B), and blue(C).

b. Conductor phase and voltage identification shall be made by color-coded insulation for all conductors smaller than No. 6 AWG. For conductors No. 6 AWG and larger, identification shall be made by color-coded insulation, or conductors with black insulation may be furnished and identified by the use of half-lapped bands of colored electrical tape wrapped around the insulation for a minimum of 3 inches of length near the end, or other method as submitted by the Contractor and approved by the Contracting Officer.

c. Control and signal circuit conductor identification shall be made by color-coded insulated conductors, plastic-coated self-sticking printed markers, permanently attached stamped metal foil markers, or equivalent means as approved. Control circuit terminals of equipment shall be properly identified. Terminal and conductor identification shall match that shown on approved detail drawings. Hand lettering or marking is not acceptable.

3.3 BOXES AND SUPPORTS

Boxes shall be provided in the wiring or raceway systems where required by NFPA 70 for pulling of wires, making connections, and mounting of devices or fixtures. Pull boxes shall be furnished with screw-fastened covers. Indicated elevations are approximate, except where minimum mounting heights for hazardous areas are required by NFPA 70. Unless otherwise indicated, boxes for wall switches shall be mounted 48 inches above finished floors. Switch and outlet boxes located on opposite sides of fire rated walls shall be separated by a minimum horizontal distance of 24 inches. The total combined area of all box openings in fire rated walls shall not exceed 100 square inches per 100 square feet. Maximum box areas for individual boxes in fire rated walls vary with the manufacturer and shall not exceed the maximum specified for that box in UL Elec Const Dir. Only boxes listed in UL Elec Const Dir shall be used in fire rated walls.

3.3.1 Box Applications

Each box shall have not less than the volume required by NFPA 70 for number of conductors enclosed in box. Boxes for metallic raceways shall be listed for the intended use when located in normally wet locations, when flush or surface mounted on outside of exterior surfaces, or when located in hazardous areas. Boxes installed in wet locations and boxes installed flush with the outside of exterior surfaces shall be gasketed. Boxes for mounting lighting fixtures shall be not less than 4 inches square, or octagonal, except smaller boxes may be installed as required by fixture configuration, as approved. Cast-metal boxes with 3/32 inch wall thickness are acceptable. Large size boxes shall be NEMA 1 or as shown. Boxes in other locations shall be sheet steel except that nonmetallic boxes may be used with nonmetallic conduit and tubing or nonmetallic sheathed cable system, when permitted by NFPA 70. Boxes for use in masonry-block or tile walls shall be square-cornered, tile-type, or standard boxes having square-cornered, tile-type covers.

3.3.2 Brackets and Fasteners

Boxes and supports shall be fastened to wood with wood screws or screw-type nails of equal holding strength, with bolts and metal expansion shields on concrete or brick, with toggle bolts on hollow masonry units, and with machine screw or welded studs on steel work. Threaded studs driven in by powder charge and provided with lockwashers and nuts, or nail-type nylon anchors may be used in lieu of expansion shields, or machine screws. Penetration of more than 1-1/2 inches into reinforced-concrete beams or more than 3/4 inch into reinforced-concrete joists shall avoid cutting any main reinforcing steel. The use of brackets which depend on gypsum wallboard or plasterboard for primary support will not be permitted. In partitions of light steel construction, bar hangers with 1 inch long studs, mounted between metal wall studs or metal box mounting brackets shall be used to secure boxes to the building structure. When metal box mounting brackets are used, additional box support shall be provided on the side of the box opposite the brackets. This additional box support shall consist of a minimum 12 inch long section of wall stud, bracketed to the opposite side of the box and secured by two screws through the wallboard on each side of the stud. Metal screws may be used in lieu of the metal box mounting brackets.

3.3.3 Mounting in Walls, Ceilings, or Recessed Locations

In walls or ceilings of concrete, tile, or other non-combustible material, boxes shall be installed so that the edge of the box is not recessed more than 1/4 inch from the finished surface. Boxes mounted in combustible walls or ceiling material shall be mounted flush with the finished surface. The use of gypsum or plasterboard as a means of supporting boxes will not be permitted. Boxes installed for concealed wiring shall be provided with suitable extension rings or plaster covers, as required. The bottom of boxes installed in masonry-block walls for concealed wiring shall be mounted flush with the top of a block to minimize cutting of the blocks, and boxes shall be located horizontally to avoid cutting webs of block. Separate boxes shall be provided for flush or recessed fixtures when required by the fixture terminal operating temperature, and fixtures shall be readily removable for access to the boxes unless ceiling access panels are provided.

3.3.4 Installation in Overhead Spaces

In open overhead spaces, cast-metal boxes threaded to raceways need not be separately supported except where used for fixture support; cast-metal boxes having threadless connectors and sheet metal boxes shall be supported directly from the building structure or by bar hangers. Hangers shall not be fastened to or supported from joist bridging. Where bar hangers are used, the bar shall be attached to raceways on opposite sides of the box and the raceway shall be supported with an approved type fastener not more than 24 inches from the box.

3.4 DEVICE PLATES

One-piece type device plates shall be provided for all outlets and fittings. Plates on unfinished walls and on fittings shall be of zinc-coated sheet steel, cast-metal, or impact resistant plastic having rounded or beveled edges. Plates on finished walls shall be of impact-resistant plastic and shall be ivory. Screws shall be of metal with countersunk heads, in a color to match the finish of the plate. Plates shall be installed with all four edges in continuous contact with finished wall surfaces without the use of mats or similar devices. Plaster fillings will not be permitted. Plates shall be installed with an alignment tolerance of 1/16 inch. The use of sectional-type device plates will not be permitted. Plates installed in wet locations shall be gasketed and provided with a hinged, gasketed cover, unless otherwise specified.

3.5 RECEPTACLES

3.5.1 Single and Duplex, 15 or 20-ampere, 125 volt

Single and duplex receptacles shall be rated 15 amperes, 125 volts, two-pole, three-wire, grounding type with polarized parallel slots. Bodies shall be of ivory to match color of switch handles in the same room or to harmonize with the color of the respective wall, and supported by mounting strap having plaster ears. Contact arrangement shall be such that contact is made on two sides of an inserted blade. Receptacle shall be side- or back-wired with two screws per terminal. The third grounding pole shall be connected to the metal mounting yoke. Receptacles with ground fault circuit interrupters shall have the current rating as indicated, and shall be UL Class A type unless otherwise shown. Ground fault circuit protection shall be provided as required by NFPA 70 and as indicated on the drawings.

3.5.2 Weatherproof Applications

Weatherproof receptacles shall be suitable for the environment, damp or wet as applicable, and the housings shall be labeled to identify the allowable use. Receptacles shall be marked in accordance with UL 514A for the type of use indicated; "Damp locations", "Wet Locations", "Wet Location Only When Cover Closed". Assemblies shall be installed in accordance with the manufacturer's recommendations.

3.5.2.1 Damp Locations

Receptacles in damp locations shall be mounted in an outlet box with a gasketed, weatherproof, cast-metal cover plate (device plate, box cover) and a gasketed cap (hood, receptacle cover) over each receptacle opening. The cap shall be either a screw-on type permanently attached to the cover plate by a short length of bead chain or shall be a flap type attached to the cover with a spring loaded hinge.

3.6 WALL SWITCHES

Wall switches shall be of the totally enclosed tumbler type. The wall switch handle and switch plate color shall be ivory. Wiring terminals shall be of the screw type or of the solderless pressure type having suitable conductor-release arrangement. Not more than one switch shall be installed in a single-gang position. Switches shall be rated 15-ampere 120-volt for use on alternating current only.

3.7 SERVICE EQUIPMENT

Service-disconnecting means shall be of the enclosed molded-case circuit breaker type the assembly shall be listed as suitable for service entrance equipment. Enclosures shall be sheet metal with hinged cover for flush mounting unless otherwise indicated. Front cover of service panel shall be labeled "Service Disconnect".

3.8 PANELBOARDS AND LOADCENTERS

Circuit breakers and switches used as a motor disconnecting means shall be capable of being locked in the open position. Door locks shall be keyed alike. Nameplates shall be as approved. Directories shall be typed to indicate loads served by each circuit and mounted in a holder behind a clear protective covering.

3.8.1 Panelboards

Panelboards shall be circuit breaker equipped as indicated on the drawings.

3.9 FUSES

Equipment provided under this contract shall be provided with a complete set of properly rated fuses when the equipment manufacturer utilize fuses in the manufacture of the equipment, or if current-limiting fuses are required to be installed to limit the ampere-interrupting capacity of circuit breakers or equipment to less than the maximum available fault current at the location of the equipment to be installed. Fuses shall have a voltage rating of not less than the phase-to-phase circuit voltage, and shall have

the time-current characteristics required for effective power system coordination. Time-delay and non-time-delay options shall be as specified.

3.9.1 Cartridge Fuses; Current-Limiting Type

Cartridge fuses, current-limiting type, Class RK5 shall have tested interrupting capacity not less than 200,000 amperes. Fuse holders shall be the type that will reject all Class H fuses.

3.10 UNDERGROUND SERVICE

Unless otherwise indicated, interior conduit systems shall be stubbed out 5 feet beyond the building wall and 2 feet below finished grade, for interface with the exterior service lateral conduits and exterior communications conduits. Outside conduit ends shall be bushed when used for direct burial service lateral conductors. Outside conduit ends shall be capped or plugged until connected to exterior conduit systems. Underground service lateral conductors will be extended to building service entrance and terminated in accordance with NFPA 70.

3.11 MOTOR-DISCONNECT MEANS

Each motor shall be provided with a disconnecting means when required by NFPA 70 even though not indicated. For single-phase motors, a single or double pole toggle switch, rated only for alternating current, will be acceptable for capacities less than 30 amperes, provided the ampere rating of the switch is at least 125 percent of the motor rating. Switches shall disconnect all ungrounded conductors.

3.12 LIGHTING FIXTURES, LAMPS AND BALLASTS

This paragraph shall cover the installation of lamps, lighting fixtures and ballasts in interior or building mounted applications.

3.12.1 Lamps

Lamps of the type, wattage, and voltage rating indicated shall be delivered to the project in the original cartons and installed just prior to project completion. Lamps installed and used for working light during construction shall be replaced prior to turnover to the Government if more than 15% of their rated life has been used. Lamps shall be tested for proper operation prior to turn-over and shall be replaced if necessary with new lamps from the original manufacturer. 10% spare lamps of each type, from the original manufacturer, shall be provided.

3.12.2 Lighting Fixtures

Fixtures shall be as shown and shall conform to the following specifications and shall be as detailed on the drawings. Illustrations shown on the drawings are indicative of the general type desired and are not intended to restrict selection to fixtures of any particular manufacturer. Fixtures of similar designs and equivalent energy efficiency, light distribution and brightness characteristics, and of equal finish and quality will be acceptable if approved. In suspended acoustical ceilings with fluorescent

fixtures, the fluorescent emergency light fixtures shall be furnished with self-contained battery packs.

3.12.2.1 Accessories

Accessories such as straps, mounting plates, nipples, or brackets shall be provided for proper installation.

3.12.2.2 Ceiling Fixtures

Ceiling fixtures shall be coordinated with and suitable for installation in, on or from the ceiling as shown. Installation and support of fixtures shall be in accordance with NFPA 70 and manufacturer's recommendations. Where seismic requirements are specified herein, fixtures shall be supported as shown or specified. Recessed fixtures shall have adjustable fittings to permit alignment with ceiling panels. Surface-mounted fixtures shall be suitable for fastening to the ceiling panel structural supports.

3.12.2.3 Fixtures for Installation in Grid Type Ceilings

Fixtures for installation in grid type ceilings which are smaller than a full tile shall be centered in the tile. 1 by 4 foot fixtures shall be mounted along the grid rail as shown. Work above the ceiling shall be coordinated among the trades to provide the lighting layout shown. Fixtures mounted to the grid shall have trim exactly compatible with the grid. Contractor shall coordinate trims with ceiling trades prior to ordering fixtures. Metric fixtures shall be designed to fit the metric grid specified. Fixtures in continuous rows shall be coordinated between trades prior to ordering. Fixtures shall be mounted using independent supports capable of supporting the entire weight of the fixture. No fixture shall rest solely on the ceiling grid. Recessed fixtures installed in seismic areas should be installed utilizing specially designed seismic clips. Junction boxes shall be supported at four points.

3.12.2.4 Suspended Fixtures

Suspended fixtures shall be provided with swivel hangers or hand-straights so that they hang plumb. Pendants, rods, or chains 4 feet or longer excluding fixture shall be braced to prevent swaying using three cables at 120 degrees of separation. Suspended fixtures in continuous rows shall have internal wireway systems for end to end wiring and shall be properly aligned to provide a straight and continuous row without bends, gaps, light leaks or filler pieces. Aligning splines shall be used on extruded aluminum fixtures to assure hairline joints. Steel fixtures shall be supported to prevent "oil-canning" effects. Fixture finishes shall be free of scratches, nicks, dents, and warps, and shall match the color and gloss specified. Pendants shall be finished to match fixtures. Aircraft cable shall be stainless steel. Canopies shall be finished to match the ceiling and shall be low profile unless otherwise shown. Maximum distance between suspension points shall be 10 feet or as recommended by the manufacturer, whichever is less.

3.12.3 Emergency Light Sets

Emergency light sets shall conform to UL 924 with the number of heads as indicated. Sets shall be permanently connected to the wiring system by conductors installed in short lengths of flexible conduit.

3.13 EQUIPMENT CONNECTIONS

Wiring not furnished and installed under other sections of the specifications for the connection of electrical equipment as indicated on the drawings shall be furnished and installed under this section of the specifications. Connections shall comply with the applicable requirements of paragraph WIRING METHODS. Flexible conduits 6 feet or less in length shall be provided to all electrical equipment subject to periodic removal, vibration, or movement and for all motors. All motors shall be provided with separate grounding conductors. Liquid-tight conduits shall be used in damp or wet locations.

3.13.1 Motors and Motor Control

Motors, motor controls, and motor control centers shall be installed in accordance with NFPA 70, the manufacturer's recommendations, and as indicated. Wiring shall be extended to motors, motor controls, and motor control centers and terminated.

3.14 PAINTING AND FINISHING

Field-applied paint on exposed surfaces shall be provided under Section 09900 PAINTS AND COATINGS.

3.15 REPAIR OF EXISTING WORK

The work shall be carefully laid out in advance, and where cutting, channeling, chasing, or drilling of floors, walls, partitions, ceiling, or other surfaces is necessary for the proper installation, support, or anchorage of the conduit, raceways, or other electrical work, this work shall be carefully done, and any damage to building, piping, or equipment shall be repaired by skilled mechanics of the trades involved at no additional cost to the Government.

3.16 FIELD TESTING

Field testing shall be performed in the presence of the Contracting Officer. The Contractor shall notify the Contracting Officer 10 days prior to conducting tests. The Contractor shall furnish all materials, labor, and equipment necessary to conduct field tests. The Contractor shall perform all tests and inspection recommended by the manufacturer unless specifically waived by the Contracting Officer. The Contractor shall maintain a written record of all tests which includes date, test performed, personnel involved, devices tested, serial number and name of test equipment, and test results. All field test reports will be signed and dated by the Contractor.

3.16.1 Safety

The Contractor shall provide and use safety devices such as rubber gloves, protective barriers, and danger signs to protect and warn personnel in the test vicinity. The Contractor shall replace any devices or equipment which are damaged due to improper test procedures or handling.

3.16.2 Ground-Resistance Tests

The resistance of each grounding electrode system shall be measured using the fall-of-potential method defined in IEEE Std 81. Soil resistivity in the area of the grid shall be measured concurrently with the grid measurements. Ground resistance measurements shall be made before the electrical distribution system is energized and shall be made in normally dry conditions not less than 48 hours after the last rainfall. Resistance measurements of separate grounding electrode systems shall be made before the systems are bonded together below grade. The combined resistance of separate systems may be used to meet the required resistance, but the specified number of electrodes must still be provided.

a. Single rod electrode - 25 ohms.

3.16.3 Cable Tests

The Contractor shall be responsible for identifying all equipment and devices that could be damaged by application of the test voltage and ensuring that they have been properly disconnected prior to performing insulation resistance testing. An insulation resistance test shall be performed on all low and medium voltage cables after the cables are installed in their final configuration and prior to energization. The test voltage shall be 500 volts DC applied for one minute between each conductor and ground and between all possible combinations of conductors. The minimum value of resistance shall be:

R in megohms = (rated voltage in kV + 1) x 1000/(length of cable in feet)

Each cable failing this test shall be repaired or replaced. The repaired cable system shall then be retested until failures have been eliminated.

3.16.3.1 Low Voltage Cable Tests

a. Continuity test.

b. Insulation resistance test.

3.16.4 Motor Tests

a. Phase rotation test to ensure proper directions.

3.16.5 Liquid-Filled Transformer Tests

The following field tests shall be performed on all liquid-filled transformers

a. Insulation resistance test phase-to-ground, each phase.

b. Turns ratio test.

c. Correct phase sequence.

3.16.6 Circuit Breaker Tests

3.16.6.1 Circuit Breakers, Molded Case

a. Insulation resistance test phase-to-phase, all combinations.

b. Insulation resistance test phase-to-ground, each phase.

c. Closed breaker contact resistance test.

d. Manual operation of the breaker.

3.17 OPERATING TESTS

After the installation is completed, and at such time as the Contracting Officer may direct, the Contractor shall conduct operating tests for approval. The equipment shall be demonstrated to operate in accordance with the specified requirements. An operating test report shall be submitted in accordance with paragraph FIELD TEST REPORTS.

3.18 ACCEPTANCE

Final acceptance of the facility will not be given until the Contractor has successfully completed all tests and after all defects in installation, material or operation have been corrected.

-- End of Section --

ATTACHMENTS

	DESCRIPTION	No of PAGES
A	CONSTRUCTION QUALITY CONTROL REPORT	2
B	DEFICIENCY TRACKING LOG	1
C	LOG AND SUMMARY OF OCCUPATION INJURIES AND ILLNESSES (OSHA FORM 300)	3
D	MINIMUM BASIC OUTLINE FOR ACCIDENT PREVENTION PROGRAM	8
E	ACTIVITY HAZARD ANALYSIS	1
F	REPORT OF WEEKLY SAFETY MEETING (SAC FORM 253)	1
G-1	SAD FORM 1437a-R, FLOATING PLANT	9
G-2	SAD FORM 1437b-R, LAUNCHES, MOTORBOATS, AND SKIFFS	2
G-3	SAD FORM 1666a-R, CRAWLER, TRUCK, AND WHEEL MOUNTED CRANES	4
G-4	SAD FORM 1666b-R, PORTAL, TOWER, AND PILLAR CRANES	2
G-5	SAD FORM 1666c-R, RIGGING	4
G-6	SAD FORM 1666d-R, MOTOR VEHICLES, TRAILERS, AND TRUCKS	3
G-7	SAD FORM 1666e-R, CRAWLER TRACTORS AND DOZERS	2
G-8	SAD FORM 1666f-R, SCRAPERS, MOTOR GRADERS, AND OTHER MOBILE EQUIPMENT	3
G-9	SAD FORM 1666g-R, MATERIAL HOISTS	1
G-10	SAD FORM 1666h-R, EARTH DRILLING EQUIPMENT	1
H	SHOP DRAWINGS AND MATERIALS SUBMITTAL CONTROL FORM (ENG 4288-R)	19
H-1	TRANSMITTAL OF SHOP DRAWINGS, EQUIPMENT DATA, MATERIAL SAMPLES,MANUFACTURERS CERTIFICATES COMPLIANCE (ENG FORM 4025-R)	2
I	DISCLOSURE OF LOBBYING ACTIVITIES Standard Form LLL	3
J	BORINGS	7
K	SECURITY BADGE REQUEST FORM	1
L	WAGE RATES	4
M	OMITTED	

ATTACHMENTS

	DESCRIPTION	No of PAGES
N	MINIMUM STANDARD FOR TEMPORARY ELECTRICAL SERVICE	1
O	ELECTRICAL SERVICE REQUIREMENTS FOR CONSTRUCTION AND MAINTENANCE OPERATIONS	11
P	PROJECT SIGN	2

FORMAT

CONTRACTOR'S NAME
(Address)

CONSTRUCTION QUALITY CONTROL REPORT

Date:_____ Report No._____

Contract No._____

Description and Location of Work:_____
_____

Weather: (Clear) (P. Cloudy) (Cloudy): Temperature:_____-Min,_____Max:;
Rainfall_____Inches

Contractor/Subcontractors and Area of Responsibility_____.
a. _____
b. _____
c._____
d._____
e._____
f._____
g._____

1. Work Performed Today:

(Indicate location and description of work performed. Refer to work performed by prime and/or subcontractors by letter in Table above.)

_____

2. Results of Control Activities:

(Indicate whether: P-Preparatory, I-Initial, or F-Follow-up and include satisfactory work completed or deficiencies with action to be taken.)

_____

3. Test Required by Plans and/or Specifications Performed and Results of Tests:

---

4. Monitoring of Materials and Equipment:

---

5. Off-Site Surveillance Activities:

---

6. Job Safety and Health Deficiencies:

(Daily Comment Required)

---

7. Remarks:

a. (Cover any conflicts in plans and specifications or instructions.)

b. (Action taken in review of submittal.)

c. (Verbal instructions received.)

CONTRACTOR'S VERIFICATION:

The above report is complete and correct and all material and equipment used and work performed during this reporting period are in compliance with the contract plans and specifications except as noted above.

_____
Chief of Contractor Quality Control

DEFICIENCY TRACKING LOG

DEFICIENCY NUMBER	INITIAL REPORT		SCHEDULED Corrective Action		When Corrected		REMARKS
	Report#	DATE*	Report#	DATE	Report#	DATE**	

*Include initials of who identified deficiency
** Include initials of who corrected deficiency

Log Prepared by:_____

OSHA's Form 300 (Rev. 01/2004)

Log of Work-Related Injuries and Illnesses

Attention: This form contains information relating to employee health and must be used in a manner that protects the confidentiality of employees to the extent possible while the information is being used for occupational safety and health purposes.

Year _____

U.S. Department of Labor
Occupational Safety and Health Administration

Form approved OMB no. 1218-0176

You must record information about every work-related injury or illness that involves loss of consciousness, restricted work activity or job transfer, days away from work, or medical treatment beyond first aid. You must also record significant work-related injuries and illnesses that are diagnosed by a physician or licensed health care professional. You must also record work-related injuries and illnesses that meet any of the specific recording criteria listed in 29 CFR 1904.8 through 1904.12. Feel free to use two lines for a single case if you need to. You must complete an injury and illness incident report (OSHA Form 301) or equivalent form for each injury or illness recorded on this form. If you're not sure whether a case is recordable, call your local OSHA office for help.

Establishment name _____

City _____ State _____

Identify the person				Describe the case		Classify the case											
(A) Case No.	(B) Employee's Name	(C) Job Title (e.g., Welder)	(D) Date of injury or onset of illness (mo./day)	(E) Where the event occurred (e.g. Loading dock north end)	(F) Describe injury or illness, parts of body affected, and object/substance that directly injured or made person ill (e.g. Second degree burns on right forearm from acetylene torch)	**CHECK ONLY ONE** box for each case based on the most serious outcome for that case:				Enter the number of days the injured or ill worker was:		Check the "injury" column or choose one type of illness:					
						Death	Days away from work	Remained at work		Away From Work (days)	On job transfer or restriction (days)	(M) Injury	Skin Disorder	Respiratory Condition	Poisoning	Hearing Loss	All other illnesses
								Job transfer or restriction	Other record-able cases								
						(G)	(H)	(I)	(J)	(K)	(L)	(1)	(2)	(3)	(4)	(5)	(6)
					Page totals	*0*	*0*	*0*	*0*	*0*	*0*	*0*	*0*	*0*	*0*	*0*	*0*

Be sure to transfer these totals to the Summary page (Form 300A) before you post it.

Injury	Skin Disorder	Respiratory Condition	Poisoning	Hearing Loss	All other illnesses
(1)	(2)	(3)	(4)	(5)	(6)

Public reporting burden for this collection of information is estimated to average 14 minutes per response, including time to review the instruction, search and gather the data needed, and complete and review the collection of information. Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number. If you have any comments about these estimates or any aspects of this data collection, contact: US Department of Labor, OSHA Office of Statistics, Room N-3644, 200 Constitution Ave, NW, Washington, DC 20210. Do not send the completed forms to this office.

OSHA's Form 300A (Rev. 01/2004)

Summary of Work-Related Injuries and Illnesses

Year _____

U.S. Department of Labor
Occupational Safety and Health Administration

Form approved OMB no. 1218-0176

All establishments covered by Part 1904 must complete this Summary page, even if no injuries or illnesses occurred during the year. Remember to review the Log to verify that the entries are complete

Using the Log, count the individual entries you made for each category. Then write the totals below, making sure you've added the entries from every page of the log. If you had no cases write "0."

Employees former employees, and their representatives have the right to review the OSHA Form 300 in its entirety. They also have limited access to the OSHA Form 301 or its equivalent. See 29 CFR 1904.35, in OSHA's Recordkeeping rule, for further details on the access provisions for these forms.

Number of Cases

Total number of deaths	Total number of cases with days away from work	Total number of cases with job transfer or restriction	Total number of other recordable cases
0	0	0	0
(G)	(H)	(I)	(J)

Number of Days

Total number of days away from work	Total number of days of job transfer or restriction
0	0
(K)	(L)

Injury and Illness Types

Total number of…
(M)

(1) Injury	0	(4) Poisoning	0
(2) Skin Disorder	0	(5) Hearing Loss	0
(3) Respiratory Condition	0	(6) All Other Illnesses	0

Post this Summary page from February 1 to April 30 of the year following the year covered by the form

Public reporting burden for this collection of information is estimated to average 50 minutes per response, including time to review the instruction, search and gather the data needed, and complete and review the collection of information. Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number. If you have any comments about these estimates or any aspects of this data collection, contact: US Department of Labor, OSHA Office of Statistics, Room N-3644, 200 Constitution Ave, NW, Washington, DC 20210. Do not send the completed forms to this office.

Establishment information

Your establishment name _____

Street _____

City _____ State _____ Zip _____

Industry description (e.g., Manufacture of motor truck trailers)

_____

Standard Industrial Classification (SIC), if known (e.g., SIC 3715)

____ ____ ____ ____

OR North American Industrial Classification (NAICS), if known (e.g., 336212)

____ ____ ____ ____ ____ ____

Employment information

Annual average number of employees _____

Total hours worked by all employees last year _____

Sign here

Knowingly falsifying this document may result in a fine.

I certify that I have examined this document and that to the best of my knowledge the entries are true, accurate, and complete.

_____ Company executive

_____ Title

_____ Phone

_____ Date

OSHA's Form 301
Injuries and Illnesses Incident Report

Attention: This form contains information relating to employee health and must be used in a manner that protects the confidentiality of employees to the extent possible while the information is being used for occupational safety and health purposes.

U.S. Department of Labor
Occupational Safety and Health Administration

Form approved OMB no. 1218-0176

This *Injury and Illness Incident Report* is one of the first forms you must fill out when a recordable work-related injury or illness has occurred. Together with the *Log of Work-Related injuries and Illnesses* and the accompanying *Summary*, these forms help the employer and OSHA develop a picture of the extent and severity of work-related incidents.

Within 7 calendar days after you receive information that a recordable work-related injury or illness has occurred, you must fill out this form or an equivalent. Some state workers' compensation, insurance, or other reports may be acceptable substitutes. To be considered an equivalent form, any substitute must contain all the information asked for on this form.

According to Public Law 91-596 and 29 CFR 1904, OSHA's recordkeeping rule, you must keep this form on file for 5 years following the year to which it pertains

If you need additional copies of this form, you may photocopy and use as many as you need.

Completed by _____

Title _____

Phone _____ Date _____

Information about the employee

1) Full Name _____

2) Street _____

City _____ State _____ Zip _____

3) Date of birth _____

4) Date hired _____

5) ☐ Male
☐ Female

Information about the physician or other health care professional

6) Name of physician or other health care professional

_____

_____

7) If treatment was given away from the worksite, where was it given?

Facility _____

Street _____

City _____ State _____ Zip _____

8) Was employee treated in an emergency room?
☐ Yes
☐ No

9) Was employee hospitalized overnight as an in-patient?
☐ Yes
☐ No

Information about the case

10) Case number from the Log _____ *(Transfer the case number from the Log after you record the case.)*

11) Date of injury or illness _____

12) Time employee began work _____ AM/PM

13) Time of event _____ AM/PM ☐ Check if time cannot be determined

14) **What was the employee doing just before the incident occurred?** Describe the activity, as well as the tools, equipment or material the employee was using. Be specific. Examples: "climbing a ladder while carrying roofing materials"; "spraying chlorine from hand sprayer"; "daily computer key-entry."

15) **What happened?** Tell us how the injury occurred. Examples: "When ladder slipped on wet floor, worker fell 20 feet"; "Worker was sprayed with chlorine when gasket broke during replacement"; "Worker developed soreness in wrist over time."

16) **What was the injury or illness?** Tell us the part of the body that was affected and how it was affected; be more specific than "hurt", "pain", or "sore." Examples: "strained back"; "chemical burn, hand"; "carpal tunnel syndrome."

17) **What object or substance directly harmed the employee?** Examples: "concrete floor"; "chlorine"; "radial arm saw." If this question does not apply to the incident, leave it blank.

18) **If the employee died, when did death occur?** Date of death

Public reporting burden for this collection of information is estimated to average 22 minutes per response, including time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Persons are not required to respond to the collection of information unless it displays a current valid OMB control number. If you have any comments about this estimate or any other aspects of this data collection, including suggestions for reducing this burden, contact: US Department of Labor, OSHA Office of Statistics, Room N-3644, 200 Constitution Ave, NW, Washington, DC 20210. Do not send the completed forms to this office.

MINIMUM BASIC OUTLINE FOR ACCIDENT PREVENTION PROGRAM

This outline is intended to be a guide and may be incomplete dependent on the type of operations to be performed. Its only purpose is to assist the contractor when submitting his proposal for carrying out the accident prevention provisions of the contract. When composing the proposals the Contractor must be mindful to be relevant, specific, and not copy or reproduce statements from safety regulations. Rather, his submitted proposals are to relate "how, who, why, what, where" he plans to perform the contracted work requirements in a safe manner using the Safety and Health Requirements Manual, EM 385-1-1, Revised September 1996 and current revisions to date.
Non-applicable parts of this outline should be disregarded.

1. CONTRACT NO: DATE SUBMITTED:

2. CONTRACTORS NAME, ADDRESS AND TELEPHONE NO:

3. PROJECT LOCATION:

4. CONTRACTORS PAST SAFETY RECORD: (Including work with other Districts.)

   A. Analysis of Accident experience

   B. Years experience covers

   C. Types of Accidents

   D. Causes of Accidents

   E. Corrective measures taken

   F. Statement giving percent debit or credit of annual rate of compensation insurance

5. INVESTIGATION: All accidents investigation for the purpose of preventing similar accidents and gather facts

   A. Procedures used in investigation accidents

   B. Completeness and promptness of reports

6. SAFETY INSPECTIONS:

   A. Who will perform these inspections

   B. How often will they be conducted

C. What items will be inspected

1) Hand Tools

2) Equipment

3) Motor Vehicles

4) Housekeeping

5) Safe work practices

6) Sanitation

7) Personal Protective Equipment

7. SAFETY TRAINING

A. Orientation and Instruction of new employee (safety topics)

B. Who will give the orientation and instruction

C. Knowledge of Corps of Engineers Safety Requirements

8. SAFETY MEETINGS:

A. Who will conduct safety meetings

B. What subjects will be discussed

C. How often will meetings be conducted

D. When will reports of these meetings be submitted

E. Do you have an incentive program for safety consciousness

F. Who will administer your overall Accident prevention Program

9. HEALTH AND SANITATION:

A. Drinking Water

1) Source

2) Type of Dispensing Unit

a. methods

b. care of units

B. Toilet Facilities

1) Location

2) Type of Unit

3) Quantity

4) Service Frequency

C. Housing and/or office facilities

1) Location

2) Type of Accommodations

D. Medical Facilities

1) First Aid Capabilities

a. Number of trained personnel and certificate of qualifications

b. Number and type of first aid kits and supplies

c. How often are instructions given to employees

2) Professional care and services (names, addresses and phone numbers)

a. Local physicians

b. Hospital Facilities

c. EMS or Ambulance Service

3) Emergency Evacuation for Critically Injured personnel

a. Procedure

b. Helicopter Service and Phone Number

10. FIRE PREVENTION AND PROTECTION:

A List your Fire Fighting Personnel

1) Who has definite responsibility

2) How often are personnel trained

B. Fire Fighting Equipment/Extinguishers

1) Type of Service

2) Is it adequate

3) Where is it located

4) When is maintenance and inspection performed

C. Flammable

1) Types stored

2) How stored (methods)

3) Where stored (containers, cabinets, etc)

4) Dispensing methods

11. PERSONAL PROTECTIVE EQUIPMENT (PPE): (Safety hats, goggles, personal flotation devices, safety shoes, respirators, etc.

A. Provided

B. Use required

C. Maintenance of PPE

D. Storage

12. LIGHTING:

A. On mobile equipment

B. Work areas

C. Access to work areas

13. TRANSPORTING PERSONNEL:

A. Equipment used

1) Design

2) Capacity

3) Maintenance and frequency

B. Operators and Qualifications

14. MACHINERY AND EQUIPMENT: (includes floating plant)

A. Number and type equipment

B. Pre-work safety checks

C. Guards and safety devices

D. Maintenance and Servicing

E. Load tests

F. Operating Personnel

1) Qualifications and Certification

2) Responsibilities

3) Observance of instructions, etc.

15. CLEARING OPERATIONS:

A. Burning

16. ACCESS FACILITIES:

A. Ladders

B. Stairways

17. HANDTOOLS

A. Electric

B. Pneumatic

C. Explosive activated

D. Other (specify)

18. WELDING AND BURNING OPERATIONS:

A. Type Equipment

B. Personal Protective Equipment and Devices

C. Storage of compressed cylinders (full and empty)

D. Safe practices

19. HEATING DEVICES:

A. Types

B. Fuel

C. Maintenance

D. Locations

20. RIPRAP - METHODS OF PLACEMENT:

21. PROTECTION OF THE PUBLIC:

A. Visitors

B. Pedestrians

C. Motor vehicles

D. Controls and procedures

22. HOUSEKEEPING POLICY:

A. Procedures

B. Methods

C. Debris Disposal

23. EXCAVATIONS:

A. Type

B. Depth

C. Shoring

D. Sloping

24. WATER SAFETY:

A. Type and size floating plant

B. Use of personal protective equipment (PPE)

C. Life saving skiff

D. Lifesaving and rescue drills

E. Diving policy and notifications procedures (Separate plan must be submitted)

25. ELECTRICAL WIRING

A. Voltage and uses

B. Elevated and/or buried

C. Grounding

D. Ground fault circuit interrupters (GFCI's)

E. Operators adjacent to overhead lines

26. NOISE ABATEMENT:

A. Hearing Conservation Program

B. Source

C. Exposure controls (PPE)

27. HAZARD COMMUNICATION PROGRAM:

A. Description of Company Policy

B. Materials Safety Data Sheets (MSDS)

C. Communication Methods with Employees

28. ALCOHOL AND DRUG POLICY:

29. COMPLIANCE STATEMENT:

(All work will be performed in accordance with Corps of Engineers' Safety and Health Requirements Manual, EM 385-1-1, Revised September 1996, and current revisions to date, and will included any additional measures the Contracting Officer deems necessary for the prevention of Accidents.)

30. OTHER SAFETY HAZARDS:

(Describe any other hazards you may anticipate for this particular job and those measures that will be taken to eliminate them.)

31. ACTIVITY HAZARD ANALYSIS:

EM 385-1-1, requires an Activity Hazards Analysis to be prepared by the Contractor. This (phase plan) will be attached to the accident prevention plan. Work will not proceed until these plans have been accepted by the Government.

This plan has been reviewed and determined appropriate for the safe operations of this job.

_____
PRIME CONTRACTOR

_____
AUTHORIZED REPRESENTATIVE
OF THE CONTRACTING OFFICER

_____
CHIEF, SAFETY OFFICE

ACTIVITY HAZARD ANALYSIS

ACTIVITY_____ANALYZED BY/DATE_____REVIEWED BY/DATE_____

PRINCIPAL STEPS	POTENTIAL HAZARDS	RECOMMENDED CONTROLS	
Identify the principal steps involved and the sequence of work activities	Analyze each principal step for its potential hazards	Develop specific controls for each potential hazard.	
EQUIPMENT TO BE USED	INSPECTION REQUIREMENTS	SUPERVISORY REQUIREMENT	TRAINING REQUIREMENT
List of equipment/machinery to be used in conducting the work activities.	List inspection requirements for the equipment/machinery listed.	List the names of the individuals responsible for the safe execution of these activities	Determine requirements for worker training including hazard communicaton.

REPORT OF WEEKLY SAFETY MEETING_____
(DR 385-1-4)

TO: Chief, Safety Office	FROM

DATE:_____ TIME:_____(A.M./P.M.)

No. Employees Present_____ Duration:_____

Old Business: (Review report of last meeting. Follow up on action taken or anticipated to correct any safety deficiencies brought up at last meeting. Discuss any unfinished business.)

New Business: (Discuss any unsafe acts or conditions observed since last safety meeting and any mishaps or injuries which occurred during the week.)

Safety Presentation: Safety talk, movie, or slide presentation on subject that is relevant to operation at hand.)

_____	_____
SIGNATURE & DATE Government Representative	SIGNATURE & DATE Contractor Safety Representative

SAFETY CHECKLIST FOR FLOATING PLANT

Contract # and title:	
Contractor:	Subcontractor:
Plant Name:	Owner:
Superintendent:	Captain:
Engineer:	Number in crew:
Contract inspector:	Date inspected:

This checklist references EM 385 1-1, revised 3 November 2003	Yes	No	N/A
1. Is a copy of the current USCG Form 835 available for plants regulated by USCG? (19.A.01)			
2. Is documentation of an accredited marine surveyor (SAMS or NAMS) available for non-USCG inspected plants? (19.A.01)			
3. Do all officers and crew posses an appropriate USCG license or USACE license and certification? (19.A.02)			
4. Are periodic inspections and test records of all floating plant, equipment, and machinery available as part of the official project file? (19.A.01)			
5. Is there a severe weather plan which contains the following available? (19.A.03) a. A description of potential types of severe weather hazards and steps to guard against the hazards? b. The time frame for implementing the plan? c. The name and location of the safe harbor? d. The name of the vessels which will be used to move any non-self propelled plant, and their type, capacity, speed, and availability? e. River gage readings at which floating plant must be moved away from dams, river structures, etc. to safe areas?			

SAD Form 1437a-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

	Yes	No	N/A
6. Is the station bill conspicuously posted throughout the vessel? (19.A.04)			
7. Has each crewmember been given a written description of their emergency duties and are they familiar with them? (19.A.04)			
8. Have the following drills and tests been recorded in the station log? (19.A.04) a. Abandon ship drill? b. Fire drill? c. Man overboard drill? d. Pump shell or pipe rupture? e. Hull failure? f. Emergency power and lighting tests? g. Bimonthly emergency power generator tests? h. Bimonthly emergency lighting storage batteries tests? Note: First set of drills shall be conducted within 24 hours of occupancy or commencement of work.			
9. Are material safety data sheets (MSDSs) available for all hazardous materials on board? (06.B.01)			
10. Are employees trained to handle hazardous materials? (06.B.01)			
11. Are at least two employees on each shift certified in CPR and first aid? (03.A.02)			
12. Is there a first aid log at each first aid station? (01.D.04)			
13. Are first aid kits located in a readily accessible location and adequately stocked? (03.B.01 & .02)			
14. Is there an adequate supply of approved, potable drinking water available? (02.A.01)			
15. Are outlets dispensing non-potable water clearly marked “Water Unfit For Drinking, Washing or Cooking”? (02.A.07)			
16. Are the proper numbers of toilets, washbasins and showers provided? (02.B.06 & .07)			

SAD Form 1437a-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

	Yes	No	N/A
17. Are water, soap, and a means of drying available? (02.C.02)			
18. Is the latest information published by the USCG regarding aids to navigation available on board the vessel? (19.A.11)			
19. Is the vessel equipped with: (19.A.05) a. Fenders? b. Axes or other emergency cutting equipment? c. An appropriate navigational signal device? d. General alarm system operated from primary electrical system with standby batteries on trickle charge? e. Easily accessible emergency controls that are adequately protected against accidental operation? f. Explosion-proof lights around gasoline and oil barges or other locations where a fire or explosive hazard exists? g. Interconnected emergency alarms? h. Smoke alarms in living quarters? i. Carbon Dioxide CO monitors in all occupied spaces? j. Doors that open from both sides? k. Clearly marked emergency exits? l. Emergency stops for prime movers operating a dredge pump? m. GFCI protection on grounded 120 or 240-volt systems in toilet/shower spaces, galley, machinery spaces, weather deck, exterior or near any sinks? n. Properly maintained and identified watertight compartments?			
20. Fuel systems: (19.A.06) a. Are tanks or lines free of gauge glasses or try cocks? b. Do all fuel tanks have shutoff valves that can be operated outside the compartment in which the tank is located and outside the engine compartment and outside the house bulkheads at or above the weather deck? c. Is there a shut off valve at the engine end of the fuel lines that are 6 feet or more in length and can it be operated from outside the house bulkheads at or above the weather deck? d. Overboard discharge?			

	Yes	No	N/A
d. Are all carburetors on gasoline engines equipped with a backfire trap or flame arrestor? e. Are all carburetors (except downdraft type) equipped with a drip pan, with flame screen, which is continuously emptied by suction from the intake manifold or if permitted by the overboard discharge? f. Are fuel storage tanks diked or curbed IAW NAVFAC DM-22? If not are portable tanks used IAW USCG requirements in 46 CFR Parts 64 and 98.3?			
21. Are cables which cross the waterways between floating plants or between plant and mooring marked? (19.A.07)			
22. Is there a fire and emergency warning system (or an established fire watch) on all vessels where people are quartered? (19.A.07)			
23. Are all floors, decks, and bilge's free of accumulation of fuel and grease? (19.A.07)			
24. Are there holdbacks or rings available to secure equipment during rough weather? (19.A.07)			
25. Are all deck openings, elevated surfaces, and similar locations provided with guardrails, bulwarks, or taut cable guard lines? (19.A.07)			
26. Are all rotating machinery, hot pipes, and moving cables guarded against accidental contact? (16.B.03)			
27. Are hazardous energy control procedures available to insure that machinery will not be operated while greasing or making repairs? (12.A.01 & 16.A.08)			
28. Are decks free of tripping hazards or adequately marked in yellow? (19.A.07)			
29. Is all deck cargo carried on fuel barges placed on dunnage? (19.A.07)			
30. Are all pieces of floating plants operating as one unit securely fastened together with no openings (or with guarded openings)? (19.A.07)			
31. Is there a list of confined spaces available? (19.A.08)			

SAD Form 1437a-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

32. Are all permitted required confined spaces labeled? (19.A.08)	Yes	No	N/A
33. Are engine spaces housing internal combustion engines having electric spark ignition systems equipped with exhaust fans? (19.A.10)			
34. Are all machinery spaces and non-diesel fuel tanks compartments equipped with at least 2 ventilators, fitted with fans? (19.A.10)			
35. Are the following spaces provided with an adequate natural ventilation system? (19.A.10) a. Spaces containing a portable fuel tank? b. Living spaces or galley? c. Other compartment spaces?			
36. Do vent intakes extend to within 1 foot of the bottom of the compartment? (19.A.10)			
37. Is suitable eye protection provided at battery charging stations? (05.B.01 & .05)			
38. Are eye wash stations provided at battery charging stations? (6.B.02)			
39. Are flammable items such as paint and thinners properly stored? (9.B)			
40. Are gasoline and other flammable liquids properly stored, dispensed, and handled? (09.B.01-.30)			
41. Does all electrical wiring meet requirements of USCG-259, the National Electrical Safety Code and the National Electric Code? (11.A.01)			
42. Are insulated mats provided at locations where machinery has exposed live parts? (11.A.07)			
43. Are switch and transformer banks adequately protected and marked to keep unauthorized personnel out of the danger area? (11.A.02)			
44. Are portable electric tools grounded by a multiconductor cord with an identified conductor and a multicontact polarized plug-in receptacle? (11.C.01)			

	Yes	No	N/A
45. Are ground fault circuit interrupters provided in locations where portable tools could be used? (11.C.05)			
46. Are flexible cords protected in work area, appropriately secured or suspended and are they used for appropriate usages? (11.A.03 and Table 11-1)			
47. Are all means of access properly secured, guarded and free of slipping and tripping hazards? (19.B.01)			
48. Are all working decks, stair treads, ship ladders, platforms, catwalks, and walkways, provided with non-slip surfaces? (19.B.01)			
49. Are grab bars provided on the sides of super structure of tugs, tenders, and launches except where railings are present? (19.B.01)			
50. Are double rung or flat tread type Jacob's ladders restricted to use only when no safer form of access is practical? (19.B.01)			
51. Is there a safe means for boarding or leaving the vessel? Note: Walking on rip-rap should be avoided where practical (19.B.02)			
52. Is there a stairway, ladder, ramp, gangway, or personnel hoist provided at all personnel points of access with breaks of 19" or more in elevation? (19.B.02)			
53. Are gangways and ramps: (19.B.02) a. Secured at one end by at least one point on each side with lines or chains to prevent overturning? b. Supported at the other end in such a manner as to support them and their normal loads in the event they slid off their supports? c. Placed at an angle no greater than that recommended by the manufacturer? d. Provided with a standard guardrail?			
54. Are stairs or permanent inclined ladders provided for vertical access between decks? (9.B.03)			

SAD Form 1437a-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

	Yes	No	N/A
55. Is there at least 2 feet of clearance on outboard edges used for passageways? (19.B.3)			
56. Is the vessel equipped with at least one portable or permanent ladder with at least one portable or permanent ladder with which to rescue a person in the water? (19.B.04)			
57. Are there at least 2 means of escape from all assembly, sleeping and messing areas on the plant? (19.B.04)			
58. Are all means of access maintained safe and functional? (19.B.04)			
59. Are all floating pipelines used as walkways equipped with a walkway which is at least 20" wide and has a handrail on at least one side? (19.B.05)			
60. Are floating pipelines that are not intended as walkways barricaded on both ends?(19B.05)			
61. Are positive measures taken to raise and secure the ladder and to block suction and discharge lines during maintenance on pumps and suction or discharge lines? (19.D.01)			
62. Do floating or trestle supported dredge pipelines display the following lights at night and in periods of restricted visibility: (19.D.02 and 33 CFR 88.13) a. One row of yellow lights that : (1) Flash 50-70 times per minute? (2) Are visible all around the horizon? (3) Are visible for at least 2 miles on a clear night? (4) Are between 3-10 feet above the water? (5) Are approximately evenly spaced? (6) Are not more than 30 feet apart where the pipeline crosses a navigable channel? (7) Are sufficient in number to clearly show the pipeline's length and course? b. Two red lights at each end of the pipeline (including ends in a channel where the pipeline is separated to allow vessels to pass) that: (1) Are visible all around the horizon? (2) Are visible for at least 2 miles on a clear dark night? (3) Are 3 feet apart in a vertical line with the lower light at the same height above the water as the flashing yellow light?			

SAD Form 1437a-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

	Yes	No	N/A
63. Is the dredge designed such that a failure or rupture of any dredge pump component including the pipe shall not cause the dredge to sink? (19.D.04)			
64. Is submerged pipeline resting on the bottom where it crosses the navigation channel and is it and the anchoring system no higher than the required project depth? (19.D.03)			
65. Is buoyant or semi-buoyant pipeline fully submerged and on the bottom? (19.D.03)			
66. Is raised pipeline adequately marked? (19.D.03)			
67. Is a bilge alarm or shutdown interface available on any dredge with the dredge pump below the waterline? (19.D.07)			
68. Are two positive means available to secure "stone boxes" when the boxes are under positive pressure? (19.D.08)			
69. Dredge Disposal Sites (19.D.09) a. Is there an adequate supply of drinking water? b. Are toilet facilities provided? c. Disposal area watchmen certified in CPR and first aid? d. Is at least one 16-unit first-aid kit available?			
70. Scows and Barges a. Are scows dumping in open ocean waters equipped with remote opening devices to preclude the transfer of personnel between vessels? b. Is a safety means of transferring personnel between the towing vessels and scow provided? c. Have contractors identified general and site-specific adverse weather and sea conditions under which the towing of scows and cargo barges is prohibited? d. Do all barges and scows comply with 46 CFR 174.010 through 174.020 for intact stability of deck cargo barges? e. Are fall protection devices and equipment listed in 21.A.15 used on scows and open barges to prevent employees transiting between the stern and bow of the vessel from fallings into the hopper or falling off the side of the vessel to the structure located 6 feet for more below?			

Contractor inspector signature			
Contractor QC/safety officer/project manager signature			

SAD Form 1437a-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

SAFETY CHECKLIST FOR LAUNCHES, MOTORBOATS AND SKIFFS

Contract # and title:	
Contractor:	Subcontractor:
Name of equipment:	Superintendent:

This checklist references EM 385 1-1, revised 3 November 2003	Yes	No	N/A
1. Is a qualified crew person assigned to assist with deck duties under the following circumstances: (19.C.01) a. When extended trips(more than 2 hours) are made from the work site? b. When conditions of navigation make it hazardous for an operator to leave the wheel while underway? c. When operations other than tying-in require the handling of lines? d. When operating at night or in inclement weather? e. When towing?			
2. Are all motorboats, launches and skiffs posted with the number of passengers and weight they can carry? (19.C.02)			
3. Is there a PFD available for each passenger and crewmember? (19.C.02)			
4. Do all launches and motorboats that are less than 26 feet in length have at least one 1A-10B:C fire extinguisher on board? (19.C.03)			
5. Do all launches and motorboats that are 26 feet or more in length have at least 2 1A-10B:C fire extinguishers on board? (19.C.03)			
6. Do all launches and motorboats that have gasoline or liquid petroleum gas power plants or equipment in cabins, compartments, or confined spaces have built-in automatic CO2 or other equally effective type of fire extinguishing system? (19.C.03)			
7. Are all cabins launches and motorboats equipped with “kill (dead man) switches”? (19.C.02(d))			

SAD Form 1437b-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

	Yes	No	N/A
8. Have all motorboat operators completed the following training? a. A boating safety course meeting the USCG Auxiliary, National Associate of Safety Boating Law Administrators (NASBLA), or equivalent; and b. Motorboat handling training, based on the type of boats they will operate, provided by qualified instructors (in-house or other). c. Operators must pass a written and operational test d. Current USCG licensed personnel are exempt from the boating safety training, but they shall complete the written exam and operational test. (19.C.05)			
7. Remarks: (Enter actions taken for “no” answers.)			
Contractor inspector signature			
Contractor QC/safety officer/project manager signature			

SAD Form 1437b-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

SAFETY CHECKLIST FOR CRAWLER-, TRUCK-, WHEEL-, RINGER-MOUNTED CRANES

Contract # and title:	
Equipment name & number: owned or leased?	
Contractor:	Subcontractor:
Contract Inspector:	Date inspected:

This checklist references EM 385 1-1, revised 3 November 2003	Yes	No	N/A
1. Unless the manufacture has specified an on-rubber rating, outriggers will be fully extended and down? (16.D.10)			
2. Are lattice boom cranes equipped with a boom angle indicator, load indicating device, or a load moment indicator? (16.D.01)			
3. Are lattice boom and hydraulic cranes equipped with a means for the operator to visually determine levelness? (16.D.02)			
4. Are lattice boom and hydraulic cranes, except articulating booms cranes, equipped with drum rotation indicators located for use for the operator? (16.D.03)			
5. Are lattice boom and hydraulic mobile cranes equipped with a boom angle or radius indicator within the operator's view? (16.D.04)			
6. Are lattice boom cranes, with exception of duty cycle cranes, equipped with an anti-two blocking device? (16.D.04)			
7. When duty cycle machines are required to make a non-duty lift, is the crane equipped with an international orange warning device and is a signal person present? (16.D 05)			
8. Are the following with the crane at all times: (16.C.02) a. The manufacturer's operating manual? b. The load-rating chart? c. The crane's logbook documenting use, maintenance, inspections and tests? d. Operating manual for crane operator aids used on the crane.			

SAD Form 1666a-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.
.

This checklist references EM 385 1-1, revised 3 November 2003	Yes	No	N/A
9. Are the following on the project site: a. Completed periodic inspection report prior to initial work? (16.C.12) b. Pre-operational checklist used for daily inspection? (16.C.12) c. Written reports of the operational performance test? (16.C.13) d. Written reports of the load performance test? (16.C.13)			
10. Are all operators physically qualified to perform work? (16.C.05)			
11. Are all operators qualified by written/oral and practical exam or by appropriate licensing agency for the type crane they are to operate? (16.C.05)			
12. Is the crane designed and constructed IAW the standards listed in Table 16-1? (16.C.06)			
13. Is a hazard analysis for set-up and set-down available? (16.C.08)			
14. Are accessible areas within the swing radius of the rear of the crane barricaded? (16.C.09)			
15. Are there at least 3 wraps of cable on the drum? (16.C.10)			
16. Are the hoisting ropes installed IAW the manufacturer's recommendations? (16.C.10)			
17. Are critical lift plans available? (16.C.18)			
18. Are minimum clearance distance for high voltage lines posted at the operator's position? (11.E.04)			
19. Do older lattice boom cranes with anti-two block warning devices in lieu of anti-two block devices have manually activated friction brakes? (16.D.05)			
20. Is the slow moving emblem used on all vehicles which by design move at 25 MPH or less on public roads? (08.A.04)			
21. Are all vehicles which will be parked or moving slower than normal traffic on haul roads equipped with a yellow flashing light or flasher visible from all directions? (16.A.13)			

SAD Form 1666a-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

	Yes	No	N/A
22. Is all equipment to be operated on public roads provided with: (16A.07) a. Headlights? b. Brake lights? c. Taillights? d. Back-up lights? e. Front and rear turn signals?			
23. Are seat and seat belts provided for the operator and each rider on equipment? (16.A.07 and 16.B.08)			
24. Is all equipment with windshields equipped with powered wipers and defogging or defrosting devices? (16.A.07)			
25. Is the glass in the windshield or other windows clear and unbroken to provide adequate protection and visibility for the operator? (16.A.07, 16.B.10)			
26. Is all equipment equipped with adequate service brake system and emergency brake system? (16.A.18)			
27. Are areas on equipment where employees walk or climb equipped with platforms, footwalks, steps, handholds, guardrails, toeboards and non-slip surfaces? (16.B.03)			
28. Is all self-propelled equipment equipped with automatic, audible, reverse signal alarms? (16.B.01)			
29. Is there a record of manufacturer's approval of any modification of equipment which affects its capacity or safe operation? (16.A.19)			
30. Are truck and crawler cranes attached to a barge or pontoon by means of a tie-down system with some slack? Movement during lifting is not permitted. (16.F.08)			
31. Have the following conditions been met for land cranes mounted on barges or pontoons: (16.F.06) a. Have load ratings been modified to reflect the increased loading from list, trim, wave, and wind action? b. Are all deck surfaces above the water? c. Is the entire bottom area of the barge or pontoon submerged? d. Are tie downs available? e. Are cranes blocked and secured?			
32. Are all belts, gears, shafts, spindles, drums, flywheels, or other rotating parts of equipment guarded where is a potential for exposure to workers? (16.B.03)			

SAD Form 1666a-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

This checklist references EM 385 1-1, revised 3 November 2003	Yes	No	N/A
33. Is the area where the crane is to work level, firm and secured? (16.A.10)			
34. Is a dry chemical or carbon dioxide fire extinguisher rated at least 5-B:C on the crane? (16.A.34)			
35. Are trucks, for truck-mounted cranes, equipped with a working reverse signal alarm? (16.B.01)			
36. Is a signal person provided where there is danger from swinging loads, buckets, booms, etc.? (16.B.02)			
37. Is there adequate clearance from overhead structures and electrical sources for the crane to be operated safely? (16.C.09)			
38. Is there adequate lighting for night operations? (16.C.19)			
39. Has the boom stop test on cable-supported booms been performed? (16.D.06)			
40. Is the boom disengaging device functioning as required? (16.D.06)			
41. Has all rigging and wire rope been inspected? (Section 15)			
Remarks:(Enter actions taken for all “no” answers.)			
Contractor inspector signature			
Contractor QC/safety officer/project manager signature			

SAD Form 1666a-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

SAFETY CHECKLIST FOR PORTAL, TOWER, AND PILLAR CRANES

Contract # and Title:	
Equipment name & number: Owned or leased?	
Contractor:	Subcontractor:
Contract Inspector:	Date Inspected:

This checklist references EM 385 1-1, revised 3 November 2003	Yes	No	N/A
1. Are the following available: (16.E.02) a. Manufactures written erection instructions? b. Listing of the weight of each component? c. An activity hazard analysis for the erection? d. Does the activity hazard analysis contain (1.) Location of crane and adjacent structures? (2.) Foundation design and construction Requirements? (3.) Clearance and bracing requirements?			
2. Is there a boom angle indicator within the operator's view? (16.E.04)			
3. Are luffing jib cranes equipped with: (16.E.05) a. Shock absorbing jib stops? b. Jib hoist limit switch? c. Jib angle indicator visible to operator?			
4. If used, do rail clamps have slack between the point of attachment to the rail and the end fastened to the crane? (16E.06)			
5. Are the following with the crane at all times: (16.C.02) a. The manufacturer's operating manual? b. The load-rating chart? c. The crane's logbook documenting use, maintenance, inspections and tests? d. The operating manual for crane operational aids used on the crane?			

SAD Form 1666b-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

6. Are all crane and derrick inspections performed by a qualified person? (16.C.12)	Yes	No	N/A
7. Are the following on the project site: a. Completed periodic inspection report prior to initial work? (16.C.12 and Appendix H) b. Pre-operational checklist used for daily inspections? (16.C.12) c. Written reports of the operational performance tests? (16.C.13) d. Written reports of the load performance tests? (16.C.13)			
8. Is every crane operator certified by a physician to be physically qualified to perform work? (16.C.05)			
9. Are all operators qualified by written and practical exam or by appropriate licensing agency for the type crane they are to operate? (16.C.05)			
10. Is the crane designed and constructed IAW the standards listed in Table 16-1? (16.C.05)			
11. Is a activity hazard analysis for set-up and set-down available? (16.C.08)			
12. Are there at least 3 wraps of cable on the drum? (16.C.10)			
13. Are the hoisting ropes installed IAW the manufacturer's recommendations? (16.C.10)			
14. Is the record of manufacturer's approval of any modification of equipment which affects its capacity or safe operation? (16.A.07)			
15. Remarks: (Enter actions taken)			
Contractor inspector signature			
Contractor QC/safety officer/project manager signature			

SAD Form 1666b-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

Page 2 of 2

SAFETY CHECKLIST FOR RIGGING

Contract # and title:			
Equipment name & number: Owned or leased?			
Contractor	Subcontractor:		
Contractor inspector:	Date inspected:		
This checklist references EM 385 1-1, revised 3 November 2003	Yes	No	N/A
1. Is rigging equipment inspected IAW manufacturer specifications, by a competent person prior to use on each shift? (15.A.01)			
2. Has all defective rigging been removed? (15.A.01)			
3. Is rigging stored properly? (15.A.01)			
4. Are running lines within 6.5' of the ground or working level guarded by a physical barriers? (15.A.03)			
5. Are all eye splices made in an approved manner with rope thimbles? (Sling eyes excepted) (15.A.04)			
6. Are positive latching devices used to secure loads? (15.A.05)			
7. Are all custom lifting accessories marked to indicate their safe working loads? (15A.07)			
8. Are all custom designed lifting accessories proof-tested to 125% of their rated load? (15.A.07)			
9. Are the following conditions met for wire rope: (15.B.01-09) a. Are they free of rust or broken wires? b. Are defective ropes cut up or marked as unusable? c. Do rope clips attached with U-bolts have the U-bolts on the dead end or short end of the rope? d. Are protruding ends of strands in splices on slings and bridles covered or blunted?			

SAD Form 1666e-R Previous editions may be used for contract submittals prior to Nov 03. Reference: EM 385-1-1, 3 November 2003 edition.

	Yes	No	N/A
e. Except for eye splices in the end of wires and for all endless wire rope slings, are all wire ropes used in hoisting, lowering, or pulling loads one continuous piece, free of knots or splices? f. Do all eye splices have at least 5 full tucks? g. If used, are wedge sockets fastening attached without attached the dead end of the wire rope to the live rope? h. Are they free of eyes or splices formed by wire rope clips or knots?			
9. Are the following conditions met for chain? (15.C.01-04) a. Are chains inspected prior to use and weekly thereafter? b. Do all coupling links or other attachments have rated capacities at least equal to that of the chain. c. Are makeshift fasteners restricted from use?			
10. Are the following conditions met for fiber rope:(15.D.01-07) a. Are all ropes protected from freezing, excessive heat or corrosive materials? b. Are all ropes protected from abrasion? c. Are splices made IAW manufacture's recommendations? d. Do all eye splices in manila rope contain at least 3 full tucks and do all short splices contain at least 6 full tucks(3 on each side of the centerline of the splice)? e. Do all splices in layed synthetic fiber rope contain at least 4 full tucks and do short splices contain at least 8 full tucks (4 on each side of the centerline of the splice)? f. Do the tails of fiber rope splices extend at least 6 rope diameters (for rope 1" diameter or greater) past the last full tuck? g. Are all eye splices large enough to provide an included angle of not greater than 60* at the splice when the eye is placed over the load or support?			
11. Are the following conditions met for all slings:(15.E.01-06) a. Is protection provided between the sling and sharp surfaces? b. Do all rope slings have minimum clear length of 40 times the diameter of component ropes between each end fitting or eye splice? c. Do all braided slings have a minimum clear length of 40 times the diameter of component ropes between each end fitting or eye splice? d. Do all welded alloy steel chain slings have affixed permanent identification stating diameter, rated load, lift capacity in vertical, choker, basket configuration, and date placed in service? e. Is each synthetic web sling marked or coded to identify its manufacturer, rated capacities for each type hitch and the type material?			

SAD Form 1666e-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

	Yes	No	N/A
12. Are drums, sheaves, and pulley smooth and free of surface defects that may damage rigging? (15.F.01)			
13. Is the ratio of the diameter of the rigging and the drum, block sheave or pulley thread diameter such that the rigging will adjust without excessive wear, deformation, or damage? (15F.02)			
14. Have all damaged drums, sheaves and pulleys been removed from service? (15.F.04)			
15. Are all connections, fittings, fastenings, and attachments of good quality, proper size and strength, and installed IAW manufacturer's recommendations? (15.F.05)			
16. Are all shackles and hooks sized properly? (15.F.06 & .07)			
17. Are hoisting hooks rated at 10 tons or greater provided with safe handling means? (15.F.07)			
18. Do all drums have sufficient rope capacity? (15.F.08)			
19. Is the drum end of the rope anchored by a clamp securely attached to the drum in a manner approved by the manufacturer? (15.F.08)			
20. Do grooved drums have the correct groove pitch for the diameter of the rope and is the groove depth correct? (15.F.08)			
21. Do the flanges on grooved drums project beyond the last layer of rope at a distance of either 2" or twice the diameter of the rope, whichever is greater? (15.F.08)			
22. Do the flanges on ungrooved drums project beyond the last layer of rope a distance of either 2.5" or twice the diameter of the rope, which ever is greater.			
23. Are the sheaves compatible with the size of rope used and as specified by the manufacture? (15F.09)			

SAD Form 1666e-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

	Yes	No	N/A
24. Are sheaves properly aligned, lubricated, and in good condition? (15.F.09)			
25. When rope is subject to riding or jumping off a sheave, are sheaves equipped with cablekeepers? 915.F.09)			
26. Are eyebolts loaded in the plane of the eye and at angles less than 45* to the horizontal? (15.F.10)			
27. Remarks: (Enter actions taken for “no” answers.)			
Contractor inspector signature			
Contractor QC/safety/project manager signature			

SAD Form 1666e-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

SAFETY CHECKLIST FOR MOTOR VEHICLES, TRAILERS AND TRUCKS

Contract # and title: Owned or leased?	
Equipment name & number:	
Contractor:	Subcontractor:
Contractor inspector:	Date inspected:

This checklist references EM 385 1-1, revised 3 November 2003	Yes	No	N/A
1. Are records of safety inspections of all vehicles available? (18.A.02)			
2. Are all vehicles to be operated between sunset and sunrise equipped with: (18.A.04) a. 2 headlights? b. Taillights and brake lights? c. Front and back turn signals? d. 3 emergency flares, reflective markers, or equivalent portable warning devices?			
3. Are vehicles, except trailers or semi-trailers having a gross weight of 5000 lbs or less, equipped with service brakes and manually operated parking brakes? (18.A.05)			
4. Are service brakes on trailers and semitrailers controlled from the driver's seat of the prime mover? (18A.05)			
5. Does the vehicle have: (18.A.06) a. An operable speedometer? b. An operable fuel gage? c. An operable audible warning device (horn)? d. A windshield & adequate windshield wiper? e. An operable defroster and defogging device? f. An adequate rearview mirror? g. A cab, cab shield, and other protection to protect the driver from the elements and falling or shifting materials? h. Non-slip surfaces on steps? I. A power-operated starting device?			

SAD Form 1666d-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

This checklist references EM 385 1-1, revised 3 November 2003	Yes	No	N/A
6. Is all the glass safety glass and is all broken or cracked glass replace? (18.A.07)			
7. Do trailers meet the following: (18A.08) a. Are all towing devices adequate for the weight drawn? b. Are all towing devices properly mounted? c. Are locking devices or a double safety system provided on every 5th wheel mechanism and tow bar arrangement to prevent accidental separation? d. Are trailers coupled with safety chains or cables to the towing vehicle? e. Are trailers equipped with the power brakes equipped with a breakaway device which will lock-up the brakes in the event the trailer separates from the towing vehicle?			
8. Are all dump trucks:(18.A.10) a. Equipped with a holding device to prevent accidental lowering of the body? b. Equipped with a hoist lever secured to prevent accidental starting or tipping? c. Equipped with means to determine (from the operator's position) if the dump box is lowered? d. Equipped with trip handles for tailgates that allows the operator to be clear?			
9. Are all buses, trucks and combination of vehicles with a carrying capacity of 1.5 tons or more, to be operated on public roads equipped with: (18.A.11) a. 3 reflective markers? b. 2 wheel chocks for each vehicle? c. At least one 2A:10B:C fire extinguisher? d. At least two properly rated fire extinguishers (for vehicles carrying flammable cargo)? e. A red flag not less than 1-foot square.			
10. Is vehicle exhaust controlled so as not to present a hazard to personnel? (18.A.13)			
11. Are all rubber tired motor vehicles equipped with fenders or with mud flaps if the vehicle is not designed for fenders? (18.A.14)			

SAD Form 1666d-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition

	Yes	No	N/A
12. Are all vehicles, except buses, equipped with seat belts? (18.B.02)			
13. Does all self-propelled construction and industrial equipment have a working reverse signal alarm? (16.B.01)			
14. Are all hot surfaces of equipment, including exhaust pipes or other lines, guarded or insulated to prevent injury or fire? (16.B.03)			
15. If an off the road vehicle, is it equipped with rollover protective structures? (16.B.12)			
16. Remarks: (Enter actions taken for “no” answers)			
Contractor inspector signature			
Contractor QC/safety officer/project manager signature			

SAD Form 1666d-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

SAFETY CHECKLIST FOR CRAWLER TRACTORS AND DOZERS

Contract # and title:	
Equipment name & number: Owned or leased?	
Contractor:	Subcontractor:
Contractor inspector:	Date inspected:

This checklist references EM 385 1-1, revised 3 November 2003	Yes	No	N/A
1. Are initial and daily/shift inspection records available? (16.A.01& .02)			
2. Are only qualified operators assigned to operate mechanized equipment? (16.A.04)			
3. Are sufficient lights provided for night operations? (16.A.11)			
4. Is the unit shut down before refueling? (16.A.14)			
5. Does the unit have as a minimum a 5-B:C fire extinguisher? (16.A.34)			
6. Is there an effective, working reverse alarm? (16.B.01)			
7. Are moving parts, shafts, sprockets, belts, etc., guarded? (16.B.03 ,07, and 13)			
8. Is protections against hot surfaces, exhausts, etc., provided? (16.B.03 and .13)			
9. Are fuel tanks located in a manner to prevent spills or overflows from running onto engine exhaust or electrical equipment? (16.B.04)			

SAD Form 1666e-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

	Yes	No	N/A
10. Are exhaust discharges directed so they do not endanger person of obstruct operator vision? (16.B.05)			
11. Are seat belts provided? (16B.08)			
12. Is protection (grills, canopies, screens) provided to shield operator from falling or flying objects? (16.B.10 and .11)			
13. Is roll over protection provided? (16.B.12)			
14. Remarks: (Enter actions taken for “no” answers)			
Contractor inspector signature			
Contractor QC/safety officer/project manager signature			

SAD Form 1666e-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

SAFETY CHECKLIST FOR SCRAPERS, MOTOR GRADERS, AND OTHER MOBILE EQUIPMENT

Contract # and title:	
Equipment name and number: Owned or leased?	
Contractor:	Subcontractor:
Contractor inspector:	Date inspected:

This checklist references EM 385 1-1, revised 3 November 2003	Yes	No	N/A
1. Are initial and daily/shift inspection records available? (16.A.01 & .02)			
2. Are only qualified operators assigned to operate equipment? (16.A.04)			
3. Are sufficient lights provided for night operations? (16.A.11)			
4. Does the unit have as a minimum a 5-B:C fire extinguisher? (16.A.26)			
5. Is there an effective working reverse alarm? (16.B.01)			
6. Is the unit shut down for refueling? (16.A.12)			
7. Are moving parts, shafts, sprockets, belts, etc., guarded? (16.B.03, .07 and .13)			
8. Is protection against hot surfaces, exhausts, etc., provided? (16.B.03 and .13)			
9. Are fuel tanks located in a manner to prevent spills or overflow from running onto engine exhaust or electrical equipment? (16.B.04)			
10. Are exhaust discharges directed so they do not endanger persons or obstruct operator vision? (16.B.05)			

SAD Form 1666f-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

This checklist references EM 385 1-1, revised 3 November 2003	Yes	No	N/A
11. Are seat belts provided for each person required to ride on the equipment? (16.B.08)			
12. Is protection (grills, canopies, screens) provided to shield operators from falling or flying objects? (16.B.10 and .11)			
13. Is roll over protection provided (ROPS)? (16.B.12)			
14. Is a safe means of access to the cab provided (steps, grab bars, non-slip surfaces)? (16.B.03)_			
15. Are adequate head and taillights provided? (16.A.07)			
16. Have brakes been tested and found satisfactory? (16.A.07)			
17. Does the unit have an emergency brake which will automatically stop the equipment upon brake failure? Is this system manually operable from the drivers position? (16.A.07)			
18. Is all equipment with windshields equipped with powered wipers and defogging or defrosting system? (16.A.07)			
19. Are all vehicles that will be parked or moving slower than normal traffic on haul roads equipped with a yellow flashing light or flasher visible from all directions? (16.A.13)			
20. Is the slow moving emblem used on all vehicles which by design move at 25 MPH or less on public roads? (08A.04)			
21. Have air tanks been tested and certified? (20.A.01)			
22. Is an air pressure gage in working condition installed on the unit? (20.A.12)			
23. Does the air tank have an accessible drain valve? (20.B.17)			

SAD Form 1666f-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

Page 2 0f 3

24. Remarks: (Enter action taken for all “no” answers)			
Contractor inspector signature			
Contractor QC/safety officer/project manager			

SAD Form 1666f-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

SAFETY CHECKLIST FOR MATERIAL HOISTS

Contract # and title:	
Equipment name & number:	
Contractor:	Subcontractor:
Contract Inspector:	Date inspected:

This checklist references EM 385 1-1, revised 3 November 2003	Yes	No	N/A
1. Prior to initial use on any USACE project, and at least monthly thereafter, is a periodic inspection conducted by a qualified person? (16.K.05) a. Are periodic inspections conduction IAW manufacturer's specification? b. At a minimum are sheaves, racks, pinions, guy ties, connections, miscellaneous clamps, braces, and similar parts? c. Is the GDA notified at least 24 hours prior to any inspections? d. Are pre-operational inspections conducted prior to every operation (shift) of the hoist?			
3. Are all hoist towers, masts, guys or braces, counterweights, drive machinery supports, sheave supports, platforms, supporting structures, and accessories designed by a licensed engineer? (16.K.02)			
4. Is a copy of the hoist-operating manual available? (16.K.04)			
5. Do all floors and platforms have slip-resistant surfaces? (16.K.08)			
6. Are landings and runways adequately barricaded and is overhead protection provided where needed? (16.K.08)			
7. Are hoisting ropes installed IAW manufacturer's instructions? (16.K.10) a. Are there at least three (3) full wraps of cable on the drums of the hoist at all times? b. Does the rope or crane manufacturer specify the drum end of the rope anchored to the drum by an arrangement? c. Are personnel prohibited from riding on material hoists or other hoisting equipment?			
8. Are operating rules posted at the hoist operator's station? (16.K.14)			

SAD Form 1666g-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition. Page 1 of 2

9. Are air-powered hoists connected to an air supply of sufficient capacity and pressure to safely operate the hoist? (16.K.15)			
10. Are pneumatic hoses secured by some positive means to prevent accidental disconnection? (16.K.15)			
11. Remarks: (Enter actions taken for all “no” answers.)			
Contractor inspector signature			
Contractor QC/safety officer/project manager signature			

SAD Form 1666g-R Previous editions may be used for contract submittals prior to Nov 03.
Reference: EM 385-1-1, 3 November 2003 edition.

Page 2 of 2-

SAFETY CHECKLIST FOR EARTH DRILLING EQUIPMENT

Contract # and title:	
Equipment name & number:	
Contractor:	Subcontractor:
Contractor inspector:	Date inspected:

	Yes	No	N/A
1. Is a copy of the manual for all drilling equipment available? (16.M.01)			
2. Have all overhead electrical hazards and potential ground hazards been identified in a site layout plan and addressed in an activity hazard analysis? (16.M.02)			
3. Are MSDSs for all drilling fluids available? (16.M.05)			
4. Does the drilling equipment have 2 easily accessible emergency shut down devices (one for the operator and one for the helper)? (16.M.06)			
5. Is the equipment posted with a warning of electrical hazards? (16.M.06)			
6. Is there a spotter or an electrical proximity warning device available to ensure safe distances from power lines are maintained? (16.M.06)			
7. Remarks: (Enter actions taken for “no” answers)			
Contractor inspector signature			
Contractor QC/safety officer/project manager			

SAD Form 1666h-R Mar 97 Previous editions may be used for contracts referencing the 1992 edition of EM 385-1-1.

Page 1 of 1

SUBMITTAL REGISTER
(ER415-1-10)

CONTRACT NO.

TITLE AND LOCATION New Kennel Facility Project, Savannah River Site, Aiken County, SC IFB W912HP-05-R-0008

CONTRACTOR

SPEC SECTION

ACTIVITY NO. a.	TRANS-MITTAL NO. b.	ITEM NO. c.	SPECIFICATION PARAGRAPH NUMBER d.	DESCRIPTION OF ITEM NUMBER e.	TYPE OF SUBMITTAL: DATA f.	DRAWINGS g.	INSTRUCTIONS h.	SCHEDULES i.	STATEMENTS j.	REPORTS k.	CERTIFICATES l.	SAMPLES m.	RECORDS n.	O&M MANUALS o.	CLASSIFICATION: INFORMATION ONLY p.	GOVERNMENT APPROVED q.	REVIEWER r.	CONTRACTOR SCHEDULE DATES: SUBMIT s.	APPROVAL NEED BY t.	MAT NEED BY u.	CONTRACTOR ACTION: CODE v.	DATE w.	SUBMIT TO GOV'T x.	GOVERNMENT ACTIONS: CODE y.	DATE z.	REMARKS aa.
			01100,1.1.2	AccidentPreventionProgram						x						x										
			01100,1.1.2	EmergencyResponseProcedures						x						x										
			01100,1.1.2	CQC Manager					x						x											
			01100,1.1.2	QC Plan					x							x										
			01100,1.1.2	Environmental Protection Plan						x						x										
			01100,1.1.2	HazardAnalysisPlan					x							x										
			01100,1.1.2	Safety Forms					x						x											
			01100,1.1.2	List of Subcontractors					x						x											
			01100,1.1.3	QCS Data File					X							X										

SUBMITTAL REGISTER

CONTRACT NO.
XXXXXXXXXXXXXXXX

TITLE AND LOCATION
DOG KENNELS-SAVANNAH RIVER SITE

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY				MAILED TO CONTR/	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	DATE RCD FRM APPR AUTH	
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		01330	SD-01 Preconstruction Submittals															
			Submittal register	1.5.1	G													
		01355A	SD-01 Preconstruction Submittals															
			Environmental Protection Plan	1.7	G													
		01500A	SD-01 Preconstruction Submittals															
			Construction site plan		G													
		01525	SD-01 Preconstruction Submittals															
			Accident Prevention Plan (APP)	1.8	G													
			Activity Hazard Analysis (AHA)	1.9	G													
			Crane Critical Lift Plan	1.8.1	G													
			SD-06 Test Reports															
			Reports	1.13														
			Accident Reports	1.13.1														
			Monthly Exposure Reports	1.13.3														
			Regulatory Citations and	1.13.4														
			Violations															
			Crane Reports	1.13.5														
		02220	SD-07 Certificates															
			Demolition plan	1.8	G													
		02300	SD-01 Preconstruction Submittals															
			Dewatering Work Plan	1.6	G DO													
			SD-03 Product Data															
			Utilization of Excavated Materials		G DO													
			SD-06 Test Reports															
			Testing	3.15														
			Borrow Site Testing															

SUBMITTAL REGISTER

CONTRACT NO.
XXXXXXXXXXXXXXXX

TITLE AND LOCATION
DOG KENNELS-SAVANNAH RIVER SITE

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		02300	SD-07 Certificates															
			Testing	3.15														
		02370A	SD-07 Certificates															
			Construction Work Sequence															
			Schedule															
		02510A	SD-03 Product Data															
			Installation	3.1	G													
			Satisfactory Installation		G													
			SD-06 Test Reports															
			Bacteriological Disinfection		G													
			SD-07 Certificates															
			Installation	3.1														
		02531	SD-02 Shop Drawings															
			Precast concrete doghouse															
			manhole															
			SD-03 Product Data															
			Pipeline materials	2.1														
		02630	SD-03 Product Data															
			Placing Pipe	3.3														
		02722N	SD-06 Test Reports															
			Gradation	3.2.2.1														
			Gradation	3.2.2.1														
			Bearing ratio															
			Liquid limit															
			Plasticity index															
			Percentage of wear															

SUBMITTAL REGISTER

CONTRACT NO. XXXXXXXXXXXXXXXX

TITLE AND LOCATION: DOG KENNELS-SAVANNAH RIVER SITE

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAG # RAPH	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		02722N	Dry weight															
			Density	3.2.2.3														
			Density	3.2.2.3														
			Smoothness	3.2.2.2														
			Thickness	3.2.2.5														
		02741A	SD-03 Product Data															
			Mix Design	2.3	G	DO												
			Contractor Quality Control	3.9	G													
			RO															
			Material Acceptance	3.10	G													
			SD-04 Samples															
			Asphalt Cement Binder	2.2	G	DO												
			Aggregates	2.1	G	DO												
			SD-06 Test Reports															
			Aggregates	2.1	G	DO												
			QC Monitoring	3.9.3.10	G	RO												
			SD-07 Certificates															
			Asphalt Cement Binder	2.2	G	DO												
			Testing Laboratory	3.5	G	RO												
		02743N	SD-03 Product Data															
			emulsified asphalt															
			SD-06 Test Reports															
			Bituminous materials															
		02744N	SD-06 Test Reports															
			emulsified asphalt	2.1.1														
		02763A	SD-03 Product Data															

SUBMITTAL REGISTER

CONTRACT NO. XXXXXXXXXXXXXXXX

TITLE AND LOCATION: DOG KENNELS-SAVANNAH RIVER SITE

CONTRACTOR:

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAG# RAPH	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		02763A	Equipment	1.4														
			Composition Requirements															
			SD-07 Certificates															
			Volatile Organic Compound															
			(VOC)															
		02770A	SD-06 Test Reports															
			Field Quality Control	3.6														
		02821N	SD-08 Manufacturer's Instructions															
			Fence															
		02921A	SD-03 Product Data															
			Equipment	3.1.3	G	RO												
			Surface Erosion Control Material		G	RO												
			Chemical Treatment Material	1.4.3	G	RO												
			Delivery	1.4.1	G	RO												
			Finished Grade and Topsoil	3.2.1	G	RO												
			Topsoil	2.2	G	RO												
			Quantity Check	3.5														
			Seed Establishment Period	3.9	G	RO												
			Maintenance Record	3.9.3.5	G	RO												
			Application of Pesticide	3.6	G	RO												
			SD-04 Samples															
			Delivered Topsoil	1.4.1.1	G	RO												
			Soil Amendments	2.3	G	RO												
			Mulch	2.4	G	RO												
			SD-06 Test Reports															
			Equipment Calibration	3.1.3														

SUBMITTAL REGISTER

CONTRACT NO.
XXXXXXXXXXXXXXXX

TITLE AND LOCATION
DOG KENNELS-SAVANNAH RIVER SITE

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		02921A	Soil Test	3.1.4	G	RO												
			SD-07 Certificates															
			Seed	2.1	G	RO												
			Topsoil	2.2	G	RO												
			pH Adjuster	2.3.1	G	RO												
			Fertilizer	2.3.2	G	RO												
			Organic Material	2.3.4	G	RO												
			Soil Conditioner	2.3.5	G	RO												
			Mulch	2.4	G	RO												
			Asphalt Adhesive	2.5	G	RO												
			Pesticide	2.7	G	RO												
		05400	SD-02 Shop Drawings															
			Framing Components including		G													
			Roof Trusses															
			SD-03 Product Data															
			studs,joists															
			SD-05 Design Data															
			Metal framing calculations	1.6.2	G													
			SD-07 Certificates															
			Cold-formed metal framing	1.4														
			Welds	3.1.1														
		05500A	SD-02 Shop Drawings															
			Miscellaneous Metal Items	1.6														
			SD-04 Samples															
			Miscellaneous Metal Items	1.6														
		07110A	SD-07 Certificates															

SUBMITTAL REGISTER

CONTRACT NO. XXXXXXXXXXXXXXXX

TITLE AND LOCATION: DOG KENNELS-SAVANNAH RIVER SITE

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		07110A	Materials															
		07220	SD-02 Shop Drawings															
			Tapered roof insulation		G													
			SD-03 Product Data															
			Fasteners	2.5	G													
			Insulation	Part 2	G													
			SD-06 Test Reports															
			Flame spread and smoke	1.4.1														
			developed ratings															
			SD-07 Certificates															
			qualifications	1.3														
			SD-08 Manufacturer's Instructions															
			fasteners	2.5														
			insulation	Part 2														
		07416A	SD-02 Shop Drawings															
			Structural Standing Seam Metal		G													
			Roof System															
			SD-03 Product Data															
			Design Analysis		G													
			Qualifications															
			SD-04 Samples															
			Accessories	2.3														
			Roof Panels	2.1														
			Factory Color Finish	2.6														
			Fasteners	2.4														
			Insulation	2.7														

SUBMITTAL REGISTER

CONTRACT NO. XXXXXXXXXXXXXXXX

TITLE AND LOCATION: DOG KENNELS-SAVANNAH RIVER SITE

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		07416A	Gaskets and Insulating	2.10														
			Compounds															
			Sealant	2.9														
			;															
			Concealed Anchor Clips	2.2														
			Subpurlins	2.5														
			EPDM Rubber Boots	2.11.3														
			SD-06 Test Reports															
			Test Report for Uplift Resistance		G													
			of the SSSMR															
			SD-07 Certificates															
			Structural Standing Seam Metal															
			Roof System															
		07600	SD-02 Shop Drawings															
			Covering on flat, sloped, or curved		G													
			surfaces															
			Gutters	3.1.7	G													
			Downspouts	3.1.8	G													
			Flashing at roof penetrations	3.1.12	G													
			SD-11 Closeout Submittals															
			Quality Control Plan	3.4														
		07920	SD-03 Product Data															
			Sealants	2.1														
			Primers	2.2														
			Bond breakers	2.3														
			Backstops	2.3														

SUBMITTAL REGISTER

CONTRACT NO. XXXXXXXXXXXXXXXX

TITLE AND LOCATION: DOG KENNELS-SAVANNAH RIVER SITE

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		07920	SD-07 Certificates															
			Sealant	3.3.4														
		08120	SD-02 Shop Drawings															
			Doors and frames	2.1	G													
			SD-08 Manufacturer's Instructions															
			Doors and frames	2.1														
		08520A	SD-02 Shop Drawings															
			Aluminum Windows	1.3														
			SD-03 Product Data															
			Aluminum Windows	1.3														
			SD-04 Samples															
			Aluminum Windows	1.3														
			SD-06 Test Reports															
			Aluminum Windows	1.3														
			SD-07 Certificates															
			Aluminum Windows	1.3														
		08710	SD-02 Shop Drawings															
			Hardware schedule	1.3	G													
			Keying system	2.3.6														
			SD-03 Product Data															
			Hardware items	2.3	G													
			SD-08 Manufacturer's Instructions															
			Installation	3.1														
			SD-10 Operation and Maintenance															
			Data															
			Hardware Schedule	1.3	G													

SUBMITTAL REGISTER

CONTRACT NO.
XXXXXXXXXXXXXXXX

TITLE AND LOCATION
DOG KENNELS-SAVANNAH RIVER SITE

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAG# RAPH	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		08710	SD-11 Closeout Submittals															
			Key bitting	1.4														
		09250	SD-03 Product Data															
			Cementitious backer units															
			Glass Mat Water-Resistant															
			Gypsum Tile Backing Board															
			Water-Resistant Gypsum Backing															
			Board															
			Glass Mat Covered or Reinforced															
			Gypsum Sheathing															
			Glass Mat Covered or Reinforced															
			Gypsum Sheathing Sealant															
			Impact Resistant Gypsum Board															
			Accessories	2.1.3.1														
			SD-04 Samples															
			Predecorated gypsum board		G													
			SD-07 Certificates															
			Asbestos Free Materials	2.1	G													
		09310	SD-03 Product Data															
			Tile	2.1														
			Setting-Bed	2.2														
			Mortar, Grout, and Adhesive	2.3														
			SD-04 Samples															
			Tile	2.1														
			Accessories	2.1.2														
			SD-06 Test Reports															

SUBMITTAL REGISTER

CONTRACT NO. XXXXXXXXXXXXXXXX

TITLE AND LOCATION: DOG KENNELS-SAVANNAH RIVER SITE

CONTRACTOR:

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAG # RAPH	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		09310	Testing															
			SD-07 Certificates															
			Tile	2.1														
			Mortar, Grout, and Adhesive	2.3														
		09510	SD-02 Shop Drawings															
			Approved Detail Drawings															
			SD-03 Product Data															
			Acoustical Ceiling Systems															
			SD-04 Samples															
			Acoustical Units	2.1														
			SD-07 Certificates															
			Acoustical Units	2.1														
		09650	SD-02 Shop Drawings															
			Tile Flooring	2.1														
			SD-03 Product Data															
			Tile Flooring	2.1														
			Accessories for Sheet Vinyl															
			Integral Coved Base															
			Adhesive for Vinyl Composition	2.2														
			Tile															
			Adhesive for Wall Base	2.2														
			SD-04 Samples															
			Tile Flooring	2.1														
			Seaming Bead															
			Wall Base															
			SD-06 Test Reports															

SUBMITTAL REGISTER

CONTRACT NO. XXXXXXXXXXXXXXXX

TITLE AND LOCATION: DOG KENNELS-SAVANNAH RIVER SITE

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		09650	Moisture Test	3.3														
			SD-08 Manufacturer's Instructions															
			Tile Flooring	2.1														
			SD-10 Operation and Maintenance															
			Data															
			Data Package 1															
		10201N	SD-02 Shop Drawings															
			Wall louvers	2.2														
			SD-04 Samples															
			Wall louvers	2.2														
			Door louvers	2.3														
		10505	SD-02 Shop Drawings															
			Types	2.1	G													
			Location	2.1	G													
			Installation	3.1														
			SD-03 Product Data															
			Material	2.2														
			Finish															
			components	2.3														
			Assembly	3.1														
			SD-04 Samples															
			Color chips	1.5.1	G													
		10605N	SD-02 Shop Drawings															
			Wire mesh partitions	1.4														
			SD-03 Product Data															
			Wire mesh partitions; G															

SUBMITTAL REGISTER

CONTRACT NO.
XXXXXXXXXXXXXXXX

TITLE AND LOCATION
DOG KENNELS-SAVANNAH RIVER SITE

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAG# RAPH	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		10800	SD-03 Product Data															
			Finishes	2.1.2														
			Accessory Items	2.2														
			SD-04 Samples															
			Finishes	2.1.2														
			Accessory Items	2.2														
			SD-07 Certificates															
			Accessory Items	2.2														
		12320A	SD-02 Shop Drawings															
			Installation	3.1														
			SD-03 Product Data															
			Cabinets	2.1														
			Countertops and Backsplash	2.2														
			SD-04 Samples															
			Cabinets	2.1														
			Countertops and Backsplash	2.2														
			;															
			SD-06 Test Reports															
			Cabinets and Countertops															
		15070A	SD-02 Shop Drawings															
			Contractor Designed Bracing	1.2.4														
			SD-03 Product Data															
			Contractor Designed Bracing	1.2.4														
		15080	SD-02 Shop Drawings															
			Mica Plates	3.2.2.4														
			SD-03 Product Data															

SUBMITTAL REGISTER

CONTRACT NO.
XXXXXXXXXXXXXXXX

TITLE AND LOCATION
DOG KENNELS-SAVANNAH RIVER SITE

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAG# RAPH	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		15080	General Materials	2.1														
			Adhesives	2.1.1														
			Sealants	2.1.13														
			Duct Insulation	2.3.1														
			Duct Insulation Jackets	2.3.2														
			Pipe Insulation Materials	2.2														
			Jackets	2.1.8														
			SD-04 Samples															
			Thermal Insulation	2.1.1.3														
		15182	SD-02 Shop Drawings															
			Refrigerant Piping System	2.3														
			SD-03 Product Data															
			Refrigerant Piping System	2.3														
			Spare Parts	1.6.3														
			Qualifications	1.3														
			Refrigerant Piping Tests	3.3														
			Demonstrations	3.4														
			Verification of Dimensions	1.6.1														
			SD-06 Test Reports															
			Refrigerant Piping Tests	3.3														
			SD-07 Certificates															
			Service Organization	2.1														
			SD-10 Operation and Maintenance															
			Data															
			Maintenance	1.7														

SUBMITTAL REGISTER

CONTRACT NO. XXXXXXXXXXXXXXXX

TITLE AND LOCATION: DOG KENNELS-SAVANNAH RIVER SITE

CONTRACTOR:

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAG# RAPH	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		15182	Operation and Maintenance	3.4														
			Manuals															
		15400A	SD-02 Shop Drawings															
			Plumbing System	3.7.1														
			Electrical Work	1.4														
			SD-03 Product Data															
			Welding															
			Plumbing Fixture Schedule	3.8														
			Plumbing System	3.7.1														
			SD-06 Test Reports															
			Tests, Flushing and Disinfection	3.7														
			Test of Backflow Prevention	3.7.1.1														
			Assemblies															
			SD-07 Certificates															
			Materials and Equipment	1.3														
			Bolts	2.1.1														
			SD-10 Operation and Maintenance															
			Data															
			Plumbing System	3.7.1														
		15700A	SD-02 Shop Drawings															
			Drawings	1.5.2														
			SD-03 Product Data															
			Materials and Equipment	2.1														
			Spare Parts	1.5.3														
			Posted Instructions	3.5														
			Verification of Dimensions	1.5.1														

SUBMITTAL REGISTER

CONTRACT NO.
XXXXXXXXXXXXXXXX

TITLE AND LOCATION
DOG KENNELS-SAVANNAH RIVER SITE

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		15700A	System Performance Tests	3.4														
			Demonstrations	3.5														
			SD-06 Test Reports															
			Refrigerant Tests, Charging, and	3.3														
			Start-Up															
			System Performance Tests	3.4														
			SD-07 Certificates															
			Materials and Equipment	2.1														
			Service Organization	2.1														
			SD-10 Operation and Maintenance															
			Data															
			Operation and Maintenance	3.5														
			Manuals															
		15895	SD-02 Shop Drawings															
			Drawings	3.1.2														
			Installation	3.1														
			SD-03 Product Data															
			Components and Equipment	2.1														
			Test Procedures															
			Welding Procedures															
			Diagrams	3.1														
			Manufacturer's Exerience															
			Welded Joints															
			Performance Tests	3.6														
			Field Training	3.8														
			SD-06 Test Reports															

SUBMITTAL REGISTER

CONTRACT NO.
XXXXXXXXXXXXXXXX

TITLE AND LOCATION
DOG KENNELS-SAVANNAH RIVER SITE

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH #	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION		DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION		DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		15895	Performance Tests	3.6														
			Testing, Adjusting, and Balancing	3.5														
			SD-07 Certificates															
			Bolts															
			SD-10 Operation and Maintenance															
			Data															
			Operating and Maintenance	3.8														
			Instructions															
		15990A	SD-02 Shop Drawings															
			TAB Schematic Drawings and	3.3														
			Report Forms															
			SD-03 Product Data															
			TAB Related HVAC Submittals	3.2														
			TAB Procedures	3.5.1														
			Calibration	1.4														
			Systems Readiness Check	3.5.2														
			TAB Execution	3.5.1														
			TAB Verification	3.5.4														
			SD-06 Test Reports															
			Design Review Report	3.1														
			Systems Readiness Check	3.5.2														
			TAB Report	3.5.3														
			TAB Verification Report	3.5.4														
			SD-07 Certificates															
			Ductwork Leak Testing	3.4														
			TAB Firm	1.5.1														

SUBMITTAL REGISTER

CONTRACT NO. XXXXXXXXXXXXXXXX

TITLE AND LOCATION: DOG KENNELS-SAVANNAH RIVER SITE

CONTRACTOR:

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAG# RAPH	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	MAILED TO CONTR/ DATE RCD FRM APPR AUTH	
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		15990A	TAB Specialist	1.5.2														
		16370A	SD-02 Shop Drawings															
			Electrical Distribution System	3.9.3														
			As-Built Drawings															
			TS-DG															
			SD-03 Product Data															
			Nameplates	2.3														
			TS-DG															
			Material and Equipment	2.2														
			General Installation Requirements	3.1														
			SD-06 Test Reports															
			Factory Tests	2.15														
			Sag and Tension Calculations															
			Field Testing	3.9														
			Operating Tests	3.9.7	G													
			SD-07 Certificates															
			Material and Equipment	2.2														
		16415A	SD-02 Shop Drawings															
			Interior Electrical Equipment		G TS-D													
			SD-03 Product Data															
			Manufacturer's Catalog		G TS-D													
			Material, Equipment, and Fixture		G TS-D													
			Lists															
			Installation Procedures															
			FIO															
			As-Built Drawings	1.2.6	G TS-D													

SUBMITTAL REGISTER

CONTRACT NO.
XXXXXXXXXXXXXXXX

TITLE AND LOCATION
DOG KENNELS-SAVANNAH RIVER SITE

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAG # RAPH	CLASSIFICATION	GOVT OR A/E REVWR	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION			APPROVING AUTHORITY					MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
							SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)		(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		16415A	Onsite Tests		G TS-D													
			SD-06 Test Reports															
			Field Test Plan		G TS-D													
			Field Test Reports	3.16	G TS-D													
			SD-07 Certificates															
			Materials and Equipment	1.4														
			FIO															

TRANSMITTAL OF SHOP DRAWINGS, EQUIPMENT DATA, MATERIAL SAMPLES, OR MANUFACTURER'S CERTIFICATES OF COMPLIANCE *(Read instructions on the reverse side prior to initiating this form)*	DATE	TRANSMITTAL NO.

SECTION I - REQUEST FOR APPROVAL OF THE FOLLOWING ITEMS *(This section will be initiated by the contractor)*

TO:	FROM:	CONTRACT NO.	CHECK ONE: ☐ THIS IS A NEW TRANSMITTAL ☐ THIS IS A RESUBMITTAL OF TRANSMITTAL _____
SPECIFICATION SEC. NO. *(Cover only one section with each transmittal)*	PROJECT TITLE AND LOCATION		

ITEM NO. *a.*	DESCRIPTION OF ITEM SUBMITTED *(Type size, model number/etc.)* *b.*	MFG OR CONTR. CAT., CURVE DRAWING OR BROCHURE NO. *(See instruction no. 8)* *c.*	NO. OF COPIES *d.*	CONTRACT REFERENCE DOCUMENT		FOR CONTRACTOR USE CODE *g.*	VARIATION *(See instruction No. 6)* *h.*	FOR CE USE CODE *i.*
				SPEC. PARA. NO. *e.*	DRAWING SHEET NO. *f.*			

REMARKS

I certify that the above submitted items have been reviewed in detail and are correct and in strict conformance with the contract drawings and specifications except as other wise stated.

_____

NAME AND SIGNATURE OF CONTRACTOR

SECTION II - APPROVAL ACTION

ENCLOSURES RETURNED *(List by Item No.)*	NAME, TITLE AND SIGNATURE OF APPROVING AUTHORITY	DATE

INSTRUCTIONS

1. Section I will be initiated by the Contractor in the required number of copies.

2. Each transmittal shall be numbered consecutively in the space provided for "Transmittal No.". This number, in addition to the contract number, will form a serial number for identifying each submittal. For new submittals or resubmittals mark the appropriate box; on resubmittals, insert transmittal number of last submission as well as the new submittal number.

3. The "Item No." will be the same "Item No." as indicated on ENG FORM 4288 for each entry on this form.

4. Submittals requiring expeditious handling will be submitted on a separate form.

5. Separate transmittal form will be used for submittals under separate sections of the specifications.

6. A check shall be placed in the "Variation" column when a submittal is not in accordance with the plans and specifications--also, a written statement to that effect shall be included in the space provided for "Remarks".

7. Form is self-transmittal, letter of transmittal is not required.

8. When a sample of material or Manufacturer's Certificate of Compliance is transmitted, indicate "Sample" or "Certificate" in column c, Section I.

9. U.S. Army Corps of Engineers approving authority will assign action codes as indicated below in space provided in Section I, column i to each item submitted. In addition they will ensure enclosures are indicated and attached to the form prior to return to the contractor. The Contractor will assign action codes as indicated below in Section I, column g, to each item submitted.

THE FOLLOWING ACTION CODES ARE GIVEN TO ITEMS SUBMITTED

A	--	Approved as submitted.	E	--	Disapproved (See attached).
B	--	Approved, except as noted on drawings.	F	--	Receipt acknowledged.
C	--	Approved, except as noted on drawings. Refer to attached sheet resubmission required.	FX	--	Receipt acknowledged, does not comply as noted with contract requirements.
D	--	Will be returned by separate correspondence.	G	--	Other *(Specify)*

10. Approval of items does not relieve the contractor from complying with all the requirements of the contract plans and specifications.

Approved by OM
0348-0046

DISCLOSURE OF LOBBYING ACTIVITIES

Complete this form to disclose lobbying activities pursuant to 31 U.S.C. 1352
(See reverse for public burden disclosure.)

1. Type of Federal Action:

☐ a. contract
b. grant
c. cooperative agreement
d. loan
e. loan guarantee
f. loan insurance

2. Status of Federal Action:

☐ a. bid/offer/application
b. initial award
c. post-award

3. Report Type:

☐ a. initial filing
b. material change

For Material Change Only:
year _____ quarter _____
date of last report _____

4. Name and Address of Reporting Entity:

☐ Prime ☐ Subawardee
Tier _____, *if known*:

Congressional District, *if known:*

5. If Reporting Entity in No. 4 is Subawardee, Enter Name and Address of Prime:

Congressional District, *if known*:

6. Federal Department/Agency:

7. Federal Program Name/Description:

CFDA Number, *if applicable*: _____

8. Federal Action Number, *if known*:

9. Award Amount, *if known*:

$

10. a. Name and Address of Lobbying Entity
(*if individual, last name, first name, MI):*

b. Individuals Performing Services *(including address if different from No. 10a)*
(last name, first name, MI):

(attach Continuation Sheet(s) SF-LLL-A, *if necessary*)

11. Amount of Payment *(check all that apply)*:

$ _____ ☐ actual ☐ planned

12. Form of Payment *(check all that apply)*:

☐ a. cash
☐ b. in-kind; specify: nature _____
value _____

13. Type of Payment *(check all that apply)*:

☐ a. retainer
☐ b. one-time fee
☐ c. commission
☐ d. contingent fee
☐ e. deferred
☐ f. other; specify: _____

14. Brief Description of Services Performed or to be Performed and Date(s) of Service, including officer(s), employee(s), or Member(s) contacted, for Payment indicated in Item 11:

(attach Continuation Sheet(s) SF-LLL-A, *if necessary*)

15. Continuation Sheet(s) SF-LLL-A attached: ☐ Yes ☐ No

16. Information requested through this form is authorized by title 31 U.S.C section 1352. This disclosure of lobbyig activities is a materia representation of fact upon which reliance was placed by the tier above when this transaction was made or entered into. This disclosure is required pursuant to 31 U.S.C. 1352 . This information will be reported to the Congress semi-annually and will be available for public inspection. Any person who fails to file the required disclosure shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each such failure.

Signature: _____

Print Name: _____

Title: _____

Telephone No.: _____ **Date:** _____

Federal Use Only:

Authorized for Local Reproduction
Standard Form - LLL

INSTRUCTIONS FOR COMPLETION OF SF-LLL, DISCLOSURE OF LOBBYING ACTIVITIES

This disclosure form shall be completed by the reporting entity, whether subawardee or prime Federal recipient, at the initiation or receipt of a covered Federal action, or a material change to a previous filing, pursuant to title 31 U.S.C. section 1352. The filing of a form is required for each payment or agreement to make payment to any lobbying entity for influencing or attempting to influence an officer or employee of any agency, a Member of Congress, an officer or employee of Congress, or an employee of a member of Congress in connection with a covered Federal action. Use the SF-LLL-A Continuation Sheet for additional information if the space on the form is inadequate. Complete all items that apply for both the initial filing and material change report. Refer to the implementing guidance published by the Office of Management and Budget for additional information.

1. Identify the type of covered Federal action for which lobbying activity is and/or has been secured to influence the outcome of a covered Federal action.

2. Identify the status of the covered Federal action.

3. Identify the appropriate classification of this report. If this is a followup report caused by a material change to the information previously reported, enter the year and quarter in which the change occurred. Enter the date of the last previously submitted report by this reporting entity for this covered Federal action.

4. Enter the full name, address, city, state and zip code of the reporting entity. Include Congressional District, if known. Check the appropriate classification of the reporting entity that designates if it is, or expects to be, a prime or subaward recipient. Identify the tier of the subawardee, e.g., the first subawardee of the prime is the 1st tier. Subawards include but are not limited to subcontracts, subgrants and contract awards under grants.

5. If the organization filing the report in item 4 checks “Subawardee”, then enter the full name, address, city, state and zip code of the prime Federal recipient. Include Congressional District, if known.

6. Enter the name of the Federal agency making the award or loan commitment. Include at least one organizational level below agency name, if known. For example, Department of Transportation, United States Coast Guard.

7. Enter the Federal program name or description for the covered Federal action (item 1). If known, enter the full Catalog of Federal Domestic Assistance (CFDA) number for grants, cooperative agreements, loans, and loan commitments.

8. Enter the most appropriate Federal identifying number available for the Federal action identified in item 1 (e.g., Request for Proposal (RFP) number; Invitation for Bid (IFB) number; grant announcement number; the contract, grant, or loan award number; the application/proposal control number assigned by the Federal agency). Include prefixes, e.g., “RFP-DE-90-001.”

9. For a covered Federal action where there has been an award or loan commitment by the Federal agency, enter the Federal amount of the award/loan commitment for the prime entity identified in item 4 or 5.

10. (a) Enter the full name, address, city, state and zip code of the lobbying entity engaged by the reporting entity identified in item 4 to influence the covered Federal action.

    (b) Enter the full names of the individuals(s) performing services, and include full address if different from 10 (a). Enter Last Name, First Name, and Middle Initial (MI).

11. Enter the amount of compensation paid or reasonably expected to be paid by the reporting entity (item 4) to the lobbying entity (item 10). Indicate whether the payment has been made (actual) or will be made (planned). Check all boxes that apply. If this is a material change report, enter the cumulative amount of payment made or planned to be made.

12. Check the appropriate box(es). Check all boxes that apply. If payment is made through an in-kind contribution, specify the nature and value of the in-kind payment.

13. Check the appropriate box(es). Check all boxes that apply. If other, specify nature.

    Provide a specific and detailed description of the services that the lobbyist has performed, or will be expected to perform, and the date(s) of any services rendered. Include all preparatory and related activity, not just time spent in

Public reporting burden for this collection of information is estimated to average 30 minutes per response, including time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding the burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to the Office of Management and Budget, Paperwork Reduction Project (0348-0046), Washington, D.C. 20503.

Approved by OM
0348-0046

DISCLOSURE OF LOBBYING ACTIVITIES
CONTINUATION SHEET

Reporting Entity: _____ Page _____ of _____ _____

CPT Soil Classification Legend

Zone	Q_t/N	Description
1	2	Sensitive, Fine Grained
2	1	Organic Soils-Peats
3	1.5	Clays-Clay to Silty Clay
4	2	Silt Mixtures-Clayey Silt to Silty Clay
5	3	Sand Mixtures-Silty Sand to Sandy Silt
6	4.5	Sands-Clean Sand to Silty Sand
7	6	Gravelly Sand to Sand
8	1	Very Stiff Sand to Clayey Sand*
9	2	Very Stiff, Fine Grained*

(*) Heavily Overconsolidated or Cemented

Normalized Friction Ratio Classification Chart

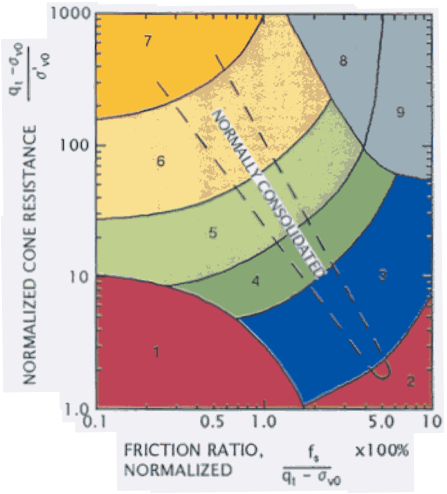

(Ref. Robertson, 1990)

Coefficient of Permeability (cm/s)

Zone	Description	Permeability
1	Sensitive Fines	10^{-5}
2	Organic Soils-Peats	10^{-5}
3	Clays	10^{-7}
4	Silt Mixtures	10^{-6}
5	Sand Mixtures	10^{-4}
6	Sands	10^{-2}
7	Gravelly Sands	10^{-1}
8	Very Stiff Sands	10^{-5}
9	Very Stiff Fines	10^{-6}

Applied Research Associates, Inc., South Royalton, Vermont 05068
(802) 763-8348, cpt@ara.com, http://www.ara.com

APPLIED RESEARCH ASSOCIATES, INC.

December 6, 2004

L. Bruce Triplett
Westinghouse Savannah River Company
Building 730-2B, Rm. 1086
Aiken, SC 29808

Dear Mr. Triplett:

Attached is the cone penetrometer data for the cone penetrometer tests conducted at SRS under WSRC subcontract AC07778N, Task 37. A total two (2) cone penetrometer tests were performed. The cone penetrometer tests are summarized in Table 1.

The information provided for the cone penetration test includes: corrected tip stress, sleeve stress, friction ratio, pore pressure, soil classification based on friction ratio, and inclination. The enclosed CD provides the ECP files that contain the plotted data in ASCII format, a copy of this letter, and Table 1 in Excel format.

The data presented on the attached sheets was obtained and interpreted by qualified ARA personnel in accordance with the requirements of SRS Subcontract No. AC07778N and contained in Specification K-SPC-G-00016, Rev. 2. The information contained on the data sheets and computer disk shall be considered as final and correct.

Please feel free to call us if you have any questions regarding the enclosed information.

Sincerely,

Ryan Langlois
Staff Scientist

RCL:nvw
Enclosures
D:\0431\Task Reports\Task36\0431_36ltr_rpt1.doc

415 WATERMAN ROAD ■ SOUTH ROYALTON, VT 05068
(802) 763-8348 ■ FAX (802) 763-8283

Table 1. Summary of Cone Penetrometer Tests Performed at S.R.S for Task 37.

Test ID	ARA Filename	Type of Test	Date of Test	Final Depth (ft)	Northing (ft)	Easting (ft)	Elevation (ft)	G.W.T. Depth (ft)
B-1	223N0402	PCPT	11/23/04	15.0	87083.2	42566.1	276.9	NA
B-2	223N0401	PCPT	11/23/04	10.0	87012.4	42610.4	275.9	NA

* NO SAMPLE
** REFUSAL

1

Applied Research Associates, Inc.
South Royalton, VT 05068
802-763-8348
cpt@ned.ara.com
www.ara.com

Date: 23/Nov/2004
Test ID: B-1
Northing: 87083.2
Easting: 42566.1
Elevation: 276.9

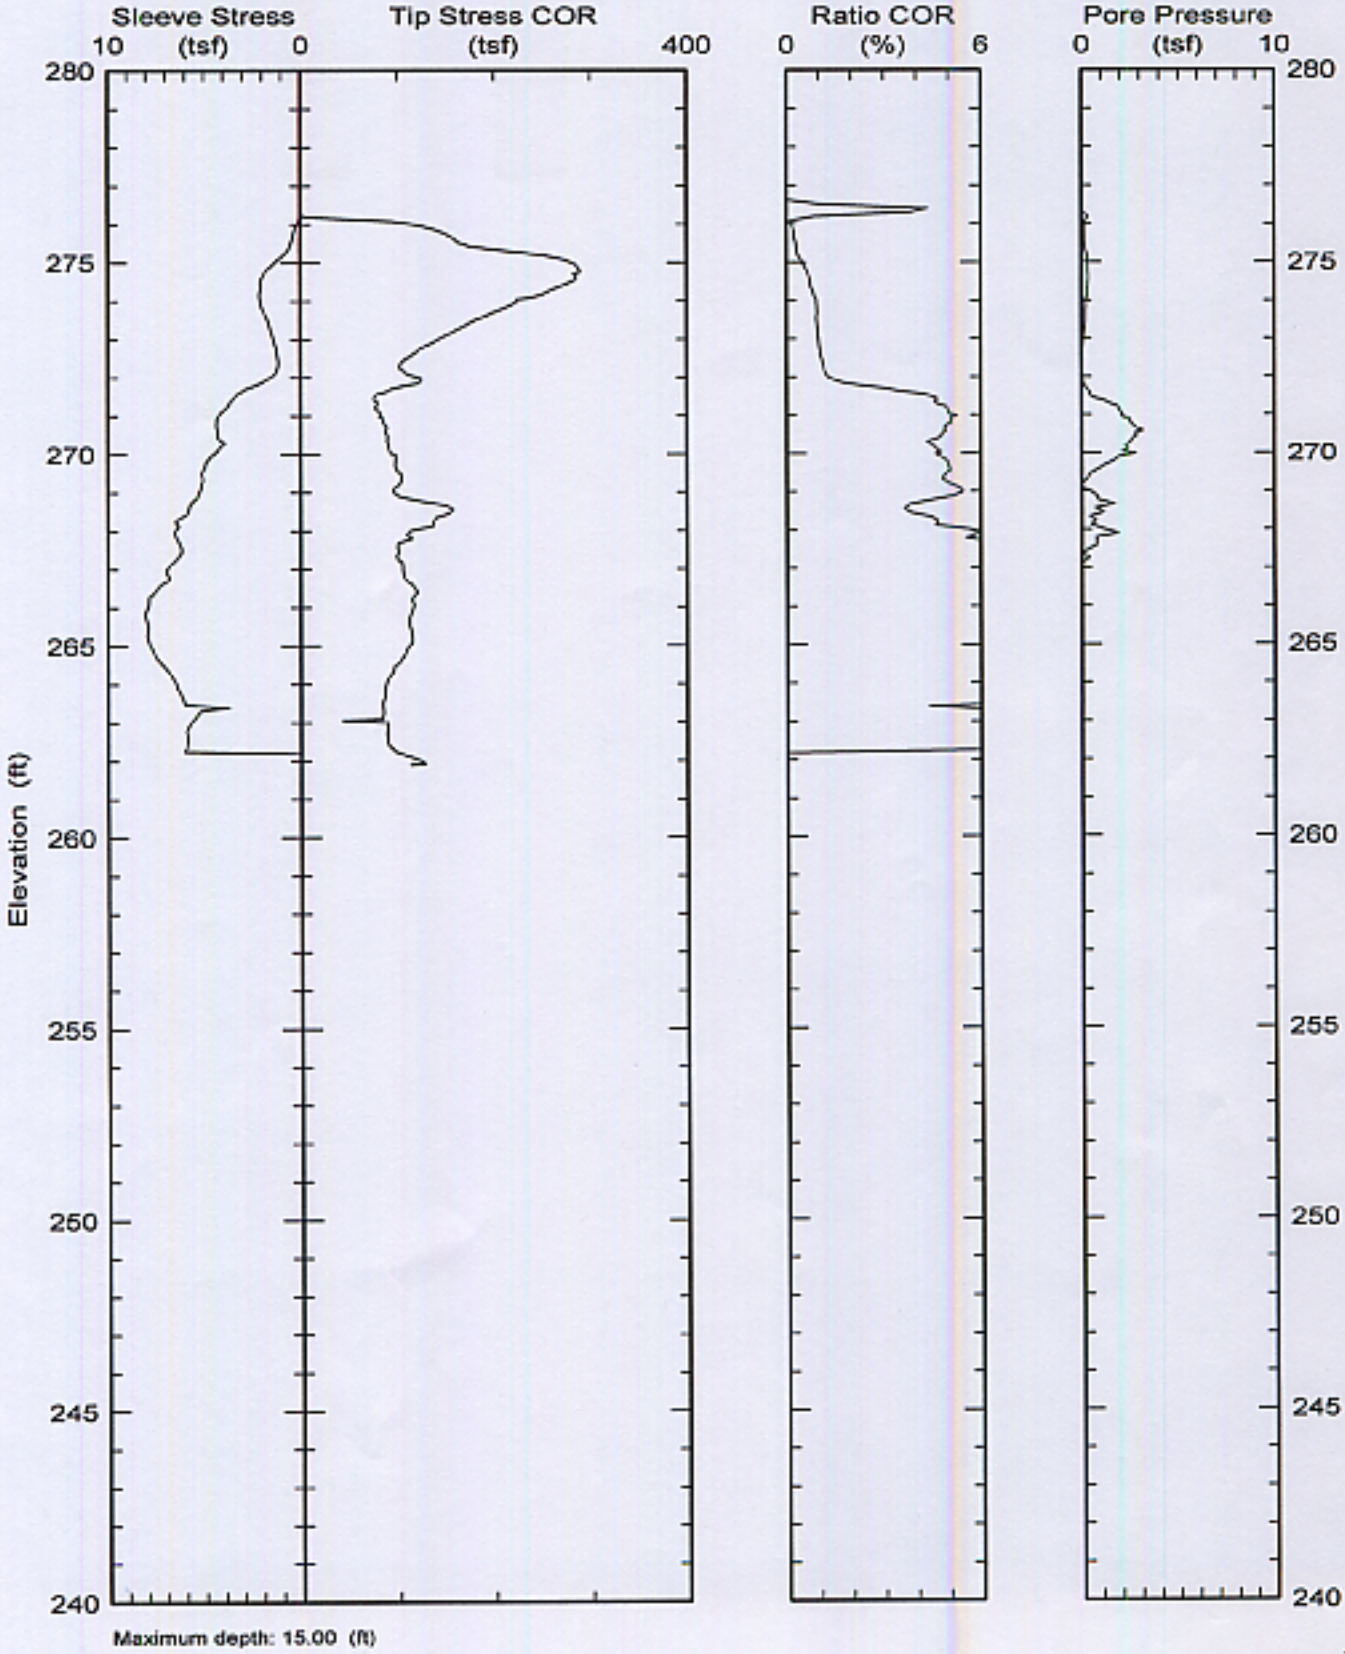

Test ID: B-1
File: 223N04020.DCP

Applied Research Associates, Inc.
South Royalton, VT 05068
802-763-8348
cpt@ned.ara.com
www.ara.com

Date: 23/Nov/2004
Test ID: B-1
Northing: 87083.2
Easting: 42566.1
Elevation: 276.9

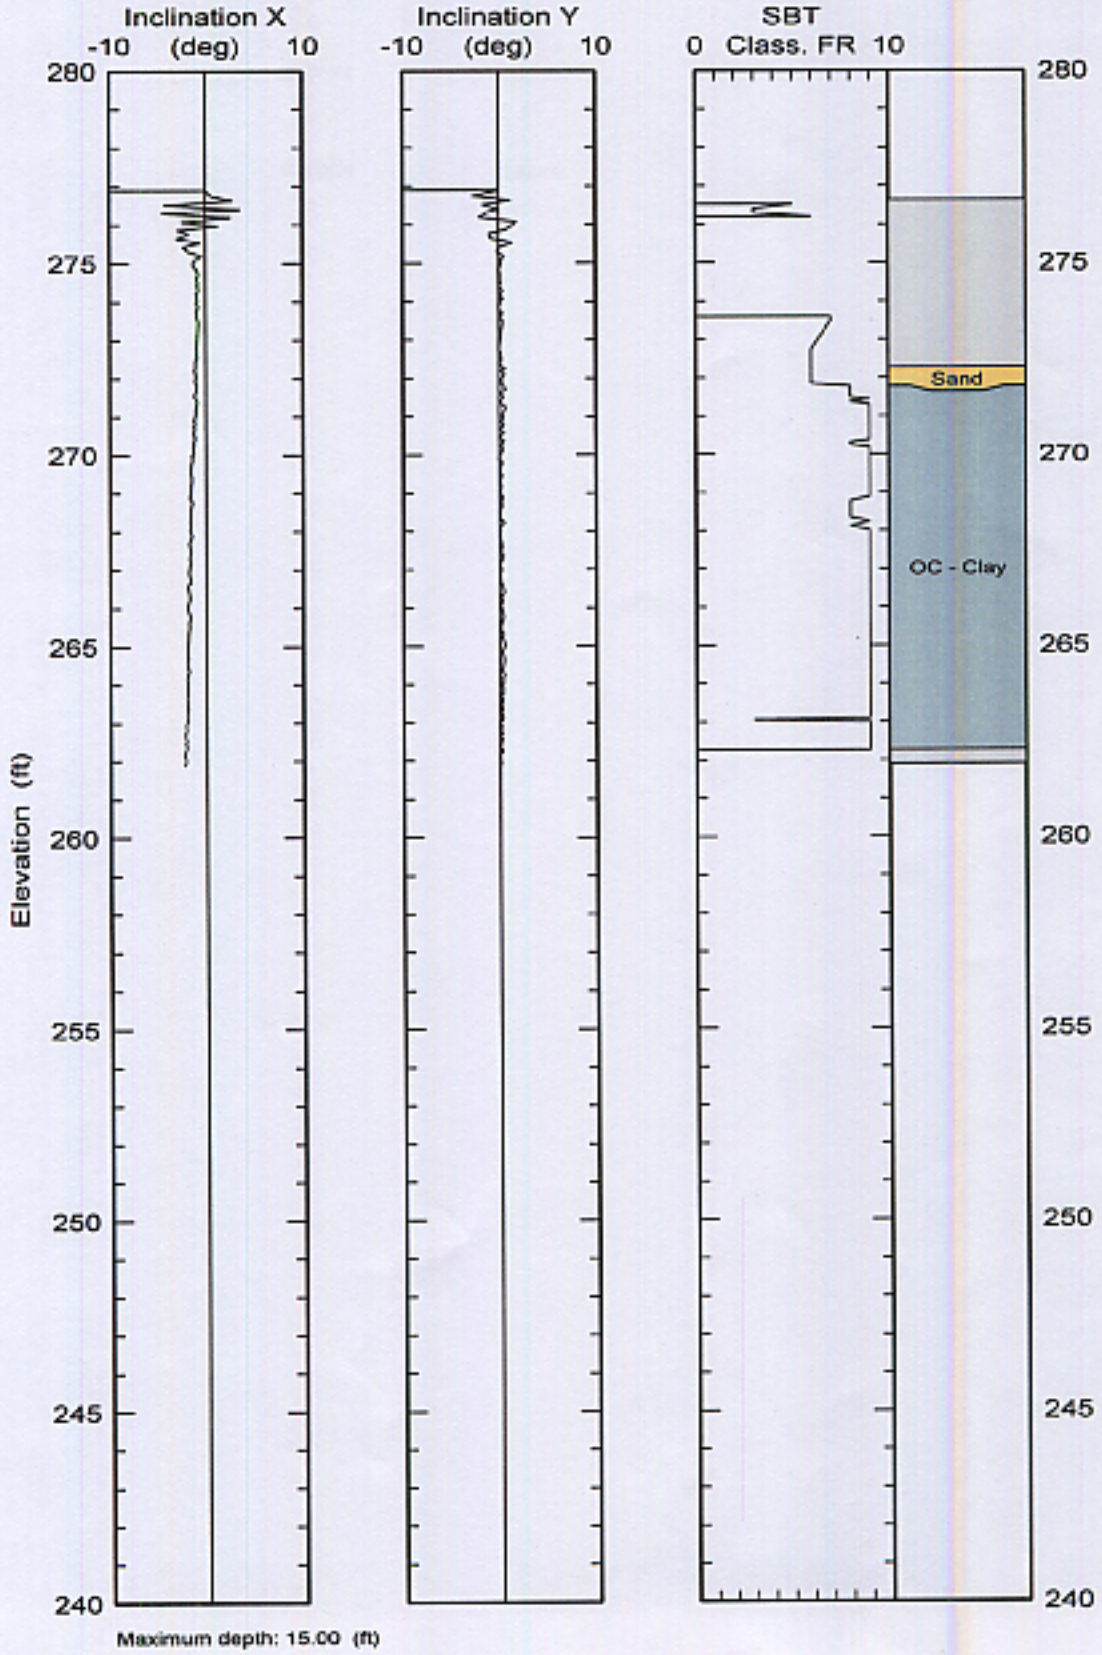

Class FR: Friction Ratio Cl
Test ID: B-1
File: 220N0432C.ECP

Applied Research Associates, Inc.
South Royalton, VT 05068
802-763-8348
cpt@ned.ara.com
www.ara.com

Date: 23/Nov/2004
Test ID: B-2
Northing: 87012.4
Easting: 42610.4
Elevation: 275.9

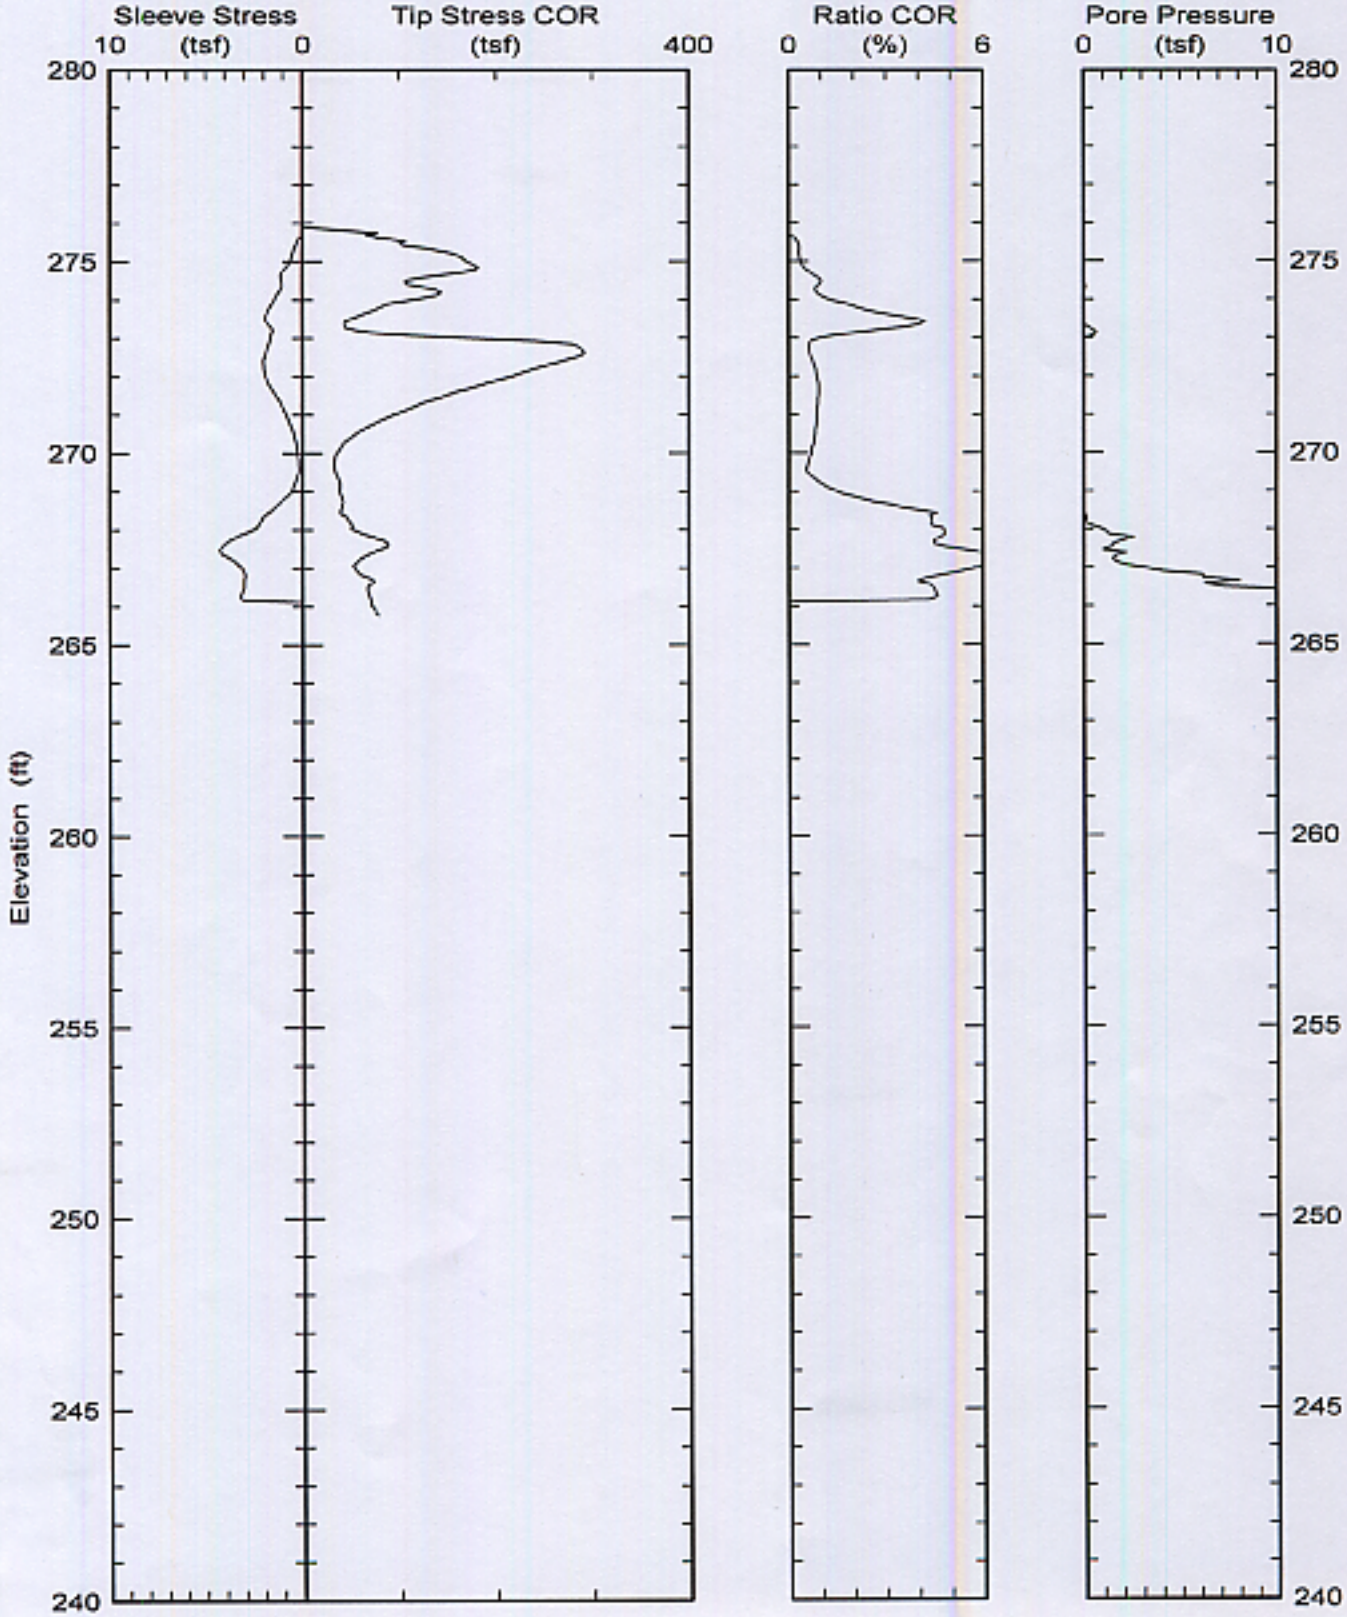

Maximum depth: 10.13 (ft)

Test ID: B-2
File: 223N04E1C.EDP

Applied Research Associates, Inc. South Royalton, VT 05068 802-763-8348 cpt@ned.ara.com www.ara.com	Date: 23/Nov/2004 Test ID: B-2 Northing: 87012.4 Easting: 42610.4 Elevation: 275.9

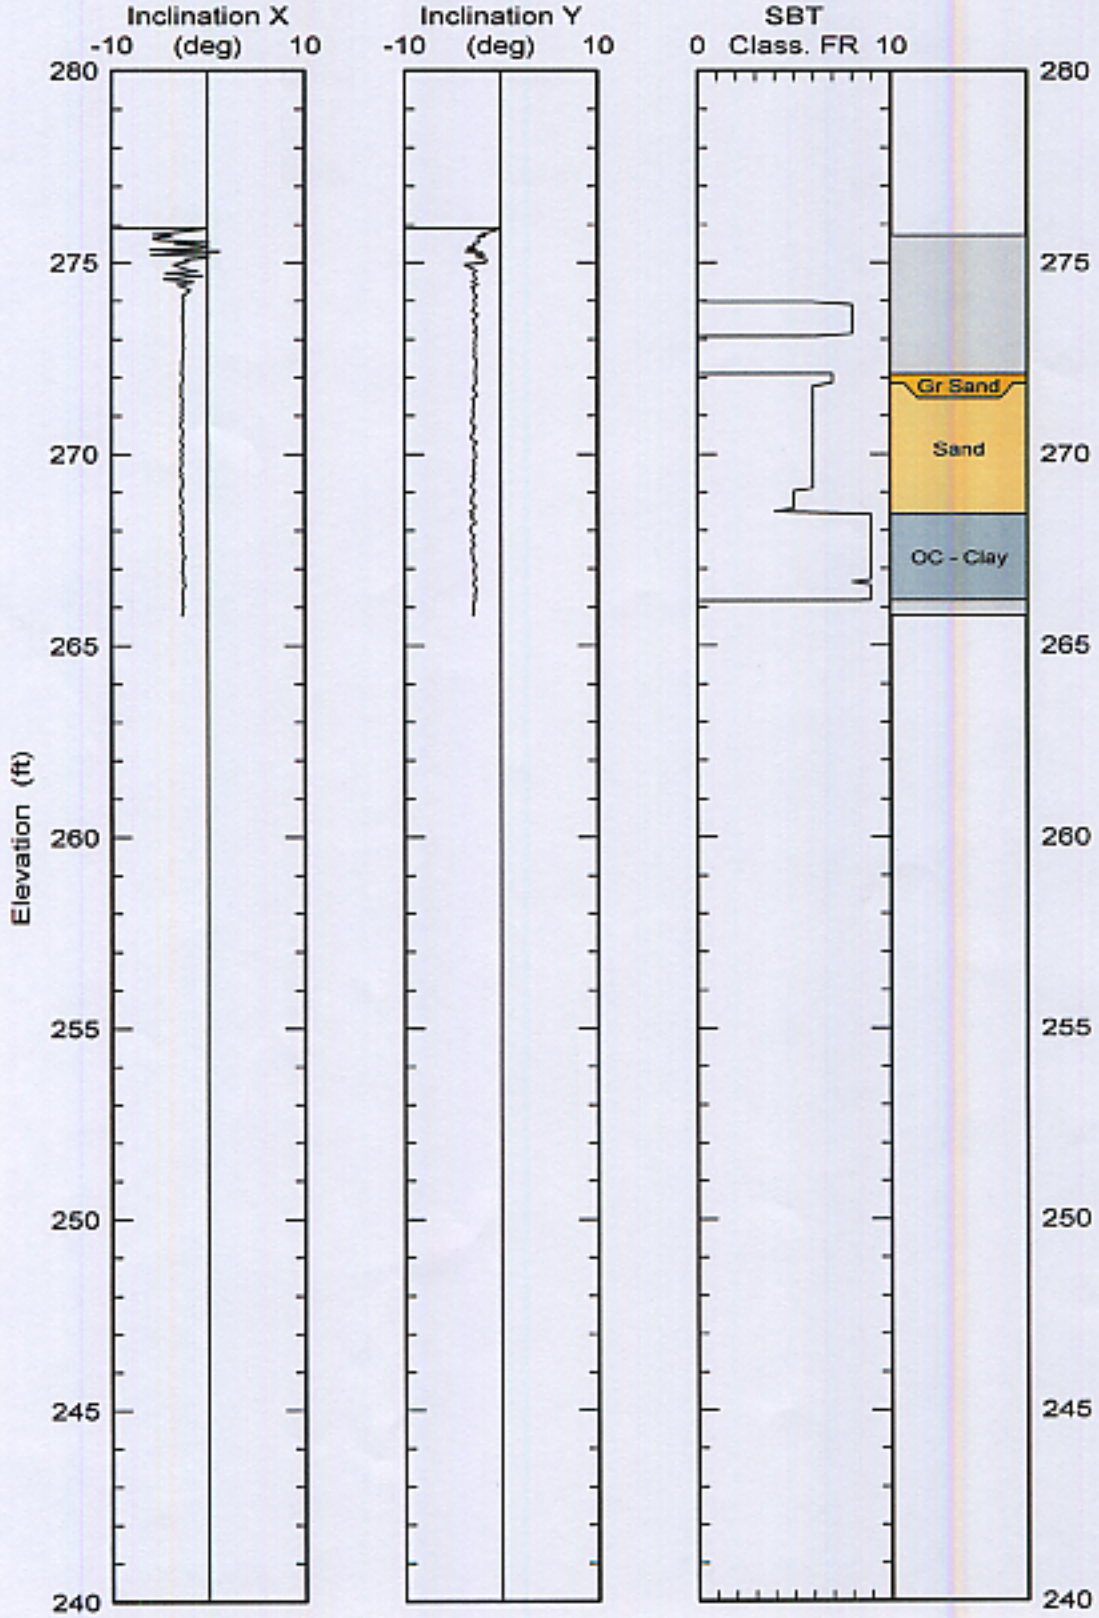

Maximum depth: 10.13 (ft)

Class FR: Friction Ratio Cl
Test ID: B-2
File: 223N0431C.ECP

SR 253# (Rev 02-18-2000)
DOE 0472.1B

U.S. Department of Energy
Savannah River Operations Office

Security Clearance Request/Justification/ Access/Badge Request

ructions This form (Page 1 and 2) will be completed when (A) requesting a security clearance; (B) requesting an upgrade of a security clearance, and (C) reaffirming need for current level of clearance under the Annual Review Program or Special Reinvestigation Program by DOE.

Date

Type of Request

- ☐ Initial
- ☐ PSAP
- ☐ Reinvestigation
- ☐ Reinstate
- ☐ Upgrade
- ☐ Downgrade
- ☐ Special Update
- ☐ Extension
- ☐ Transfer
- ☐ Employer Change
  From_____ To _____
- ☐ Contract Number Change
  From_____ To _____

Type of Action

Social Security No._____

DOE Number_____

- ☐ Site access only
- ☐ L Clearance is requested
- ☐ LQ Clearance is requested
- ☐ Q Clearance is requested

for _____
(Full Name)
(Print or Type First, Middle, and Last Name)

_____
Position Title and Position Location

U. S. Citizen ☐ Yes ☐ No

Employer _____

Contract Number _____ /Expiration Date _____

(List all Applicable) _____ /Expiration Date _____

ial Security Clearance Review and Justification Only

ity Clearance Must Be (Check One)

- ☐ Upgrade
- ☐ Downgrade
- ☐ Terminated, No Clearance Needed
- ☐ No Change

Employee Holds or Has Previously Held DOD Clearance

- ☐ Secret
- ☐ Top Secret
- ☐ SCI Access

Employee is Currently Cleared or Being Processed For An Investigation By Another Agency

☐ Yes ☐ No

Pre-employment Screening (M&O Contractors Only)

- ☐ No Pre-employment Required (Subcontractor)
- ☐ Pre-employment Conducted

U.S. Citizen ☐ Yes ☐ No

Date Checks Conducted _____

No Derogatory _____

- ☐ Permanent Access Requested
- ☐ Temporary Access Requested for Period of_____ To _____
  (Cannot be more than one year.)

Derogatory Information

_____

_____

_____

Certification Approval

_____ Requesting Official — _____ Date

_____ Position Sensitivity Validation, HRM&DD (DOE Employees Only) — _____ Date

_____ DOE-SR ISD Approval — _____ Date

ATTACHMENT K

General Decision Number: SC030023 02/18/2005 SC23

Superseded General Decision Number: SC020023

State: South Carolina

Construction Types: Building, Heavy and Highway

Counties: Aiken, Allendale and Barnwell Counties in South Carolina.

SAVANNAH RIVER SITE ONLY

BUILDING CONSTRUCTION PROJECTS (does not include single family homes and apartments up to and including 4 stories)

HEAVY CONSTRUCTION PROJECTS (includes sewer & water line projects, and drainage projects)

HIGHWAY CONSTRUCTION PROJECTS

Modification Number	Publication Date
0	06/13/2003
1	02/20/2004
2	02/18/2005

* SUSC2003-001 10/17/2003

	Rates	Fringes
Asbestos Abatement Worker/hazardous material handler (Includes preparation, wetting, stripping, removal, scrapping, vacuuming, bagging and disposing of all insulation materials, whether they contain asbestos or not, from mechanical systems).....	$ 10.62	0.15
Asbestos Worker/Insulator (Includes application of all insulating materials, protective coverings, coatings & finishings to all types of mechanical systems)...	$ 21.23	7.75
Boilermaker.....	$ 23.93	14.16
Bricklayer.....	$ 19.41	5.30
Carpenter.....	$ 19.16	6.83
Cement Mason.....	$ 18.84	5.30
Electricians & Line Construction		
Cable splicer.....	$ 21.14	3.75% + 7.70
Electrician & Line technician.....	$ 21.89	3.75% + 7.70
Ground person.....	$ 14.89	3.75% + 7.70
Elevator Constructor.....	$ 23.395	10.12

Glazier	$ 19.09	5.37
Ironworker	$ 22.17	6.40
Laborers		
Concrete & building	$ 13.74	4.08
Hazardous waste verifier	$ 14.49	4.08
Mortar mixer	$ 13.99	4.08
Nozzleperson	$ 14.24	4.08
Pipelayer	$ 13.99	4.08
Pneumatic concrete gun operator	$ 14.24	4.08
Pneumatic tool operator	$ 13.99	4.08
Tool facility operator	$ 14.49	4.08
Machinist	$ 24.82	7.30
Millwright	$ 20.20	8.18
Operating Engineer		
Air compressor; concrete mixer (10 s or less); conveyor; elevator; hoist, 1-drum; light plant; motor crane driver and oiler; roller; tractor (50 hp and over)	$ 16.72	8.32
Backhoe; central mixing plant; concrete placing machine; crane, derrick, dragline; hoist, 2-drum; motor grader; shovel; sideboom tractor; tower/pedestal crane; hoist, 1-drum (hoisting personnel); mechanical (diesel & gas); maxi grinder	$ 20.15	8.32
Batch plant; bulldozer; concrete mixer (over 10 s); distributor (bituminous surfaces); end loader; fork lift truck; lead oiler; pan scraper; paving machine; pumpcrete; trenching machine; well drill	$ 18.54	8.32
Pump (2-1/2 in. and over); tractor (under 50 hp); fireperson (boiler); oiler	$ 14.71	8.32
Painter (Composite rate applies to all work performed by journeyman painters and sign painters except when engaged in industrial premium work.)	$ 19.09	5.37
Piledriver	$ 19.41	6.83
Pipefitter	$ 20.96	9.54
Plasterer	$ 18.84	5.30
Roofer (including Built Up, Composition and Single Ply) (Composition, built-up and waterproofing)	$ 18.12	2.63

Sheet metal worker	$ 22.41	8.29
Sprinkler Fitter	$ 21.50	9.00
Truck Driver		
2-1/2 tons & over, and special equipment	$ 19.64	4.125
Oiler (light equipment and garage attendant)	$ 19.29	4.125
Under 2-1/2 tons	$ 19.01	4.125

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

==========

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

In the listing above, the "SU" designation means that rates listed under the identifier do not reflect collectively bargained wage and fringe benefit rates. Other designations indicate unions whose rates have been determined to be prevailing.

WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can be:

* an existing published wage determination
* a survey underlying a wage determination
* a Wage and Hour Division letter setting forth a position on a wage determination matter
* a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations

Wage and Hour Division

U.S. Department of Labor

200 Constitution Avenue, N.W.

Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator

U.S. Department of Labor

200 Constitution Avenue, N.W.

Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board

U.S. Department of Labor

200 Constitution Avenue, N.W.

Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

==========

END OF GENERAL DECISION

MINIMUM STANDARD FOR TEMPORARY ELECTRICAL SERVICE

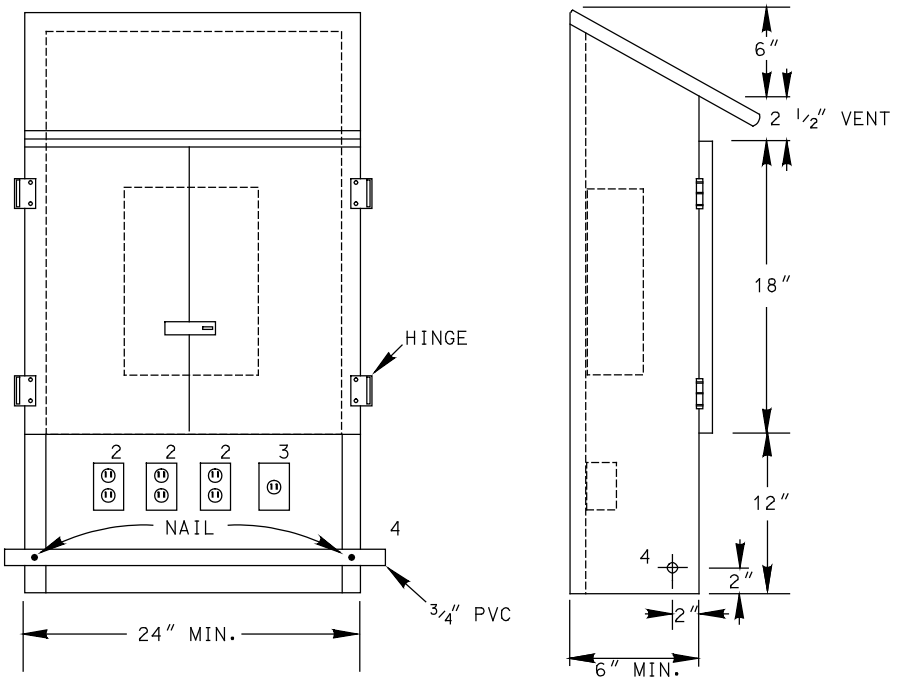

(DIMENSIONS ARE APPROXIMATE)

A. GENERAL CONSTRUCTION OF THE ENCLOSURE FOR TEMPORARY SERVICE SHALL CONSIST OF NOT LESS THAN 1/2 INCH PLYWOOD OF EXTERIOR GRADE.

B. ITEM 1: NEMA 1 CIRCUIT BREAKER TYPE PANELBOARD. THIS PANELBOARD SHALL CONSIST OF 1 TWO POLE 60 AMP MAIN CIRCUIT BREAKER, 4*ONE POLE 20 AMP BRANCH CIRCUIT BREAKERS, AND 1*TWO POLE 20 AMP BRANCH CIRCUIT BREAKER. BREAKERS SHALL MEET FEDERAL SPECIFICATIONS STANDARDS FOR CLASS 1A BREAKERS AND SHALL BE OF THE PLUG-IN TYPE (*NIMBER OF BREAKERS TO BE ADJUSTED TO SUIT JOB REQUIREMENTS). ANY OF THE ABOVE BREAKERS WHICH FEED 15 OR 20 AMP 120 VOLT RECEPTACLES SHALL BE GROUND FAULT INTERRUPTER TYPE.

C. ITEM 2 SHALL BE DUPLEX GROUNDING TYPE CONVENIENCE OUTLETS IN STANDARD UTILITY TYPE OUTLET BOXES WITH METAL COVERS. CONNECTIONS TO THE BRANCH CIRCUIT BREAKERS SHALL BE GROUNDED TWO CONDUCTOR #12 NMC CABLE.

D. ITEM 3 SHALL BE A SINGLE 3 CONDUCTOR GROUNDING TYPE OUTLET RATED FOR 240 VOLT SERVICE. CONNECTIONS FROM THIS OUTLET TO THE TWO POLE BREAKER SHALL BE BY TWO CONDUCTOR GROUNDED TYPE NMC CABLE. (IF REQUIRED).

E. ITEM 4 IS 3/4 INCH PVC AND IS USED TO SUPPORT EXTENSION CORDS.

F. THE PANELBOARD SHALL BE GROUNDED BY #6 WIRE CONNECTED TO A 3/4 INCH BY 8 FOOT LONG GROUND ROD.

G. SERVICE TO THE PANEL SHALL CONSIST OF THREE CONDUCTOR #6 MINIMUM SERVICE ENTRANCE CABLE. THIS CABLE MAY ENTER EITHER THE TOP OR THE SIDE OF THE WOODEN ENCLOSURE WITH THE OPENING BETWEEN THE CABLE AND THE WOOD SEALED WITH ELECTRICAL PUTTY OR SOME SIMILAR ACCEPTABLE SEALING COMPOUND.

H. PERIODIC INSPECTIONS OF SYSTEMS AND DEVICES WILL BE MADE BY THE CONTRACTOR AT INTERVALS NOT TO EXCEED ONE WEEK, AND A REPORT WILL BE SUBMITTED INDICATING THE RESULTS.

I. GROUND FAULT CIRCUIT INTERRUPTERS, APPROVED FOR PROTECTION OF PERSONNEL, WILL BE MANDATORY ON ALL 15 AND 20 AMPERE RECEPTACLE OUTLETS ON 120-VOLT SINGLE PHASE CIRCUITS FOR CONSTRUCTION SITES. THIS REQUIREMENT INCLUDES NOT ONLY TEMPORARY WIRING INSTALLED BY THE CONTRACTOR BUT ALSO ANY PART OF PERMANENT WIRING OF THE BUILDING OR STRUCTURE UTILIZED BY THE CONTRACTOR UNDER THIS CONTRACT. THIS SHALL INCLUDE ANY AND ALL GENERATORS EQUIPPED WITH 15 OR 20 AMPERE 120-VOLT RECEPTACLES.

APPENDIX VIII

ELECTRICAL SERVICE REQUIREMENTS FOR CONSTRUCTION AND MAINTENANCE OPERATIONS

1. Purpose. The purpose of this appendix is to provide for safe temporary electrical service installed and used by contractors and government employees on all construction and maintenance operations.

2. Applicability. All elements and all contractors of the District will comply.

3. References.

a. AR 385-10
b. EM 385-1-1
c. ANSI-CI (NFPA 70)

4. General.

a. All wire, apparatus, and equipment used in a temporary power service shall be listed by Underwriters' or Factory Mutual Laboratories for the specific application. Materials and equipment need not be new but must be in good repair and serviceable condition.

b. Electrical systems and devices will be checked and approved for polarity, continuity of ground, and resistance to ground prior to being put into service. Resistance of driven rods shall be measured, recorded, and furnished to the Resident or Area Engineer at the time of installation, and shall not exceed 25 ohms. Periodic inspections of systems and devices will be made by the contractor at intervals not to exceed one week and a report will be submitted indicating the results.

c. Temporary electrical systems shall conform to the applicable provisions of the National Electrical Code and the Corps of Engineers' "Safety and Health Requirements Manual," EM 385-1-1.

d. Prime contractors shall submit a sketch of their proposed temporary power distribution systems to the Area or Resident Engineer at the prework conference.

e. Typical configurations of temporary electrical services and panels are shown in sketches A-D and will be included in the Special Conditions of the Contract.

f. Conductors shall be sized according to the recommendations of the National Electric Code.

5. Grounding.

a. All electrical tools, fuse boxes, and other equipment with conducting surfaces that could become energized shall be grounded. The only exception is double insulated tools that carry a legible Underwriters' or Factory Mutual Laboratories label.

b. Ground Fault Circuit Interrupters, approved for protection of personnel, will be mandatory on all 15 and 20 ampere 120-volt receptacle outlets on single phase circuits for construction sites beginning 1 January 1974. Until then Ground Fault Circuit Interrupters may be used in addition to adequate grounding methods. Ground Fault Circuit Interrupters are not an acceptable substitute for grounding.

c. Bare conductors or earth returns shall not be used for the wiring of any circuit.

d. Grounding will normally be accomplished by one of the following methods:

(1) A conductor is the supply cord or run with the circuit conductors to the distribution point where it is grounded. All portable and semi-portable electrical tools shall be grounded using this method via a multi-conductor cord having an identified grounding conductor and a multicontact polarized plug/receptacle.

(2) A grounding conductor separate form the power supply cable attached to a grounding rod, water pipe, or other grounded object. This method may be used only by special permission. Grounding rods must be at least five-eighths inch diameter, copper clad steel, steel or iron rods or three-fourths inch diameter pipe. They shall be in unbroken 8 -foot lengths and driven to full depth. Resistance to ground shall not exceed 25 ohms for any grounding system.

6. Plugs and Receptacles.

a. NEMA type 5 or 1.5 plugs and receptacles for the appropriate amperage shall be used for 125-volt services. See figure 1.

b. 250-Volt circuits shall be direct wired where feasible. Type 6 or 1.6 plugs and receptacle for the appropriate amperage shall be used when directing-wiring 250-volt circuits is not practical.

c. Other NEMA device configurations may be used only on written approval of the Contracting Officer.

d. Equipment requiring 3-phase current, over 250 volts, or more than 20 amperes per phases shall be direct wired.

e. Fuse and breaker boxes, receptacle boxes and switch boxes shall be plainly marked on the exterior to indicate the maximum operating amperage and voltage.

f. Underwriters' Laboratories approved double insulted tools having a standard parallel plug (NEMA Type 1-15P) will be considered to comply with paragraph a. above.

g. Receptacles used in damp or wet location shall be approved for the purpose. Outdoors is a wet locations and a receptacle installed outdoors where exposed to the weather shall be in a weatherproof enclosure, the integrity of which is not affected when an attachment plug cap is inserted.

7. Overcurrent Protection and Disconnects.

a. Overcurrent protection devices must be readily accessible, not exposed to physical damage and not placed in the vicinity of easily ignitable material.

b. Each circuit shall be protected by a fuse or breaker of the proper rating for the circuit to be protected.

c. A readily accessible, manually operated fusible switch or circuit breaker shall be provided for each incoming service or supply circuit. It shall disconnect all ungrounded conductors.

d. An approved type switch, properly identified and plainly marked to indicate that it is the tank or space disconnect shall be provided at or near the entrance to tanks or other confined spaces. It shall disconnect all power in such spaces.

e. Switches, boxes, circuit breakers, fuse panels, and motor controller in wet locations or outside shall be enclosed in a weatherproof enclosure or cabinet.

8. Wiring Methods.

a. Extension Cords. Flexible (extension) cords shall be of the hard usage (type SJ, SJO, SJT and SJTO) or extra hard usage (types S, SO, ST and STO) types and shall be listed by the Underwriters' Laboratories for the purpose in which they are used.

(1) The current carrying conductors shall not be smaller than No. 14 in any cord supplying more than one receptacle.

(2) If the insulation on a cord is burned, cut, or abraided to such an extent that bare conductor is exposed or the effectiveness of the insulation is questionable, it shall be removed the service.

(3) Flexible electrical cords shall be used only in continuous Lengths without splice or tap.

(4) Cords shall be connected to devices and fittings that tension will not be transmitted to joints, terminal screw or conductors. This shall be accomplished by a knot in the cord, winding with tape, by a special fitting designed for that purpose, or by other approved means. The outer insulation jacket on cords must be securely held by the connector devices for plugs, receptacle boxes, panel boxes, or other equipment.

(5) Field fabricated cords shall be constructed of materials for this purpose. Knockout type boxes shall not be laid on the ground unless properly protected.

(6) Plugs and receptacles shall be kept out of water unless of an approved submersible type.

b. Open Wiring on Insulators. Conductors shall be rigidly supported on insulators of noncombustible, nonabsorptive material. A loop of insulated wire approved for use in wet locations meets this requirement. Conductors may touch only their insulated support or using device. Conductors shall be supported as follows:

(1) At intervals not to exceed 4-1/2 feet over surfaces. Where conductors are likely to be disturbed, support distances shall be shortened.

(2) At intervals not to exceed 10 feet along walls and ceilings.

(3) For voltage not to exceeding 300 volts between conductors.

(4) Conductors shall be separated:

(a) A minimum of 2-1.2 inches from each other.

(b) Conductors shall be separated at least 1 inch from the surface wired over

(c) Within 6 inches of tap.

(5) The clear span between supports for areas other than the aforementioned which does not contain a messenger shall not exceed:

AWG (Copper)	Span (ft)
14	20
12	30
10	50
8	60

(6) Where open conductors cross ceiling joists or wall studs within 7 feet of the floor or are otherwise exposed to physical damage, they shall be protected. Conduit, pipe, guard strips, or other means may be used.

(7) Conductors entering or leaving damp locations shall have drip loops formed in them.

c. Splices and Taps. Conductors shall be spliced or joined with splicing devices approved for the use or by brazing, welding or soldering with a fusible metal or alloy. Soldered splices shall be so spliced or joined as to be mechanically or electrically secure without solder and then soldered. All splices and joints and the free ends of conductors shall be covered with an insulations equivalent to that of the conductors.

9. Use of Cable.

a. Nonmetallic sheathed cable may be used as follows:

(1) Type NM only in dry locations.

(2) Type NMC in wet or dry locations.

(3) Type UF as protected buried cable not less than 12 inches in depth. Also may be installed without protection at depths greater than 18 inches.

(4) When secured by staples, straps, or similar fittings designed and installed so as not to injure the cable insulation.

(5) Along studs, joists, or similar supports closely following the building finish or running boards when 7 feet, 8 inches or less above the floor. Above 7 feet, 8 inches, see paragraph 8b(1)(e).

(6) When firmly attached to each cabinet, box, fitting or fixture by means of a cable clamp.

(7) When protected by conduit, pipe, guard strips or other means on exposure to physical damage. Through the floor when mechanically protected to at least 6 inches above the floor.

b. Nonmetallic sheathed cable may not be used as follows:

(1) As portable extensions cords.
(2) Lying on the ground subject to any type of traffic.
(3) Where subject to frequent flexing.
(4) As service entrance cable.

c. Rigid metal conduit and other methods of installing temporary wiring may be used when installed by qualified electricians in conformity with the National Electrical Code and the Corps of Engineers “Safety and Health Requirements Manual,” EM 385-1-1

10. Outside Clearance - 600 Volts and Less.

a. Conductors shall clear the highest point of roofs by 8 feet except, where the voltage between conductors is less than 300 volts and the roof cannot be readily walked upon, only 3 feet of clearance is required.

b. Conductors shall be 10 feet above the ground or any other platform or projection from which they might be reached.

c. Conductors shall be 3 feet from windows, doors, balconies, fire escapes, or similar locations.

d. 10 feet above sidewalks

e. 18 feet above driveways, alleys and public roads.

11. Festoon Lighting.

a. Conductors which span over 15 feet between supports may not be less than No. 12 unless supported by messenger wires. All conductors with spans in excess of 40 feet between supports shall be supported by messenger wires.

b. Messenger wire shall be supported by approved strain insulators.

c. Conductors or messenger wire shall not be attached to any fire escape, downspout, or plumbing equipment.

d. Festoon lighting strings shall be made using weatherproof lamp sockets. Pendant taps shall be used as specified in para. 8b(4).

Enclosures 1 through 5

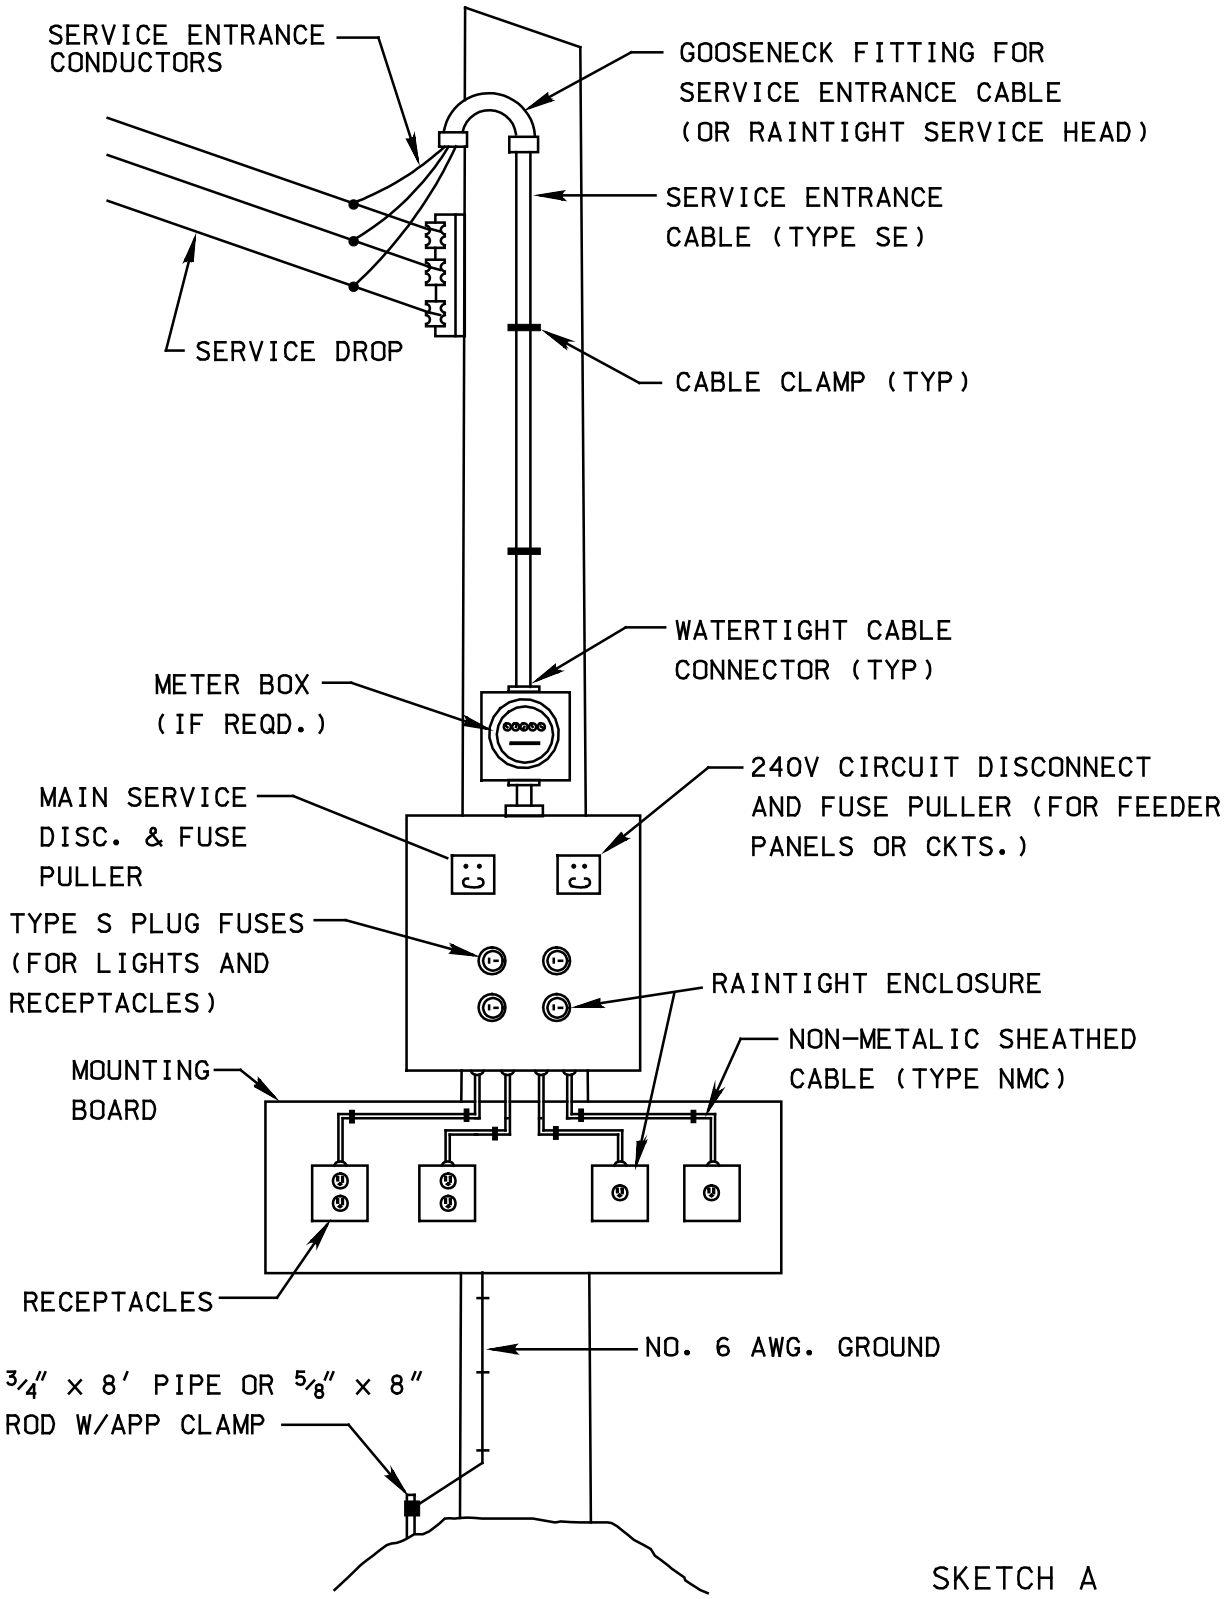

INCL 1

TEMPORARY ELECTRICAL SERVICE USING CABLE (TYPICAL)

SKETCH A
ATTACHMENT O

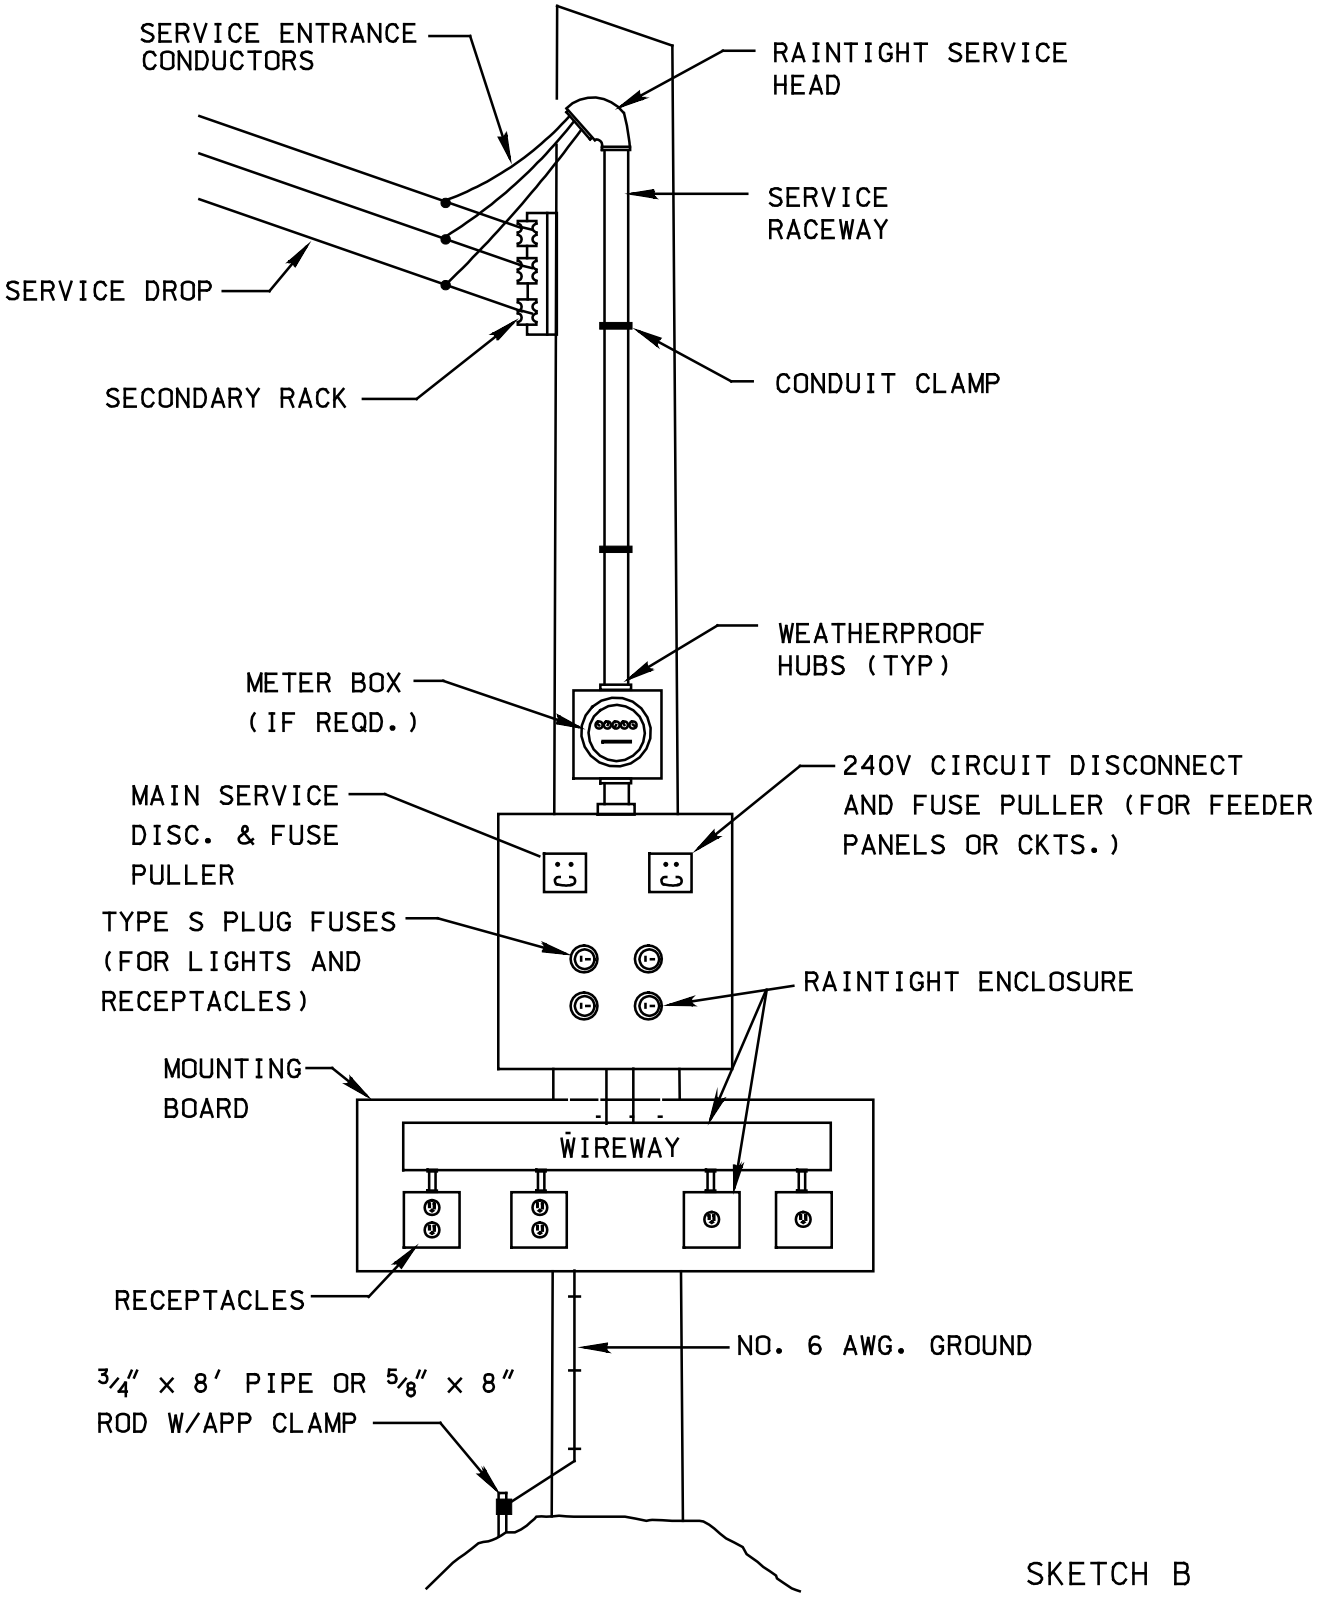

SKETCH B

INCL 2

ATTACHMENT O

TEMPORARY ELECTRICAL SERVICE USING RIGID CONDUIT OR E.M.T. (TYPICAL)

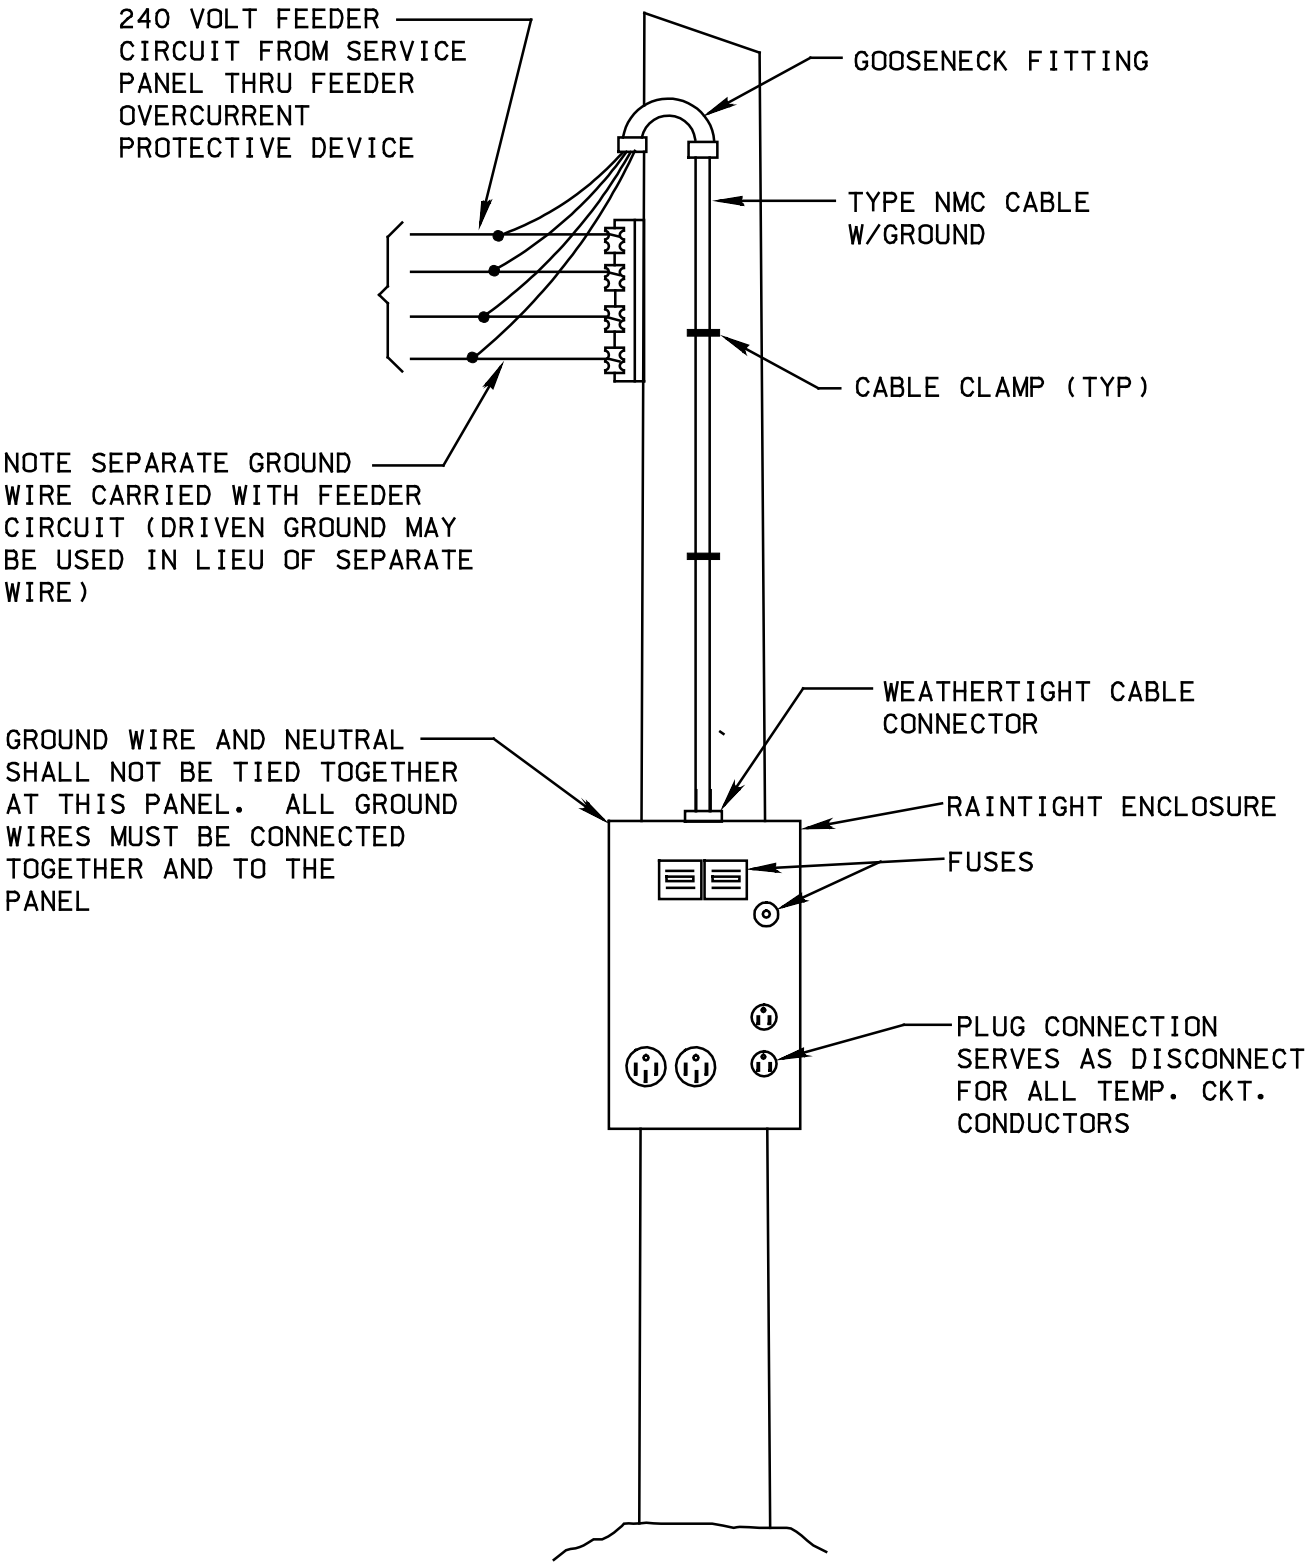

INCL 3

TEMPORARY POWER PANEL OTHER THAN SERVICE EQUIPMENT (TYPICAL)

SKETCH C

ATTACHMENT O

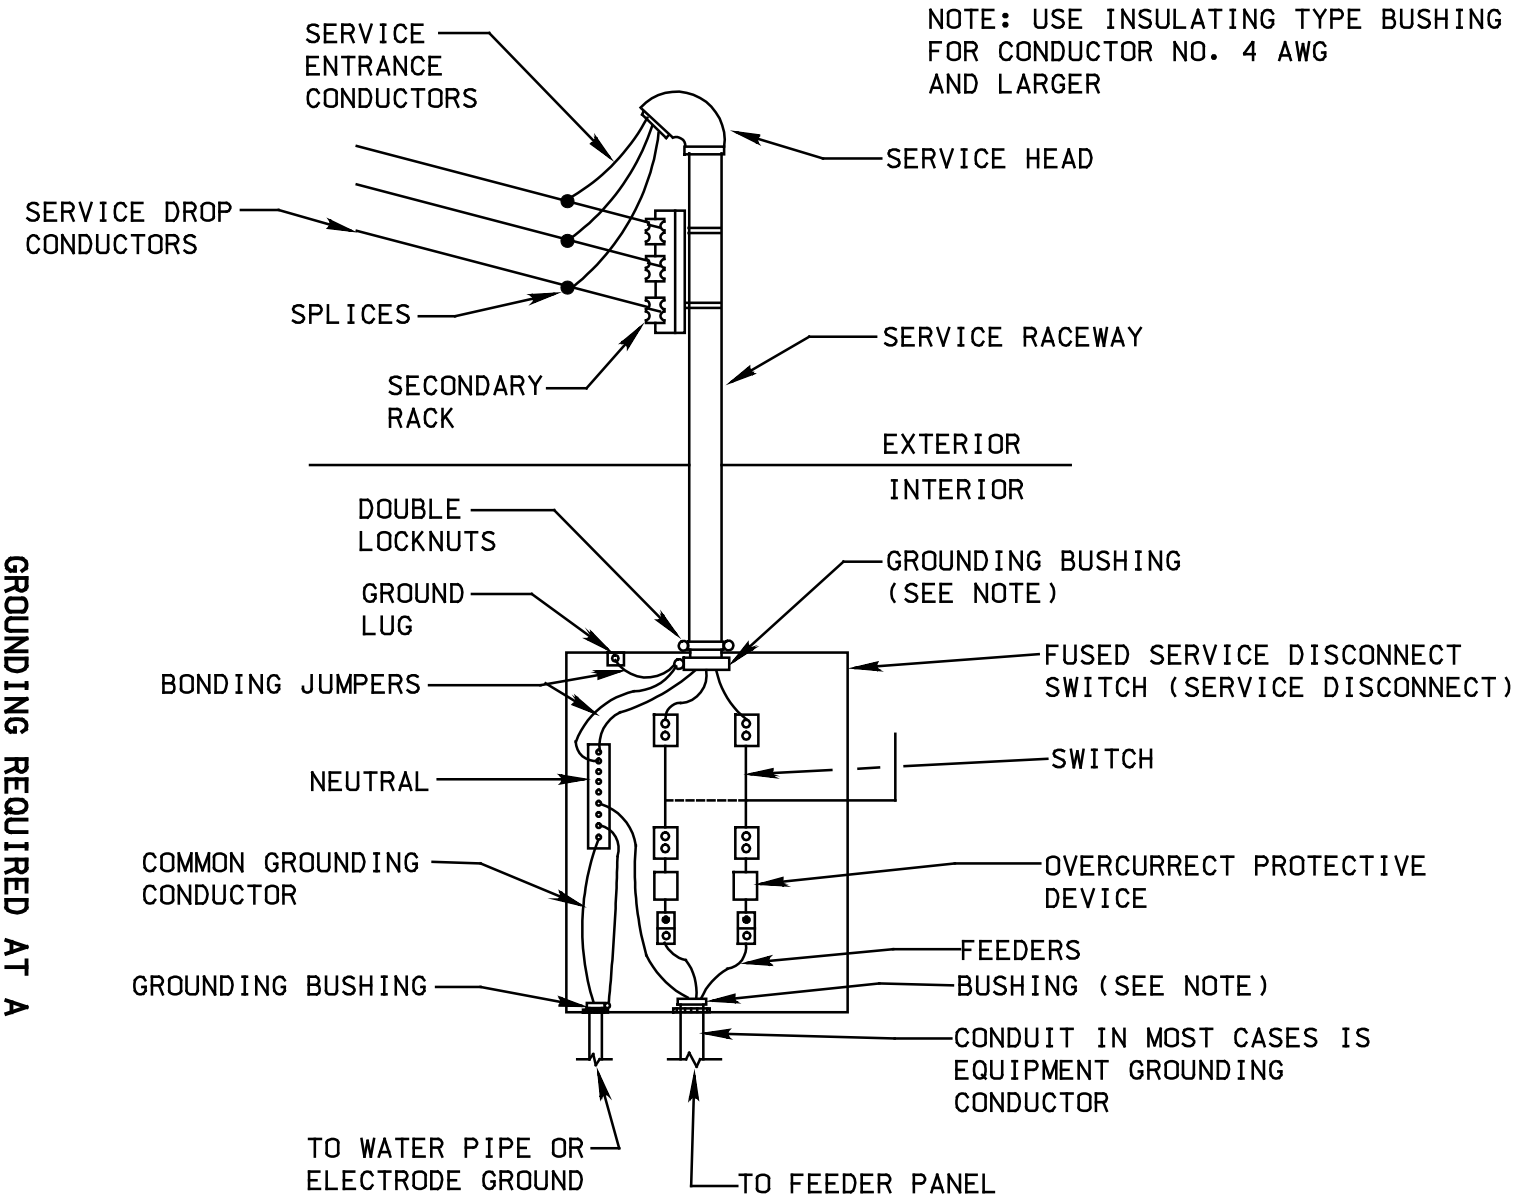

GROUNDING REQUIRED AT A TYPICAL ELECTRICAL SERVICE

NEMA STANDARD FOR PLUG DESIGN

	15 AMPERE				20 AMPERE			
	NON-LOCKING		LOCKING		NON-LOCKING		LOCKING	
	RECPTACLE	PLUG	RECPTACLE	PLUG	RECPTACLE	PLUG	RECPTACLE	PLUG
125 VOLT								
	5-15R	5-15P	L5-15R	L5-15P	5-20R	5-20P	L5-20R	L5-20P
250 VOLT								
	6-15R	6-15P	L6-15R	L6-15P	6-20R	6-20P	L6-20R	L6-20P

FIGURE 1

INCL 5

ATTACHMENT O

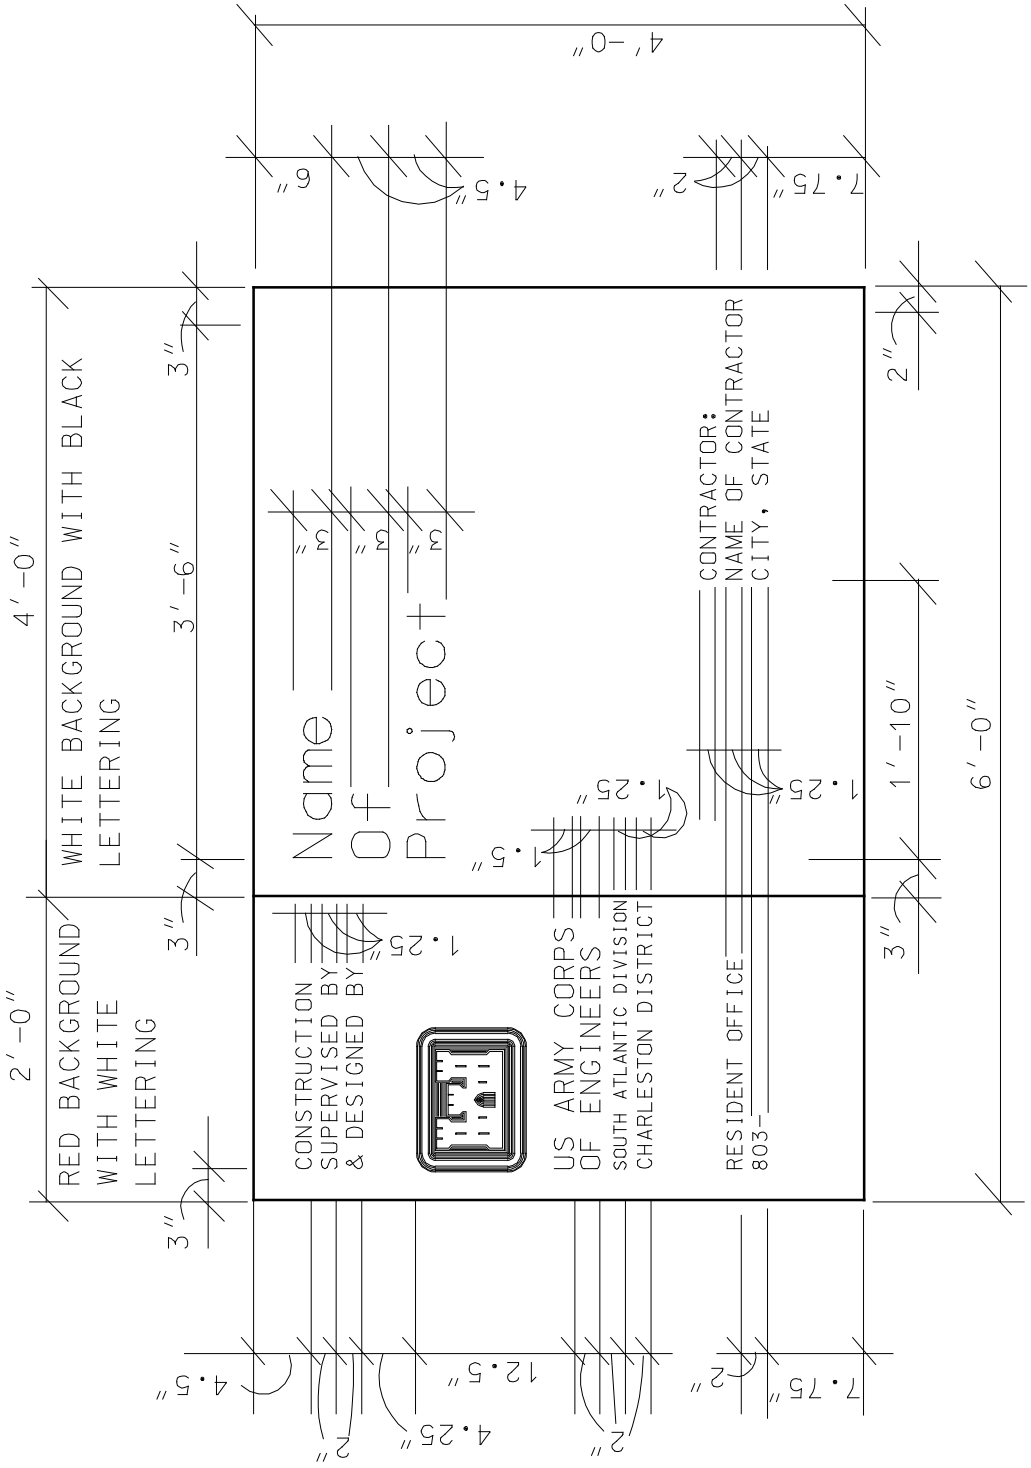

PROJECT IDENTIFICATION SIGN

NOTE: ALL LETTERING TO BE STANDARD BLOCK LETTERING.
ALL LETTERING SHALL BE EXECUTED BY CRAFTSMAN
SKILLED IN THIS TYPE OF WORK.

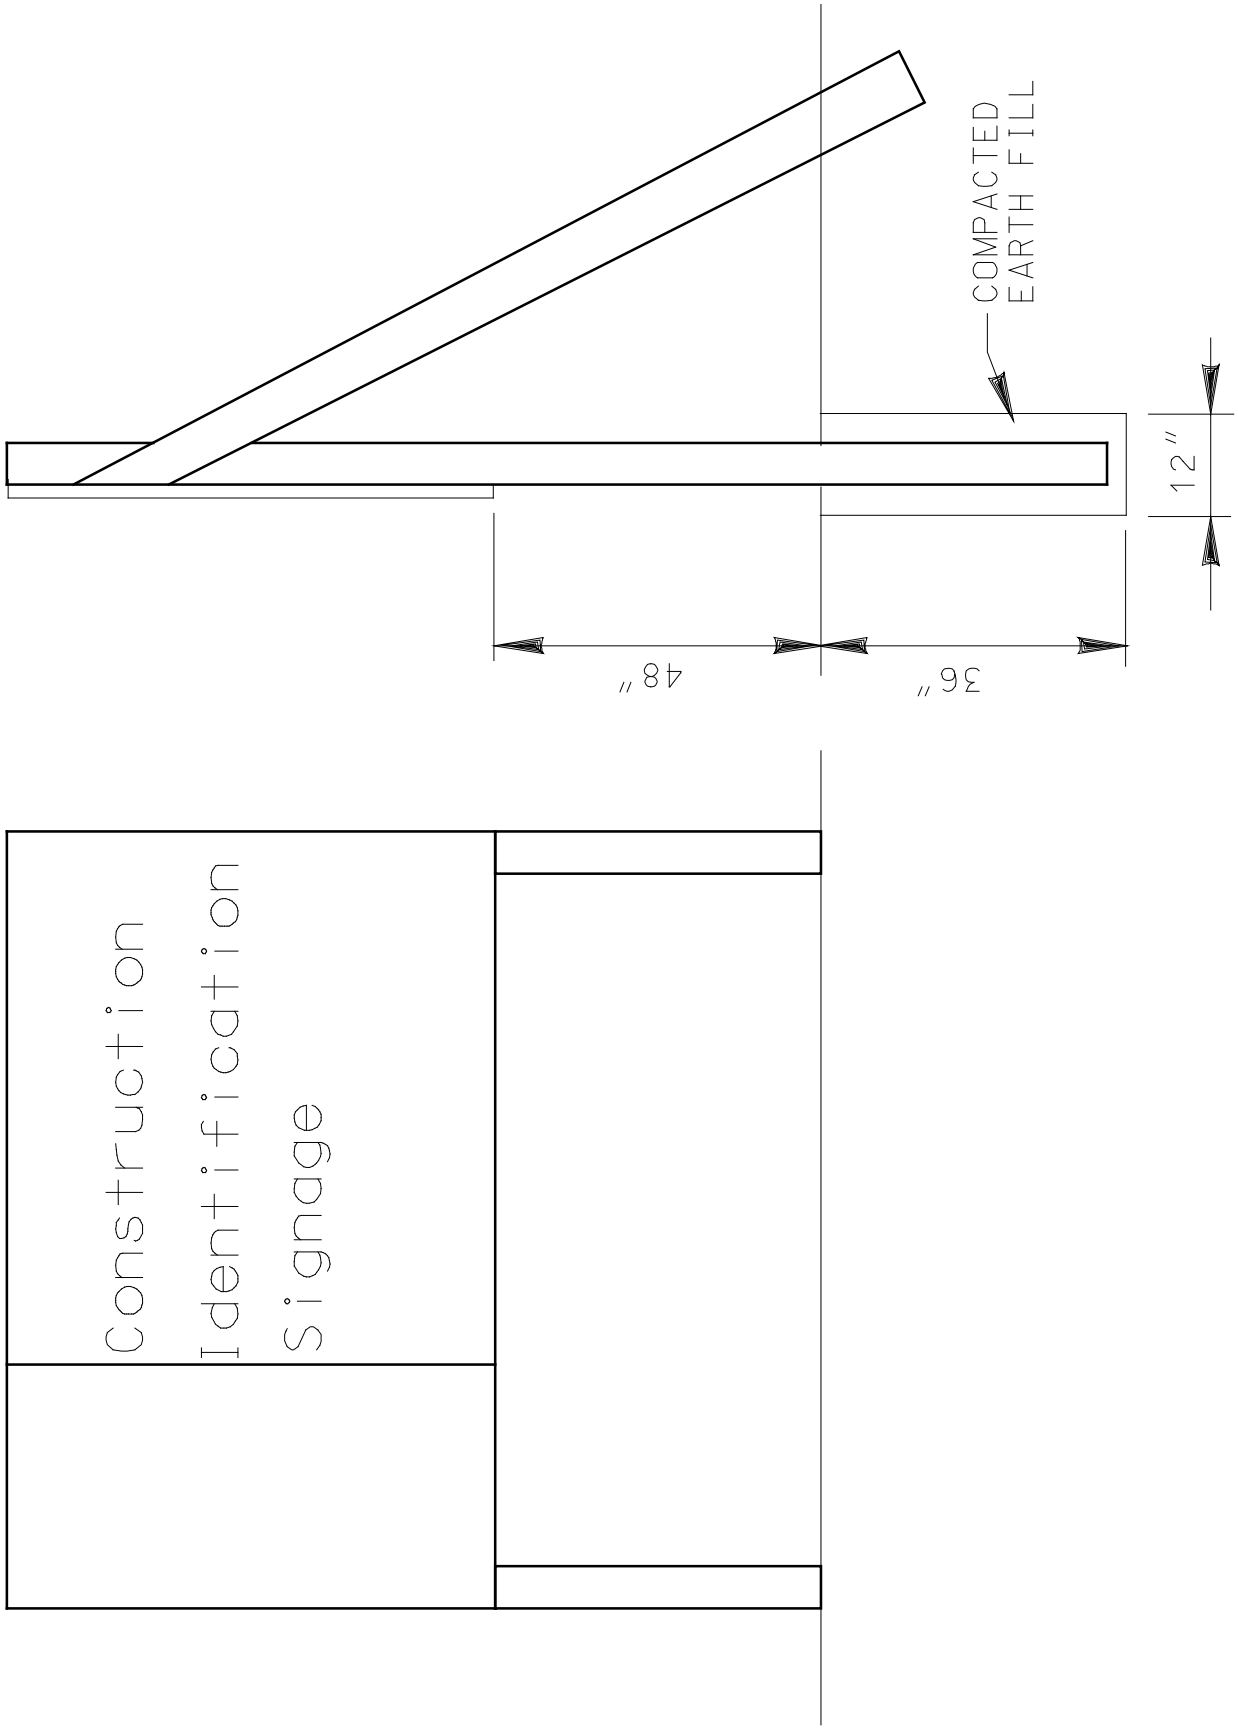

FILE: STDSIGN.DGN	PROJECT IDENTIFICATION SIGN	ATTACHMENT P	P-2